



1

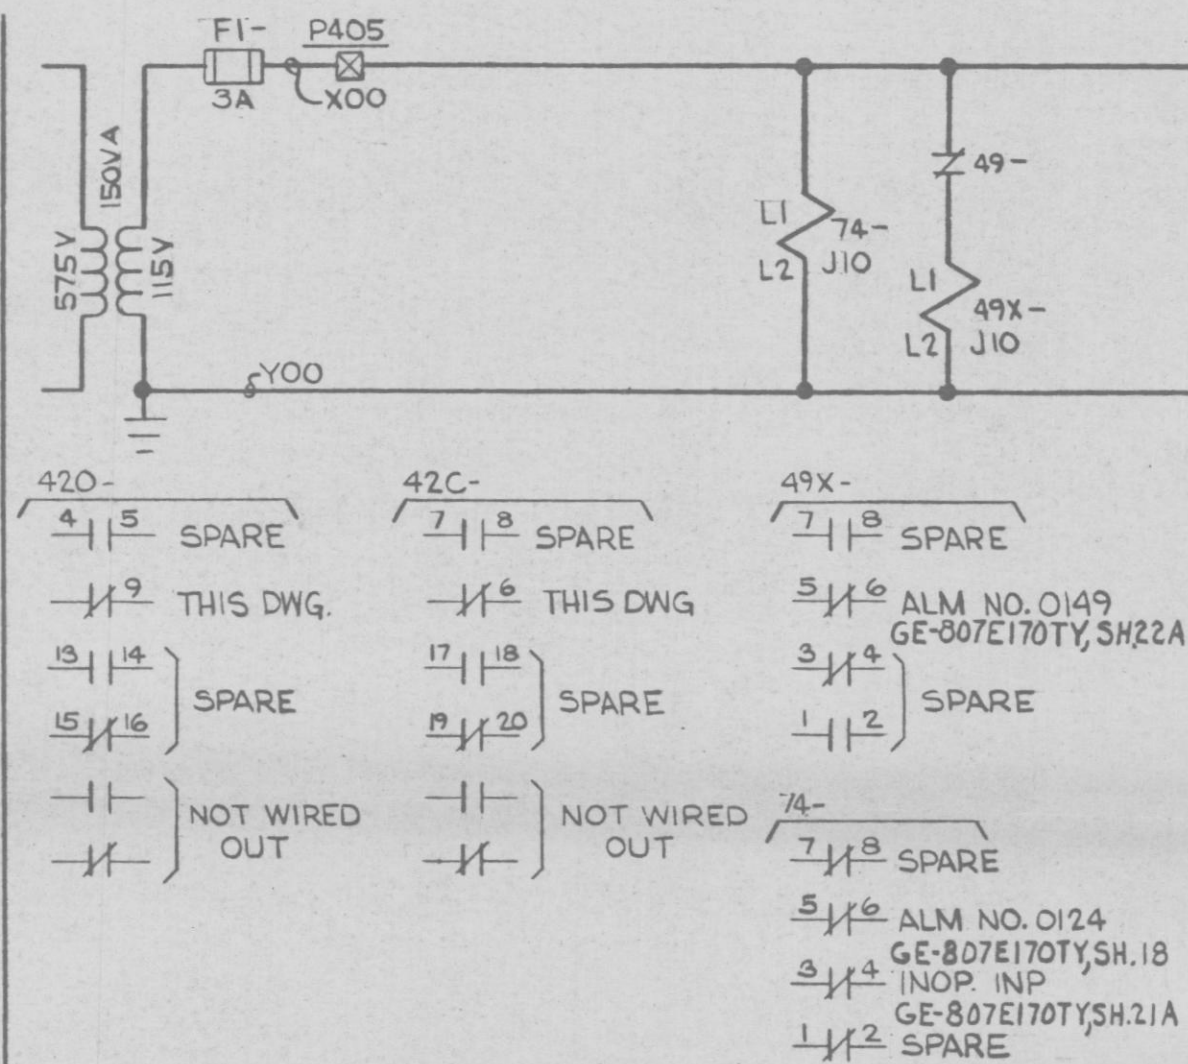

RHR	33	LIMIT SWITCH DEVELOPEMENT				FUNCTION
		FULL OPEN	5%	95%	FULL CLOSED	
1	1					SPARE
	2					SPARE
	3					GREEN LT
	4					OPEN LIMIT
2	5					SPARE
	6					SPARE
	7					RED LT
	8					GE-807E170TY, SH.20
3	9					SPARE
	10					SPARE
	11					BYPASS
	12					GE 807E170TY SH.9
4	13					SPARE
	14					SPARE
	15					BYPASS
	16					SPARE
TORQUE SW	17	CLOSING TORQUE SW INTERRUPTS CLOSING CYCLE IF MECHANICAL OVERLOAD OCCURS DURING CLOSING CYCLE				
	18	OPENING TORQUE SW INTERRUPTS OPENING CYCLE IF MECHANICAL OVERLOAD OCCURS DURING OPENING CYCLE				

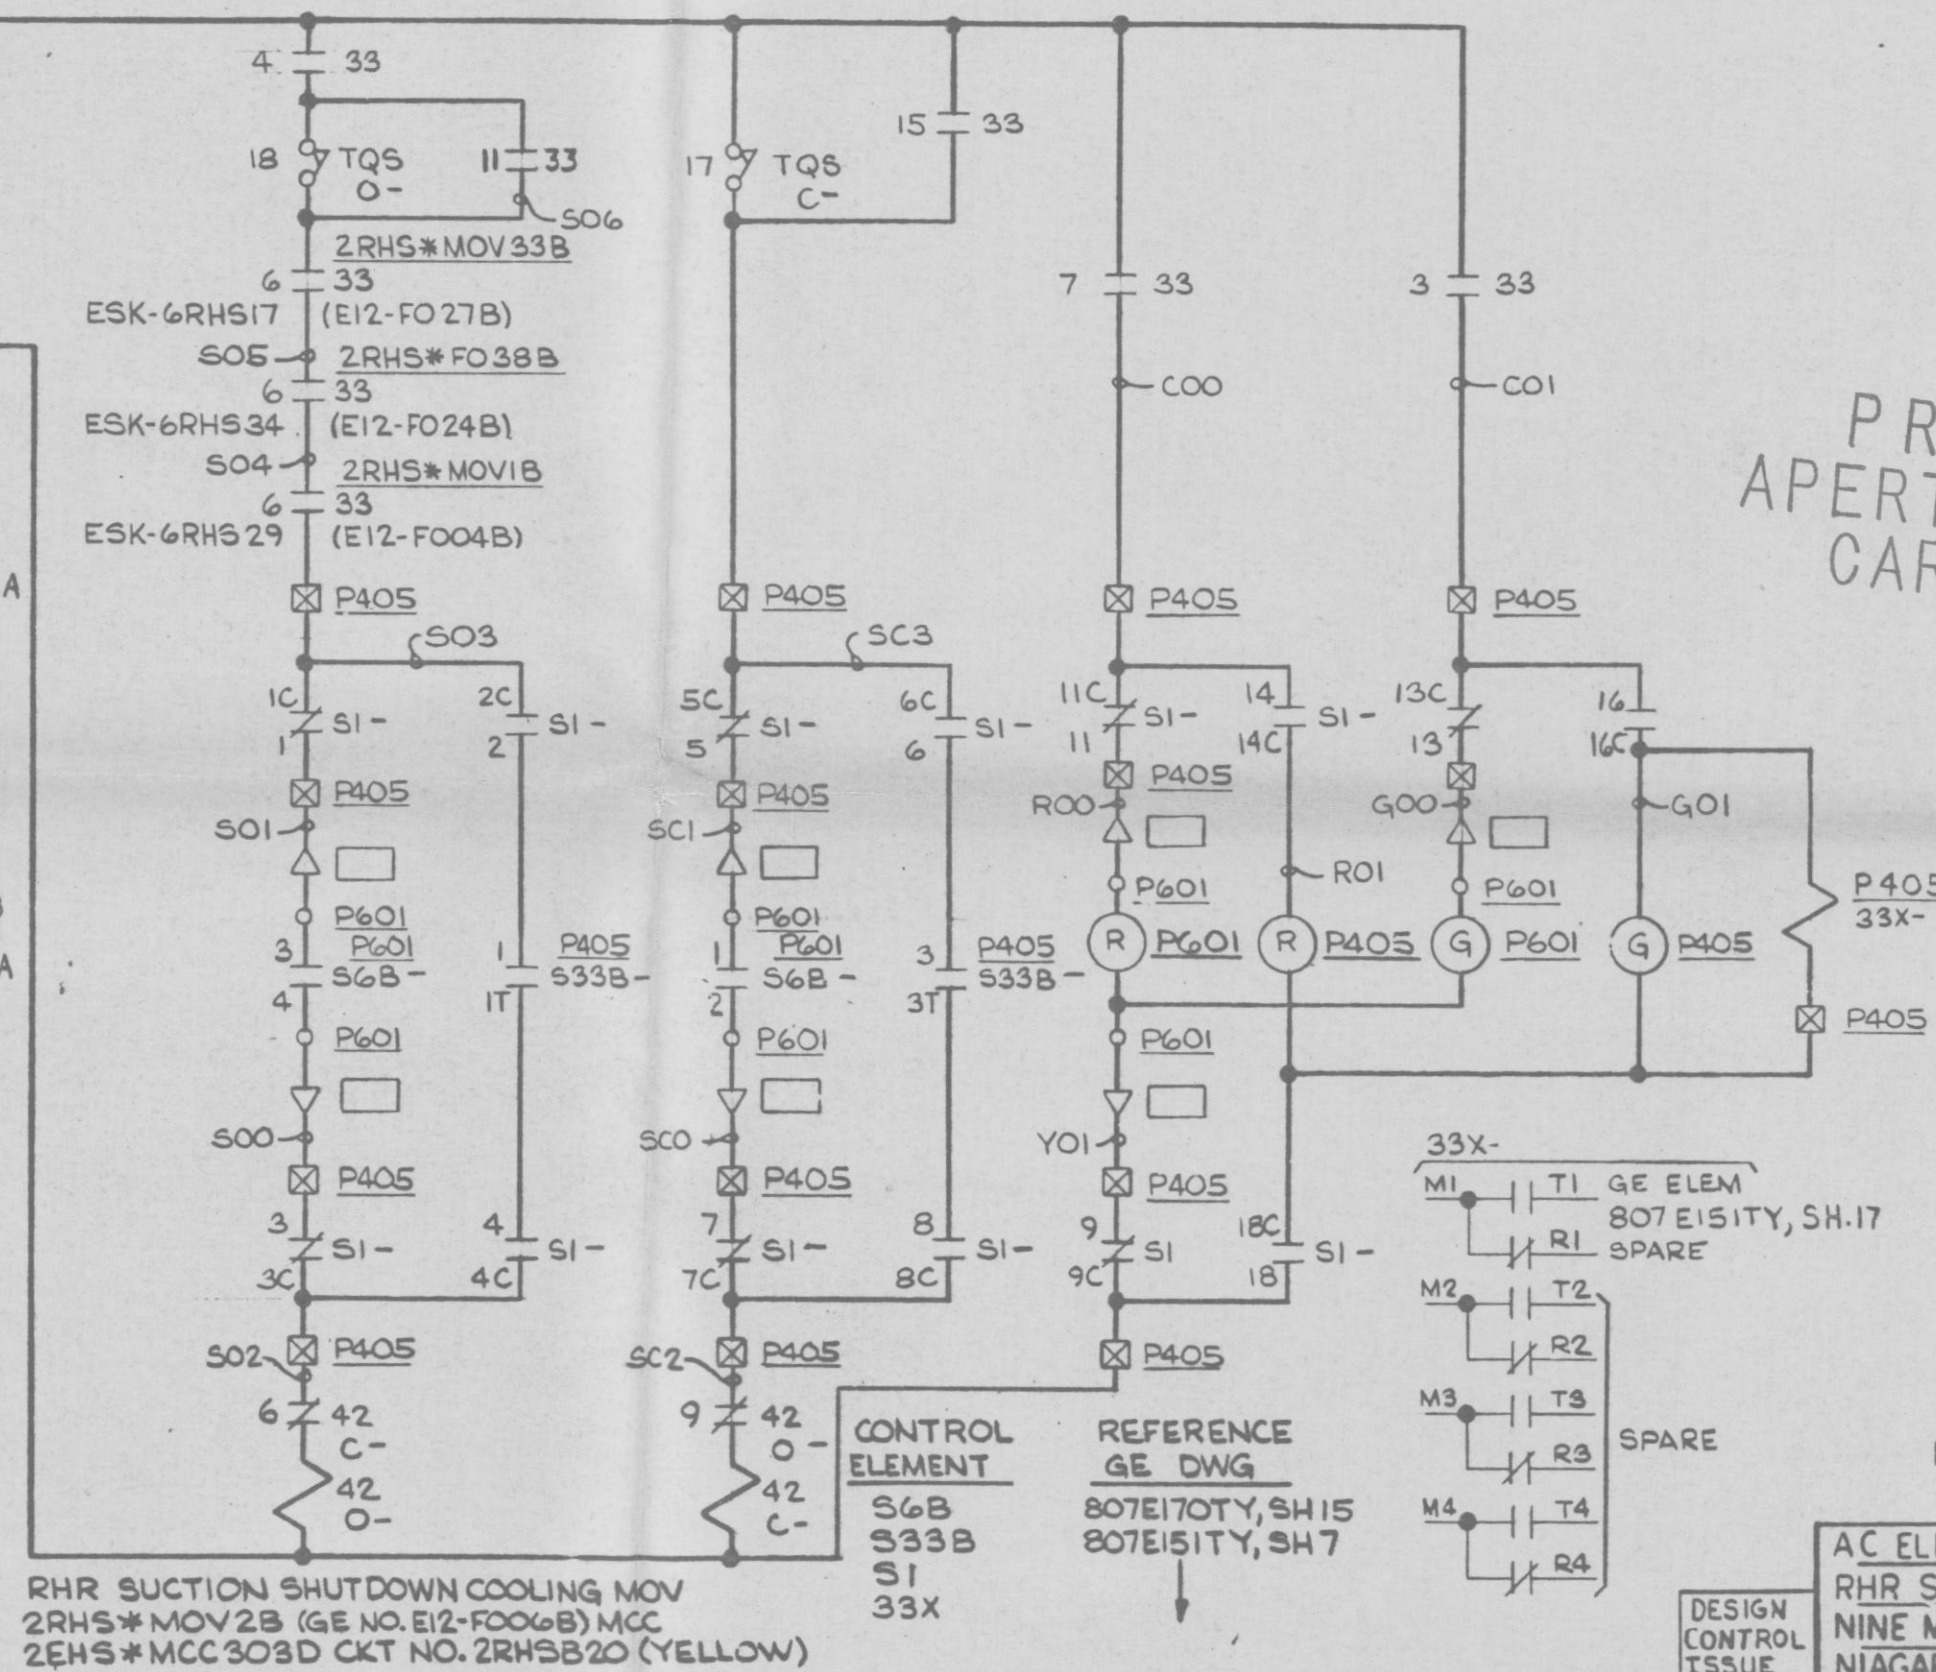

PRC
APERTURE
CARD

- NOTES:
1. VALVE LIMIT SWITCH LOCATED ON VALVE ACTUATOR, TRANSFER SWITCH SI- IS LOCATED AT P405 ALL OTHER EQUIPMENT LOCATED AT MCC UNLESS OTHERWISE NOTED.
 2. SEE APPLICABLE GE ELEMENTARY: 807E170TY, 807E15ITY
 3. $\square$ - INDICATES PNL P405 TERMINATION.

NUCLEAR SAFETY RELATED
QA CAT I

AC ELEM DIAG-600V MCC CKT
RHR SHUTDOWN COOLING MOV
NINE MILE POINT NUCLEAR STATION-UNIT 2
NIAGARA MOHAWK POWER CORPORATION
STONE & WEBSTER ENGINEERING CORPORATION

DESIGN
CONTROL
ISSUE

7/1/81

1

BP/LS

8 8819 a

12177-ESK-6RHS30

D