


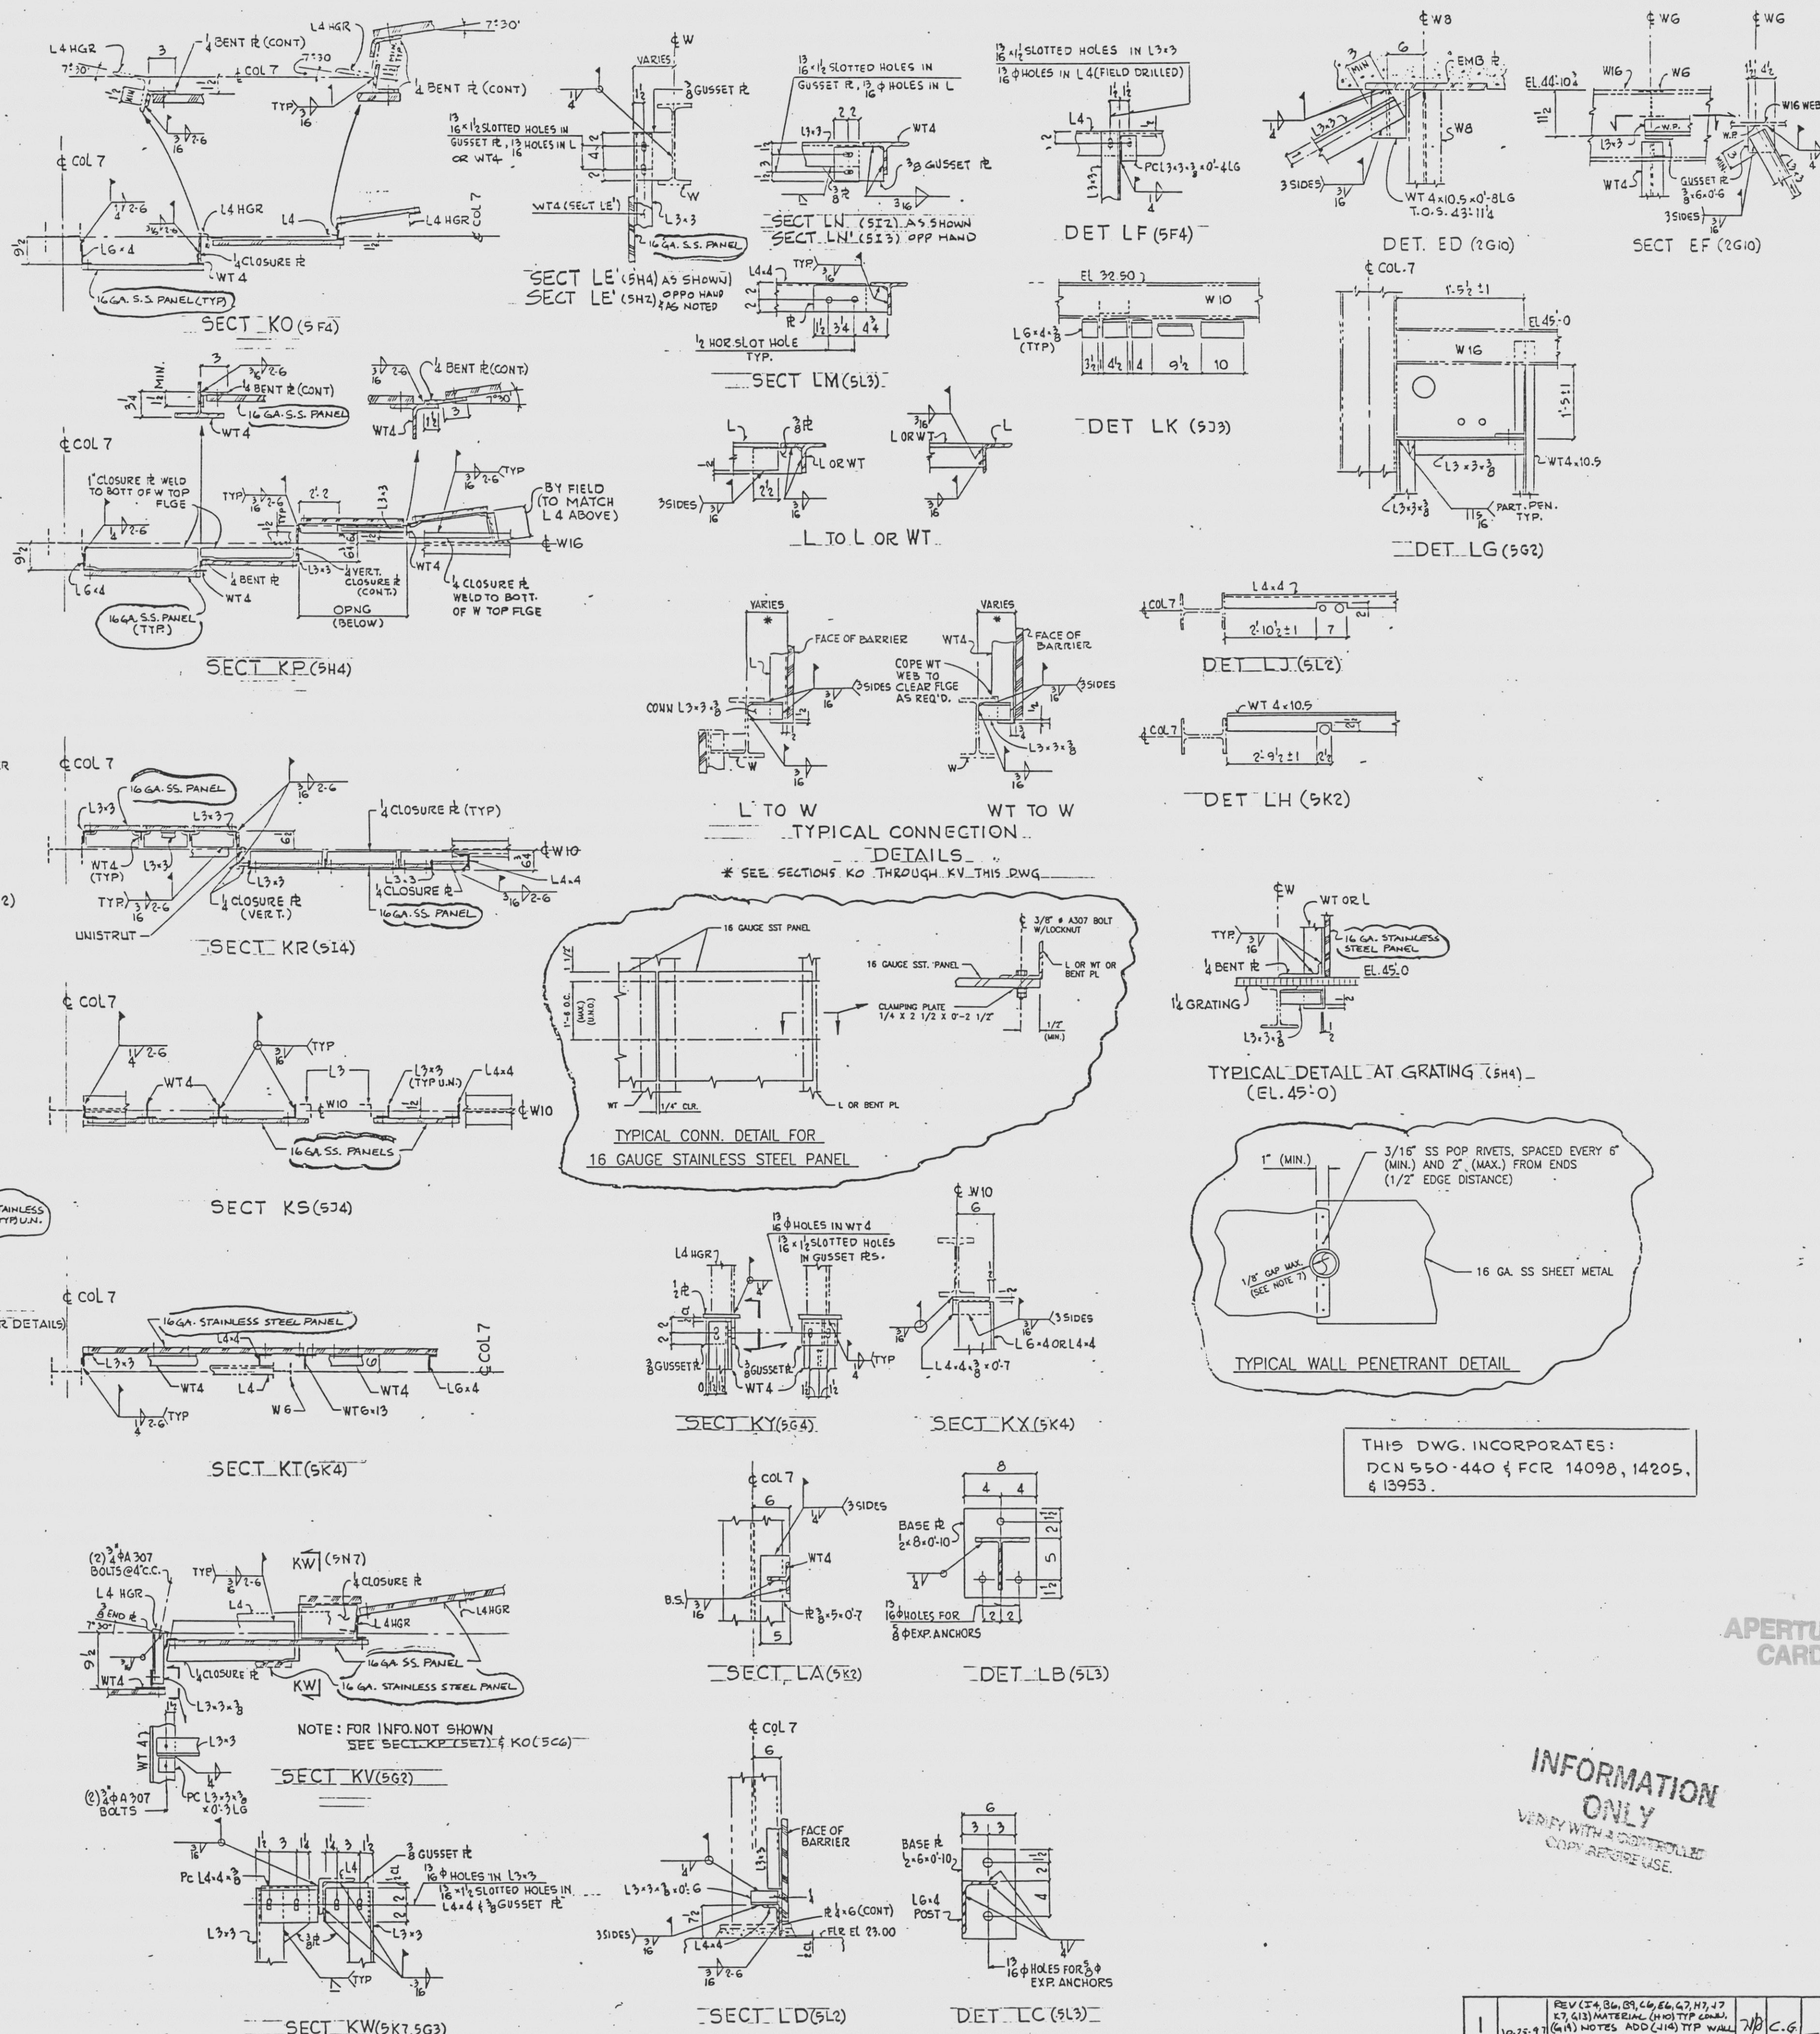

- NOTES:
1. ALL EXPANSION ANCHORS SHALL BE IN ACCORDANCE WITH EBASCO SPEC. FLO-2998-469.
 2. EXISTING STEEL MEMBERS SHOWN THUS ———
— INDICATES SPAN OF 16 GAUGE STAINLESS STEEL PANELS.
 3. ALL STEEL TO BE A36 U.N.O.
 4. ALL BOLTS FOR SLOTTED HOLE CONN'GS TO BE 3/4" DIA. 7077 TYPE WITH DOUBLE-NUTS, HARD TIGHT.
 5. RADIANT BARRIER SHALL NOT BE USED AS SUPPORT OR PENETRATING CABLE TRAYS, HVAC DUCTS, ETC.
 6. RADIANT BARRIER PANELS TO BE 16 GAUGE
 7. STAINLESS STEEL ASTM A-240 TYPE 304 OR 316.
 8. SLEEVES OR PATCHES CAN BE UTILIZED TO MAINTAIN 1/8" MAX. GAP AT WALL PENETRANTS (CONDUIT, TRAY, CABLE, ETC.).

R.B. PLATFORMS SH 1 & 2 - 2998-G795, SH 1 & 2
R.B. CABLE TRAY REST. - 2998-G791
SH 3, 4, 5, 9 & 10 SH 3, 4, 5, 9 & 10

THIS DWG. INCORPORATES:
DCN 550-440 & FCR 14098, 14205
& 13953

APERTURE CARD

INFORMATION
ONLY
VERIFY WITH A CONTROLLED
COPY BEFORE USE.

WORK THIS DWG WITH 2998-G795 SH 1,2,3 & 4

THIS DOCUMENT IS THE PROPERTY OF EBASCO SERVICES INCORPORATED ITS USE IS EXPRESSLY RESTRICTED BY THE TERMS OF THE CONTRACT, DATED AS OF 9-1-75 BETWEEN EBASCO SERVICES INCORPORATED AND FLORIDA POWER & LIGHT COMPANY.

FLORIDA POWER & LIGHT COMPANY
ST. LUCIE PLANT
1983-890 MW (s) EXTENSION-UNIT NO.2
REACTOR BUILDING
RADIANT BARRIER

FRASCO SERVICES INCORPORATED

N.T.9.	APPROVED <i>El: [signature]</i>	DATE 2-7
--------	------------------------------------	----------

A-5
J. NEAGOE *Phil Brown* 2998

A. HINT

		HTG	HTH
--	--	-----	-----

 SH 5

990604221

20000000