

C-E Power Systems  
Combustion Engineering, Inc.  
Route 21-A  
Hematite, Missouri 63047

Tel. 314/937-4691  
314/296-5640

I+E

70-36

NIS/81/820

release



24-16206-01



Dr. Ed Shum  
U.S. Nuclear Regulatory Commission  
7915 Eastern Avenue  
Silver Spring, Maryland 20910


March 5, 1981

R

Dear Dr. Shum:

Enclosed are two copies of our consultant's report concerning the effect of a breach in the Lake Virginia Dam on the 100-year flood elevations in Joachim Creek. This report concludes that a breach of the dam would have a negligible effect on the peak flow of a 100-year flood.

Thus, the 100-year flood levels in the vicinity of the C-E Hematite plant would not be significantly affected.

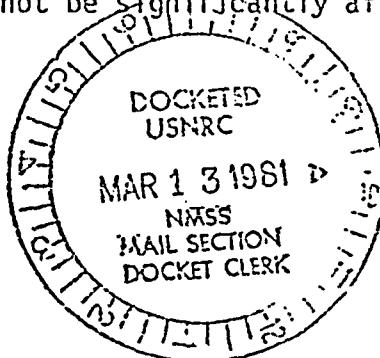

Very truly yours,

COMBUSTION ENGINEERING, INC.

Handwritten signature of H. E. Eskridge.

H. E. Eskridge  
Supervisor, Nuclear Licensing,  
Safety and Accountability

/wg  
Enclosure

cc: James Hammelman - SAI

MAR 30 1981

FILED  
FEB 21 1981  
info only

H-12

IV

202025

SPECIAL STUDY FOR  
JOACHIM CREEK AND  
LAKE VIRGINIA DAM  
JEFFERSON COUNTY, MISSOURI

Prepared for:  
Combustion Engineering Co.  
Hematite, Missouri

February 1981

REITZ & JENS, INC.  
Consulting Engineers  
1040 N. Lindbergh Blvd.  
St. Louis, MO 63132

12685

REITZ & JENS, INC.  
CONSULTING ENGINEERS

HENRY M. REITZ, PRESIDENT  
STIFEL W. JENS, SENIOR VICE PRESIDENT  
JOHN J. BAILEY, JR., VICE PRES., CHIEF ENG.  
DAVID E. MURRAY, VICE PRESIDENT  
DONALD S. ESKRIDGE, SECRETARY

1040 NORTH LINDBERGH  
St. Louis, Missouri 63132

(314) 993-4132

SOIL MECHANICS-FOUNDATIONS  
HYDROLOGY-HYDRAULICS  
RESOURCE RECLAMATION  
DRAINAGE-PAVEMENTS  
LAND DEVELOPMENT  
WATER RESOURCES  
SOLID WASTE

February 6, 1981

Mr. Harold Eskridge  
Combustion Engineering Co.  
P.O. Box 107  
Hematite, MO 63047

Re: Joachim Creek & Lake Virginia Study

Dear Mr. Eskridge:

Attached is our report concerning the effect of a breach in the Lake Virginia Dam on the 100-year flood elevations in Joachim Creek. We have, in our files, original copies of the computer output referred to in the report. Each of the "runs" consists of 50 or more pages of closely printed numbers. We can lend you these on request or we can rerun the calculations using the input cards which we also have in our files.

If there is anything in the report that is unclear or if you have any questions, please contact us.

Very truly yours,

JOHN J. BAILEY, JR.

Encl.  
JJB/rs

20205

SPECIAL STUDY FOR  
JOACHIM CREEK AND  
LAKE VIRGINIA DAM  
JEFFERSON COUNTY, MISSOURI

Prepared for:  
Combustion Engineering Co.  
Hematite, Missouri

February 1981

REITZ & JENS, INC.  
Consulting Engineers  
1040 N. Lindbergh Blvd.  
St. Louis, MO 63132

TABLE OF CONTENTS

Report

Plate 1 Floodplain Map

Plate 2 Stage Discharge at Mile 14.729

Plate 3 Storage Discharge Functions  
Mile 11.875 to Mile 15.771

Plate 4 Computer Results

Plate 5 Discharges in Reach 13.334 to 15.146

References

Appendix A Sheets A-1 through A-14  
Computer Input & Selected Output

SPECIAL STUDY FOR JOACHIM CREEK AND LAKE VIRGINIA IN  
JEFFERSON COUNTY, MISSOURI

1. INTRODUCTION

This report presents the findings of a special study for a portion of Joachim Creek and Lake Virginia Dam in Jefferson County, Mo. near the town of Hematite. The location of the study area is shown on Plate 1. The purpose of the study was to evaluate the effect of failure of the Lake Virginia Dam on flood levels in Joachim Creek in the vicinity of the Combustion Engineering plant near stream mile 14.8+. The intermittent stream from the valley with the Lake Virginia Dam enters Joachim Creek at mile 14.94.

Criteria that the consultants were requested to use for the study included the requirements:

- a) that flows established by previous flood hazard studies be accepted;
- b) that the Lake Virginia reservoir be assumed to be full to the level of the spillway, at the beginning of the design storm, and
- c) that the occurrence of a  $\frac{1}{2}$  Probable Maximum Flood ( $\frac{1}{2}$  PMF) on the Lake Virginia watershed be coincident with occurrence of a 100-year (1% annual chance) flood in Joachim Creek.

Furthermore:

- d) that the Lake Virginia dam fail by breaching when it was overtopped.

2. METHOD ADOPTED FOR STUDY

Reference 6 describes procedures for routing dam breach hydrographs through the valley below the dam. Because of the highly variable flow rates during a dam breach, the breach hydrograph is attenuated by valley storage in the reach below the dam. The tributary area of Joachim Creek is about two orders of magnitude greater than the watershed controlled by the Lake Virginia Dam so, for this study, the Lake Virginia dam breach hydrograph for a  $\frac{1}{2}$  PMF flood is required to be combined with the hydrograph of a severe flood in Joachim Creek. The consultants first calculated and routed hydrographs of flow in Joachim Creek including outflow past the unbroken Lake Virginia Dam for such a severe flood. Adjustments in various parameters were made to obtain peak flow rates equal to those used in the previous flood study (Reference 1) and the Phase 1 Dam Safety Study for Lake Virginia (Reference 2) until a satisfactory match was obtained. The resulting computer model was then rerun with appropriate instructions which caused it to calculate the effect of a particular breach width and rate of development on the outflow from Lake Virginia (the breach hydrograph). This

breach hydrograph was substituted for the previously used hydrograph of flow from Lake Virginia and the entire routing procedure was repeated. Several breach widths and rates of development were so studied.

### 3. AVAILABLE DATA

The hydraulic characteristics of the Joachim Creek channel and floodplain were established by other consultants who prepared the Special Flood Study for this reach of Joachim Creek (Reference 1). A copy of their data, prepared on punch cards for input to the HEC-2 computer program (Reference 5), was obtained from the St. Louis District, USCE. This included cross-sections, channel lengths, values of channel and overbank roughness and hydraulic characteristics of bridges.

Hydrologic and hydraulic characteristics of the Lake Virginia watershed were available from the Phase 1 Inspection Report, National Dam Safety Program for the Lake Virginia Dam (Reference 2). These included the drainage area, hydrologic lag time, loss rate indicators, storage volumes in the reservoir at various water elevations, spillway capacities and the profile of the dam crest.

Selected comments from Reference 2, concerning the reservoir area of Lake Virginia, are:

- 1.2 h. "The reservoir appears to be subject to severe water loss from leakage through either the sides or bottom or both."
- 2.3 "The lake filled after construction and, at one time, the southwest spillway flowed nearly full. The reservoir seems to drain through a crack or sinkhole in the bottom of the lake."
- 3.1 a. "A visual inspection of the Lake Virginia dam was made on 10 November 1978."  
  
b. "During field inspections and surveys the reservoir was completely dry except for a small "puddle" no more than 1-1/2 feet deep. Much of the lake bottom appears to have been cultivated during the growing season of 1978."  
d. "The reservoir area is effectively empty. Photos show the culture that has developed in the reservoir area."
- 3.2 "Site observations show a wholly unsatisfactory lake development as far as the amenities and benefits to be anticipated."

Drainage areas at various locations along the reach of Joachim Creek were obtained from Reference 1 and detailed tributary drainage patterns in the vicinity of the reach were measured on the USGS, Festus, Mo., 1:24,000 Quadrangle Map, Edition of 1964.

#### 4. STAGE DISCHARGE AND STORAGE IN JOACHIM CREEK

Computer Program HEC-2 (Reference 5) calculates water surface profiles, storage volumes and other hydraulic parameters from cross-sections, channel roughness values, velocity head losses, bridge geometry and bridge hydraulic data supplied as input to the program. A copy of the data used for the previous study of Joachim Creek was obtained from the St. Louis District office of the Corps of Engineers (Reference 1). The data was in the form of HEC-2 input punch cards including cross-sections, "n" values and bridge data used in calculating the flood profiles. This was rerun to verify the data. Precisely the same high water profiles were obtained as in the previous study by the USCE.

HEC-2 water surface profiles in Joachim Creek were then calculated for rates of flow from 5000 cfs to 70,000 cfs. The stage-discharge relationship at cross-section 7 at mile 14.73, shown on Plate 2, was plotted from the results of this computation. The storage-discharge relationships for the various reaches of Joachim Creek were also calculated by the program as part of the standard output values. These relationships are shown on Plate 3 for three reaches of Joachim Creek, one spanning the sites of the Combustion Engineering plant and the Lake Virginia Dam and the others immediately above and below this reach. Limits of these reaches are shown numerically on Plate 3 and graphically on Plate 1. The middle reach covering the plant and dam extends from Section 3 at mile 13.34 to Section 8 at mile 15.146.

#### 5. HEC-1 COMPUTER PROGRAM

Data required for the HEC-1 computer program include drainage areas, watershed characteristics, index rainfall, and for flood routing, storage-discharge relationships, spillway capacities and characteristics of overflow sections of the dam.

The present consultants established the hydrologic lag time and loss rate indicators for the Joachim Creek main branch and tributaries by methods set out in Reference 5. Twenty-four hour, 100-year rainfall depths were obtained from data assembled by the St. Louis District, USCE. All other data was obtained from previous studies or as described in paragraphs above.

6. HYDROGRAPH ROUTING

a. 100-Year Flood in Joachim Creek:

To establish a reference for comparison with routed dam breach hydrographs, a set of hydrographs for the 100-year flood was routed according to the following sequence:

- Calculate Joachim Creek Runoff Hydrograph at mile 15.711
- Route Joachim Creek Hydrograph to mile 15.146
- Calculate Lake Virginia Runoff Hydrograph
- Route Lake Virginia Hydrograph over Dam
- Calculate tributary runoff hydrograph between mile 15.146 and mile 13.334
- Combine three Hydrographs at mile 15.146
- Route Combined Hydrograph to mile 13.334
- Calculate Runoff Hydrograph from Bucks Creek
- Combine two hydrographs at 13.334
- Route Combined Hydrographs to mile 12.631

The initial routing with the consultant's best estimate of the hydrologic lag time and loss parameters resulted in a 32,000 cfs peak flow in the reach between mile 15.146 and mile 13.334. Since this was considerably less than the 39,500 cfs used in Reference 1, the parameters were adjusted to give a peak flow in this reach of 39,069 cfs. Computer input and summaries of output for this final calculation are shown on Sheets A-1 through A-3 in Appendix A. The 100-year index rainfall was increased from 5.4 inches to 6.15 inches (input line 11) and the lag time was decreased from 4.0 hours to 2.5 hours (input line 13) to obtain this 22% increase in peak flow.

b. Breach Hydrographs:

Little if any data or dam and embankment failure, that would be directly applicable to the Lake Virginia Dam, has been published. The consultants believe this particular embankment which is constructed from fairly cohesive soils would be resistant to erosion by overtopping flows and would degrade at a slow rate. Certainly, the embankment would not degrade as rapidly as one constructed from cohesionless material. Even so, the consultants initially tested breaches with development times to bottom of reservoir of 20 minutes. All breaches were timed to start at maximum reservoir elevation, thus releasing the largest possible volume of stored water. Typical breach hydrographs are shown on Sheets A-6 and A-10 in Appendix A. The first is for a 40-foot wide breach and the other is for a 400-foot wide breach which would involve essentially complete disappearance of the dam in

20 minutes. These hydrographs have peak flows of 14,737 and 23,958 cfs respectively. All stored water is released within 30 minutes of the breach starting for the 40-foot wide case 2 breach and within 15 minutes for the 400-foot wide breach.

c. Routing Breach Hydrographs:

When the breach hydrographs were combined with the Joachim Creek hydrographs and routed downstream, rapid drainage of the Lake Virginia reservoir increased flows on the rising side of the Joachim Creek hydrograph as stored water was quickly released. Exhaustion of retention in the reservoir prior to the arrival of the peak flows from the distant upstream portion of the Joachim Creek watershed resulted in decreased contributions from Lake Virginia at the time of the peak flow in Joachim Creek. Case 2 and Case 3 for 40- and 400-foot wide breaches with 20-minute development times, as shown on Plate 4, resulted in an increase of 35 cfs and a decrease of 4 cfs in peak flows in the study reach. Attenuation of the breach hydrographs by effect of valley storage caused considerably smaller increases in discharge on the rising side of the Joachim Creek hydrograph three hours prior to occurrence of the 100-year flood peak in Joachim Creek for the reach in question. Computer input and summaries of output for these cases are shown on Sheets A-4 through A-11 in Appendix A. To obtain any appreciable increase of the peak flow in Joachim Creek it was necessary to assume breach development times of several hours. The greatest increase, to 40,188 cfs in the study reach, resulted from a breach development time of 5 hours which is Case 4 on Plates 4 and 5 and on Sheets A-12 through A-14. Because of the long development time, no breach hydrograph was provided by the computer for Case 4.

7. EFFECT OF DAM BREACH ON FLOOD ELEVATIONS

The indicated time offset of flow from assumed breach of Lake Virginia Dam and the Joachim Creek flood hydrograph result from both occurring from the same rare and intense storm event.

In most of the cases investigated, breaching the Lake Virginia Dam had a negligible effect on the peak flow of the 100-year flood in Joachim Creek. Only by extending the breach development time past the line of peak flow in Joachim Creek, thus allowing stored water to be released at the appropriate time, could a slight increase in peak flows be induced. However, if the breach development time is extended to a greater amount, the rate of release during peak flood flow from the upper reaches of Joachim Creek is again reduced.

The stage-discharge curve on Plate 2 allows a determination of the change in

stage resulting from an increase or decrease in peak flow. For Case 4 an increase of 1119 cfs results in 0.15-foot increase in the level of the 100-year flood. For Cases 2 and 3 the effect on stage was insignificant.

#### 8. EVALUATION OF RESULTS

Using the most improbable combination of criteria events that can be conceived, calculations using computer program HEC-1 indicate that breaching of the Lake Virginia Dam by a  $\frac{1}{2}$  Probable Maximum Flood could raise the 100-year flood profile in Joachim Creek 0.15-foot. For this to happen it would be necessary for the dam breach to take five hours to develop to its maximum depth. The resulting release of stored water will be at a very low rate of flow. Because of the attenuating effect of the large volume of valley storage in the reach of Joachim Creek below the Lake Virginia Dam, a sudden breach in the dam cannot supply enough flow from the relatively limited volume of water stored behind the dam to produce any significant rise in the Joachim Creek stage on the rising side of the 100-year flood hydrograph.

LEGEND

-600 ~ GROUND ELEV.  
IN FEET MSL

{ 100 YEAR  
FLOOD


4 CROSS  
SECTIONS  
STREAM  
MILE

12

0 800 1600 2400

SCALE IN FEET


PACIFIC

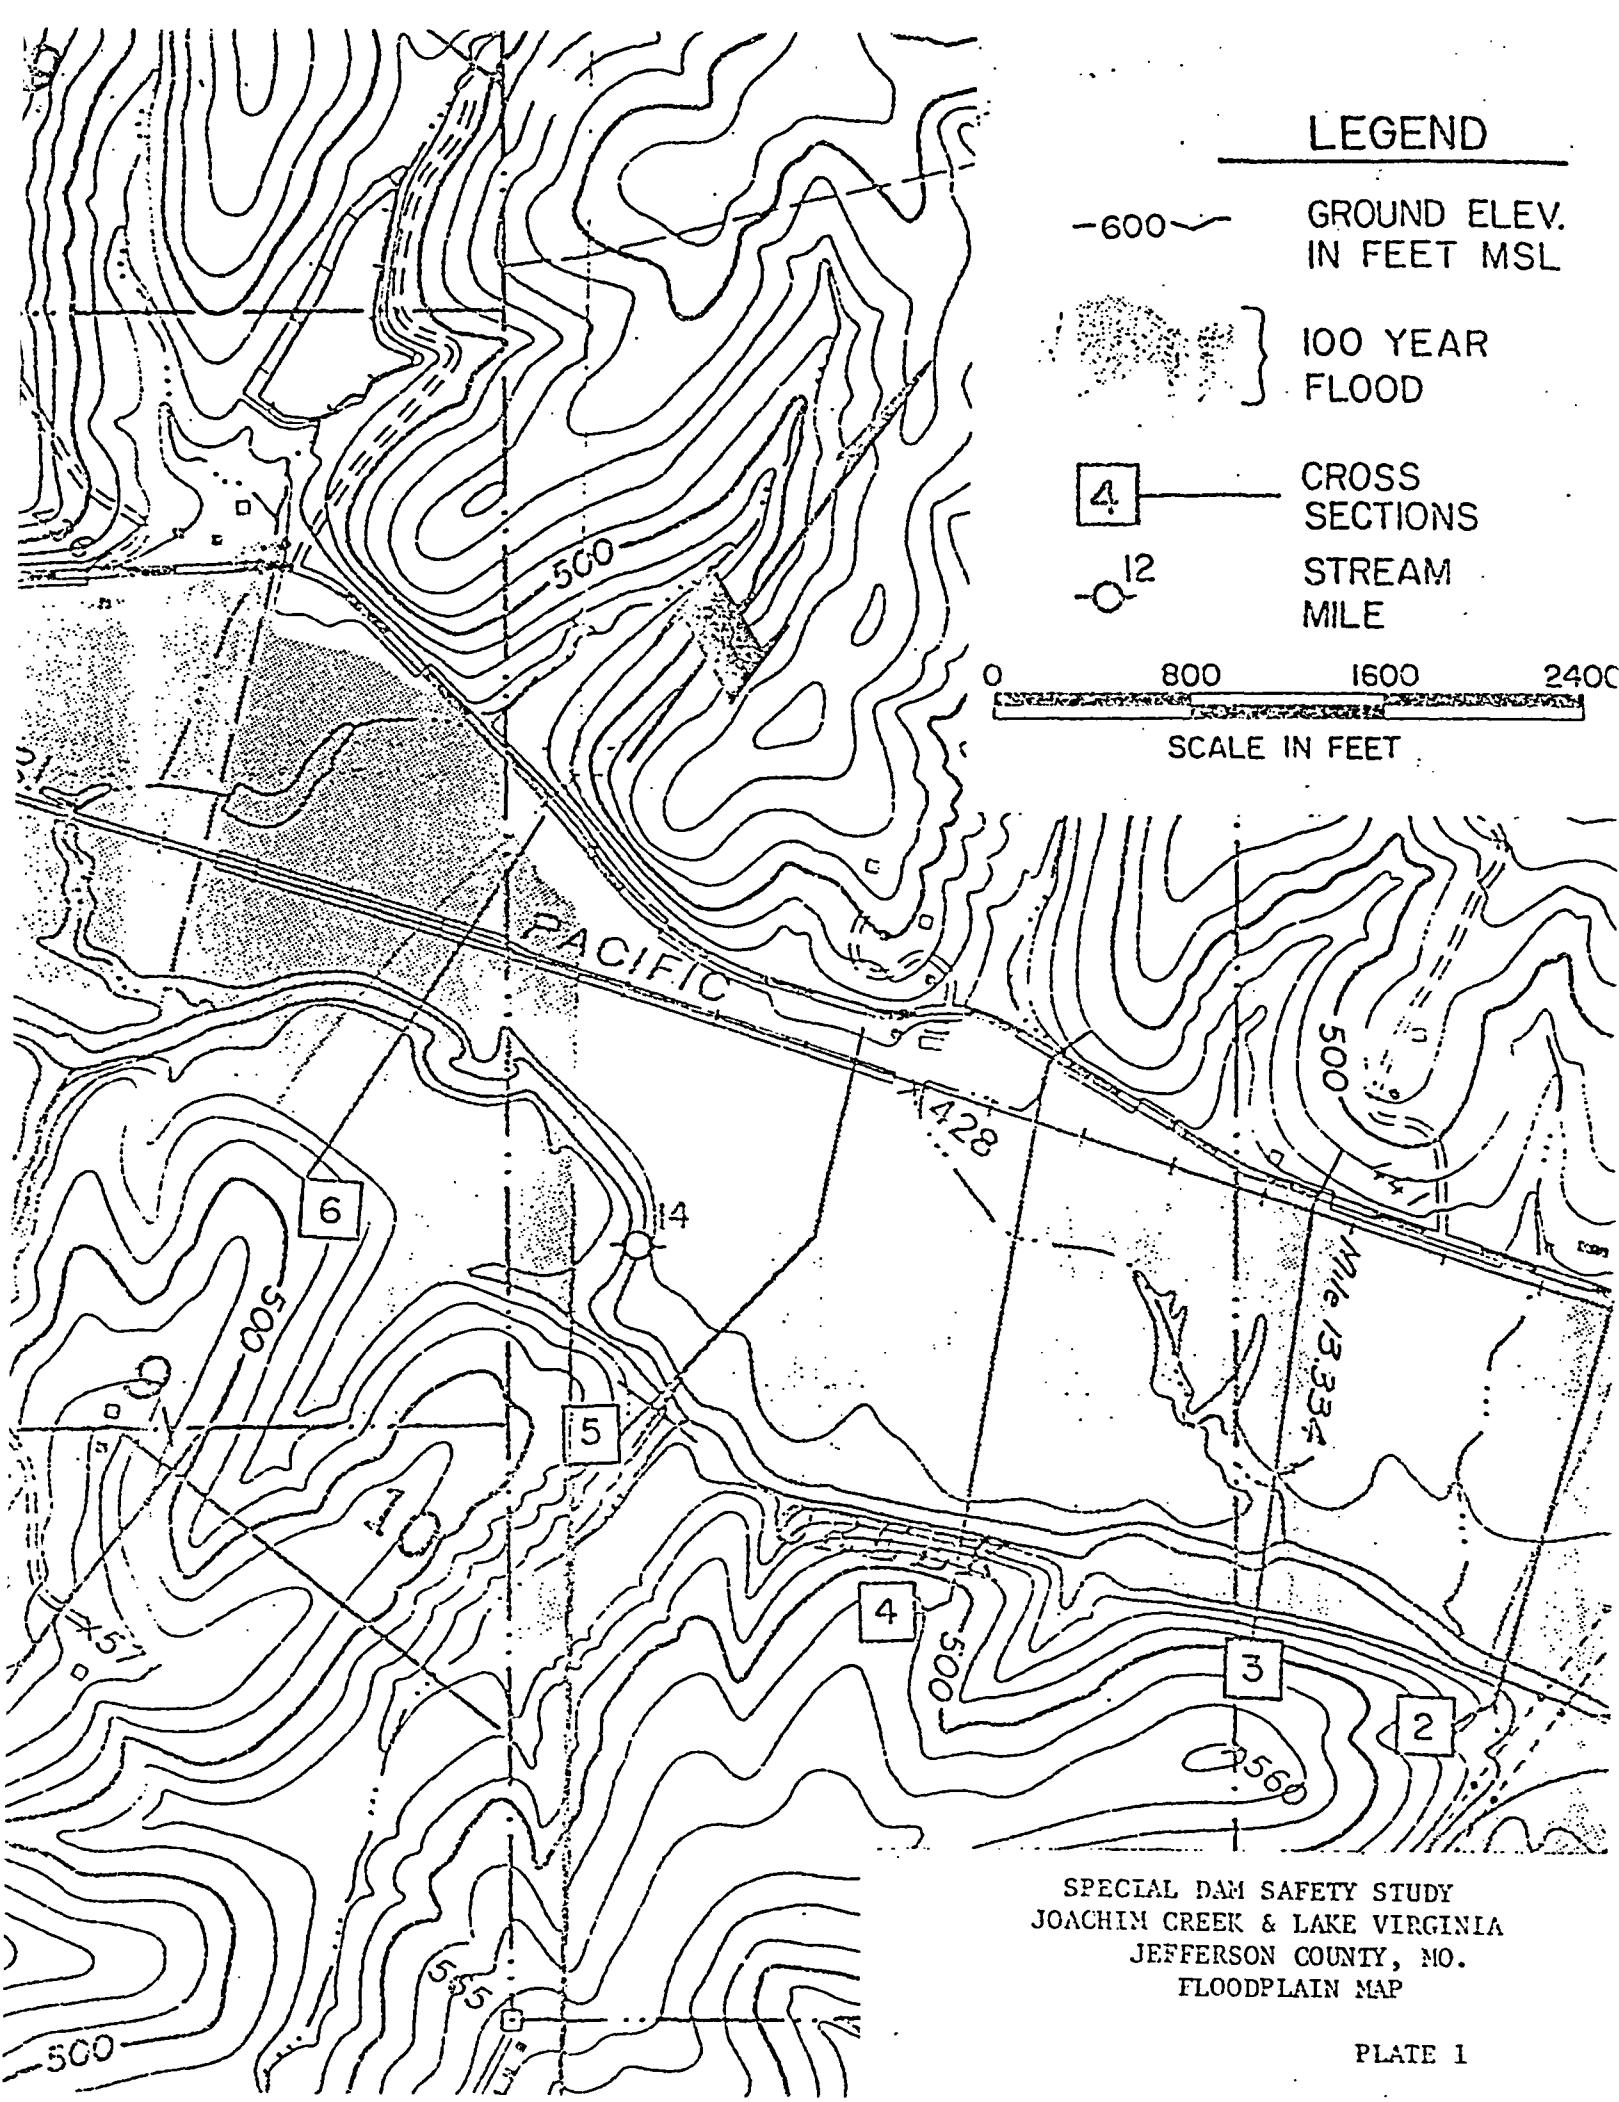

SPECIAL DAM SAFETY STUDY  
JOACHIN CREEK & LAKE VIRGINIA  
JEFFERSON COUNTY, MO.  
FLOODPLAIN MAP

PLATE 1



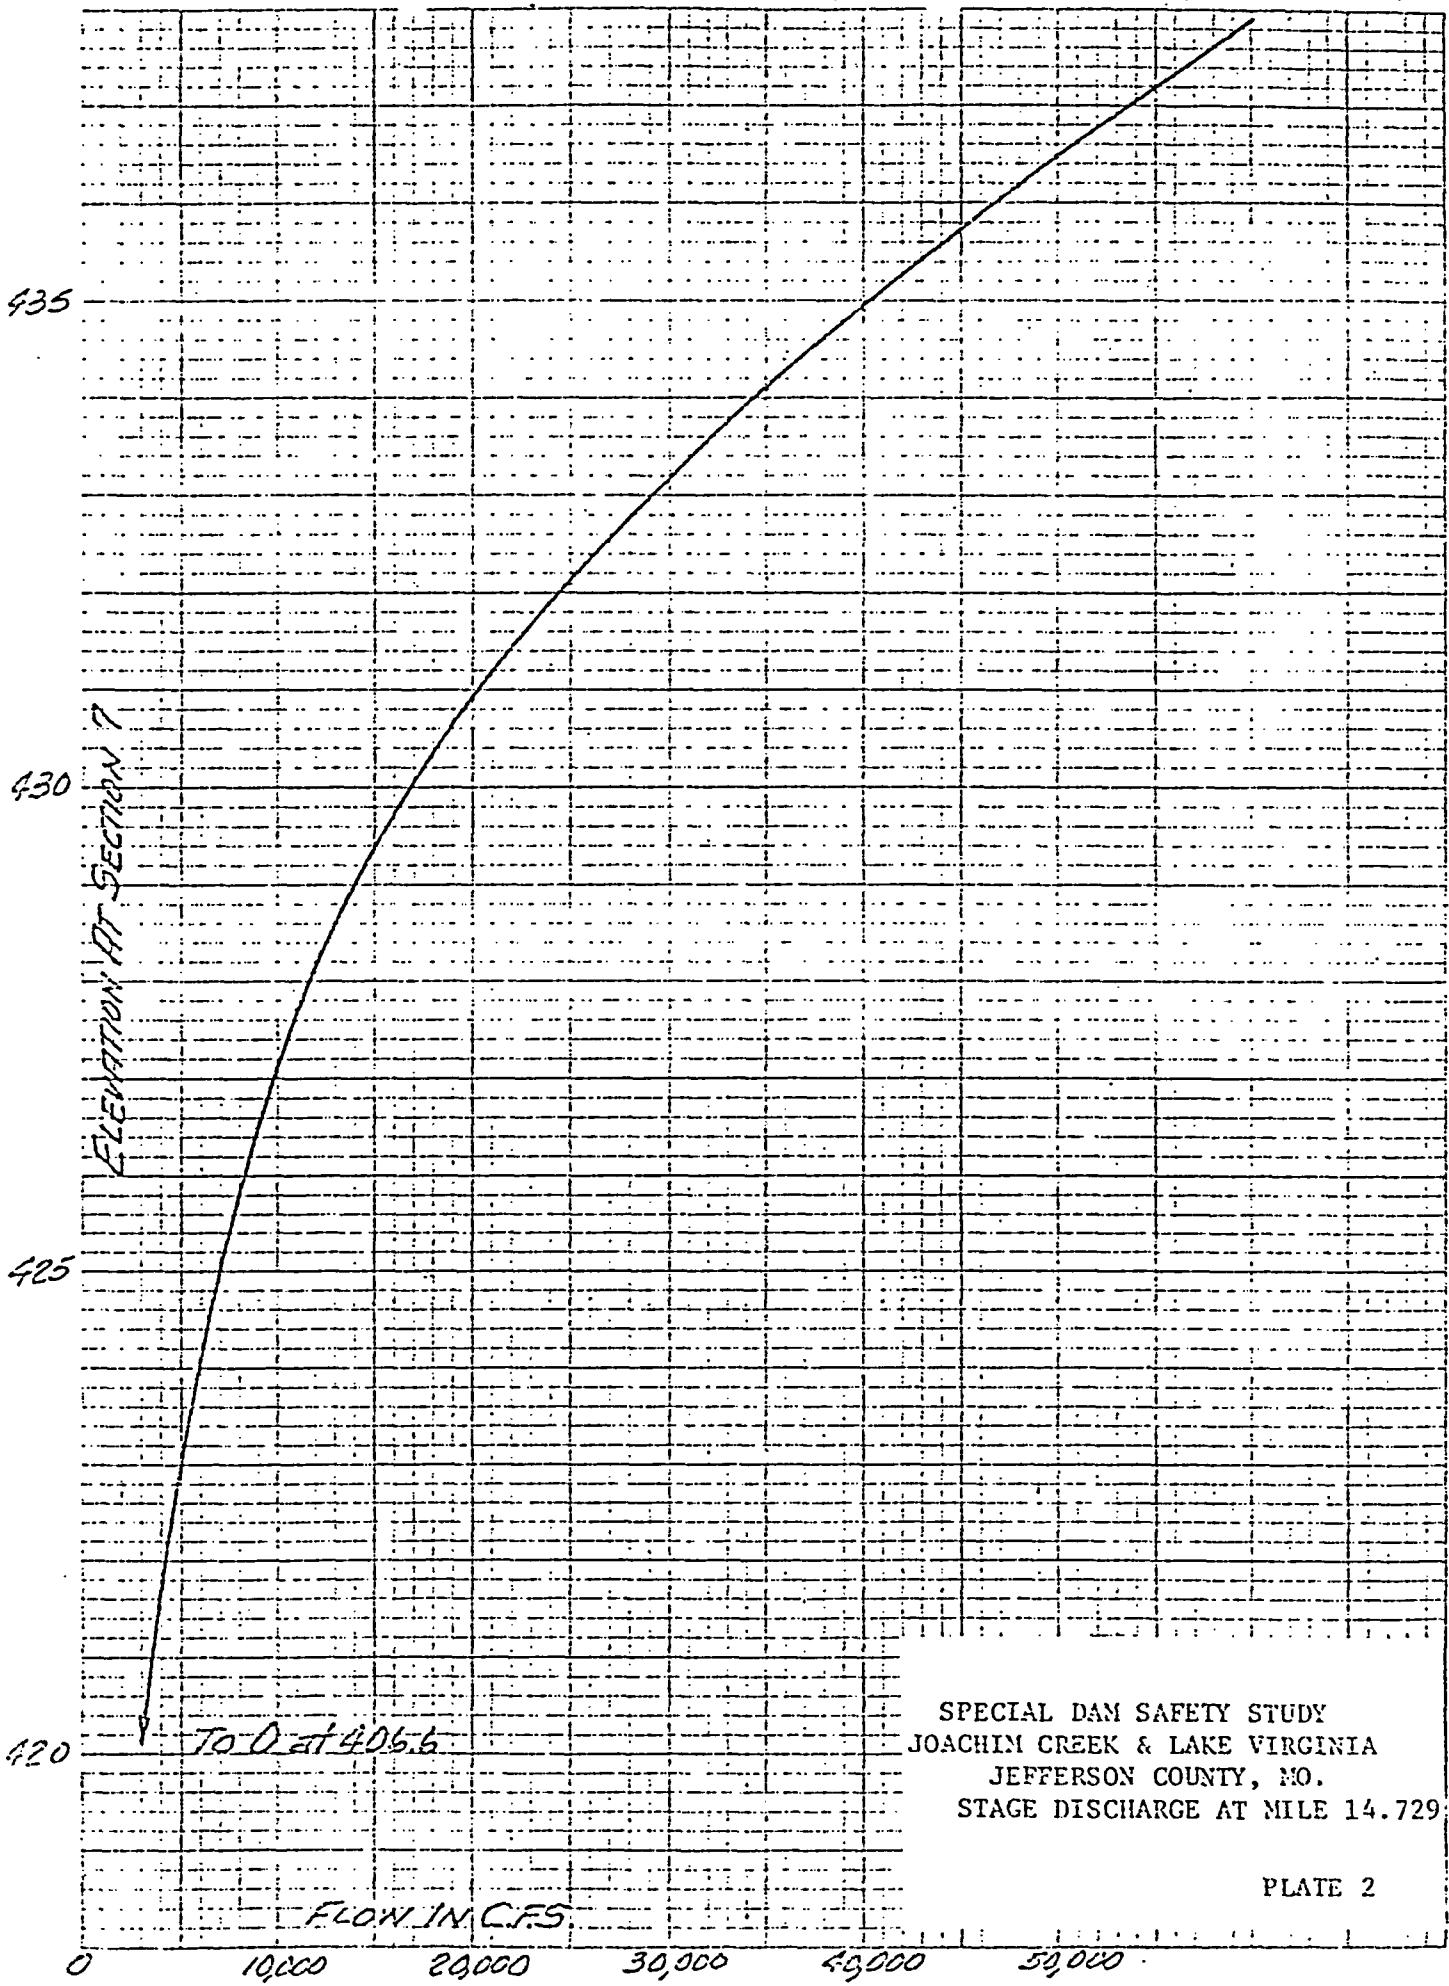

SPECIAL DAM SAFETY STUDY  
JOACHIM CREEK & LAKE VIRGINIA  
JEFFERSON COUNTY, NO.  
STAGE DISCHARGE AT MILE 14.729

PLATE 2

55-100-000

DISCHARGE(Q) - VOLUME(V) FUNCTIONS JOACHIM CREEK (from S-XL4F-QV.9-FD)


MILE → 11.875	12.631	13.334	15.146	15.771	STOR
INCREMENT →	1754	704	1,812	0,625	
Q cfs					
0 0	0 0	0 0	0 0	0 0	0 0
5000	153	153	104	257	239
10 000	323	323	221	544	628
15 000		553	382	935	1030
20 000		748	592	1340	1411
25 000	Right	1052	832	1984	1774
30 000	Some col to Right	1260	1089	2349	2128
35 000		1391	1243	2636	2250
40 000		1521	1398	2919	2765
45 000		1653	1553	3206	3080
50 000		1784	1711	3495	3396
55 000		1917	1867	3784	3718
60 000		2037	2015	4052	4033
65 000		2170	2170	4340	4367
70 000	0	2254	2254	4607	4696
		2353	4607	4696	4303
					1317
					10622

SPECIAL DAM SAFETY STUDY  
JOACHIM CREEK & LAKE VIRGINIA  
JEFFERSON COUNTY, MO.  
STORAGE DISCHARGE FUNCTIONS  
Mile 11.875 to Mile 15.771

CASE COMPUTER RUN I.D. <u>(Computer Run)</u>	DAM BREAK		PEAK		FLOWS	
	<u>Width</u>	<u>Develop</u>	<u>Lake</u>	<u>Virginia</u>	<u>cfs</u>	<u>Reach</u>
1. ØXL0H5B	NO BREAK		3552	@ 16.00	39069	@ 19.15
2. ØXLOPA7	40 ft.	20 min.	14737	@ 16.25	39104	@ 19.15
3. ØXLOPBR	400 ft.	20 min.	23958	@ 16.07	39065	@ 19.15
4. ØXL0Ø87	40 ft.	5 hrs.	3642	@ 16.00	40188	@ 19.10

SPECIAL DAM SAFETY STUDY  
 JOACHIM CREEK & LAKE VIRGINIA  
 JEFFERSON COUNTY, MO.  
 COMPUTER RESULTS

CASE 1  
40' wide Breach In  
Lake Virginia Dam  
5 Hours to Develop

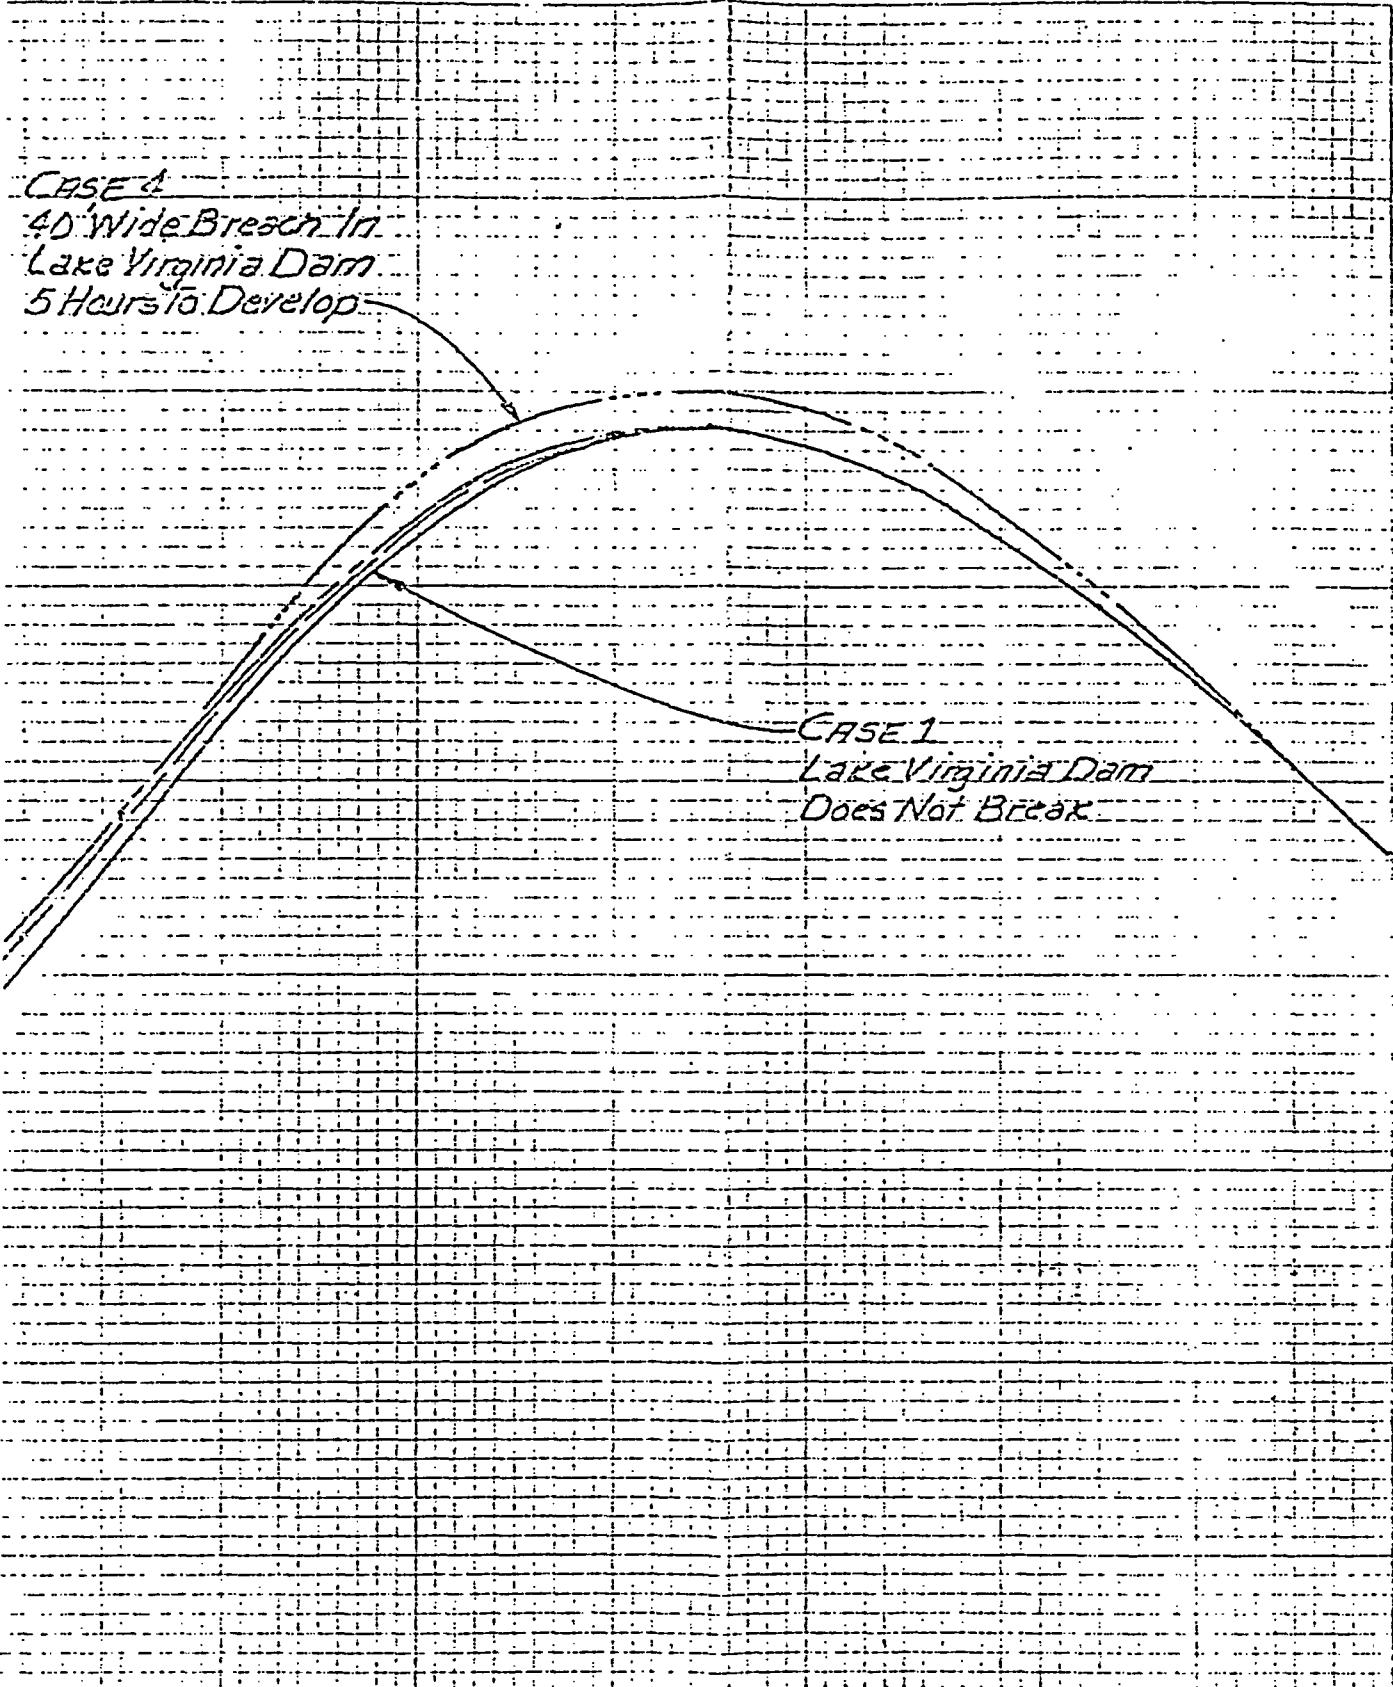

CASE 1  
Lake Virginia Dam  
Does Not Break

SPECIAL DAM SAFETY STUDY  
JOACHIN CREEK & LAKE VIRGINIA  
JEFFERSON COUNTY, MO.  
DISCHARGES IN REACH 13.334 to 15.146

PLATE 5

STORM

12

19

20

21

#### REFERENCES

1. Special Study for Joachim Creek, prepared for U.S. Army Corps of Engineers St. Louis District by Clark Dietz Engineers, March 1980.
2. Phase I Inspection Report National Dam Safety Program - Lake Virginia Dam, (Mo. Inventory #30425), U.S. Army Engineers, District St. Louis, November 1978.
3. HEC-1 Flood Hydrograph Package, U.S. Army Corps of Engineers Hydrologic Engineering Center, User's Manual, January 1973, 723-010.
4. HEC-1 Flood Hydrograph Package, U.S. Army Corps of Engineers, Hydrologic Engineering Center, User's Manual for Dam Safety Investigations, September 1978.
5. HEC-2 Water Surface Profiles, U.S. Army Corps of Engineers, Hydrologic Engineering Center, User's Manual, February 1972, 723-02A.
6. Simplified Dam Breach Routing Procedure, Technical Release No. 66, U.S. Department of Agriculture, Soil Conservation Service, Engineering Division Design Unit, March 1979.
7. HR33, Seasonal Variations of Probable Maximum Precipitation, East of the 105th Meridian for Areas 10 to 1000 Square Miles and Durations from 6 to 48 Hours, U.S. Department of Commerce, NOAA, National Weather Service, 1956.
8. Engineering Handbook, Section 4; Hydrology, Supplement A, U.S. Department of Agriculture, Soil Conservation Service.

**APPENDIX A**

**COMPUTER INPUT**

**AND SELECTED OUTPUT**

0XLOH5B

FLOOD HYDROGRAPH PACKAGE (HEC-1)  
DAH SAFETY VERSION JULY 1978  
LAST MODIFICATION 26 FEB 79

1 A FLOOD ROUTING IN JOACHIM CREEK  
2 A LAKE VIRGINIA DAM DOES NOT BREAK  
3 A 100 YEAR FLOOD ON JOACHIM 1/2 PHF ON LAKE VIRGINIA  
4 B 200 0 5 0 0 0 0 0 -4 0  
5 I S  
6 J 1 1 1  
7 J1 1.0  
8 K 0 15.711 1 3 1  
9 I \*\*\*\*\* HYDROGRAPH OF FLOW ABOVE MILE 15.711  
10 H 1 2 94.400 1  
11 P 6.15 79 97 107 -1 -73 0.02  
12 T  
13 W2 2.500  
14 X -0.20 2.0  
15 K 1 15.146 1 3 1  
16 I \*\*\*\*\* ROUTE JOACHIM CREEK FLOW MILE 15.711 TO 15.146  
17 Y 1 1 -1  
18 Y1 1  
19 Y2 0.0 120. 283. 428. 536. 634. 725. 809. 889. 965.  
20 Y2 1030. 1110. 1180. 1250. 1319.  
21 Y3 0 5000 10000 15000 20000 25000 30000 35000 40000 45000  
22 Y3 50000 55000 60000 65000 70000  
23 K 0 LAKE V 1 3 1  
24 I \*\*\*\* LAKE VIRGINIA INFLOW HYDROGRAPH  
25 H 1 2 0.742 1  
26 P 14.82 101 120 130 -1 -80 0.09  
27 T  
28 W2 0.30  
29 X -0.20 2.0  
30 K 1 OVRODAH 1 2 1  
31 I \*\*\*\*\* RESERVOIR ROUTING ~ SPILLWAY RATING CURVE - SLOPING DAM \*\*\*\*\*  
32 Y 1 1  
33 Y1 1  
34 Y4 465.5 465.0 466.5 457.0 467.5 468.0 468.5 469.0 469.5 470.0  
35 Y4 470.5 471.0 471.5  
36 Y5 0.0 4.0 13.0 28.5 50.0 78.5 112.0 152.0 244.0 279.0  
37 Y5 435.0 654.0 920.0  
38 SA 0.0 25.71 41.8 78.9  
39 SE 444 466 480 500  
40 SS 465.5  
41 SD 469.1  
42 SL 25 200 325 475 575 650 700 710 720  
43 SV 469.1 469.8 470.0 470.6 470.7 471.0 472.2 475.0 478.0  
44 K 0 15-13 1 3 1  
45 I \*\*\*\*\* LOCAL RUNOFF TRIBUTARY BETWEEN MILE 15.146 AND 13.334  
46 H 1 2 3.650 1  
47 P 5.4 101 120 130 -1 -73 0.05  
48 T  
49 W2 0.55  
50 X -0.20 2.0

SPECIAL DAM SAFETY STUDY  
JOACHIM CREEK & LAKE VIRGINIA  
Case 1 Computer Input

Sheet A-1

51 K 3 15.146 1 3 1  
 52 I \*\*\*\*\* COMBINE HYDROGRAPHS MILE 15.146  
 53 K 1 13.334 1 3 1  
 54 I \*\*\*\*\* ROUTE JOACHIM CREEK FLOW MILE 15.146 TO 13.334  
 55 Y 1 1 -1  
 56 Y2 0.0 239. 628. 1030. 1411. 1774. 2128. 2450. 2765. 3080.  
 57 Y2 3396. 3718. 4033. 4367. 4696.  
 58 Y3 0 5000 10000 15000 20000 25000 30000 35000 40000 45000  
 59 Y3 50000 55000 60000 65000 70000  
 60 K 0 BUCKS 1 3 1  
 61 I \*\*\*\*\* LOCAL RUNOFF TRIBUTARY BETWEEN MILE 13.334 AND 12.631 1  
 62 K 1 2 8.400 1  
 63 P 5.4 101 120 130 -1 -73 0.03  
 64 T 1  
 65 V2 1.30  
 66 X -0.40 1.5  
 67 K 2 13.334 1 3 1  
 68 I \*\*\*\*\* COMBINE HYDROGRAPHS MILE 13.334  
 69 K 1 12.631 1 3 1  
 70 I \*\*\*\*\* ROUTE JOACHIM CREEK FLOW MILE 13.334 TO 12.631  
 71 Y 1 1 -1  
 72 Y1 1  
 73 Y2 0.0 104. 221. 382. 592. 882. 1089. 1243. 1398. 1553.  
 74 Y2 1711. 1867. 2015. 2170. 2353.  
 75 Y3 0 5000 10000 15000 20000 25000 30000 35000 40000 45000  
 76 Y3 50000 55000 60000 65000 70000  
 77 K 99

SPECIAL DAM SAFETY STUDY  
JOACHIN CREEK & LAKE VIRGINIA

Case 1 Computer Input (Cont.)

PEAK FLOW AND STORAGE (END OF PERIOD) SUMMARY FOR MULTIPLE PLAN-RATIO ECONOMIC COMPUTATIONS  
 FLOWS IN CUBIC FEET PER SECOND (CUBIC METERS PER SECOND)  
 AREA IN SQUARE MILES (SQUARE KILOMETERS)

OPERATION	STATION	AREA	PLAN RATIO 1 1.00	RATIOS APPLIED TO FLOWS	
HYDROGRAPH AT	15.711	94.40 ( 244.49)	1 40829. ( 1156.16)		
ROUTED TO	15.146	94.40 ( 244.49)	1 40581. ( 1149.11)		
HYDROGRAPH AT	LAKE V	.74 ( 1.92)	1 3932. ( 111.33)		
ROUTED TO	OVRDAM	.74 ( 1.92)	1 3552. ( 100.57)		
HYDROGRAPH AT	15-13	3.66 ( 9.47)	1 3999. ( 113.24)		
3 COMBINED	15.146	98.80 ( 255.89)	1 42191. ( 1194.73)		
ROUTED TO	13.334	98.80 ( 255.89)	1 39069. ( 1166.31)		
HYDROGRAPH AT	BUCKS	8.40 ( 21.76)	1 5787. ( 163.88)		
2 COMBINED	13.334	107.20 ( 277.65)	1 41504. ( 1175.25)		
ROUTED TO	12.631	107.20 ( 277.65)	1 40823. ( 1155.96)		

SUMMARY OF DAM SAFETY ANALYSIS

PLAN 1 .....	ELEVATION	INITIAL VALUE	SPILLWAY CREST	TOP OF DAM			
	STORAGE	465.50	465.50	469.10			
	OUTFLOW	176.	176.	273.			
		0.	0.	170.			
RATIO OF PHF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
1.00	471.24	2.14	338.	3552.	7.83	16.00	0.00

FLOOD HYDROGRAPH PACKAGE (HEC-1)  
DAH SAFETY VERSION JULY 1978  
LAST MODIFICATION 26 FEB 79


\*\*\*\*\*  
1 A FLOOD ROUTING IN JOACHIM CREEK  
2 A 100 YEAR FLOOD ON JOACHIM 1/2 PMF ON LAKE VIRGINIA  
3 A LAKE VIRGINIA DAM BREAKS WHEN OVERFLOW IS AT MAXIMUM DEPTH  
4 B 288 0 5 0 0 0 0 0 -4 0  
5 I 5  
6 J 1 1 1  
7 J1 1.0  
8 K 0 15.711  
9 I \*\*\*\*\* HYDROGRAPH OF FLOW ABOVE MILE 15.711 1 3 1  
10 H I 2 94.400 1  
11 P 6.15 79 97 107  
12 T -1 -73 0.02  
13 W2 2.500  
14 X -0.10 3.0  
15 K I 15.146 1 3 1  
16 I \*\*\*\*\* ROUTE JOACHIM CREEK FLOW MILE 15.711 TO 15.146  
17 Y 1 1  
18 Y1 1  
19 Y2 0.0 120. 283. 420. 536. 634. 725. 809. 889. 965.  
20 Y2 1038. 1110. 1180. 1250. 1319.  
21 Y3 0 5000 10000 15000 20000 25000 30000 35000 40000 45000  
22 Y3 50000 55000 60000 65000 70000  
23 K 0 LAKE V 1 3 1  
24 I \*\*\*\* LAKE VIRGINIA INFLOW HYDROGRAPH  
25 H I 2 0.742 1  
26 P 14.82 101 120 130  
27 T -1 -60 0.09  
28 W2 0.30  
29 X -0.20 2.0  
30 K I OVRDAH 1 2 1  
31 I \*\*\*\*\* DAM BREACH 40 FEET WIDE 20 MINUTES TO DEVELOP  
32 Y 1 1  
33 Y1 1  
34 Y4 465.5 466.0 466.5 467.0 467.5 468.0 468.5 469.0 469.5 470.0  
35 Y4 470.5 471.0 471.5  
36 Y5 0.0 4.0 13.0 28.5 50.0 78.5 112.0 152.0 244.0 279.0  
37 Y5 435.0 654.0 920.0  
38 SA 0.0 25.71 41.8 78.9  
39 SE 444 466 480 500  
40 SS 465.5  
41 SD 469.1  
42 SL 25 200 325 475 575 650 700 710 720  
43 SV 469.1 469.0 470.0 470.6 470.7 471.0 472.2 475.0 478.0  
44 SB 40. 0.5 444.5 0.33333 465.5 471.22  
45 K 0 15-13 1 3 1  
46 I \*\*\*\*\* LOCAL RUNOFF TRIBUTARY BETWEEN MILE 15.146 AND 13.334  
47 H I 2 3.658 1  
48 P 5.4 101 120 130  
49 T -1 -73 0.05  
50 W2 0.55

0XLOPA7

SPECIAL DAM SAFETY STUDY  
JOACHIM CREEK & LAKE VIRGINIA  
Case 2 Computer Input

Sheet A-4

51 X -0.20 2.0  
 52 K 3 15.146 1 3 1  
 53 I \*\*\*\*\* COMBINE HYDROGRAPHS MILE 15.146 )  
 54 K 1 13.334 1 3 1 )  
 55 I \*\*\*\*\* ROUTE JOACHIM CREEK FLOW MILE 15.146 TO 13.334 )  
 56 Y 1 1 )  
 57 Y1 1 )  
 58 Y2 0.0 239. 628. 1030. 1411. 1774. 2128. 2450. 2765. 3000.  
 59 Y2 3396. 3718. 4033. 4367. 4696.  
 60 Y3 0 5000 10000 15000 20000 25000 30000 35000 40000 45000  
 61 Y3 50000 55000 60000 65000 70000  
 62 K C BUCKS 1 3 1  
 63 I \*\*\*\*\* LOCAL RUNOFF TRIBUTARY BETWEEN MILE 13.334 AND 12.631 1  
 64 H 1 2 8.400 1  
 65 P 5.4 101 120 130  
 66 T -1 -73 0.03  
 67 R2 1.30  
 68 X -0.40 1.5  
 69 K 2 13.334 1 3 1  
 70 I \*\*\*\*\* COMBINE HYDROGRAPHS MILE 13.334 )  
 71 K 1 12.631 1 3 1 )  
 72 I \*\*\*\*\* ROUTE JOACHIM CREEK FLOW MILE 13.334 TO 12.631 )  
 73 Y 1 1 )  
 74 Y1 1 )  
 75 Y2 0.0 104. 221. 362. 592. 882. 1089. 1243. 1398. 1553.  
 76 Y2 1711. 1867. 2015. 2170. 2353.  
 77 Y3 0 5000 10000 15000 20000 25000 30000 35000 40000 45000  
 78 Y3 50000 55000 60000 65000 70000  
 79 K 99

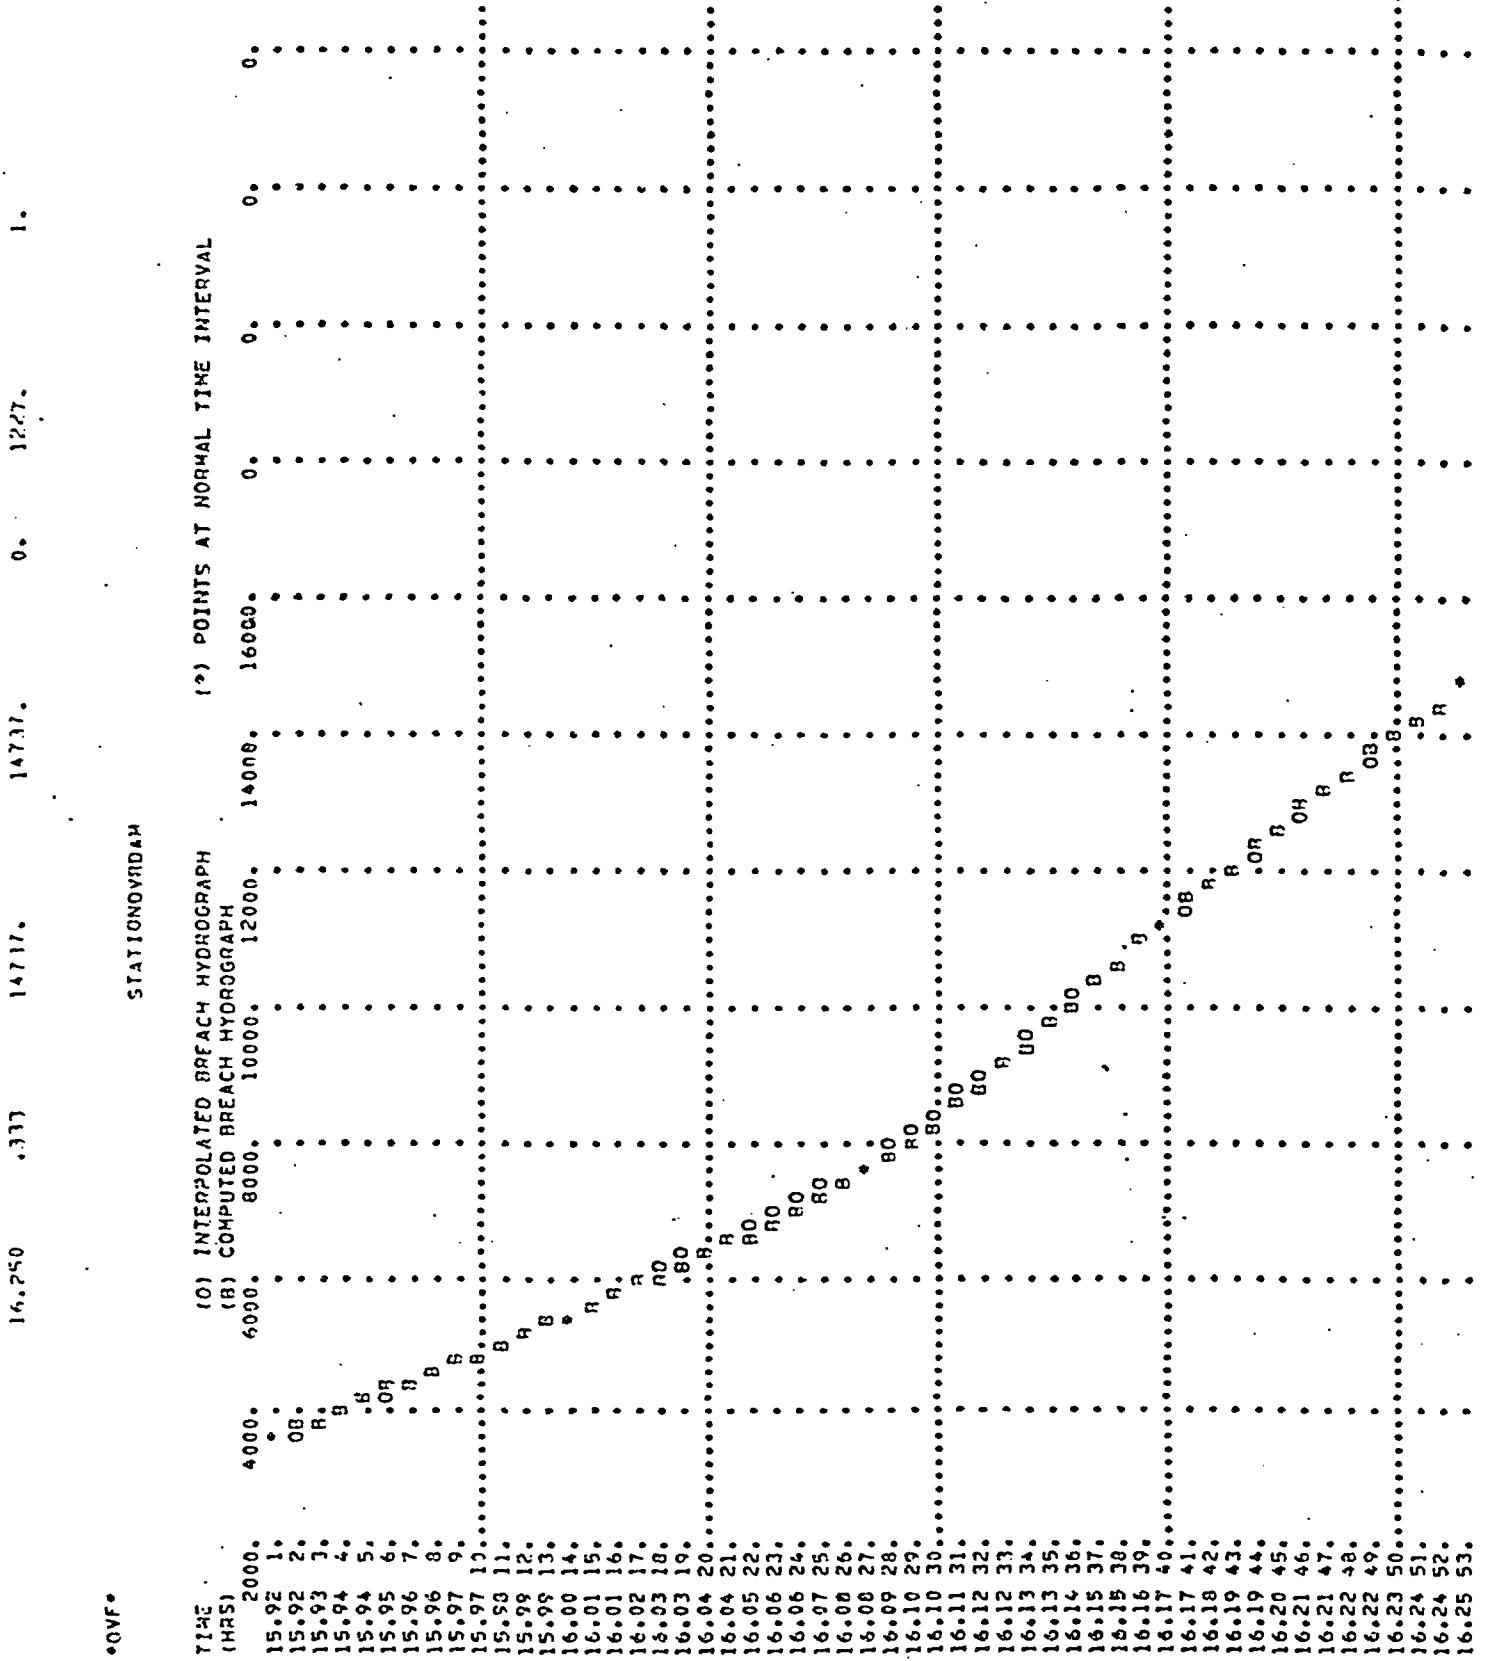

SPECIAL DAM SAFETY STUDY  
JOACHIM CREEK & LAKE VIRGINIA  
Case 2 Computer Output  
Dam Breach Hydrograph

PEAK FLOW AND STORAGE (END OF PERIOD) SUMMARY FOR MULTIPLE PLAN-RATIO COMPUTATIONS  
 FLOWS IN CUBIC FEET PER SECOND (CUBIC METERS PER SECOND)  
 AREA IN SQUARE MILES (SQUARE KILOMETERS)

OPERATION	STATION	AREA	PLAN RATIO	RATIOS APPLIED TO FLOWS	
				1	1.00
HYDROGRAPH AT	15.711	94.40	1	40829.	
		( 244.49)		( 1156.16)	(
ROUTED TO	15.146	94.40	1	40581.	
		( 244.49)		( 1149.11)	(
HYDROGRAPH AT	LAKE V	.74	1	3932.	
		( 1.92)		( 111.33)	(
ROUTED TO	OVRUAM	.74	1	14737.	
		( 1.92)		( 417.30)	(
HYDROGRAPH AT	15-13	3.66	1	3999.	
		( 9.47)		( 113.24)	(
3 COMBINED	15.146	98.80	1	42090.	
		( 255.89)		( 1191.85)	(
ROUTED TO	13.334	98.80	1	39104.	
		( 255.89)		( 1107.31)	(
HYDROGRAPH AT	BUCKS	8.40	1	5787.	
		( 21.76)		( 163.88)	(
2 COMBINED	13.334	107.20	1	41604.	
		( 277.65)		( 1178.08)	(
ROUTED TO	12.631	107.20	1	40943.	
		( 277.65)		( 1159.37)	(

SUMMARY OF DAM SAFETY ANALYSIS

PLAN 1 .....	ELEVATION	INITIAL VALUE	SPILLWAY CREST	TOP OF DAM			
	STORAGE	465.50	465.50	469.10			
	OUTFLOW	176.	176.	273.			
		0.	0.	170.			
RATIO	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP	TIME OF MAX OUTFLOW	TIME OF FAILURE
1.00	471.25	2.15	338.	14737.	2.61	16.25	15.92

## FLOOD HYDROGRAPH PACKAGE (HEC-1)

DAH SAFETY VERSION JULY 1978

LAST MODIFICATION 26 FEB 79

\*\*\*\*\*

1 A FLOOD ROUTING IN JOACHIM CREEK  
 2 A 100 YEAR FLOOD ON JOACHIM 1/2 PMF ON LAKE VIRGINIA  
 3 A LAKE VIRGINIA DAM BREAKS WHEN OVERFLOW IS AT MAXIMUM DEPTH  
 4 B 288 0 5 0 0 0 0 0 -4 0  
 5 1 5  
 6 J 1 1 1  
 7 J1 1.0  
 8 K 0 15.711 1 3 1  
 9 I \*\*\*\* HYDROGRAPH OF FLOW ABOVE MILE 15.711 1  
 10 H 1 2 94.400 1  
 11 P 6.15 79 97 107 1  
 12 T -1 -73 0.02  
 13 U2 2.500  
 14 X -0.20 2.0  
 15 K 1 15.146 1 3 1  
 16 I \*\*\*\* ROUTE JOACHIM CREEK FLOW MILE 15.711 TO 15.146 1  
 17 Y 1 1  
 18 Y1 1  
 19 Y2 0.0 120. 283. 428. 536. 634. 725. 809. 889. 911  
 20 Y2 1038. 1110. 1180. 1250. 1319. 25000 30000 35000 40000 45000  
 21 Y3 0 5000 10000 15000 20000 25000 30000 35000 40000 45000  
 22 Y3 50000 55000 60000 65000 70000  
 23 K 0 LAKE V 1 3 1  
 24 I \*\*\* LAKE VIRGINIA INFLOW HYDROGRAPH 1  
 25 H 1 2 0.742 1  
 26 P 14.82 101 120 130 1  
 27 T -1 -80 0.09  
 28 U2 0.30  
 29 X -0.20 2.0  
 30 K 1 OVROAM 1 2 1  
 31 I \*\*\*\* DAM BREACH 400 FEET WIDE 20 MINUTES TO DEVELOP 1  
 32 Y 1 1  
 33 Y1 1  
 34 Y4 465.5 466.0 466.5 467.0 467.5 468.0 468.5 469.0 469.5 470.0  
 35 Y4 470.5 471.0 471.5  
 36 Y5 0.0 4.0 13.0 28.5 50.0 78.5 112.0 152.0 244.0 279.0  
 37 Y5 435.0 654.0 920.0  
 38 SA 0.0 25.71 41.8 78.9  
 39 SE 444 466 480 500  
 40 SS 465.5  
 41 SD 469.1  
 42 SL 25 200 325 475 575 650 700 710 720

SPECIAL DAM :  
 JOACHIN CREEK  
 Case 3 Compute


ØXLOPBR

51                    -0.20      2.0  
 52                    X     3    15.146      1      3      1  
 53                    X     \*\*\*\*\* COMBINE HYDROGRAPHS MILE 15.146  
 54                    X     1    13.334      1      3      1  
 55                    I     \*\*\*\*\* ROUTE JOACHIM CREEK FLOW MILE 15.146 TO 13.334  
 56                    Y     1      1      1      1  
 57                    Y1    1  
 58                    Y2    0.0    239.    629.    1030.    1411.    1774.    2128.    2450.    2765.    3060.  
 59                    Y2    3396.    3718.    4033.    4367.    4696.  
 60                    Y3    0    5000    10000    15000    20000    25000    30000    35000    40000    45000  
 61                    Y3    50000    55000    60000    65000    70000  
 62                    K     0    BUCKS      1      3      1  
 63                    I     \*\*\*\*\* LOCAL RUNOFF TRIBUTARY BETWEEN MILE 13.334 AND 12.631  
 64                    N     1      2    0.400      1      1  
 65                    P     5.4    101    120    130  
 66                    T     -1      -73      0.03  
 67                    U2    1.30  
 68                    X     -0.40    1.5  
 69                    X     2    13.334      1      3      1  
 70                    I     \*\*\*\*\* COMBINE HYDROGRAPHS MILE 13.334  
 71                    K     1    12.631      1      3      1  
 72                    I     \*\*\*\*\* ROUTE JOACHIM CREEK FLOW MILE 13.334 TO 12.631  
 73                    Y     1      1      1      1  
 74                    Y1    1  
 75                    Y2    0.0    104.    221.    382.    592.    882.    1089.    1243.    1398.    1553.  
 76                    Y2    1711.    1867.    2015.    2170.    2353.  
 77                    Y3    0    5000    10000    15000    20000    25000    30000    35000    40000    45000  
 78                    Y3    50000    55000    60000    65000    70000  
 79                    K     99

SPECIAL DAM SAFETY STUDY  
 JOACHIM CREEK & LAKE VIRGINIA  
 Case 3 Computer Input (Cont.)

•OVF•

**STATION OYRDAM**

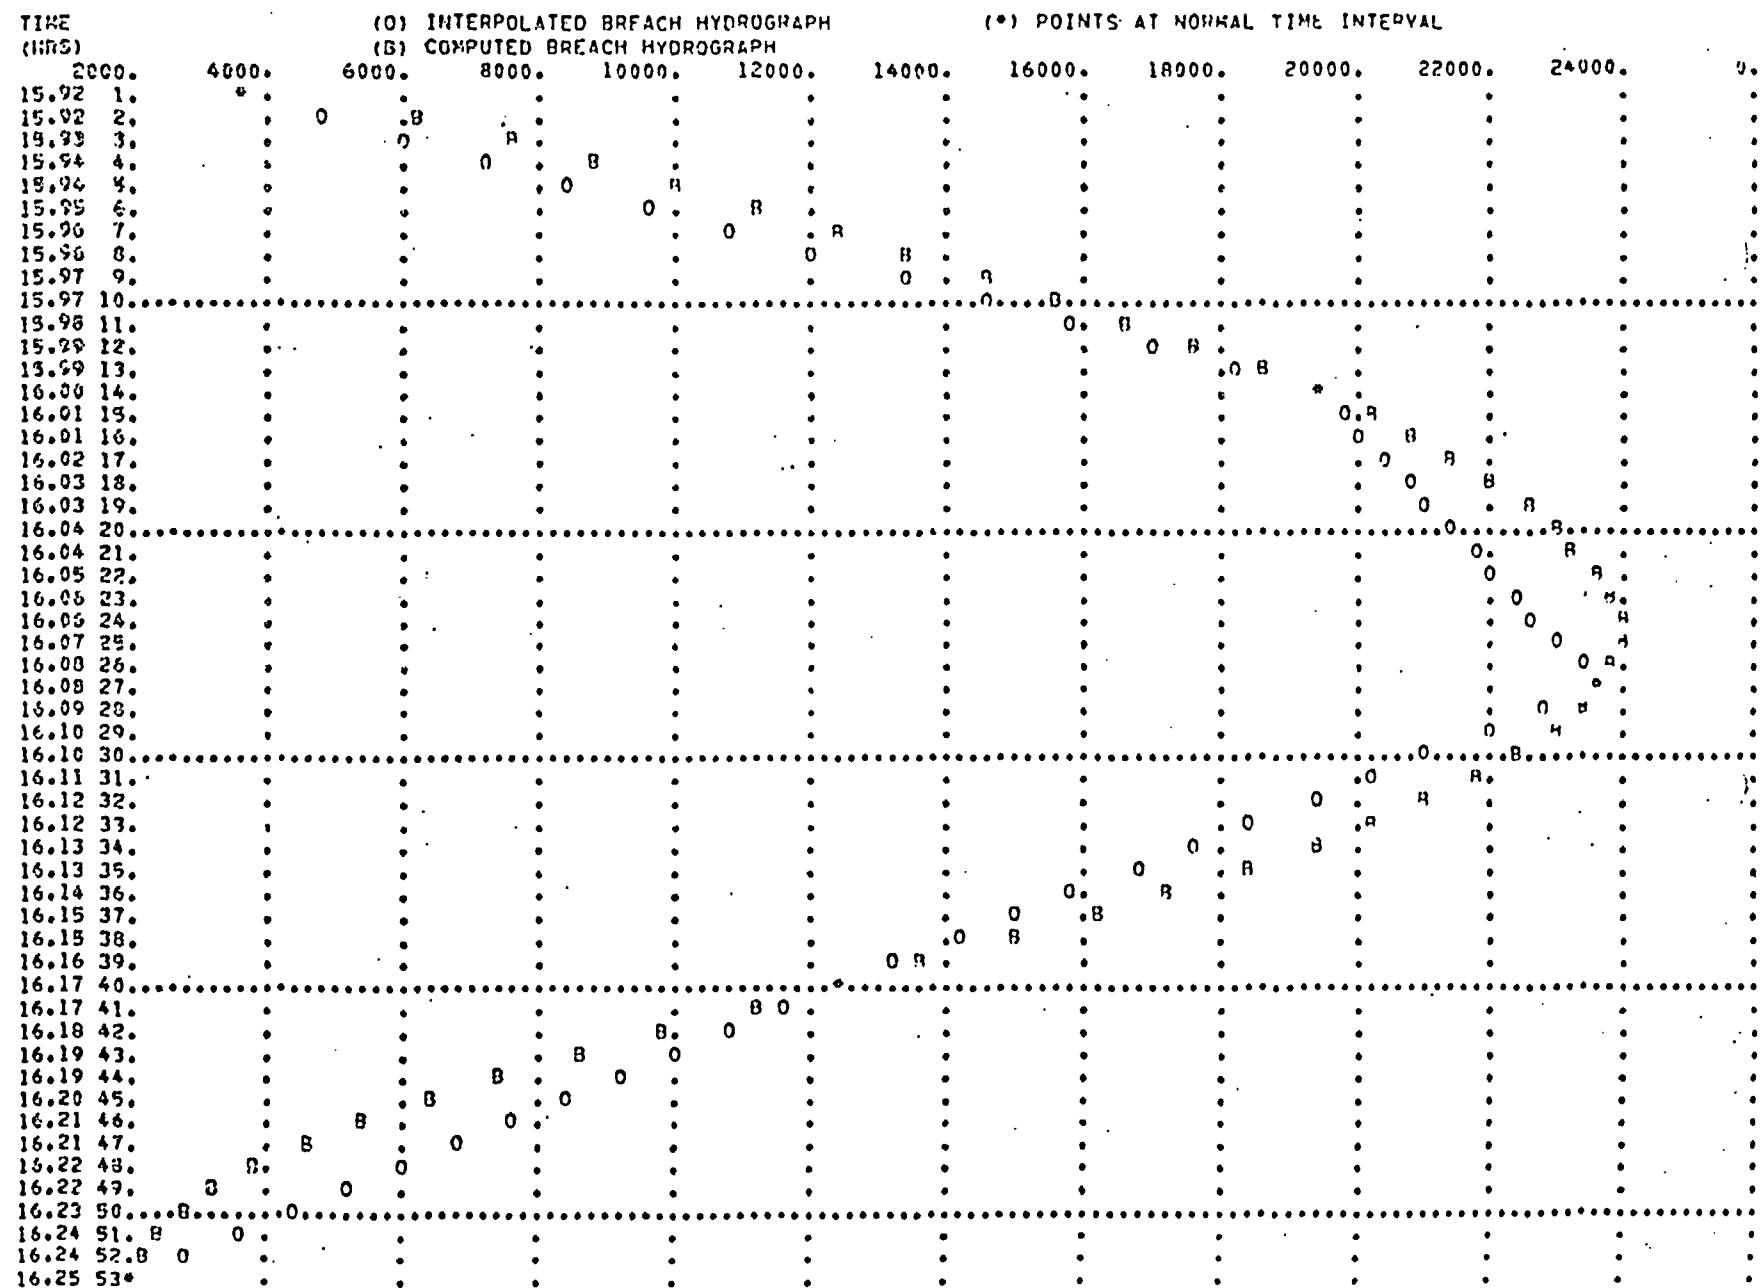

ΦΚΙ.ΟΠΒΡ

**SPECIAL DAM SAFETY STUDY  
JOACHIM CREEK & LAKE VIRGINIA  
Case 3 Computer Output  
Dam Breach Hydrograph**

PEAK FLOW AND STORAGE (END OF PERIOD) SUMMARY FOR MULTIPLE PLAN-RATIO ECONOMIC COMPUTATIONS  
 FLOWS IN CUBIC FEET PER SECOND (CUBIC METERS PER SECOND)  
 AREA IN SQUARE MILES (SQUARE KILOMETERS)

OPERATION	STATION	AREA	PLAN RATIO	RATIOS APPLIED TO FLOWS	
				1	1.00
HYDROGRAPH AT	15.711	94.40	1	40829.	
		( 244.49)		( 1156.16)	
ROUTED TO	15.146	94.40	1	40581.	
		( 244.49)		( 1149.11)	
HYDROGRAPH AT	LAKE Y	.74	1	3932.	
		( 1.92)		( 111.33)	
ROUTED TO	OVNDAM	.74	1	23664.	
		( 1.92)		( 670.09)	
HYDROGRAPH AT	15-13	3.66	1	3999.	
		( 9.47)		( 113.24)	
3 COMBINED	15.146	98.80	1	42162.	
		( 255.89)		( 1193.89)	
ROUTED TO	13.334	98.80	1	39665.	
		( 255.89)		( 1106.20)	
HYDROGRAPH AT	BUCKS	8.40	1	5787.	
		( 21.76)		( 163.88)	
2 COMBINED	13.334	107.20	1	41551.	
		( 277.65)		( 1176.58)	
ROUTED TO	12.631	107.20	1	40885.	
		( 277.65)		( 1157.73)	

SUMMARY OF DAM SAFETY ANALYSIS

PLAN 1 .....	ELEVATION	INITIAL VALUE	SPILLWAY CREST	TOP OF DAM			
	STORAGE	465.50	465.50	469.10			
	OUTFLOW	176.	176.	273.			
		0.	0.	170.			
RATIO OF PHF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
1.00	471.24	2.14	338.	23958.	2.67	16.07	15.92

FLOOD HYDROGRAPH PACKAGE (HEC-1)  
 DAM SAFETY VERSION JULY 1978  
 LAST MODIFICATION 26 FEB 79

\*\*\*\*\*  
 1 A FLOOD ROUTING IN JOACHIM CREEK  
 2 A 100 YEAR FLOOD ON JOACHIM 1/2 PHF ON LAKE VIRGINIA  
 3 A LAKE VIRGINIA DAM BREAKS WHEN OVERFLOW IS AT MAXIMUM DEPTH  
 4 B 288 0 5 0 0 0 0 -4 0  
 5 1 5  
 6 J 1 1 1  
 7 J1 1.0  
 8 K 0 15.711 1 3 1  
 9 I \*\*\*\*\* HYDROGRAPH OF FLOW ABOVE MILE 15.711  
 10 H 1 2 94.400 1  
 11 D 6.15 79 97 107 1  
 12 T -1 -73 0.02  
 13 W2 2.500  
 14 X -0.10 3.0  
 15 K 1 15.146 1 3 1  
 16 I \*\*\*\*\* ROUTE JOACHIM CREEK FLOW MILE 15.711 TO 15.146  
 17 Y 1 1  
 18 Y1 1 -1  
 19 Y2 0.0 120. 283. 428. 536. 634. 725. 809. 889. 965.  
 20 Y2 1038. 1110. 1180. 1250. 1319.  
 21 Y3 0 5000 10000 15000 20000 25000 30000 35000 40000 45000  
 22 Y3 50000 55000 60000 65000 70000  
 23 K 0 LAKE V 1 3 1  
 24 I \*\*\*\* LAKE VIRGINIA INFLOW HYDROGRAPH  
 25 H 1 2 0.742 1 1  
 26 D 14.82 101 120 130 -1 -80 0.09  
 27 T -1 -73 0.02  
 28 W2 0.30  
 29 X -0.20 2.0  
 30 K 1 OVRDAM 1 2 1  
 31 I \*\*\*\*\* DAM BREACH 40 FEET WIDE FIVE HOURS TO DEVELOP  
 32 Y 1 1  
 33 Y1 1 -1  
 34 Y4 465.5 466.0 466.5 467.0 467.5 468.0 468.5 469.0 469.5 470.0  
 35 Y4 470.5 471.0 471.5  
 36 Y5 0.0 4.0 13.0 28.5 50.0 78.5 112.0 152.0 244.0 279.0  
 37 Y5 435.0 654.0 920.0  
 38 SA 0.0 25.71 41.8 78.9  
 39 SE 444 466 480 500  
 40 SS 465.5  
 41 SD 469.1  
 42 SL 25 200 325 475 575 650 700 710 720  
 43 SV 469.1 469.8 470.0 470.6 470.7 471.0 472.2 475.0 478.0  
 44 SB 40. 0.5 444.5 5.0 465.5 471.22  
 45 K 0 15-13 1 3 1  
 46 I \*\*\*\* LOCAL RUNOFF TRIBUTARY BETWEEN MILE 15.146 AND 13.334  
 47 H 1 2 3.658 1 1  
 48 D 5.4 101 120 130 -1 -73 0.05  
 49 T -1 -73 0.05  
 50 W2 0.55

51            X        -0.20      2.0  
 52            K        3 15.146                  1      3      1  
 53            I        \*\*\*\*\* COMBINE HYDROGRAPHS MILE 15.146  
 54            K        1 13.334                  1      ?      ?  
 55            I        \*\*\* ROUTE JOACHIM CREEK FLOW MILE 15.146 TO 13.334  
 56            Y        1                          1      1  
 57            Y1      1                              -1  
 58            Y2      0.0      239.      628.      1030.      1411.      1774.      2128.      2450.      2765.      3080.  
 59            Y2      3396.     3718.     4039.     4367.     4696.  
 60            Y3      0      5000      10000      15000      20000      25000      30000      35000      40000      45000  
 61            Y3      50000     55000     60000     65000     70000  
 62            K        0      BUCKS                  1      3      1  
 63            I        \*\*\*\*\* LOCAL RUNOFF TRIBUTARY BETWEEN MILE 13.334 AND 12.631  
 64            N        1                          1      1  
 65            P        2      8.400                  1  
 66            P        5.4      101      120      130  
 67            T        1.30  
 68            V2      1.30  
 69            X        -0.40      1.5  
 70            K        2 13.334                  1      3      1  
 71            I        \*\*\*\*\* COMBINE HYDROGRAPHS MILE 13.334  
 72            K        1 12.631                  1      3      1  
 73            I        \*\*\* ROUTE JOACHIM CREEK FLOW MILE 13.334 TO 12.631  
 74            Y1      1                              -1  
 75            Y2      0.0      104.      221.      382.      592.      882.      1089.      1243.      1398.      1553.  
 76            Y2      1711.     1867.     2015.     2170.     2353.  
 77            Y3      0      5000      10000      15000      20000      25000      30000      35000      40000      45000  
 78            Y3      50000     55000     60000     65000     70000  
 79            K        99

'SPECIAL DAM SAFETY STUDY  
 JOACHIM CREEK & LAKE VIRGINIA  
 Case 4 Computer Input (Cont.)

6XLOP87

PEAK FLOW AND STORAGE (END OF PERIOD) SUMMARY FOR MULTIPLE PLAN-RATIO ECONOMIC COMPUTATIONS  
 FLOWS IN CUBIC FEET PER SECOND (CUBIC METERS PER SECOND)  
 AREA IN SQUARE MILES (SQUARE KILOMETERS)

OPERATION	STATION	AREA	PLAN	RATIO <sup>E</sup> APPLIED TO FLOWS	
				RATIO 1	1.00
HYDROGRAPH AT	15.711	94.40	1	40829.	
		( 244.49)		( 1156.16)	(
ROUTED TO	15.146	94.40	1	40581.	
		( 244.49)		( 1149.11)	(
HYDROGRAPH AT	LAKE V	.74	1	3932.	
		( 1.92)		( 111.33)	(
ROUTED TO	OVRDAH	.74	1	3642.	
		( 1.92)		( 103.13)	(
HYDROGRAPH AT	15-13	3.66	1	3999.	
		( 9.47)		( 113.24)	(
3 COMBINED	15.146	98.80	1	43576.	
		( 255.89)		( 1233.93)	(
ROUTED TO	13.334	98.80	1	40168.	
		( 255.89)		( 1137.99)	(
HYDROGRAPH AT	BUCKS	8.40	1	5787.	
		( 21.76)		( 163.88)	(
2 COMBINED	13.334	107.20	1	42703.	
		( 277.65)		( 1209.22)	(
ROUTED TO	12.631	107.20	1	41943.	
		( 277.65)		( 1187.69)	(

SUMMARY OF DAM SAFETY ANALYSIS

PLAN 1 .....	ELEVATION	INITIAL VALUE	SPILLWAY CREST	TOP OF DAM			
	STORAGE	465.50	465.50	469.10			
	OUTFLOW	176.	176.	273.			
		0.	0.	170.			
RATIO OF PKF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
1.00	471.24	2.14	338.	3642.	3.67	16.00	15.92

0XL0087