

Browns Ferry Nuclear Plant  
Unit 2, Cycle 10

**CORE OPERATING LIMITS REPORT  
(COLR)**

TENNESSEE VALLEY AUTHORITY  
Nuclear Fuel Division  
BWR Fuel Engineering Department

Prepared By: *Earl E. Riley* Date: 7/7/98  
Earl E. Riley, Engineering Specialist  
BWR Fuel Engineering

Verified By: *Alan L. Bruce* Date: 7/7/98  
Alan L. Bruce, Nuclear Engineer  
BWR Fuel Engineering

Approved By: *T. A. Keys* Date: 7/8/98  
T. A. Keys, Manager  
BWR Fuel Engineering

Reviewed By: *J. Lewis* Date: 7-9-98  
Reactor Engineering Supervisor

Reviewed By: *[Signature]* Date: 7/9/98  
PORC Chairman

Revision 2 (7/8/98)

Revise for Improved Technical Specification Implementation  
Pages Affected: All

9808210172 980817  
PDR ADOCK 05000260  
P PDR

⊗

10/10/10

10/10/10

10/10/10

10/10/10

10/10/10

## Revision Log

<u>Revision</u>	<u>Date</u>	<u>Description</u>	<u>Affected Pages</u>
0	9/25/97	Initial Release	All
1	5/21/98	Revise Tau Calculation (ref. BFN PER no. 98-005651-000)	1, 2, 6, 9
2	7/8/98	Revise to Implement Improved Technical Specification Requirements	All




## 1. INTRODUCTION

This Core Operating Limits Report for Browns Ferry Unit 2, Cycle 10 is prepared in accordance with the requirements of Browns Ferry Technical Specification 5.6.5. The core operating limits presented here were developed using NRC-approved methods (References 1 and 2). Results from the reload analyses for Browns Ferry Unit 2, Cycle 10 are documented in Reference 3.

The following core operating limits are included in this report:

- a. Average Planar Linear Heat Generation Rate (APLHGR) Limit  
(Technical Specifications 3.2.1 and 3.7.5)
- b. Linear Heat Generation Rate (LHGR) Limit  
(Technical Specification 3.2.3)
- c. Minimum Critical Power Ratio Operating Limit (OLMCPR)  
(Technical Specifications 3.2.2, 3.3.4.1, and 3.7.5)
- d. Average Power Range Monitor (APRM) Flow Biased Rod Block Trip Setting  
(Technical Requirements Manual Section 5.3.1 and Table 3.3.4-1)
- e. Rod Block Monitor (RBM) Trip Setpoints and Operability  
(Technical Specification Table 3.3.2.1-1)
- f. Shutdown Margin (SDM) Limit  
(Technical Specification 3.1.1)




## 2. APLHGR LIMIT (TECHNICAL SPECIFICATIONS 3.2.1 AND 3.7.5)

The APLHGR limits for full power and flow conditions for each type of fuel as a function of exposure are shown in Figures 1-8. The APLHGR limits for the GE9B, GE11 and GE13 assemblies are for the most limiting lattice (excluding natural uranium) at each exposure point. The specific values for each lattice are given in Reference 4.

These APLHGR limits are adjusted for off-rated power and flow conditions using the ARTS factors, MAPFAC(P) and MAPFAC(F). The reduced power factor, MAPFAC(P), is given in Figure 9. Similarly, adjustments for reduced flow operation are performed using the MAPFAC(F) corrections given in Figure 10. Both factors are multipliers used to reduce the standard APLHGR limit. The most limiting power-adjusted or flow-adjusted value is taken as the APLHGR operating limit for the off-rated condition.

The APLHGR limits in figures 1-8 are applicable for both Turbine Bypass In-Service and Out-Of-Service. The off-rated power and flow corrections in figures 9 and 10 bound both Turbine Bypass In-Service and Out-Of-Service operation. No corrections are required to the APLHGR limits for TBOOS for either rated or off-rated operation.





### 3. LHGR LIMIT (TECHNICAL SPECIFICATION 3.2.3)

The LHGR limit for unit 2 cycle 10 is fuel type dependent , as shown below:

Fuel Type	LHGR Limit
GE7B (BP8X8R)	13.4 kw/ft
GE9B (GE8X8NB)	14.4 kw/ft
GE11	14.4 kw/ft
GE13	14.4 kw/ft

4. OLMCPR (TECHNICAL SPECIFICATIONS 3.2.2, 3.3.4.1, AND 3.7.5)

- a. The MCPR Operating Limit for rated power and flow conditions, OLMCPR(100), is equal to the fuel type and exposure dependent limit shown in Figures 11 thru 14. The actual OLMCPR(100) value is dependent upon the scram time testing results, as described below:

$$\tau = 0.0 \quad \text{or} \quad \frac{\tau_{ave} - \tau_B}{\tau_A - \tau_B}, \quad \text{whichever is greater}$$

where;  $\tau_A = 1.096$  sec (analytical Option A scram time limit - based on dropout time for notch position 36)

$$\tau_{ave} = \frac{\sum_{i=1}^n \tau_i}{n}$$

$$\tau_B = \mu + 1.65 * \sigma * \left[ \frac{N}{n} \right]^{\frac{1}{2}}$$

where;  $\mu = 0.830$  sec (mean scram time used in transient analysis - based on dropout time for notch position 36)

$\sigma = 0.019$  sec (standard deviation of  $\mu$ )

$N =$  Total number of active rods measured in Technical Specification Surveillance Requirement SR3.1.4.1

$n =$  Number of surveillance rod tests performed to date in cycle

$\tau_i =$  Scram time (dropout time) from fully withdrawn to notch position 36 for the  $i^{\text{th}}$  rod

- b. Option A OLMCPR limits ( $\tau=1.0$ ) shall be used prior to the determination of  $\tau$  in accordance with SR 3.1.4.1.
- c. For off-rated power and flow conditions, power-adjusted and flow-adjusted operating limits are determined from Figures 15 and 16, respectively. The most limiting power-dependent or flow-dependent value is taken as the OLMCPR for the off-rated condition.
- d. OLMCPR limits and off-rated corrections are provided for Recirculation Pump Trip out-of-service (RPTOOS) or Turbine Bypass out-of-service (TBOOS) conditions. These events are analyzed separately and the core is not analyzed for both systems Out-Of-Service at the same time.



**5. APRM FLOW BIASED ROD BLOCK TRIP SETTING (TECHNICAL REQUIREMENTS MANUAL SECTION 5.3.1 AND TABLE 3.3.4-1)**

The APRM Rod Block trip setting shall be:

$$S_{RB} \leq (0.66W + 66\%) \quad \text{Allowable Value}$$

$$S_{RB} \leq (0.66W + 64\%) \quad \text{Nominal Trip Setpoint (NTSP)}$$

where:

$S_{RB}$  = Rod Block setting in percent of rated thermal power (3293 MWt)

$W$  = Loop recirculation flow rate in percent of rated

The APRM Rod Block trip setting is clamped at a maximum allowable value of 115% (corresponding to a NTSP of 113%).

**6. ROD BLOCK MONITOR (RBM) TRIP SETPOINTS AND OPERABILITY  
(TECHNICAL SPECIFICATION TABLE 3.3.2.1-1)**

The RBM trip setpoints and applicable power ranges shall be as follows:


RBM Trip Setpoint	Allowable Value (AV)	Nominal Trip Setpoint (NTSP)	
LPSP	27%	25%	
IPSP	62%	60%	
HPSP	82%	80%	
LTSP - unfiltered	121.7%	120.0%	(1),(2)
- filtered	120.7%	119.0%	
ITSP - unfiltered	116.7%	115.0%	(1),(2)
- filtered	115.7%	114.0%	
HTSP - unfiltered	111.7%	110.0%	(1),(2)
- filtered	110.9%	109.2%	
DTSP	90%	92%	

- Notes: (1) These setpoints are based upon a MCPR operating limit of 1.34 using a safety limit of 1.10. This is consistent with a MCPR operating limit of 1.30 using a safety limit of 1.07, as reported in references 6, 7, and 8.
- (2) The unfiltered setpoints are consistent with a nominal RBM filter setting of 0.0 seconds (reference 8). The filtered setpoints are consistent with a nominal RBM filter setting  $\leq 0.5$  seconds (reference 7).

The RBM setpoints in Technical Specification Table 3.3.2.1-1 are applicable when:

THERMAL POWER	Applicable MCPR	Notes from Table 3.3.2.1-1
$\geq 27\%$ and $< 90\%$ RATED	$< 1.75$	(a), (b), (f), (h)
$\geq 90\%$ RATED	$< 1.44$	(g)

Note: The given MCPR operating limits are adjusted to correspond to a MCPR safety limit of 1.10. The values shown correspond to operating limits of 1.70 and 1.40 given the original 1.07 MCPR safety limit used in reference 6.



**7. SHUTDOWN MARGIN (SDM) LIMIT  
(TECHNICAL SPECIFICATION 3.1.1)**

The core shall be subcritical with the following margin with the strongest OPERABLE control rod fully withdrawn and all other OPERABLE control rods fully inserted.

$$\text{SDM} \geq 0.38\% \text{ dk/k}$$






## 8. REFERENCES

1. NEDE-24011-P-A-13, "General Electric Standard Application for Reactor Fuel", August 1996.
2. NEDE-24011-P-A-13-US, "General Electric Standard Application for Reactor Fuel (Supplement for United States)", August 1996.
3. J11-03144SRLR Rev. 1, "Supplemental Reload Licensing Report for Browns Ferry Nuclear Plant Unit 2 Reload 9 Cycle 10", September 1997.
4. J11-03144MAPL Rev. 0, "Lattice-Dependent MAPLHGR Report for Browns Ferry Nuclear Plant Unit 2 Reload 9 Cycle 10", August 1997.
5. NEDC-32774P Rev. 1, "Safety Analyses for Browns Ferry Nuclear Plant Units 1, 2, and 3 Turbine Bypass and End-of-Cycle Recirculation Pump Trip Out-Of-Service", dated September 1997.
6. NEDC-32433P, "Maximum Extended Load Line Limit and ARTS Improvement Program Analyses for Browns Ferry Nuclear Plant Unit 1, 2, and 3", dated April 1995.
7. EDE-28-0990 Rev. 3 Supplement F, "PRNM (APRM, RBM, and RFM) Setpoint Calculations [ARTS/MELLL (NUMAC) - Current Rated Condition] for Tennessee Valley Authority Browns Ferry Nuclear Plant", dated Sept. 1997.
8. EDE-28-0990 Rev. 2 Supplement F, "PRNM (APRM, RBM, and RFM) Setpoint Calculations [ARTS/MELLL (NUMAC) - Current Rated Condition] for Tennessee Valley Authority Browns Ferry Nuclear Plant", dated Sept. 1997.
9. GE Letter LB#: 262-97-133, "Browns Ferry Nuclear Plant Rod Block Monitor Setpoint Clarification - GE Proprietary Information", dated September 12, 1997.  
[L32 970912 800]
10. GE Letter JAB-T8019a, "Technical Specification Changes for Implementation of Advanced Methods", dated June 4, 1998. [L32 980608 800]



**Figure 1**  
**APLHGR Limits for Bundle Type GE13-P9HTB384-12G4.0**  
**(GE13)**




Most Limiting Lattice  
for Each Exposure Point

Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)	Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)	Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)
0.0	10.09	7.0	11.71	25.0	10.6
0.2	10.15	8.0	11.95	30.0	9.99
1.0	10.31	9.0	12.16	35.0	9.39
2.0	10.52	10.0	12.28	40.0	8.76
3.0	10.75	12.5	12.16	45.0	8.11
4.0	10.99	15.0	11.88	50.0	7.44
5.0	11.25	17.5	11.56	55.0	6.74
6.0	11.48	20.0	11.24	55.98	6.60

These values apply to both Turbine Bypass In-Service and Out-Of-Service.

**Figure 2**  
**APLHGR Limits for Bundle Type GE11-P9HUB366-12G4.0**  
**(GE11)**




Most Limiting Lattice  
for Each Exposure Point

Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)	Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)	Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)
0.0	9.55	7.0	11.39	25.0	10.51
0.2	9.62	8.0	11.67	30.0	9.84
1.0	9.80	9.0	11.81	35.0	9.19
2.0	10.05	10.0	11.95	40.0	8.55
3.0	10.32	12.5	11.92	45.0	7.91
4.0	10.58	15.0	11.72	50.0	7.26
5.0	10.84	17.5	11.48	55.0	6.59
6.0	11.11	20.0	11.20	56.17	6.42

These values apply to both Turbine Bypass In-Service and Out-Of-Service.



**Figure 3**  
**APLHGR Limits for Bundle Type GE11-P9HUB367-14GZ**  
**(GE11)**

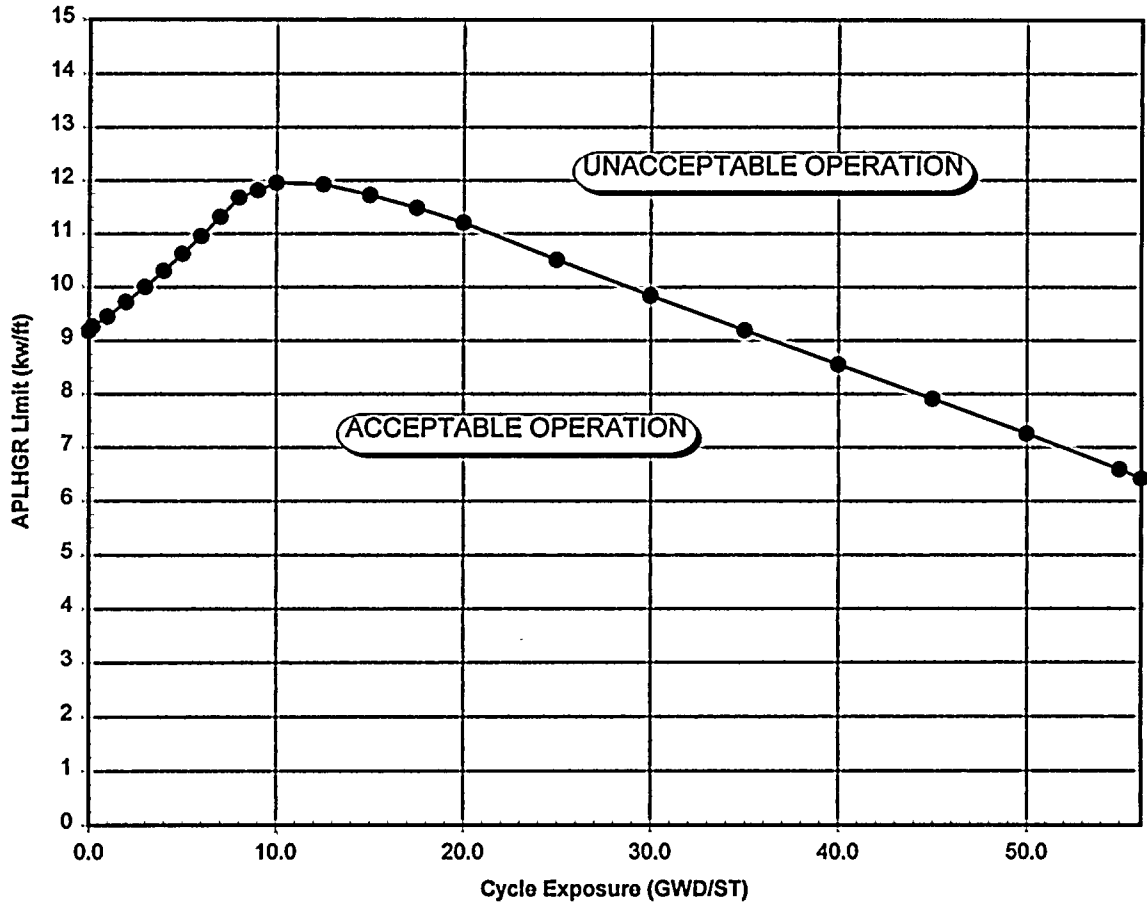


Most Limiting Lattice  
for Each Exposure Point

Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)	Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)	Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)
0.0	9.18	7.0	11.31	25.0	10.51
0.2	9.27	8.0	11.67	30.0	9.84
1.0	9.45	9.0	11.81	35.0	9.19
2.0	9.72	10.0	11.95	40.0	8.55
3.0	10.00	12.5	11.92	45.0	7.91
4.0	10.30	15.0	11.72	50.0	7.26
5.0	10.62	17.5	11.48	55.0	6.59
6.0	10.95	20.0	11.20	56.17	6.42

These values apply to both Turbine Bypass In-Service and Out-Of-Service.

**Figure 4**  
**APLHGR Limits for Bundle Type GE9B-P8DWB319-9GZ**  
**(GE8X8NB)**

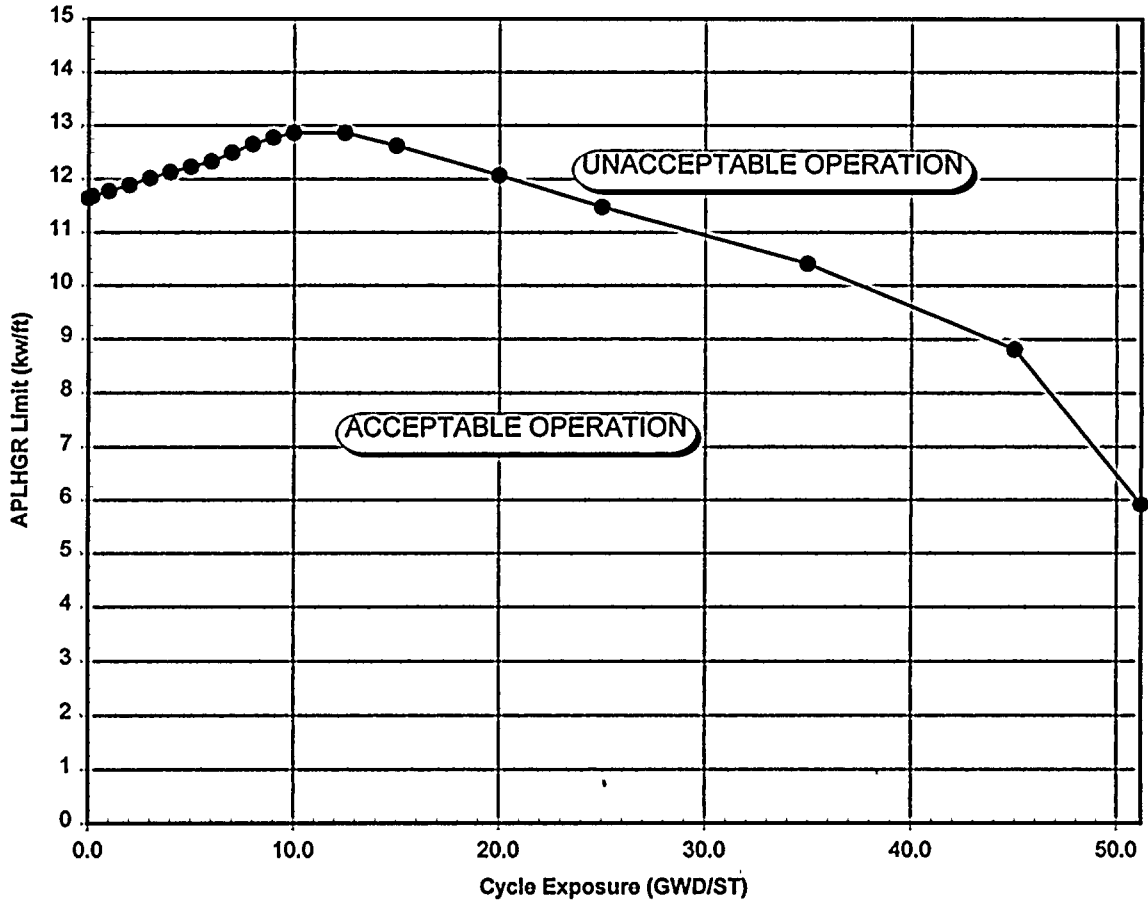

Most Limiting Lattice  
for Each Exposure Point


Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)	Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)	Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)
0.0	11.64	7.0	12.49	35.0	10.41
0.2	11.68	8.0	12.65	45.0	8.81
1.0	11.77	9.0	12.77	51.2	5.91
2.0	11.88	10.0	12.86		
3.0	12.01	12.5	12.86		
4.0	12.12	15.0	12.62		
5.0	12.22	20.0	12.06		
6.0	12.32	25.0	11.47		

These values apply to both Turbine Bypass In-Service and Out-Of-Service.





**Figure 5**  
**APLHGR Limits for Bundle Type GE9B-P8DWB325-10GZ**  
**(GE8X8NB)**

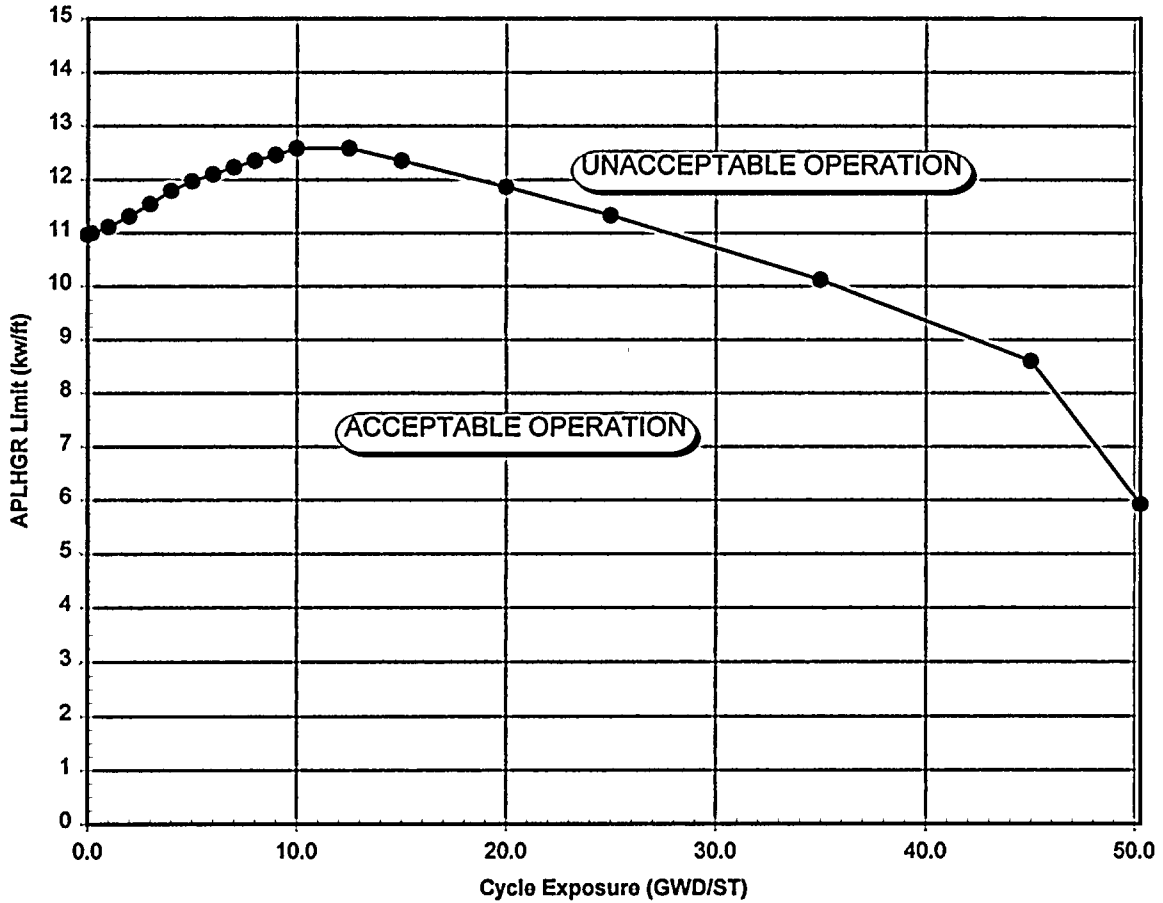


Most Limiting Lattice  
for Each Exposure Point

Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)	Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)	Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)
0.0	10.97	7.0	12.23	35.0	10.12
0.2	11.00	8.0	12.35	45.0	8.60
1.0	11.11	9.0	12.46	50.27	5.92
2.0	11.31	10.0	12.58		
3.0	11.54	12.5	12.58		
4.0	11.79	15.0	12.35		
5.0	11.97	20.0	11.86		
6.0	12.10	25.0	11.33		

These values apply to both Turbine Bypass In-Service and Out-Of-Service.

**Figure 6**  
**APLHGR Limits for Bundle Type GE9B-P8DWB326-7GZ**  
**(GE8X8NB)**

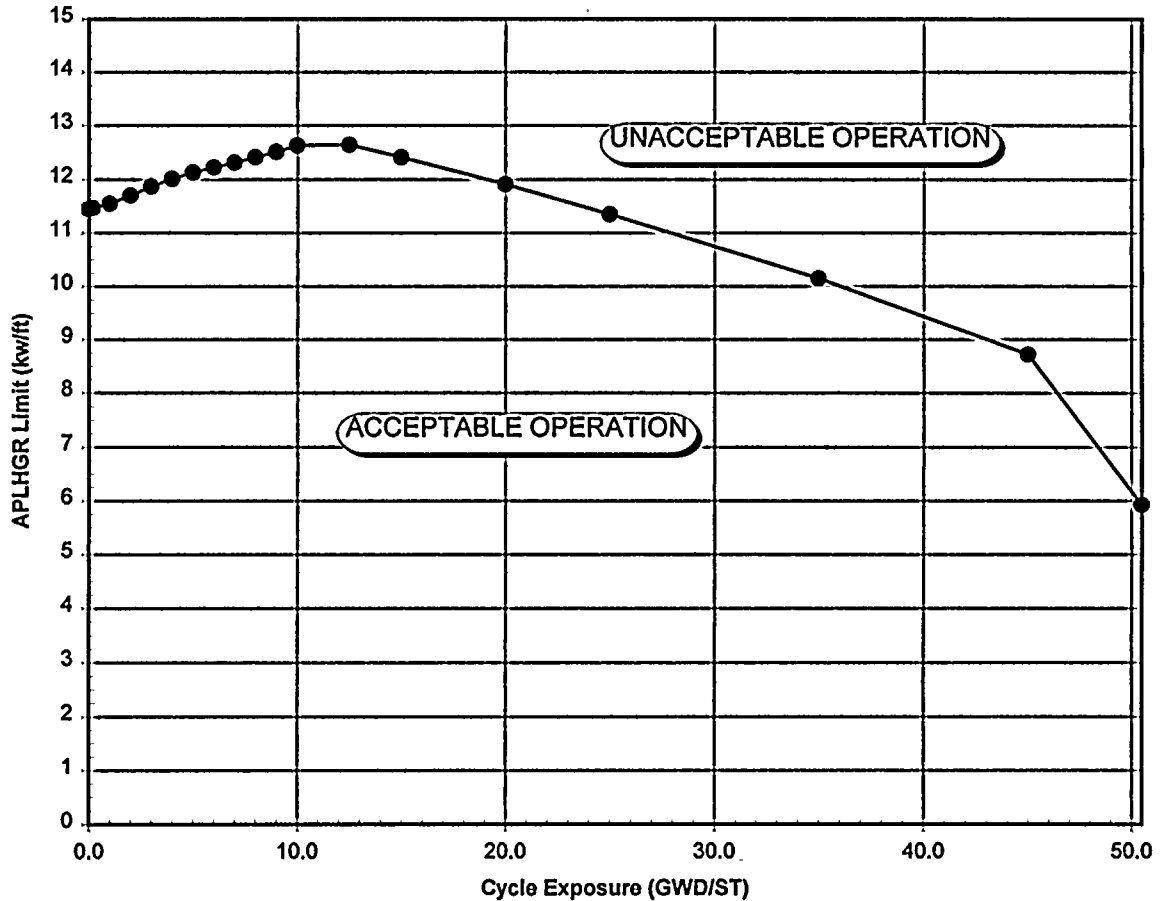


Most Limiting Lattice  
for Each Exposure Point

Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)	Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)	Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)
0.0	11.45	7.0	12.31	35.0	10.15
0.2	11.47	8.0	12.41	45.0	8.72
1.0	11.55	9.0	12.51	50.49	5.93
2.0	11.70	10.0	12.63		
3.0	11.87	12.5	12.64		
4.0	12.01	15.0	12.41		
5.0	12.13	20.0	11.91		
6.0	12.22	25.0	11.35		

These values apply to both Turbine Bypass In-Service and Out-Of-Service.



**Figure 7**  
**APLHGR Limits for Bundle Type BP8DRB301L**  
**(BP8X8R)**




Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)	Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)	Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)
0.0	11.32	7.0	11.98	35.0	10.82
0.2	11.33	8.0	12.03	43.52	9.17
1.0	11.40	9.0	12.11		
2.0	11.50	10.0	12.19		
3.0	11.61	12.5	12.34		
4.0	11.73	15.0	12.47		
5.0	11.86	20.0	12.58		
6.0	11.93	25.0	12.03		

These values apply to both Turbine Bypass In-Service and Out-Of-Service.




**Figure 8**  
**APLHGR Limits for Bundle Type BP8DRB299**  
**(BP8X8R)**



Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)	Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)	Average Planar Exposure (GWD/ST)	LHGR Limit (kw/ft)
0.0	10.71	7.0	11.78	35.0	10.65
0.2	10.75	8.0	11.95	42.13	9.36
1.0	10.86	9.0	12.09		
2.0	11.01	10.0	12.20		
3.0	11.19	12.5	12.37		
4.0	11.35	15.0	12.47		
5.0	11.47	20.0	12.37		
6.0	11.62	25.0	11.77		

These values apply to both Turbine Bypass In-Service and Out-Of-Service.

**Figure 9**  
**Power Dependent MAPLHGR Factor - MAPFAC(P)**



$$\text{MAPLHGR}(P) = \text{MAPFAC}(P) \times \text{MAPLHGRstd}$$

MAPLHGRstd = Standard MAPLHGR Limits

For  $25\% \geq P$  : NO THERMAL LIMITS MONITORING REQUIRED

For  $25\% \leq P < 30\%$  : MAPFAC(P) =  $0.60 + 0.005(P-30\%)$  For  $\leq 50\%$  CORE FLOW  
 : MAPFAC(P) =  $0.46 + 0.005(P-30\%)$  For  $> 50\%$  CORE FLOW


For  $30\% \leq P$  : MAPFAC(P) =  $1.0 + 0.005224(P-100\%)$

These values bound both Turbine Bypass In-Service and Out-Of-Service





**Figure 10**  
**Flow Dependent MAPLHGR Factor - MAPFAC(F)**



$MAPLHGR(F) = MAPFAC(F) \times MAPLHGRstd$

MAPLHGRstd = Standard MAPLHGR Limits

$MAPFAC(F) = \text{MINIMUM}( 1.0 , Af * Wc /100 + Bf)$

Wc = % Rated Core Flow

Af and Bf are Constants Given Below:


Maximum Core Flow (% Rated)	Af	Bf
102.5	0.6784	0.4861
107.0	0.6758	0.4574

These values bound both Turbine Bypass In-Service and Out-Of-Service.

The 102.5% maximum flow line is used for operation up to 100% rated flow.

The 107% maximum flow line is used for operation up to 105% rated flow (ICF).

**Figure 11**  
**MCPR Operating Limit for GE13**

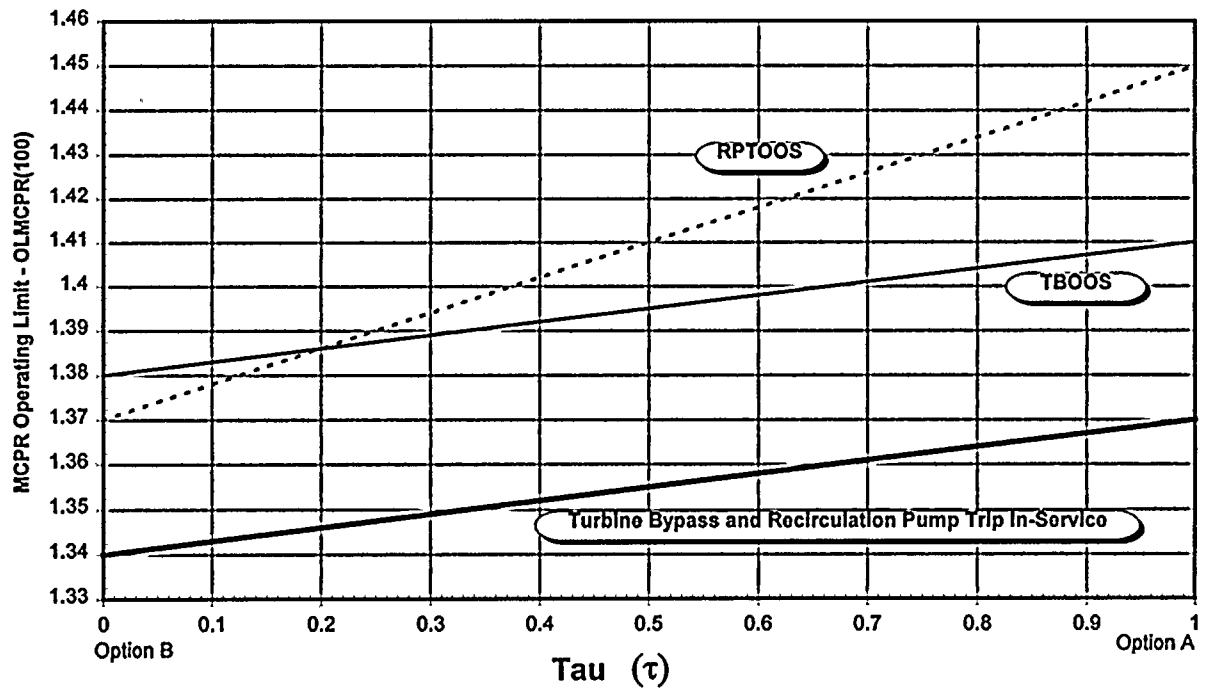


Exposure Range	Out-Of-Service	Option A Tau=1.0	Option B Tau=0.0
BOC10 to EOC10	na	1.37 (1)	1.34
BOC10 to EOC10	Turbine Bypass (TBOOS)	1.41	1.38
BOC10 to EOC10	Recirculation Pump Trip (RPTOOS)	1.45	1.37

**Notes**

1. Use this value prior to performing scram time testing per SR 3.1.4.1.
2. Either Turbine Bypass or Recirculation Pump Trip may be Out-Of-Service.  
The core is not analyzed for both TBOOS and RPTOOS at the same time.


**Figure 12**  
**M CPR Operating Limit for GE11**

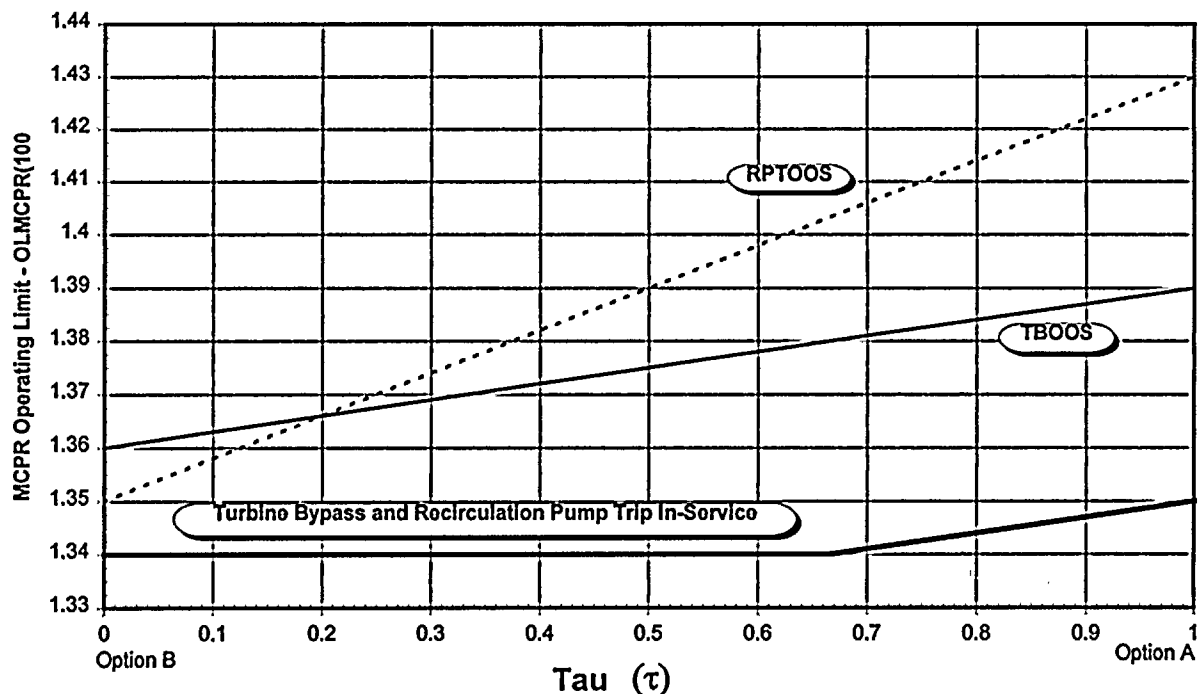


Exposure Range	Out-Of-Service	Option A Tau=1.0	Option B Tau=0.0
BOC10 to EOC10	na	1.35 (1)	1.34
BOC10 to EOC10	Turbine Bypass (TBOOS)	1.39	1.36
BOC10 to EOC10	Recirculation Pump Trip (RPTOOS)	1.43	1.35

**Notes**

1. Use this value prior to performing scram time testing per SR 3.1.4.1.
2. Either Turbine Bypass or Recirculation Pump Trip may be Out-Of-Service.  
The core is not analyzed for both TBOOS and RPTOOS at the same time.



**Figure 13**  
**MCPR Operating Limit for GE9B (GE8X8NB)**

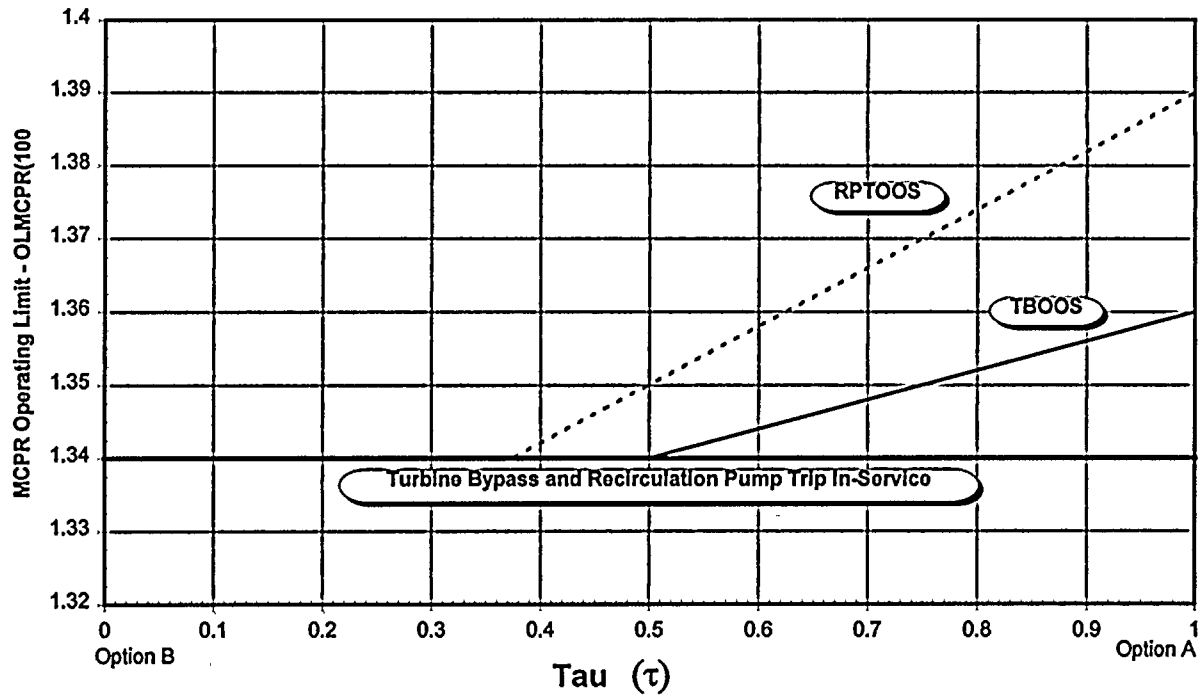


Exposure Range	Out-Of-Service	Option A Tau=1.0	Option B Tau=0.0
BOC10 to EOC10	na	1.34 (1)	1.34
BOC10 to EOC10	Turbine Bypass (TBOOS)	1.36	1.34
BOC10 to EOC10	Recirculation Pump Trip (RPTOOS)	1.39	1.34

**Notes**

1. Use this value prior to performing scram time testing per SR 3.1.4.1.
2. Either Turbine Bypass or Recirculation Pump Trip may be Out-Of-Service.  
The core is not analyzed for both TBOOS and RPTOOS at the same time.

**Figure 14**  
**MCPR Operating Limit for GE7B (BP8X8R)**




Exposure Range	Out-Of-Service	Option A Tau=1.0	Option B Tau=0.0
BOC10 to EOC10	na	1.34 (1)	1.34
BOC10 to EOC10	Turbine Bypass (TBOOS)	1.34	1.34
BOC10 to EOC10	Recirculation Pump Trip (RPTOOS)	1.38	1.34

**Notes**

1. Use this value prior to performing scram time testing per SR 3.1.4.1.
2. Either Turbine Bypass or Recirculation Pump Trip may be Out-Of-Service.  
The core is not analyzed for both TBOOS and RPTOOS at the same time.



**Figure 15**  
**Power Dependent MCPR(P) Limits**



**OPERATING LIMIT MCPR(P) =  $K_p \cdot \text{OLMCPR}(100)$**

For  $P \leq 25\%$  : NO THERMAL LIMITS MONITORING REQUIRED

For  $25\% \leq P < P_{\text{bypass}}$  : ( $P_{\text{bypass}} = 30\%$ )

$K_p = [K_{\text{byp}} + 0.02(30\% - P)] / \text{OLMCPR}(100)$

Turbine Bypass and RPT In-Service,  
or RPT Out-Of-Service (RPTOOS)

$K_{\text{byp}} = 1.97$  For  $\leq 50\%$  CORE FLOW

$K_{\text{byp}} = 2.21$  For  $> 50\%$  CORE FLOW

Turbine Bypass Out-Of-Service (TBOOS)

$K_{\text{byp}} = 2.01$  For  $\leq 50\%$  CORE FLOW

$K_{\text{byp}} = 3.01$  For  $> 50\%$  CORE FLOW

For  $30\% \leq P < 45\%$  :  $K_p = 1.28 + 0.01340(45\% - P)$

For  $45\% \leq P < 60\%$  :  $K_p = 1.15 + 0.00867(60\% - P)$


For  $60\% \leq P$  :  $K_p = 1.00 + 0.00375(100\% - P)$

**Note:** Either Turbine Bypass or Recirculation Pump Trip may be Out-Of-Service. The core is not analyzed for both TBOOS and RPTOOS at the same time.





**Figure 16**  
**Flow Dependent MCPR Operating Limit - MCPR(F)**

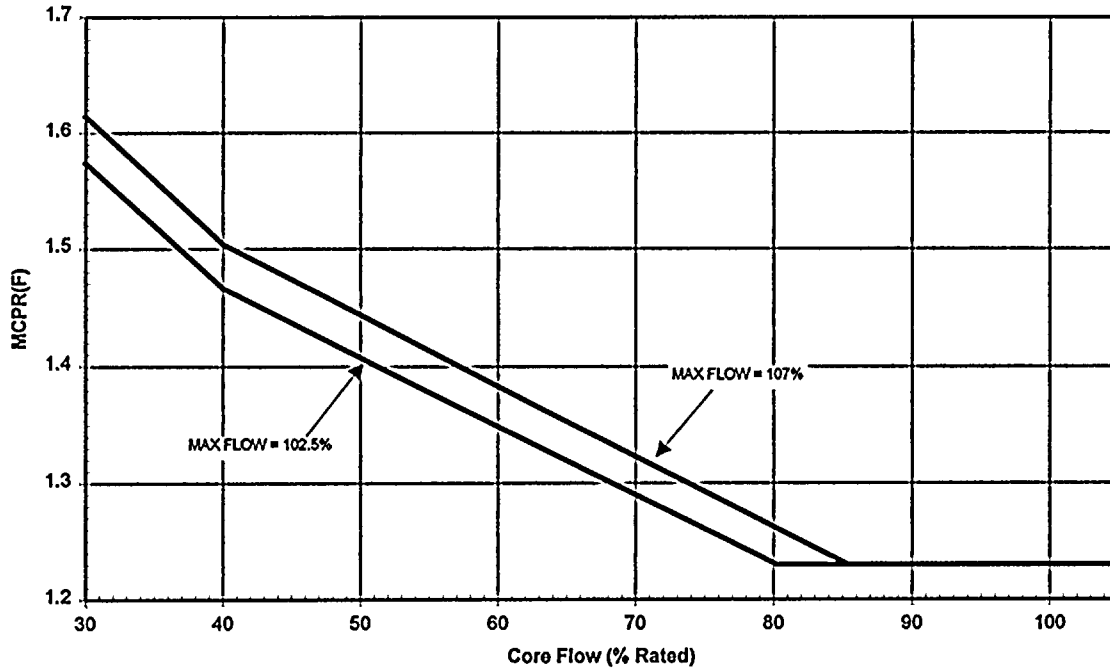

For  $Wc < 40\%$  :  $MCPR(F) = (Af \cdot Wc/100 + Bf) \cdot [1 + 0.0032(40 - Wc)]$

For  $Wc \geq 40\%$  :  $MCPR(F) = \text{MAX}(1.23, Af \cdot Wc/100 + Bf)$

$Wc = \% \text{ Rated Core Flow}$

$Af$  and  $Bf$  are Constants Given Below:

Maximum Core Flow (% Rated)	$Af$	$Bf$
102.5	-0.587	1.701
107.0	-0.603	1.745

These values bound both Turbine Bypass In-Service and Out-Of-Service.

These values bound both Recirculation Pump Trip In-Service and Out-Of-Service

Either Turbine Bypass or Recirculation Pump Trip may be Out-Of-Service.  
The core is not analyzed for a combination of TBOOS and RPTOOS.

The 102.5% maximum flow line is used for operation up to 100% rated flow.  
The 107% maximum flow line is used for operation up to 105% rated flow (ICF).

ENCLOSURE 2

TENNESSEE VALLEY AUTHORITY  
BROWNS FERRY NUCLEAR PLANT (BFN)  
UNIT 3

CORE OPERATING LIMITS REPORT (COLR), REVISION 3  
FOR CYCLE 8 OPERATION

---

(SEE ATTACHED)

