

NRC DISTRIBUTION FOR PART 50 DOCKET MATERIAL
(TEMPORARY FORM)

CONTROL NO: 7219
FILE: MONTHLY REPORT FILE

FROM: Florida Power & Light Co. Miami, Fla. A.D. Schmidt		DATE OF DOC 7-3-75	DATE REC'D 7-7-75	LTR xxx	TWX	RPT	OTHER
TO: NRC		ORIG 1 Signed	CC	OTHER	SENT AEC PDR _____ SENT LOCAL PDR _____		
CLASS	UNCLASS XXXX	PROP INFO	INPUT	NO CYS REC'D 1	DOCKET NO: <u>50-250</u> 251		

DESCRIPTION:

Ltr trans the following:

ENCLOSURES:

Monthly Report for June 1975
Plant & Component Operability & Availability
This Report to be used in preparing Gray Book
by Plans & Operations.

NUMBER OF COPIES REC'D

PLANT NAME: Turkey Point 3 & 4

FOR ACTION/INFORMATION

VCR 7-8-75

BUTLER (L) W/ Copies	SCHWENCER (L) W/ Copies	ZIEMANN (L) W/ Copies	REGAN (E) W/ Copies
CLARK (L) W/ Copies	STOLZ (L) W/ Copies	DICKER (E) W/ Copies	LEAR (L) W/ Copies
PARR (L) W/ Copies	VASSALLO (L) W/ Copies	KNIGHTON (E) W/ Copies	SPELS W/ Copies
KNIEL (L) W/ Copies	PURPLE (L) W/ Copies	YOUNGBLOOD (E) W/ Copies	MIPC/PE W/4 Copies

INTERNAL DISTRIBUTION

<u>REG FILE</u> NRC PDR OGC, ROOM P-506A. GOSSICK/STAFF CASE GIAMBUSSO BOYD MOORE (L) DEYOUNG (L) SKOVHOLT (L) GOLLER (L) (Ltr) P. COLLINS DENISE REG OPR FILE & REGION (2) T.R. WILSON STEELE	<u>TECH REVIEW</u> SCHROEDER MACCARY KNIGHT PAWLICKI SHAO STELLO HOUSTON NOVAK ROSS IPPOLITO TEDESCO J. COLLINS LAINAS BENAROYA VOLLMER	<u>DENTON</u> GRIMES GAMMILL KASTNER BALLARD SPANGLER <u>ENVIRO</u> MULLER DICKER KNIGHTON YOUNGBLOOD REGAN PROJECT LDR <u>HARLESS</u>	<u>LIC ASST</u> R. DIGGS (L) H. GEARIN (L) E. GOULBOURNE (L) P. KREUTZER (E) J. LEE (L) M. MAIGRET (L) S. REED (E) M. SERVICE (L) S. SHEPPARD (L) M. SLATER (E) H. SMITH (L) S. TEETS (L) G. WILLIAMS (E) V. WILSON (L) R. INGRAM (L)	<u>A/T IND.</u> BRAITMAN SALTZMAN MELTZ <u>PLANS</u> MCDONALD CHAPMAN DUBE (Ltr) E. COUPE PETERSON HARTFIELD (2) KLECKER EISENHUT WIGGINTON
--	--	---	--	--

EXTERNAL DISTRIBUTION


Miami, Fla.
1 - LOCAL PDR
1 - TIC (ABERNATHY) (1)(2)(10) - NATIONAL LABS
1 - NSIC (BUCHANAN) 1 - W. PENNINGTON, Rm E-201 GT
1 - ASLB 1 - CONSULTANTS
1 - Newton Anderson
- ACRS HOLDING/SENT
NEWMARK/BLUME/AGBABIAN

1 - PDR-SAN/LA/NY
1 - BROOKHAVEN NAT LAB
1 - G. ULRIKSON, ORNL
1 - AGMED (RUTH GUSSMAN)
Rm B-127 GT
1 - J. D. RUNKLES, Rm E-201
GT

Regulatory


P.O. BOX 3100 MIAMI, FLORIDA 33101

60-250/251



July 3, 1975

Office of Management Information
and Program Controls
U.S. Nuclear Regulatory Commission
Washington, D. C. 20555

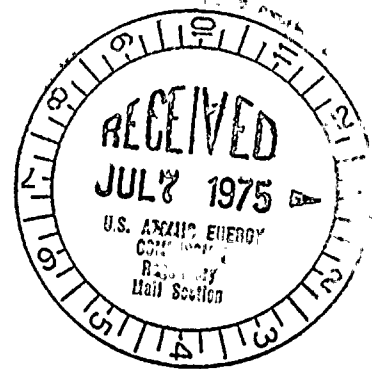

Gentlemen:

Attached are the June, 1975 Operating Status Reports for
Turkey Point Units Nos. 3 and 4.

Very truly yours,

A. D. Schmidt
Vice President
Power Resources



VTC/mld

Attachments

cc: Mr. Norman C. Moseley
Jack R. Newman, Esquire

7219

HELPING BUILD FLORIDA

“...and I have been thinking about you ever since.”

DOCKET NO. 50-250
UNIT NAME Turkey Point Unit No. 3
Report Month June, 1975
DATE July 1, 1975
COMPLETED BY Mary Lee Montgomery
TELEPHONE (805) 245-2910 Ext. 228

OPERATING STATUS

1. REPORTING PERIOD: 0001 75 06 01 THROUGH 2400 75 06 30
GROSS HOURS IN REPORTING PERIOD: 720:00
2. CURRENTLY AUTHORIZED POWER LEVEL (MWt) 2200
MAX. DEPEND. CAPACITY (MWe NET) 666
3. POWER LEVEL TO WHICH RESTRICTED (IF ANY): (MWe NET) None
4. REASONS FOR RESTRICTIONS (IF ANY):

	THIS MONTH	YR-TO-DATE	CUMULATIVE TO DATE
5. NUMBER OF HOURS THE REACTOR WAS CRITICAL	720.0	4189.1	18216.8
6. REACTOR RESERVE SHUTDOWN HOURS	-0-	-0-	-0-
7. HOURS GENERATOR ON LINE	720.0	4148.8	17567.1
8. UNIT RESERVE SHUTDOWN HOURS	-0-	-0-	85.0
9. GROSS THERMAL ENERGY GENERATED (MWH)	1564961	8774176	31454200
10. GROSS ELECTRICAL ENERGY GENERATED (MWH)	474221	2785902	10213707
11. NET ELECTRICAL ENERGY GENERATED (MWH)	450126	2676523	9657688
12. REACTOR AVAILABILITY FACTOR 1/	100.0	96.5	80.8
13. UNIT AVAILABILITY FACTOR 2/	100.0	95.5	78.0
14. UNIT CAPACITY FACTOR 3/	93.9	92.5	65.7
15. UNIT FORCED OUTAGE RATE 4/	0.0	3.7	4.1

16. SHUTDOWNS SCHEDULED OVER NEXT 6 MONTHS (TYPE, DATE AND DURATION OF EACH):
July 16-19, 1975 - Hydraulic snubber inspection
October 20, November 30, 1975 - Refueling, maintenance, and inspection
17. IF SHUTDOWN AT END OF REPORT PERIOD, ESTIMATED DATE OF STARTUP:

1/ REACTOR AVAILABILITY FACTOR = $\frac{\text{HOURS REACTOR WAS CRITICAL} \times 100}{\text{GROSS HOURS IN REPORTING PERIOD}}$

2/ UNIT AVAILABILITY FACTOR = $\frac{\text{HOURS GENERATOR ON LINE} \times 100}{\text{GROSS HOURS IN REPORT PERIOD}}$

3/ UNIT CAPACITY FACTOR = $\frac{\text{NET ELECTRICAL POWER GENERATED} \times 100}{\text{MAX. DEPENDABLE CAPACITY} \times \text{GROSS HOURS IN REPORT PERIOD}}$

4/ UNIT OUTAGE RATE = $\frac{\text{FORCED OUTAGE HOURS} \times 100}{\text{HOURS GENERATOR ON LINE} + \text{FORCED OUTAGE HOURS}}$

ENCLOSURE A

DOCKET NO. 50-250
UNIT NAME Turkey Point Unit No. 3
DATE July 1, 1975
COMPLETED BY Mary Lee Montgomery
TELEPHONE NO. (305) 245-2910 Ext. 228

DAILY UNIT POWER OUTPUTMONTH June, 1975

<u>DAY</u>	<u>AVERAGE DAILY MWe-net</u>	<u>DAY</u>	<u>AVERAGE DAILY MWe-net</u>
1	<u>639</u>	20	<u>639</u>
2	<u>623</u>	21	<u>636</u>
3	<u>619</u>	22	<u>640</u>
4	<u>640</u>	23	<u>639</u>
5	<u>622</u>	24	<u>627</u>
6	<u>634</u>	25	<u>629</u>
7	<u>630</u>	26	<u>630</u>
8	<u>631</u>	27	<u>550</u>
9	<u>625</u>	28	<u>622</u>
10	<u>624</u>	29	<u>616</u>
11	<u>620</u>	30	<u>621</u>
12	<u>612</u>	31	<u> </u>
13	<u>625</u>		
14	<u>622</u>		
15	<u>622</u>		
16	<u>623</u>		
17	<u>629</u>		
18	<u>633</u>		
19	<u>638</u>		

SUMMARY: Unit No. 3 reactor was operated at full power except for reducing load to perform the periodic turbine valve tests on June 27, 1975,

Docket No. 50-250

UNIT NAME Turkey Point Unit No. 3

DATE July 1, 1975

PREPARED BY Mary Lee Montgomery

TELEPHONE (309) 245-2910 Ext. 228

REPORT MONTH June, 1975

UNIT SHUTDOWNS / REDUCTIONS

NO.	DATE	TYPE F-FORCED S-SCHEDULED	DURATION (HOURS)	REASON *	METHOD OF SHUTTING DOWN THE REACTOR **	COMMENTS
19	75-06-27	S	0	B	N/A	Load on Unit No. 3 reduced to perform periodic test of turbine main steam stop and control valves, reheat intercept and reheat stop valves. (Non-Nuclear systems)

* REASON:
A-EQUIPMENT FAILURE (EXPLAIN)
B-MAINT. OR TEST
C-REFUELING
D-REGULATORY RESTRICTION
E-OPERATOR TRAINING AND
LICENSE EXAMINATION
F-ADMINISTRATIVE
G-OPERATIONAL ERROR
H-OTHER (EXPLAIN)

** METHOD:
1-MANUAL
2-MANUAL SCRAM
3-AUTOMATIC SCRAM

ENCLOSURE A

DOCKET NO.

50-251

UNIT NAME

Turkey Point Unit No. 4

DATE

July 1, 1975

COMPLETED BY

Mary Lee Montgomery

TELEPHONE NO.

(305) 245-2910 Ext. 228

DAILY UNIT POWER OUTPUTMONTH June, 1975

<u>DAY</u>	<u>AVERAGE DAILY MWe-net</u>	<u>DAY</u>	<u>AVERAGE DAILY MWe-net</u>
1	-	20	-
2	-	21	36
3	-	22	143
4	-	23	407
5	-	24	465
6	-	25	595
7	-	26	513
8	-	27	526
9	-	28	483
10	-	29	661
11	-	30	663
12	-	31	-
13	-		
14	-		
15	-		
16	-		
17	-		
18	-		
19	-		

DOCKET NO. 50-251
UNIT NAME TURKEY POINT UNIT NO. 4
PORT MONTH JUNE 1975
DATE JULY 1, 1975
COMPLETED BY MARY LEE MONTGOMERY
TELEPHONE (305) 245-2910 Ext. 228

OPERATING STATUS

1. REPORTING PERIOD: 0001 75 06 01 THROUGH 2400 75 06 30
GROSS HOURS IN REPORTING PERIOD: 720:00
2. CURRENTLY AUTHORIZED POWER LEVEL (MWt) 2200
MAX. DEPEND. CAPACITY (MWe NET) 666
3. POWER LEVEL TO WHICH RESTRICTED (IF ANY): (MWe NET) None
4. REASONS FOR RESTRICTIONS (IF ANY):

	THIS MONTH	YR-TO-DATE	CUMULATIVE TO DATE
5. NUMBER OF HOURS THE REACTOR WAS CRITICAL	287.9	2323.6	11 657.4
6. REACTOR RESERVE SHUTDOWN HOURS	-0-	97.3	97.3
7. HOURS GENERATOR ON LINE	218.8	2232.0	11 289.9
8. UNIT RESERVE SHUTDOWN HOURS	-0-	-0-	-0-
9. GROSS THERMAL ENERGY GENERATED (MWH)....	354 306	4659 680	23 011 890
10. GROSS ELECTRICAL ENERGY GENERATED (MWH).....	115 098	1510 476	7 284 737
11. NET ELECTRICAL ENERGY GENERATED (MWH)..	104 538	1429 108	6 898 164
12. REACTOR AVAILABILITY FACTOR 1/.....	40.0	53.5	73.4
13. UNIT AVAILABILITY FACTOR 2/.....	30.4	51.4	71.1
14. UNIT CAPACITY FACTOR 3/.....	21.8	49.4	66.5
15. UNIT FORCED OUTAGE RATE 4/.....	0.9	0.1	4.8
16. SHUTDOWNS SCHEDULED OVER NEXT 6 MONTHS (TYPE, DATE AND DURATION OF EACH):			
None			
17. IF SHUTDOWN AT END OF REPORT PERIOD, ESTIMATED DATE OF STARTUP:			

1/ REACTOR AVAILABILITY FACTOR = $\frac{\text{HOURS REACTOR WAS CRITICAL} \times 100}{\text{GROSS HOURS IN REPORTING PERIOD}}$

2/ UNIT AVAILABILITY FACTOR = $\frac{\text{HOURS GENERATOR ON LINE} \times 100}{\text{GROSS HOURS IN REPORT PERIOD}}$

3/ UNIT CAPACITY FACTOR = $\frac{\text{NET ELECTRICAL POWER GENERATED} \times 100}{\text{MAX. DEPENDABLE CAPACITY} \times \text{GROSS HOURS IN REPORT PERIOD}}$

4/ UNIT OUTAGE RATE = $\frac{\text{FORCED OUTAGE HOURS} \times 100}{\text{HOURS GENERATOR ON LINE} + \text{FORCED OUTAGE HOURS}}$

SUMMARY: Unit No. 4 was returned to service on June 21, 1975 after completion of refueling maintenance, and inspections. Reactor was returned to full power based on performance of reactor physics test program. Unit No. 4 performance was satisfactory except for malfunctions of heater drain pump discharge control valve actuator linkage on June 27, 1975. and condenser tube leak on June 28, 1975.

Docket No. 50-251
UNIT NAME Turkey Point Unit No. 4
DATE July 1, 1975
PREPARED BY Mary Lee Montgomery
TELEPHONE (305) 245-2910 Ext. 228

REPORT MONTH June, 1975

UNIT SHUTDOWNS / REDUCTIONS

NO.	DATE	TYPE F-FORCED S-SCHEDULED	DURATION (HOURS)	REASON *	METHOD OF SHUTTING DOWN THE REACTOR **	COMMENTS
05	75-03-29	S	496.5	C	1	Unit No. 4 was removed from service (deliberate manual shutdown) for refueling, maintenance and inspection: (Nuclear and non-Nuclear systems)
06	75-06-22	S	2.7	B	N/A	Unit No. 4 was removed from service to perform turbine overspeed trip test. (Non-Nuclear system)
07	75-06-22	F	-0-	B	N/A	Load on Unit No. 4 was reduced to 54% R.P. to clean steam generator feedwater pump No. 4A suction strainer. (Non-Nuclear system).
08	75-06-27	F	2.0	A	3	Reactor tripped by steam generator No. 4A low level in coincidence with steam flow greater than feedwater flow during transient caused by malfunction of heater drain pump discharge control valve actuator linkage. (Non-Nuclear system).
09	75-06-28	F	-0-	A	N/A	Load on Unit No. 4 was reduced to 40% R.P. to repair condenser tube leak (Non-Nuclear system)

* REASON:

- A-EQUIPMENT FAILURE (EXPLAIN)
- B-MAINT. OR TEST
- C-REFUELING
- D-REGULATORY RESTRICTION
- E-OPERATOR TRAINING AND LICENSE EXAMINATION
- F-ADMINISTRATIVE
- G-OPERATIONAL ERROR
- H-OTHER (EXPLAIN)

** METHOD:

- 1-MANUAL
- 2-MANUAL SCRAM
- 3-AUTOMATIC SCRAM

Q