

REGULATORY DOCKET FILE COPY

REGULATORY DOCKET FILE COPY

SUPPLEMENT TO THE JULY 1977 REPORT

PRESSURE MITIGATING SYSTEMS
TRANSIENT ANALYSIS RESULTS

Docket # 50-280
Control #
Date 10/14/77 of Document:
REGULATORY DOCKET FILE

Prepared by

WESTINGHOUSE ELECTRIC CORPORATION

FOR

THE WESTINGHOUSE OWNERS GROUP ON

REACTOR COOLANT SYSTEM

OVERPRESSURIZATION

September 1977

772930210

SUPPLEMENT TO THE JULY 1977 REPORT

PRESSURE MITIGATING SYSTEMS
TRANSIENT ANALYSIS RESULTS

Prepared by

WESTINGHOUSE ELECTRIC CORPORATION

FOR

THE WESTINGHOUSE OWNERS GROUP ON

REACTOR COOLANT SYSTEM

OVERPRESSURIZATION

September 1977

TABLE OF CONTENTS

	<u>PAGE</u>
I. SUPPLEMENTARY LOFTRAN HEAT INPUT RESULTS	1
A. SETPOINT OVERSHOOT VARIATION WITH RELIEF VALVE OPENING TIME	1
B. SETPOINT OVERSHOOT VARIATION WITH RELIEF VALVE SETPOINT	8
C. SETPOINT OVERSHOOT VARIATION WITH NORMALIZED STEAM GENERATOR UA	14
D. SETPOINT OVERSHOOT VARIATION WITH REACTOR COOLANT SYSTEM TEMPERATURE	27
II. INSTRUCTIONAL GUIDE FOR OVERSHOOT DETERMINATION	31
A. GENERAL	31
B. PROCEDURES	33
C. ILLUSTRATIVE EXAMPLES	34

1. ILLUSTRATIVE EXAMPLE 1: 34
DETERMINATION OF SETPOINT OVERSHOOT GIVEN
RELIEF VALVE SETPOINT AND RELIEF VALVE
OPENING TIME WITHIN GENERIC ENVELOPE

2. ILLUSTRATIVE EXAMPLE 2: 38
DETERMINATION OF SETPOINT OVERSHOOT GIVEN
RCS VOLUME AND RELIEF VALVE OPENING TIME
WITHIN GENERIC ENVELOPE

3. ILLUSTRATIVE EXAMPLE 3: 42
DETERMINATION OF SETPOINT OVERSHOOT
GIVEN RELIEF VALVE SETPOINT AND RCS
VOLUME WITHIN GENERIC ENVELOPE

4. ILLUSTRATIVE EXAMPLE 4: 45
DETERMINATION OF SETPOINT OVERSHOOT
GIVEN SG TUBE HEAT TRANSFER AREA AND
RCS VOLUME WITHIN GENERIC ENVELOPE

5. ILLUSTRATIVE EXAMPLE 5: 52
DETERMINATION OF SETPOINT OVERSHOOT
GIVEN SG TUBE HEAT TRANSFER AREA AND
RELIEF VALVE OPENING TIME WITHIN
GENERIC ENVELOPE

PAGE

6. ILLUSTRATIVE EXAMPLE 6:

59

DETERMINATION OF SETPOINT OVERSHOOT GIVEN SG

TUBE HEAT TRANSFER AREA AND RELIEF VALVE

SETPOINT WITHIN GENERIC ENVELOPE

REFERENCE

66

I. SUPPLEMENTARY LOFTRAN HEAT INPUT RESULTS

A. SETPOINT OVERSHOOT VARIATION WITH
RELIEF VALVE OPENING TIME

Figure 1

EFFECT OF RELIEF VALVE OPENING TIME ON RCS PRESSURE OVERSHOOT

- RCS PUMP STARTUP IN 1 LOOP
- LINEAR RELIEF VALVE
- VALVE DELAY = 20% OF OPENING TIME
- INITIAL RCS PRESSURE = 300 PSIG
- RCS/SG $\Delta T = 50^{\circ}F$
- SG HEAT TRANSFER AREA = 58,000 FT^2
- RCS VOLUME = 6,000 CU.FT.


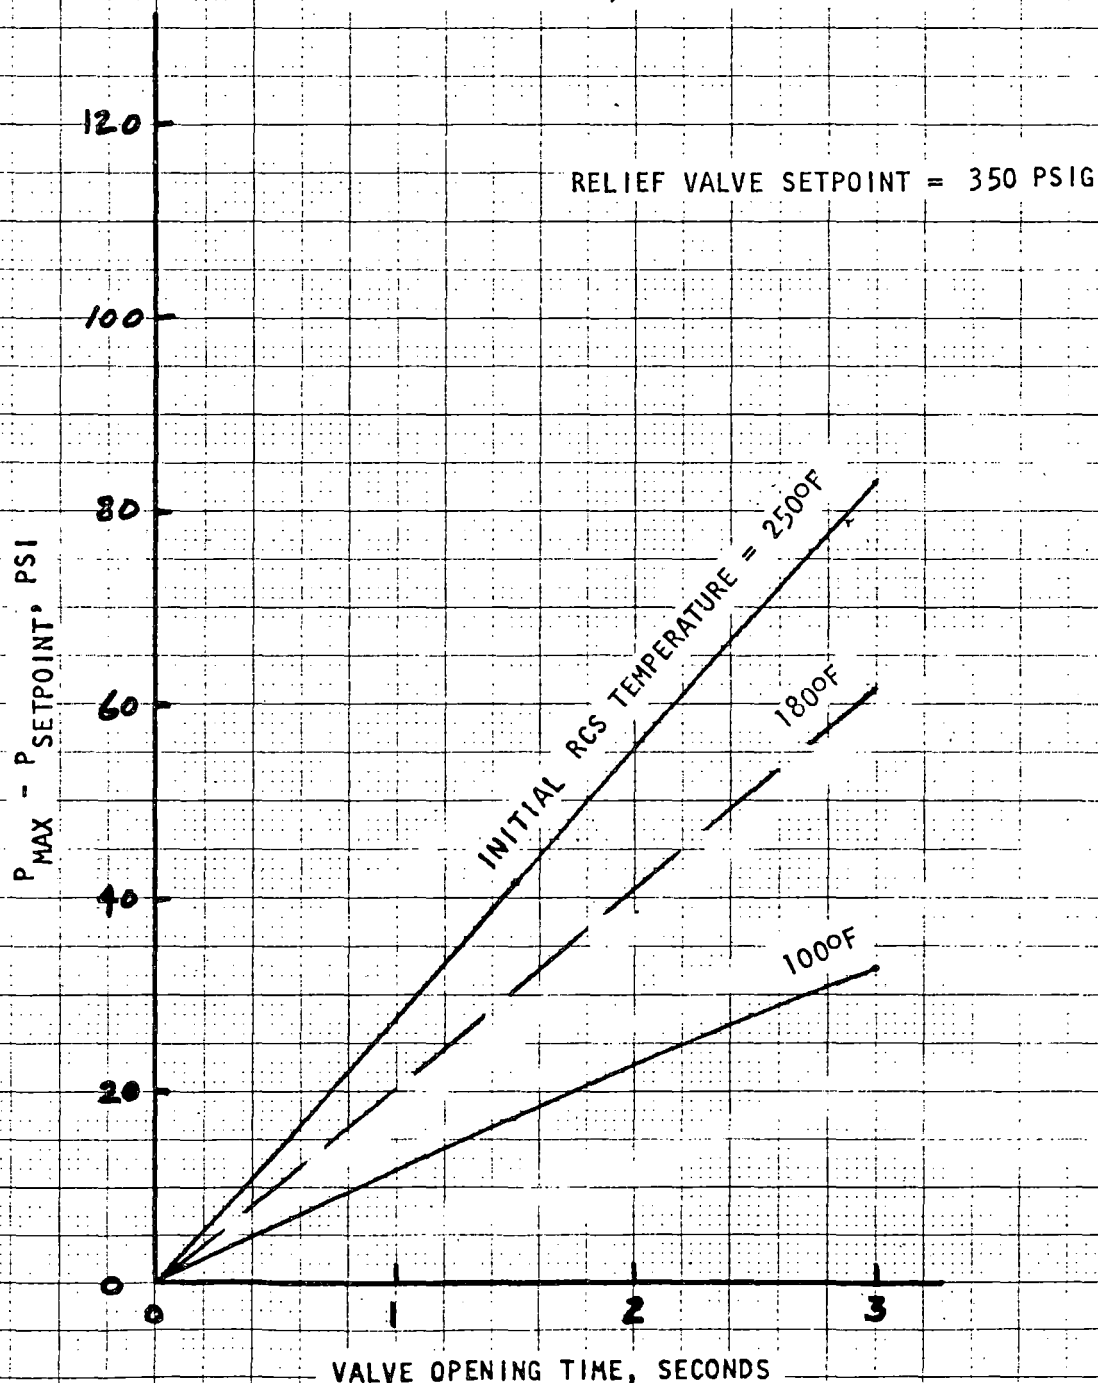


Figure 2

EFFECT OF RELIEF VALVE OPENING TIME ON RCS PRESSURE OVERSHOOT

- RCS PUMP STARTUP IN 1 LOOP
- LINEAR RELIEF VALVE
- VALVE DELAY = 20% OF OPENING TIME
- INITIAL RCS PRESSURE = 300 PSIG
- RCS/SG $\Delta T = 50^\circ F$
- SG HEAT TRANSFER AREA = 58,000 FT^2
- RCS VOLUME = 13000 CU.FT.

RELIEF VALVE SETPOINT = 350 PSIG

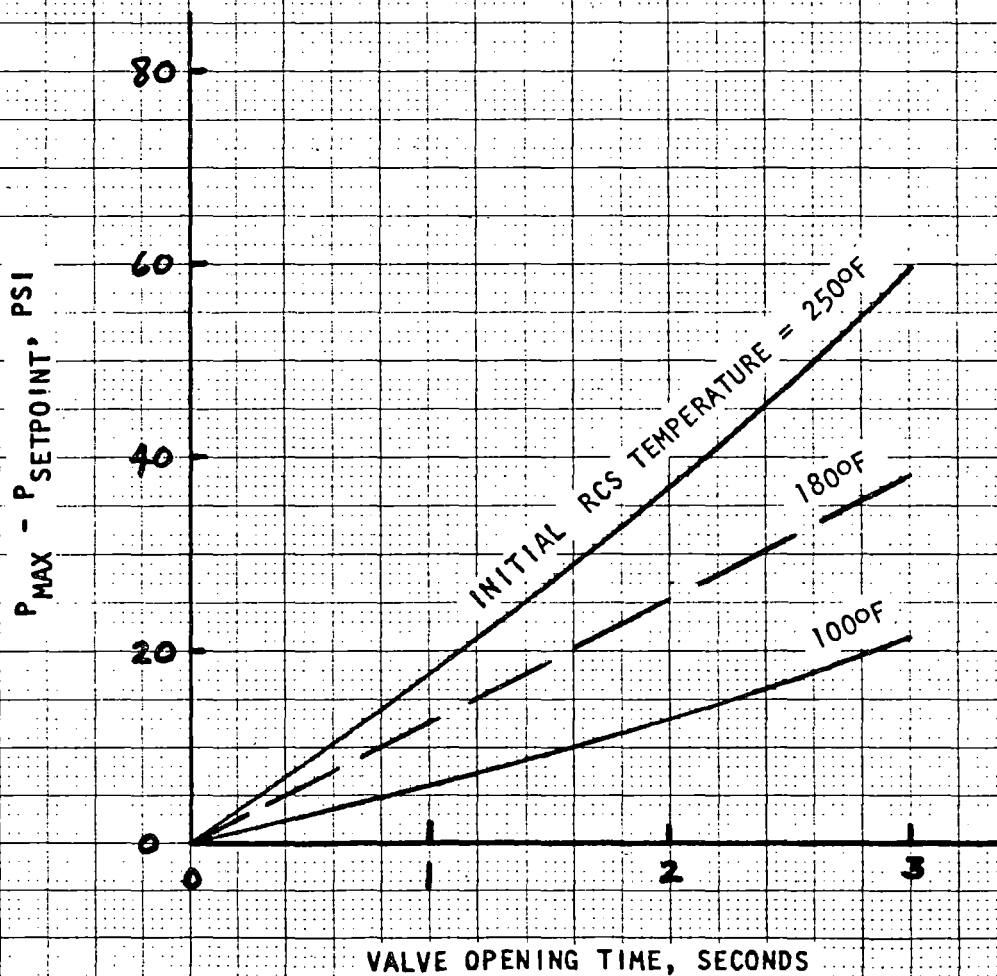

EFFECT OF RELIEF VALVE OPENING TIME ON RCS PRESSURE OVERSHOOT

Figure 3

- RCS PUMP STARTUP IN 1 LOOP
- LINEAR RELIEF VALVE
- VALVE DELAY = 20% OF OPENING TIME
- INITIAL RCS PRESSURE = 300 PSIG
- RCS/SG $\Delta T = 50^\circ F$
- SG HEAT TRANSFER AREA = 58,000 FT^2
- RCS VOLUME = 6,000 CU.FT.


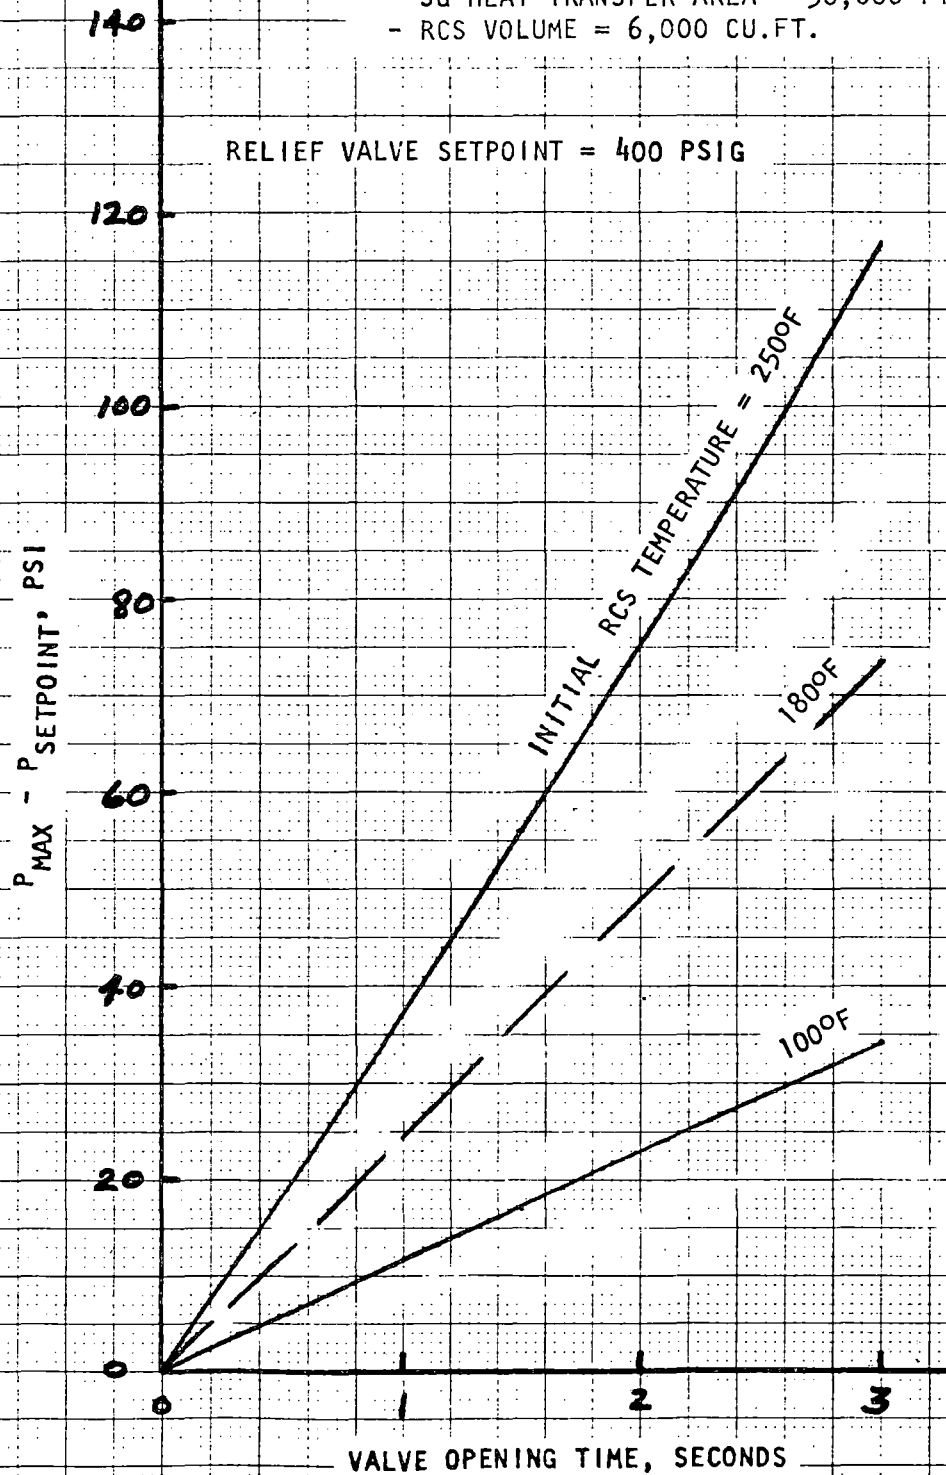


Figure 4

EFFECT OF RELIEF VALVE OPENING TIME ON RCS PRESSURE OVERSHOOT


- RCS PUMP STARTUP IN 1 LOOP
- LINEAR RELIEF VALVE
- VALVE DELAY = 20% OF OPENING TIME
- INITIAL RCS PRESSURE = 300 PSIG
- RCS/SG $\Delta T = 50^{\circ}F$
- SG HEAT TRANSFER AREA = 58,000 FT^2
- RCS VOLUME = 13000 CU. FT.

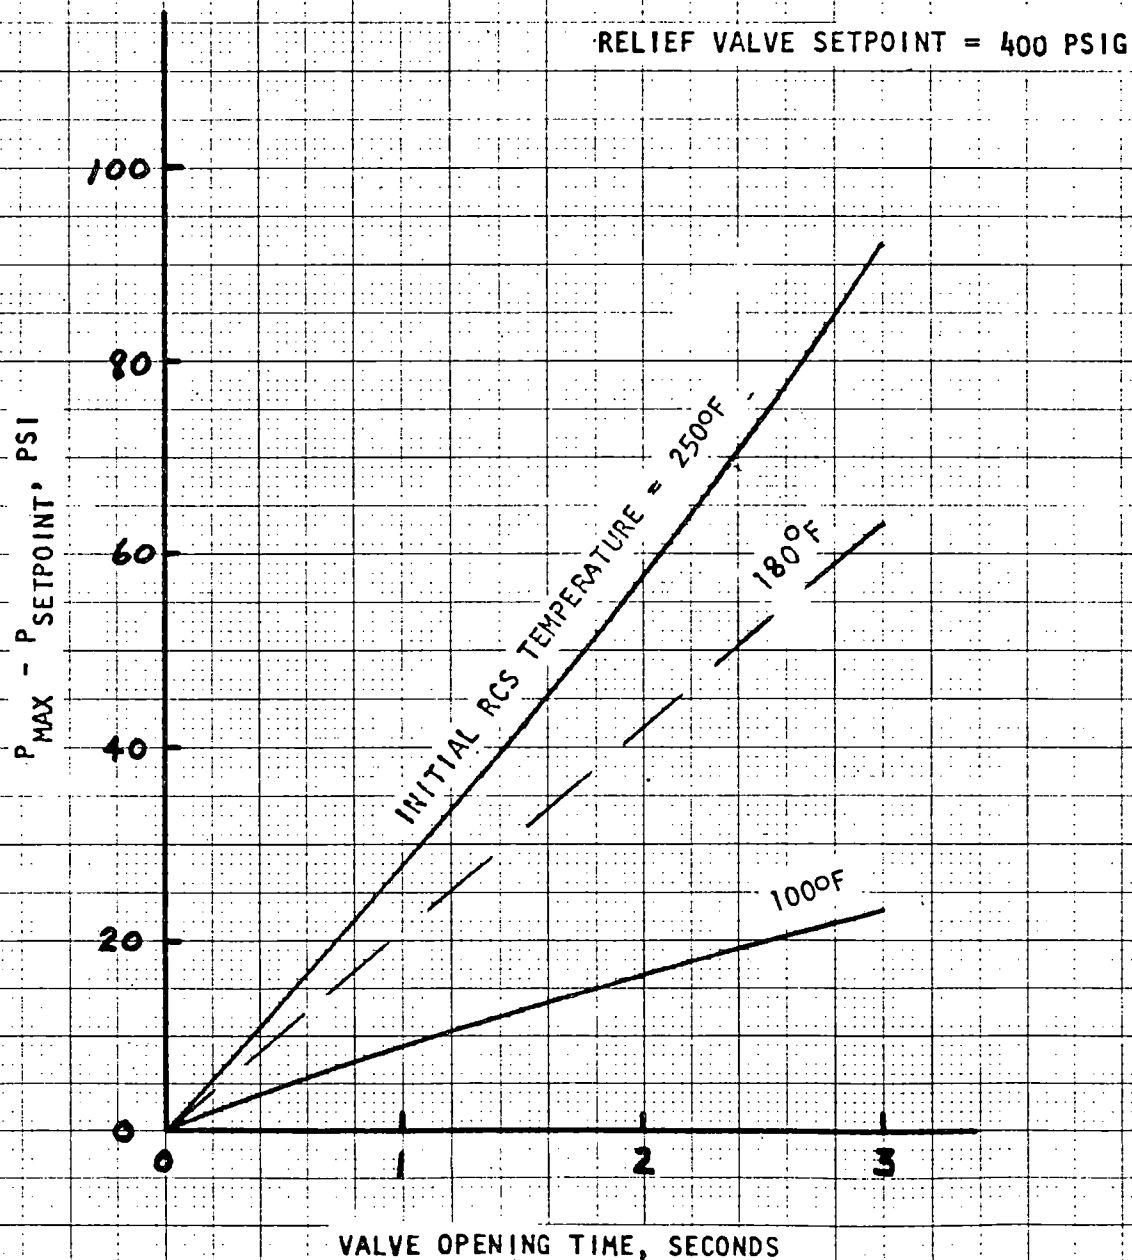

EFFECT OF RELIEF VALVE OPENING TIME ON RCS PRESSURE OVERSHOOT

Figure 5


- RCS PUMP STARTUP IN 1 LOOP
- LINEAR RELIEF VALVE
- VALVE DELAY = 20% OF OPENING TIME
- INITIAL RCS PRESSURE = 300 PSIG
- RCS/SG $\Delta T = 50^\circ F$
- SG HEAT TRANSFER AREA = 58,000 FT^2
- RCS VOLUME = 6,000 CU.FT.

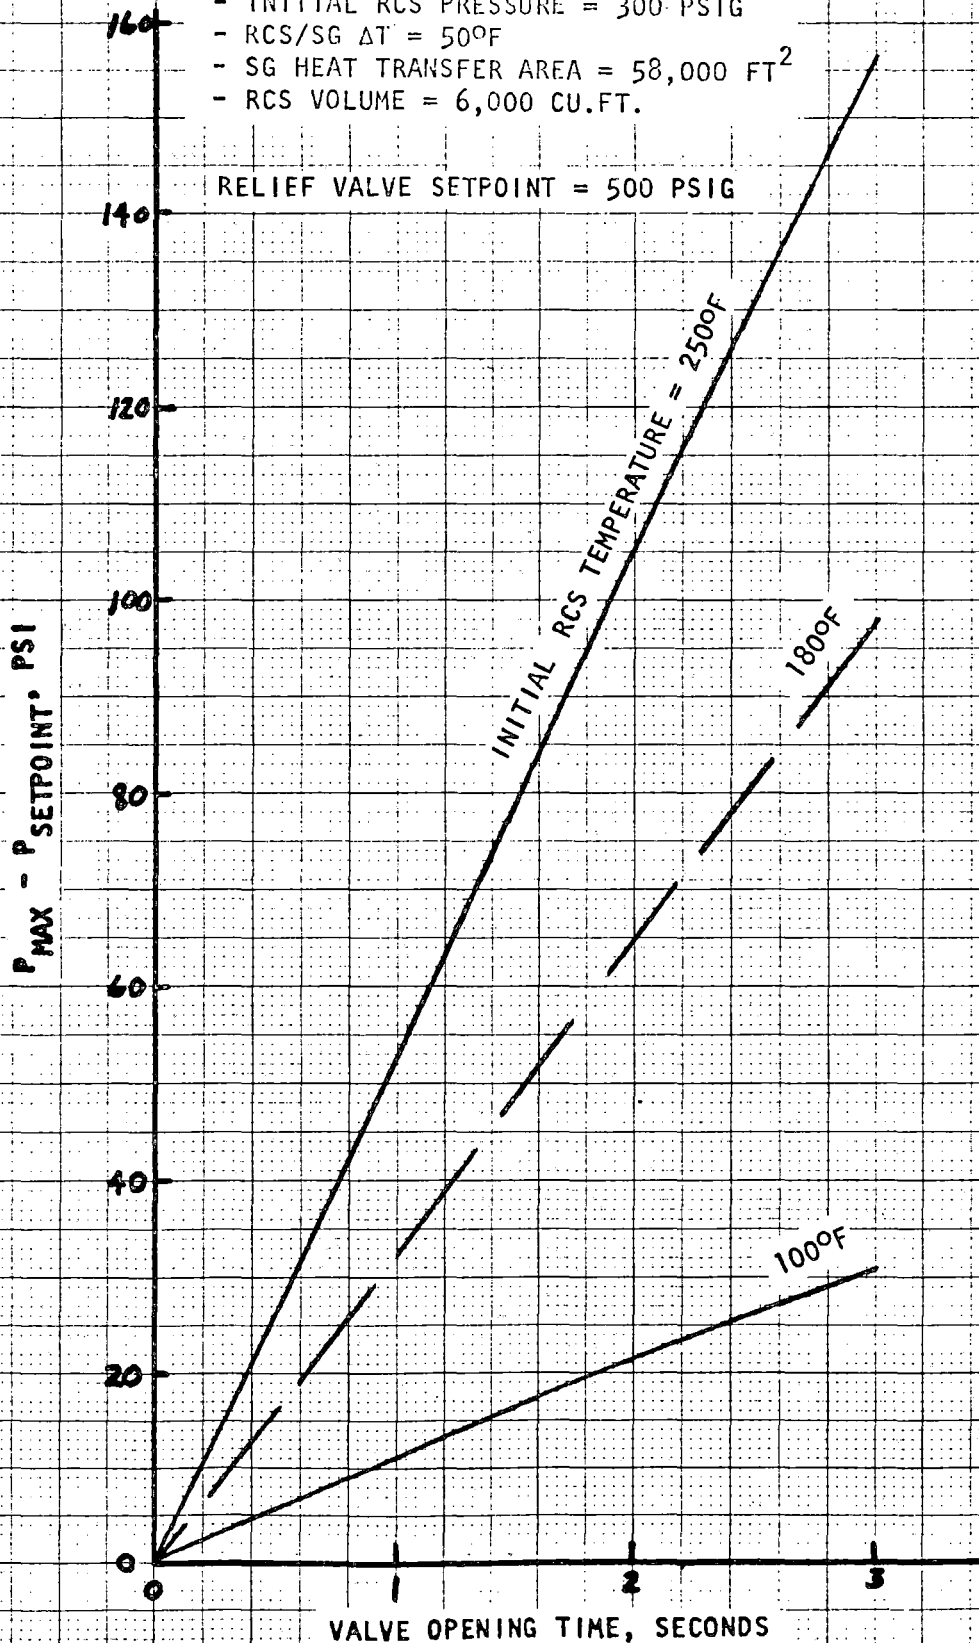

**EFFECT OF RELIEF VALVE
OPENING TIME ON RCS
PRESSURE OVERSHOOT**

Figure 6

- RCS PUMP STARTUP IN 1 LOOP
- LINEAR RELIEF VALVE
- VALVE DELAY = 20% OF OPENING TIME
- INITIAL RCS PRESSURE = 300 PSIG
- RCS/SG $\Delta T = 50^{\circ}F$
- SG HEAT TRANSFER AREA = 58,000 FT^2
- RCS VOLUME = 13000 CU. FT.

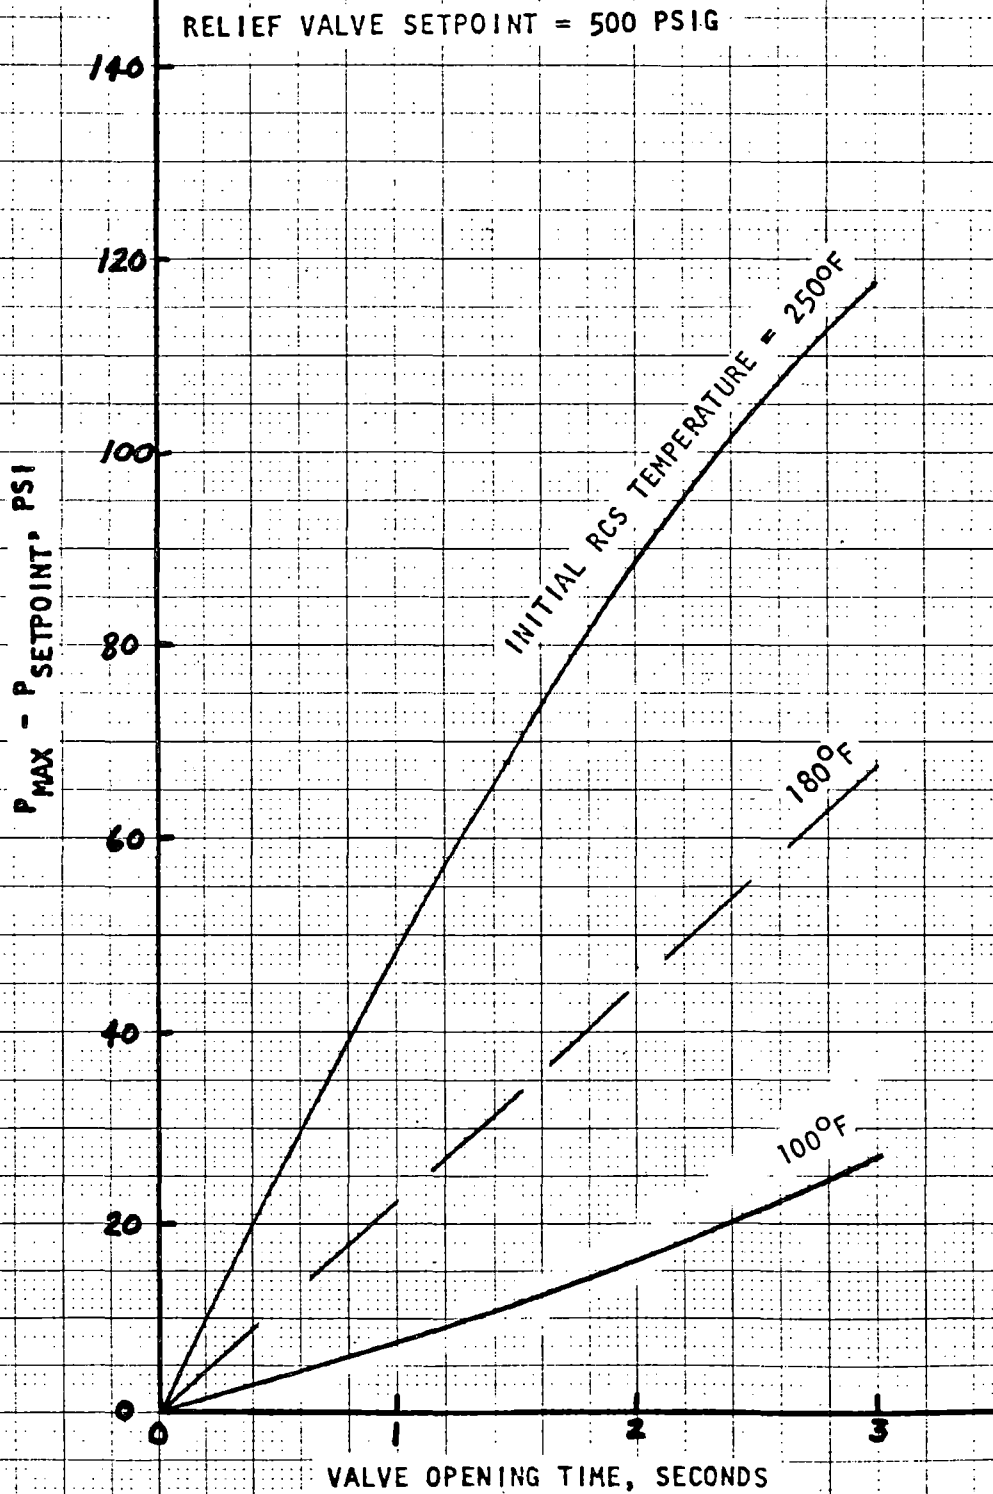

B. SETPOINT OVERSHOOT VARIATION WITH
RELIEF VALVE SETPOINT

Figure 7

EFFECT OF RELIEF VALVE SETPOINT ON PRESSURE OVERSHOOT

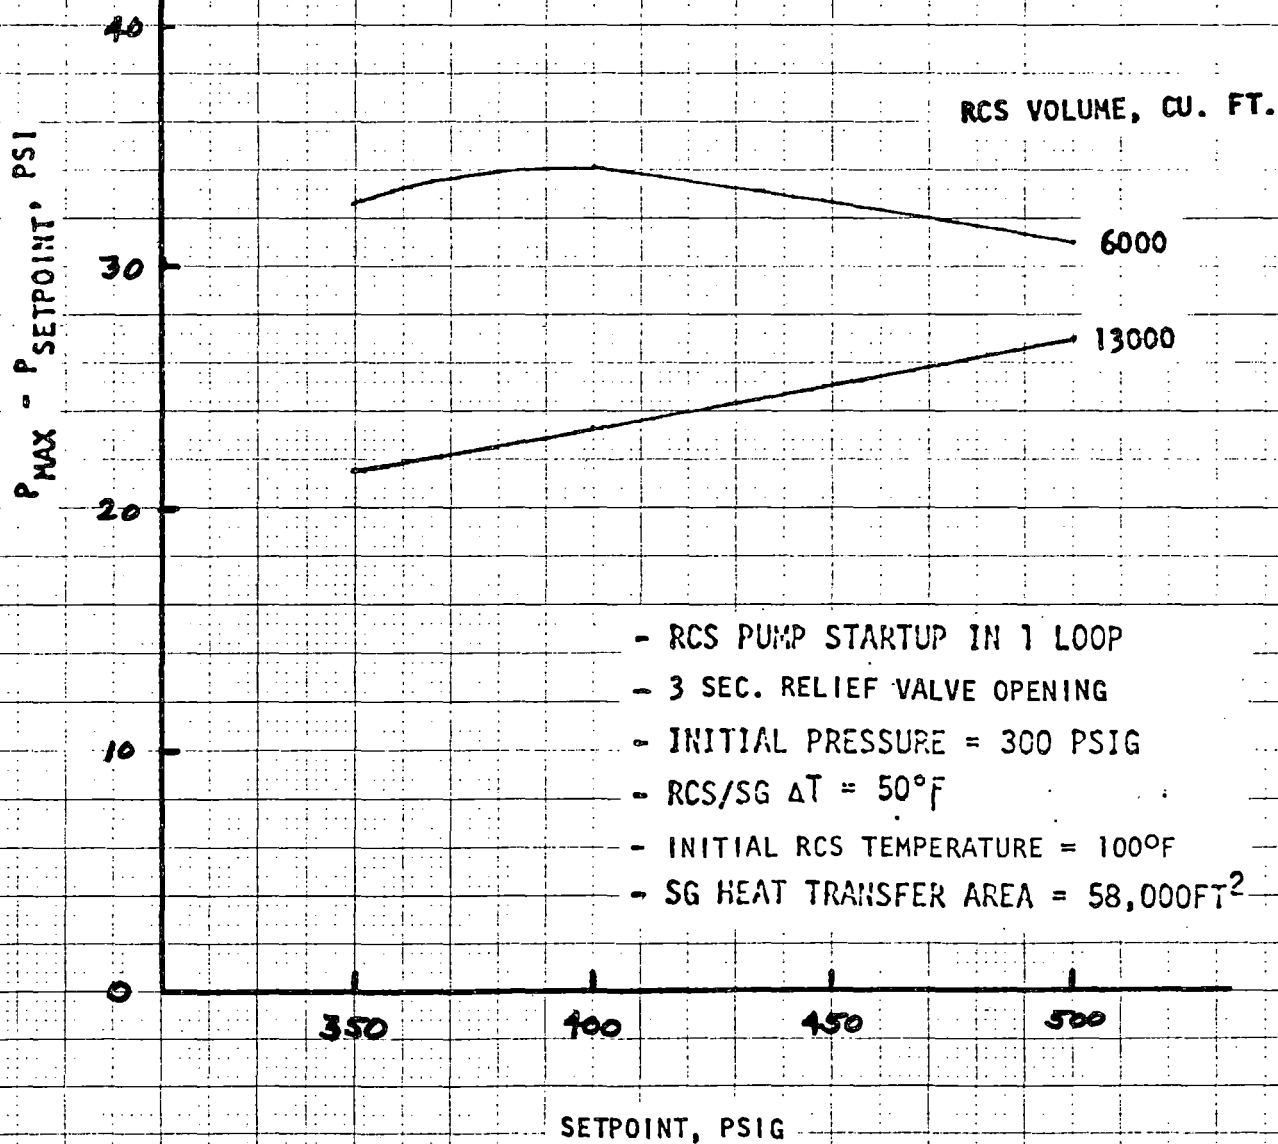


Figure 8

EFFECT OF RELIEF VALVE SETPOINT ON PRESSURE OVERSHOOT

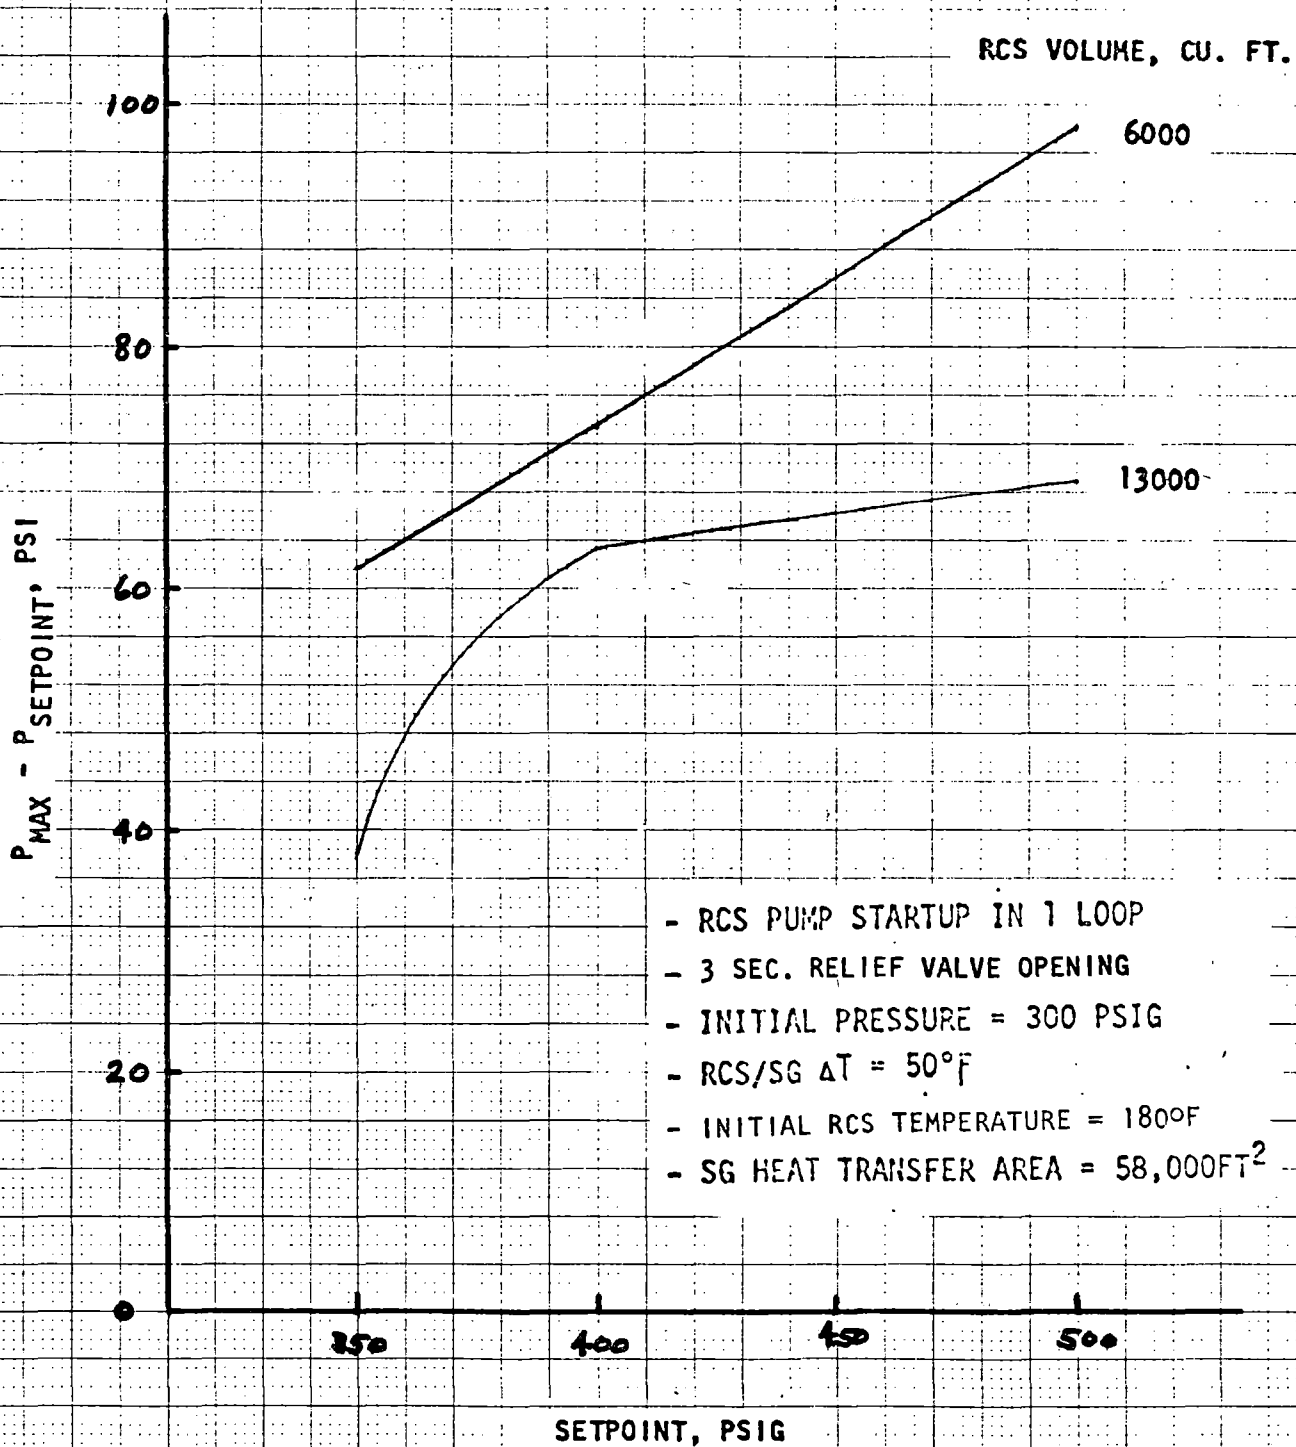


Figure 9

RCS VOLUME, CU. FT.

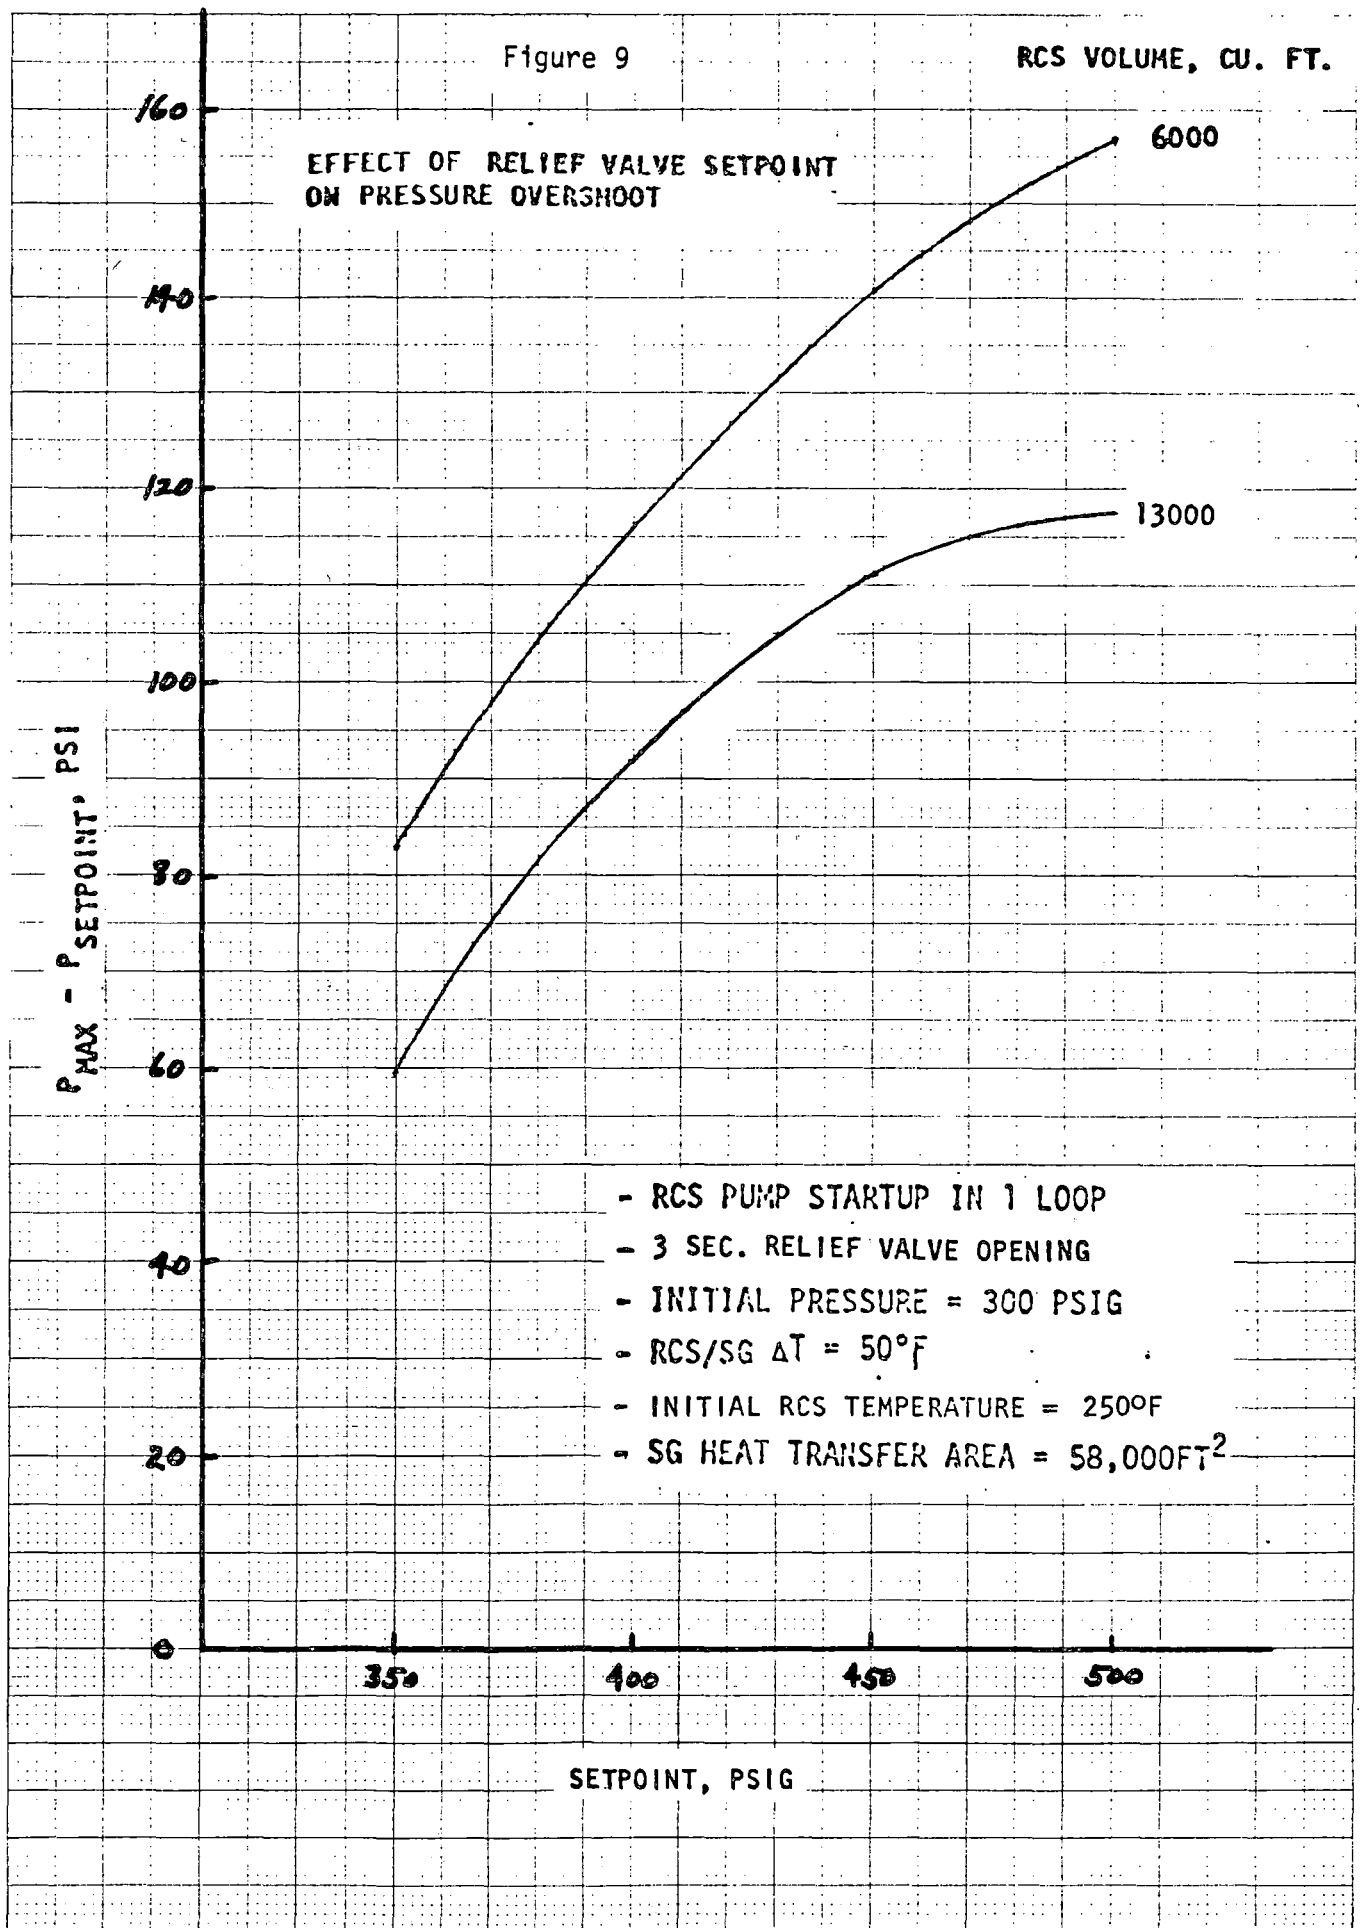


Figure 10

EFFECT OF RELIEF VALVE SETPOINT ON PRESSURE OVERSHOOT

- RCS PUMP STARTUP IN 1 LOOP
- 1.5 SEC. RELIEF VALVE OPENING
- INITIAL PRESSURE = 300 PSIG
- RCS/SG $\Delta T = 50^{\circ}F$
- INITIAL RCS TEMPERATURE = $100^{\circ}F$
- SG HEAT TRANSFER AREA = 58,000FT²


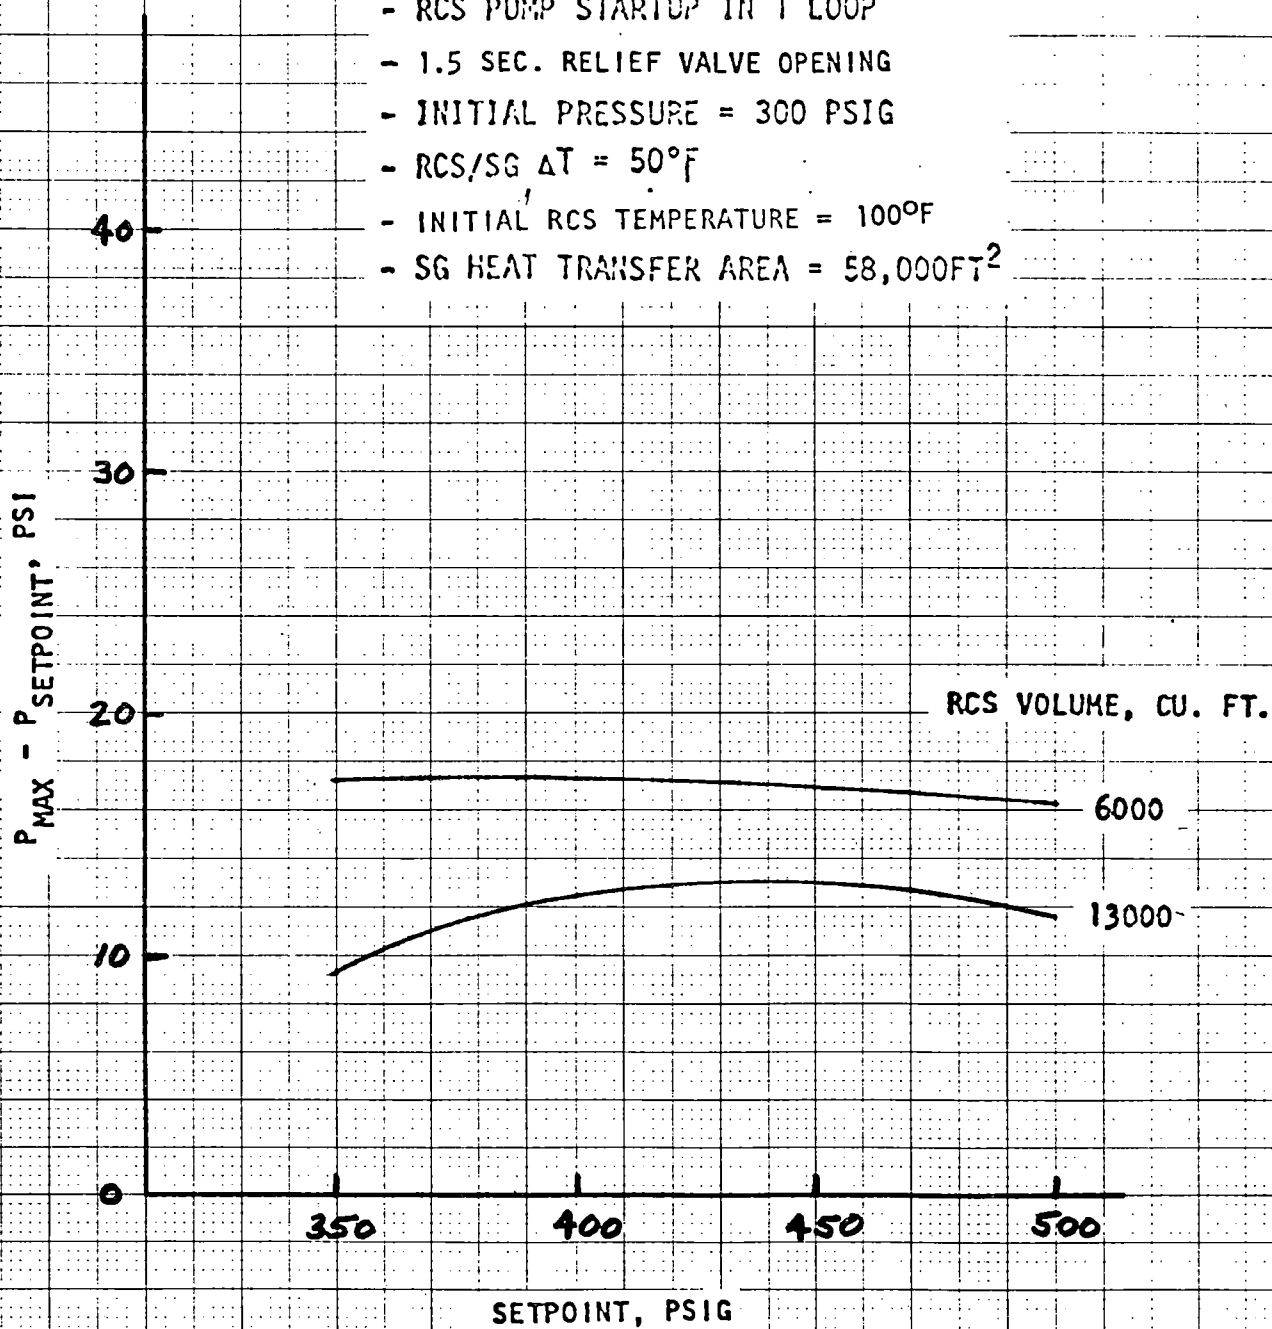


Figure 11

EFFECT OF RELIEF VALVE SETPOINT ON PRESSURE OVERSHOOT


- RCS PUMP STARTUP IN 1 LOOP
- 1.5 SEC. RELIEF VALVE OPENING
- INITIAL PRESSURE = 300 PSIG
- RCS/SG $\Delta T = 50^{\circ}F$
- INITIAL RCS TEMPERATURE = $250^{\circ}F$
- SG HEAT TRANSFER AREA = $58,000FT^2$

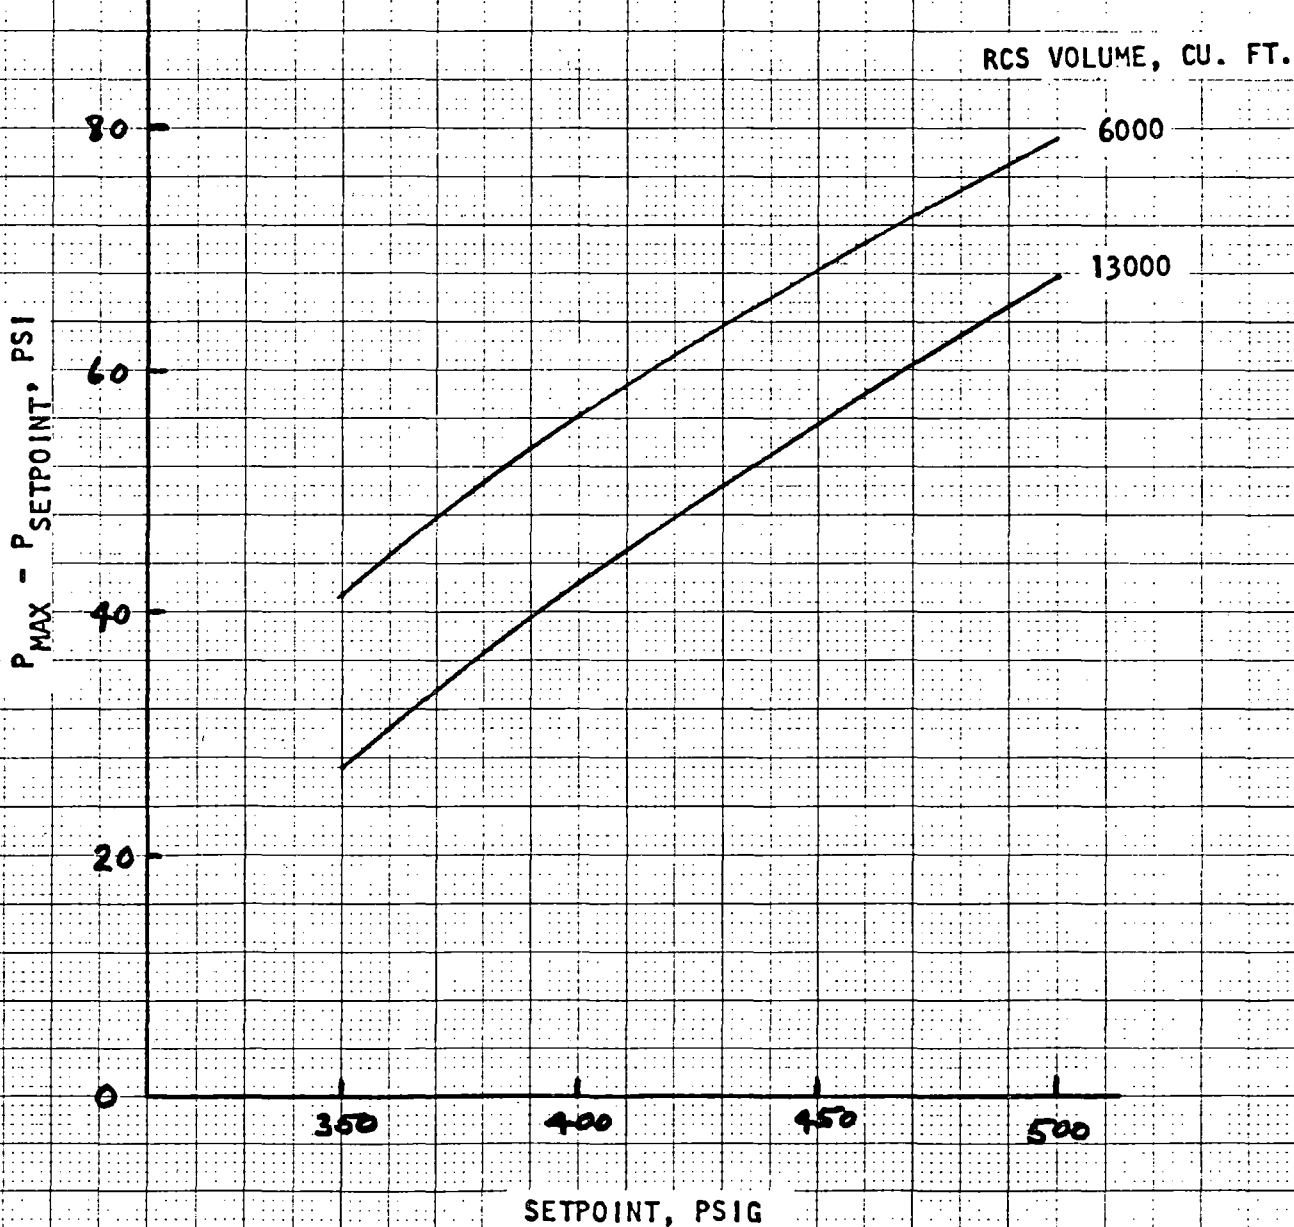

C. SETPOINT OVERSHOOT VARIATION WITH
NORMALIZED STEAM GENERATOR UA

Figure 12

EFFECT OF STEAM GENERATOR UA ON PRESSURE OVERSHOOT

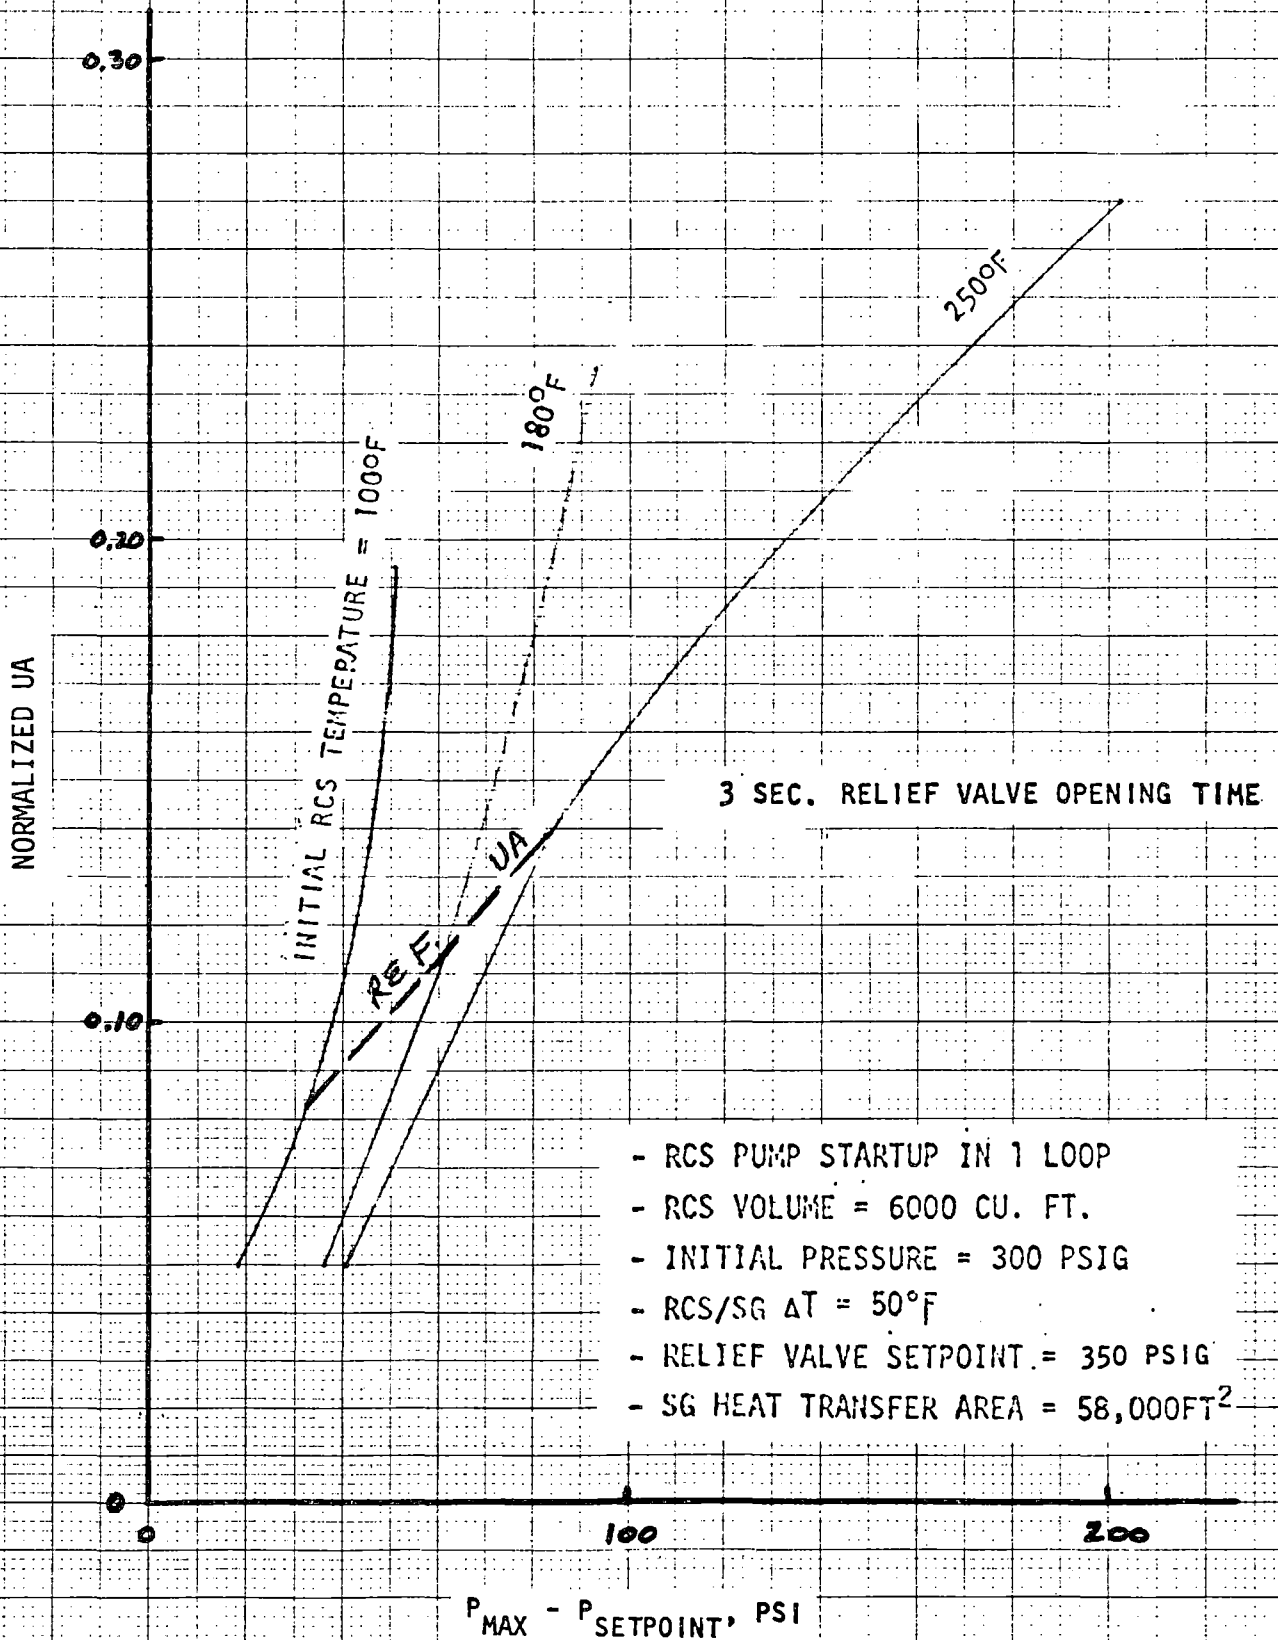

EFFECT OF STEAM GENERATOR UA ON PRESSURE OVERSHOOT

Figure 13


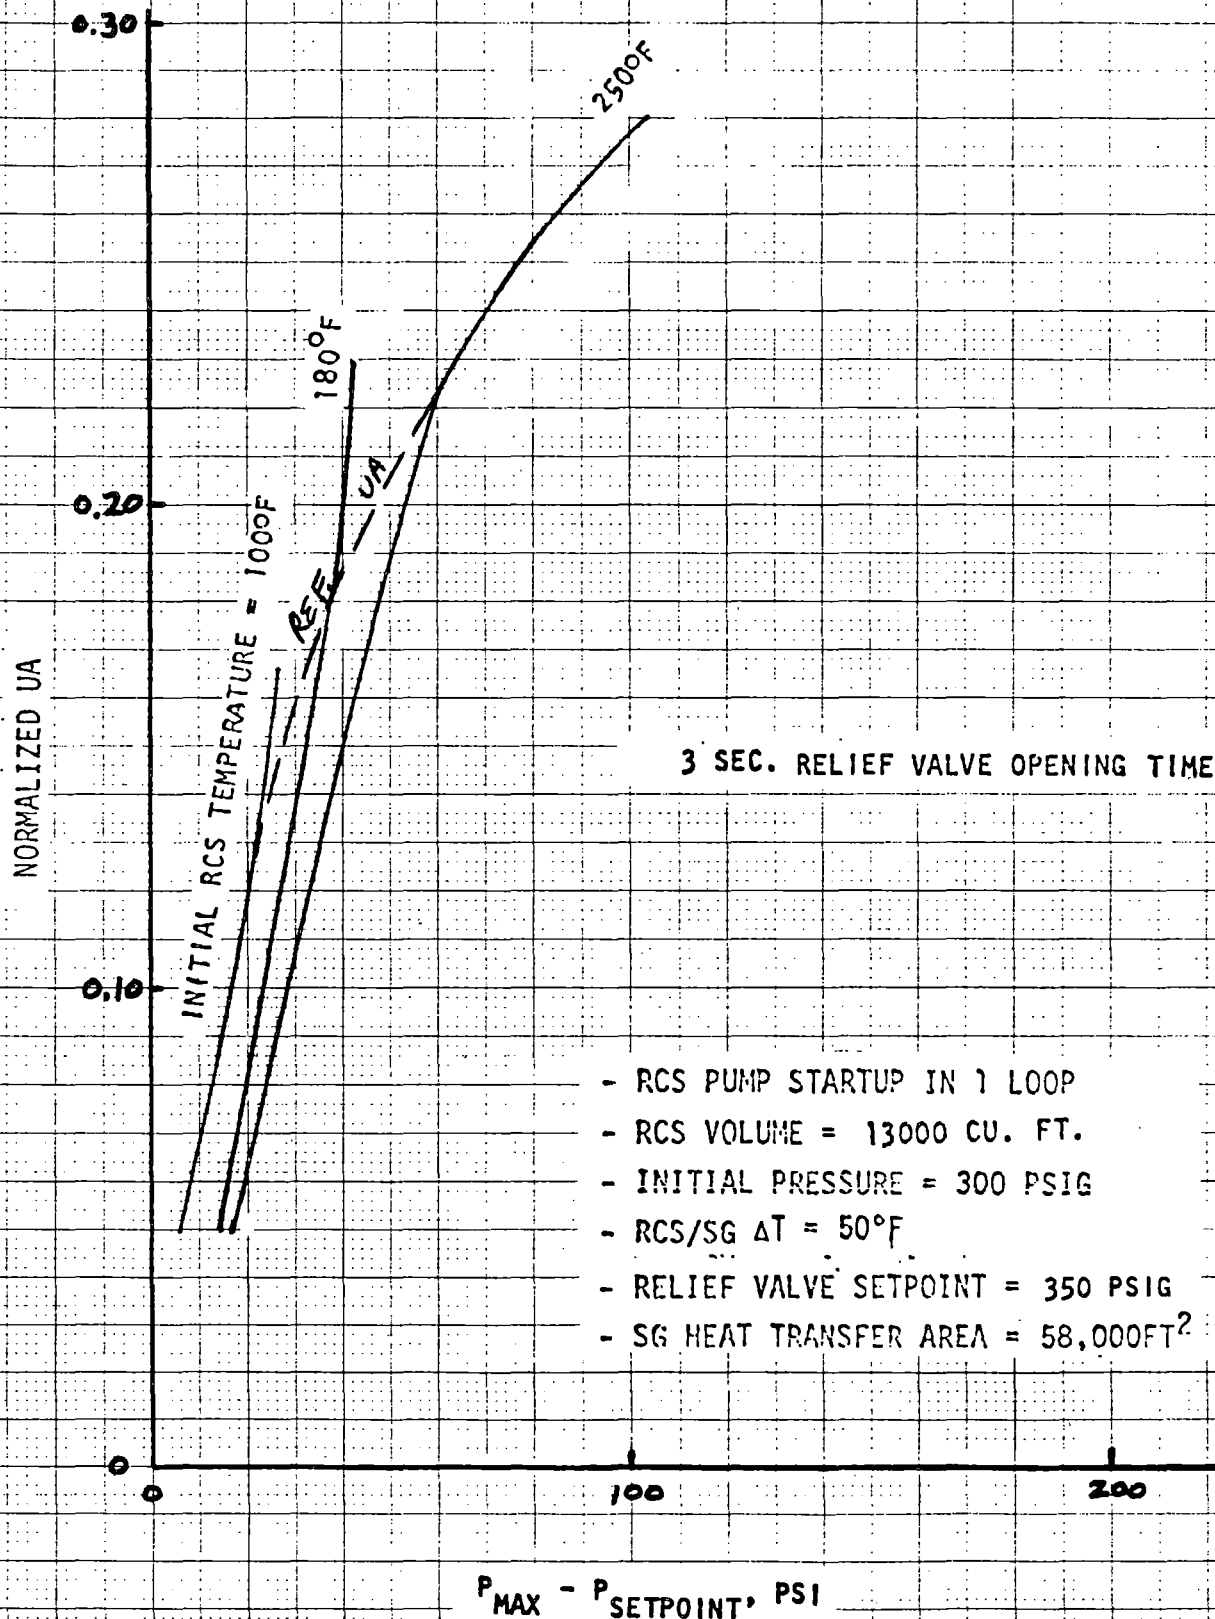


Figure 14

EFFECT OF STEAM GENERATOR UA ON PRESSURE OVERSHOOT

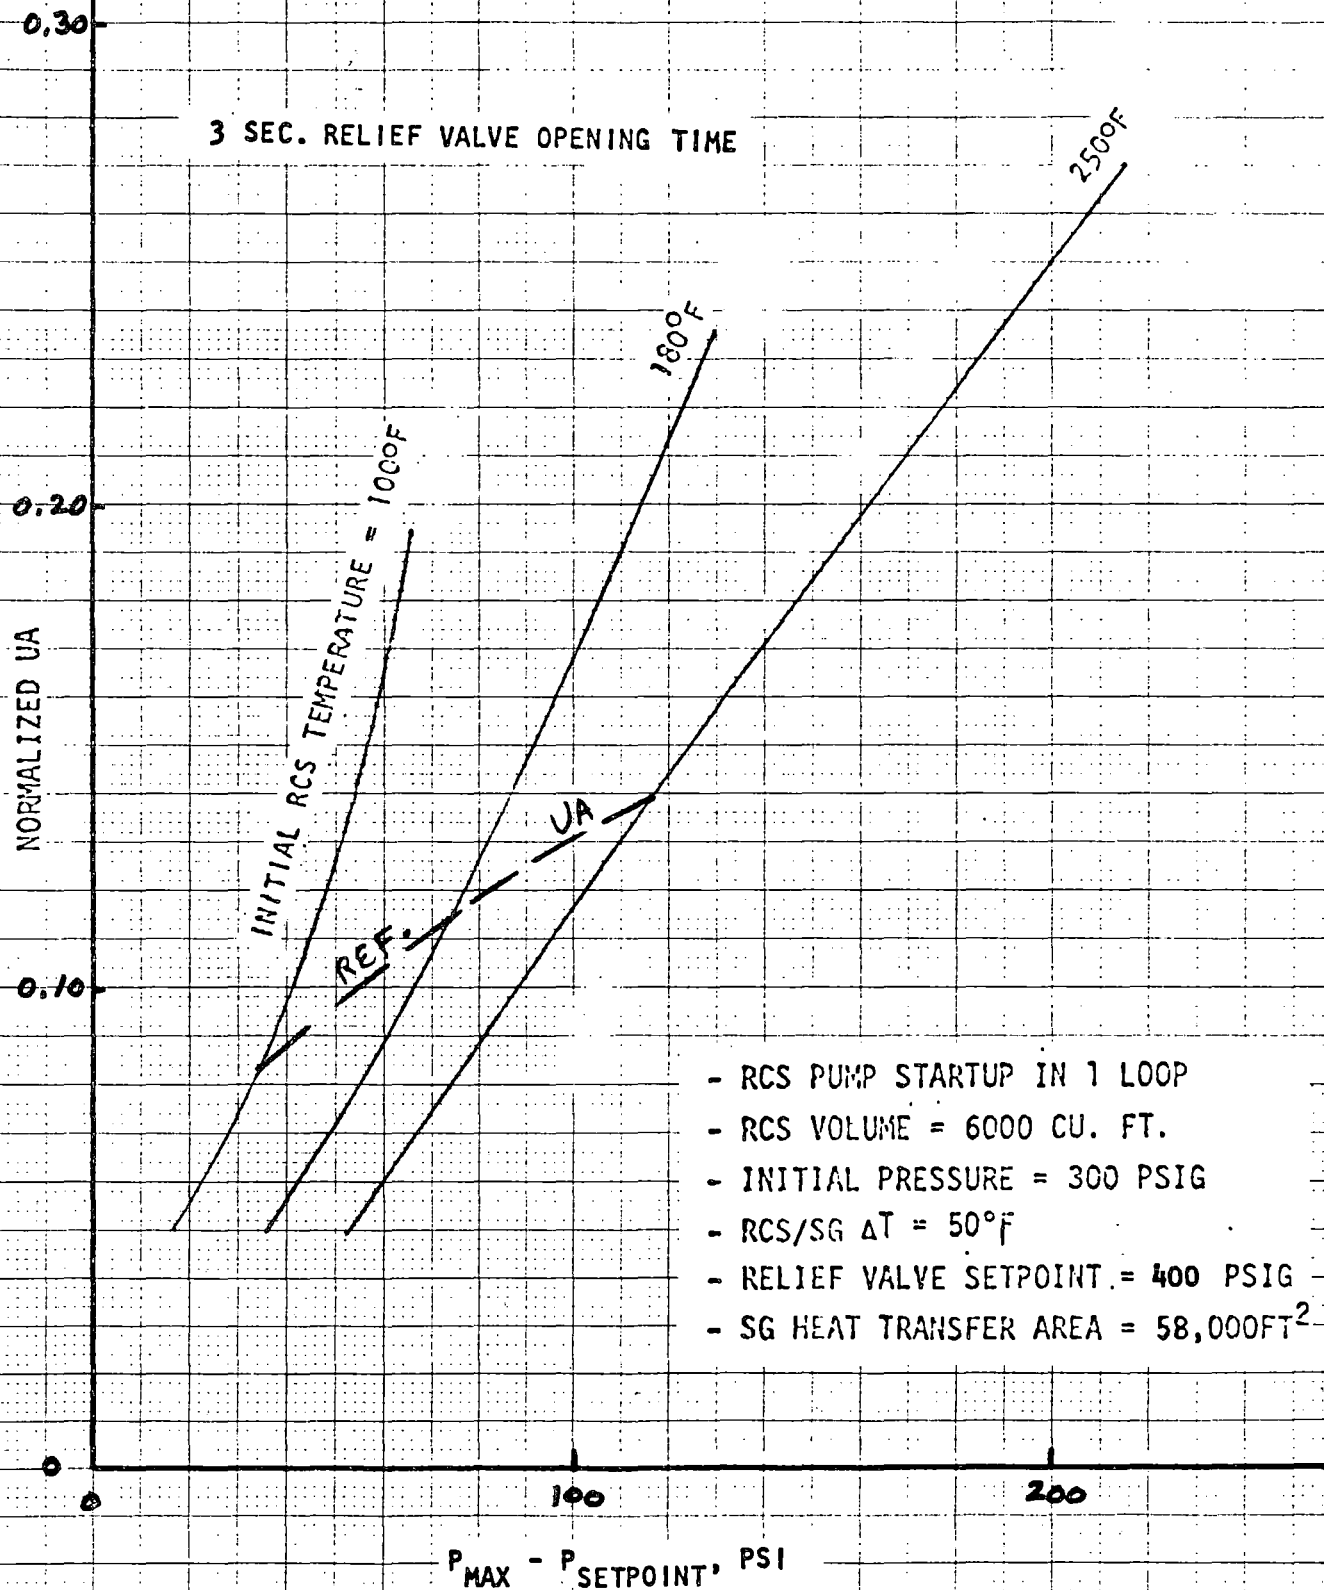

EFFECT OF STEAM GENERATOR UA ON PRESSURE OVERSHOOT

Figure 15


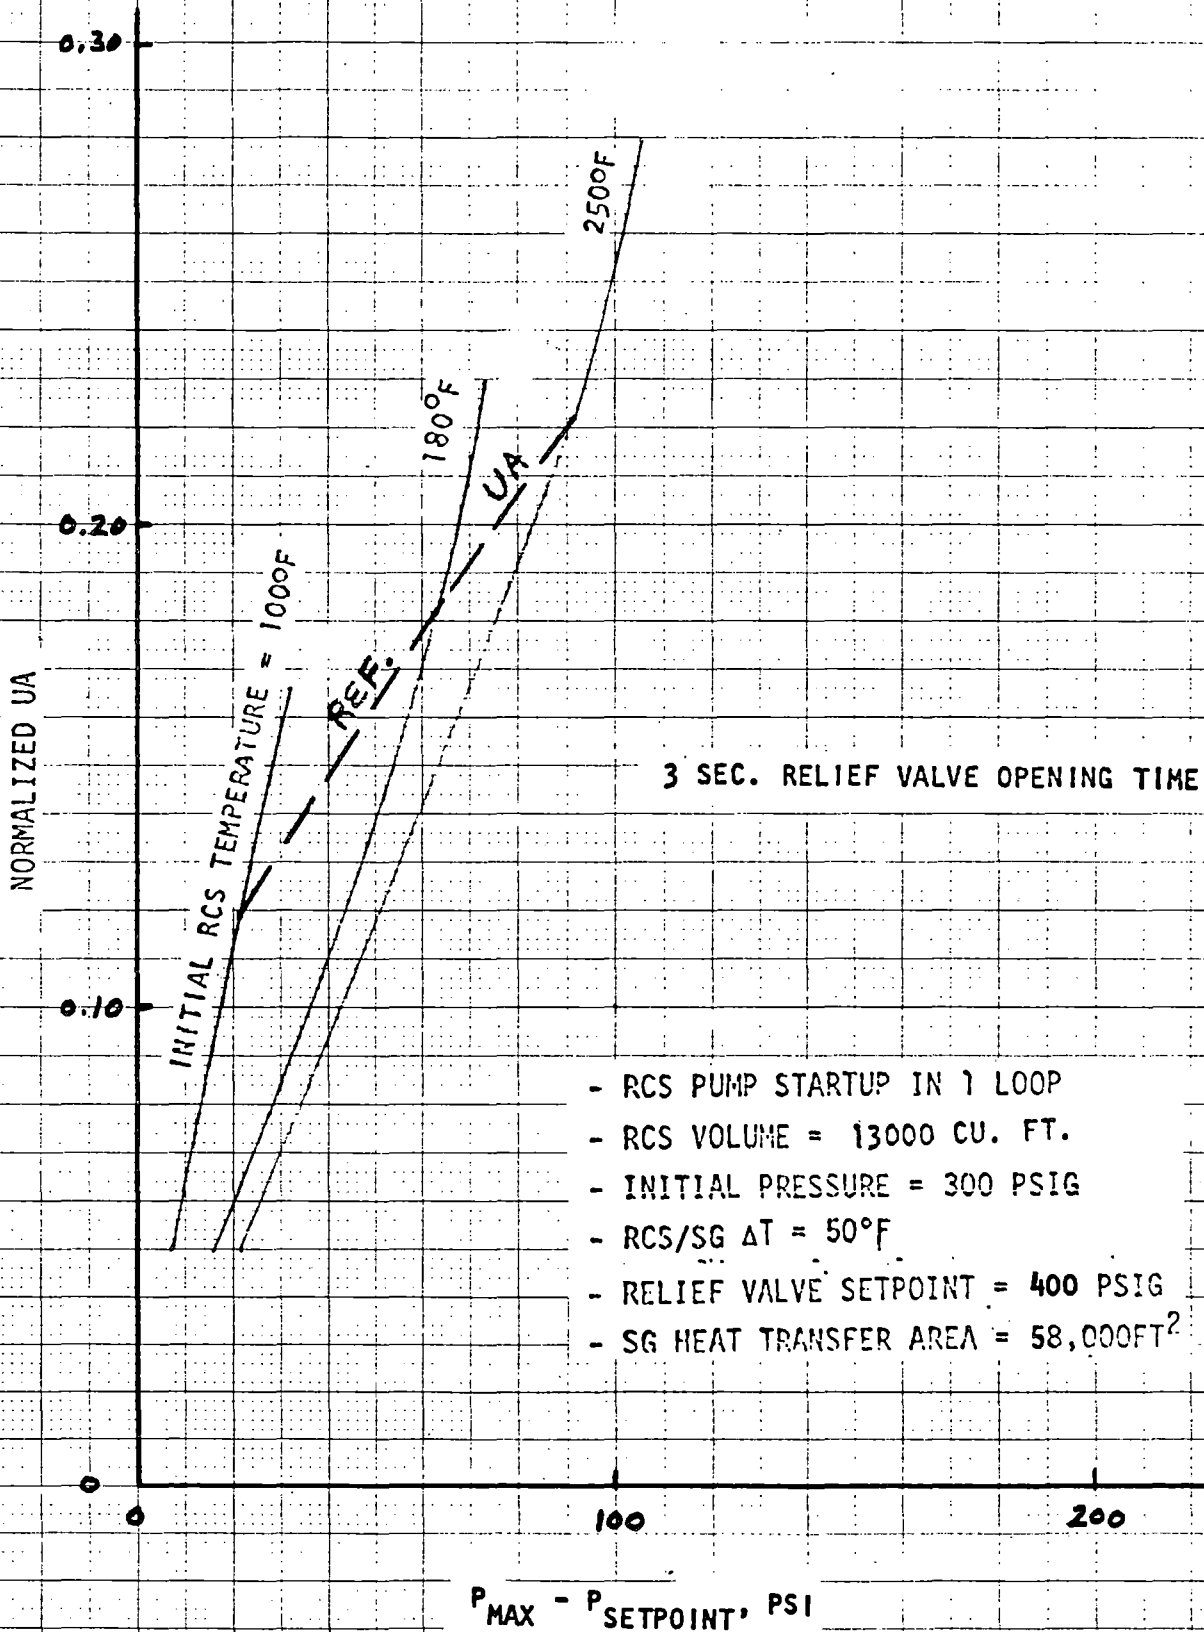


Figure 16

EFFECT OF STEAM GENERATOR UA ON PRESSURE OVERSHOOT

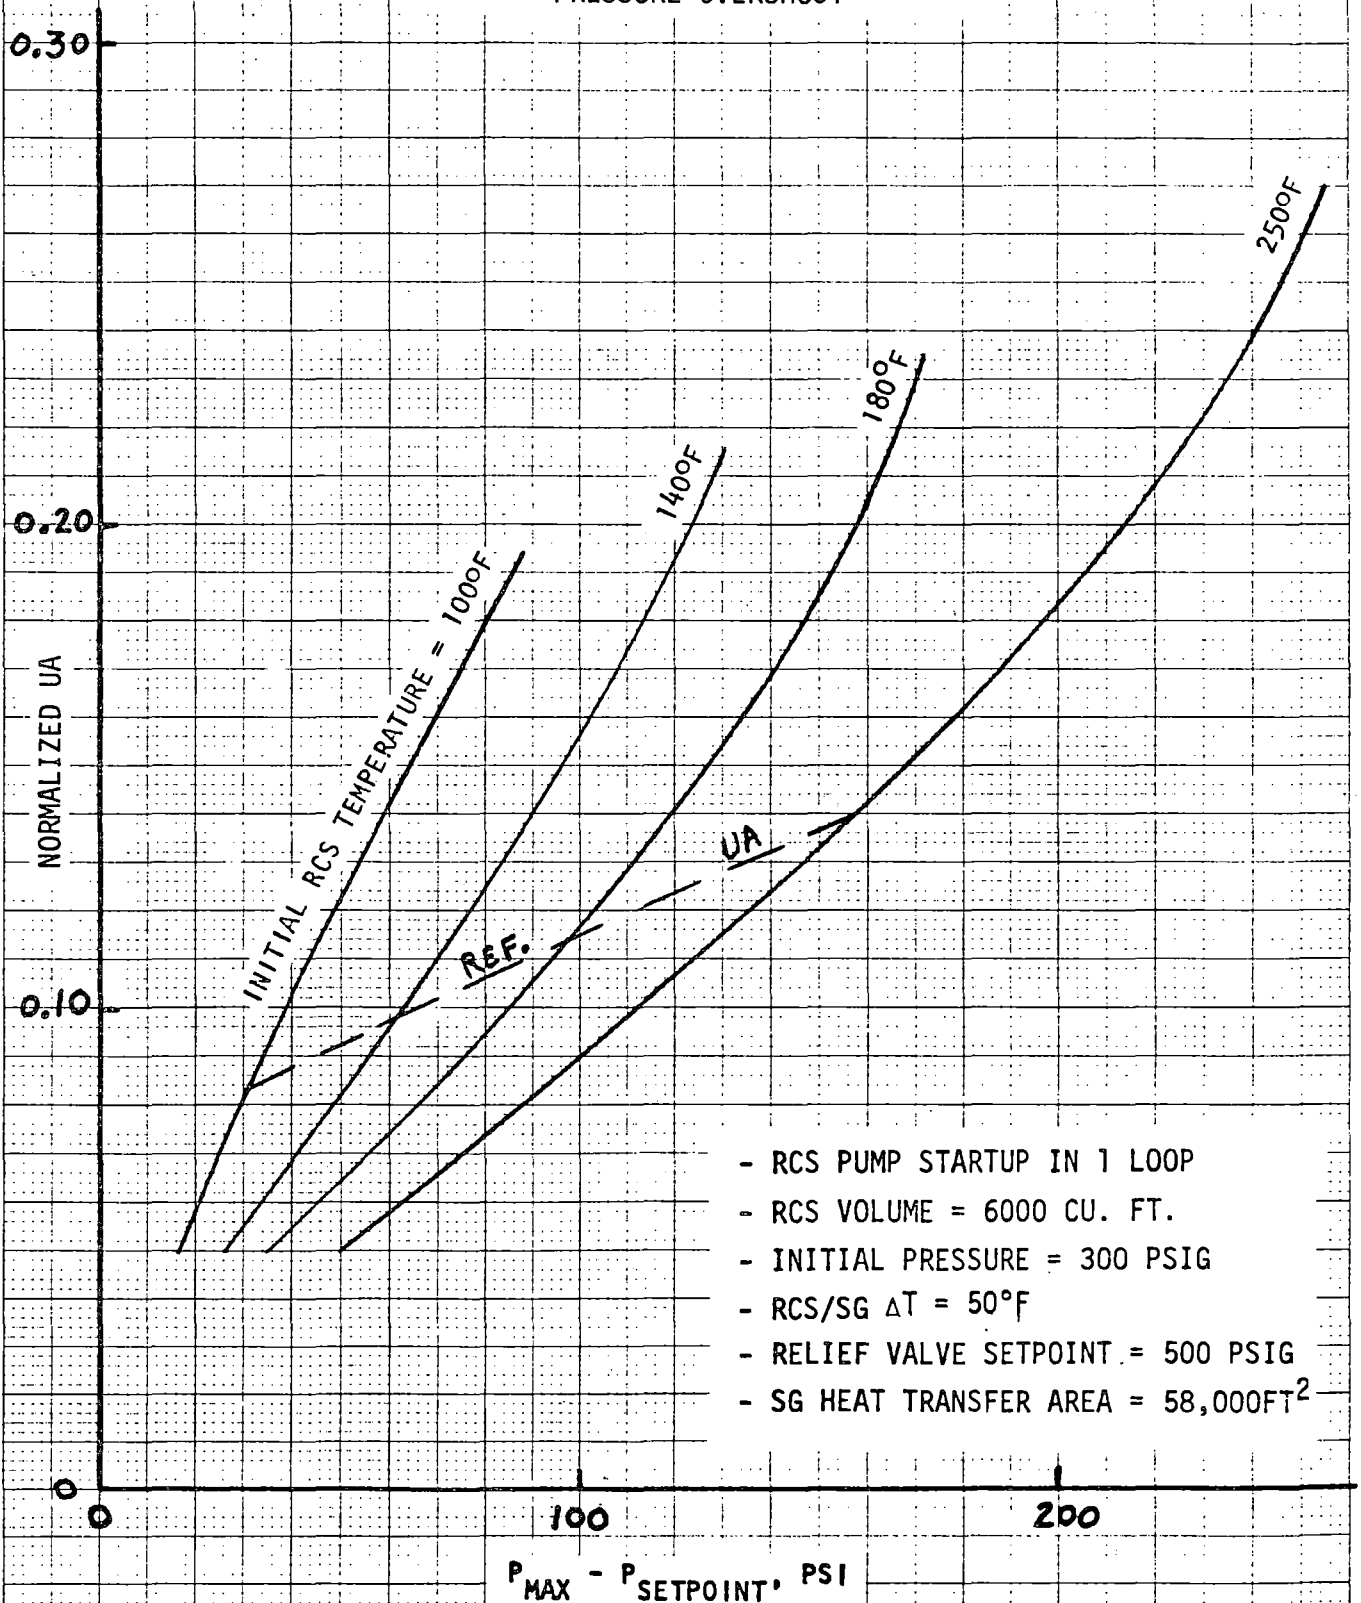

- RCS PUMP STARTUP IN 1 LOOP
- RCS VOLUME = 6000 CU. FT.
- INITIAL PRESSURE = 300 PSIG
- RCS/SG $\Delta T = 50^{\circ}F$
- RELIEF VALVE SETPOINT = 500 PSIG
- SG HEAT TRANSFER AREA = 58,000FT²

Figure 17

EFFECT OF STEAM GENERATOR UA ON PRESSURE OVERSHOOT

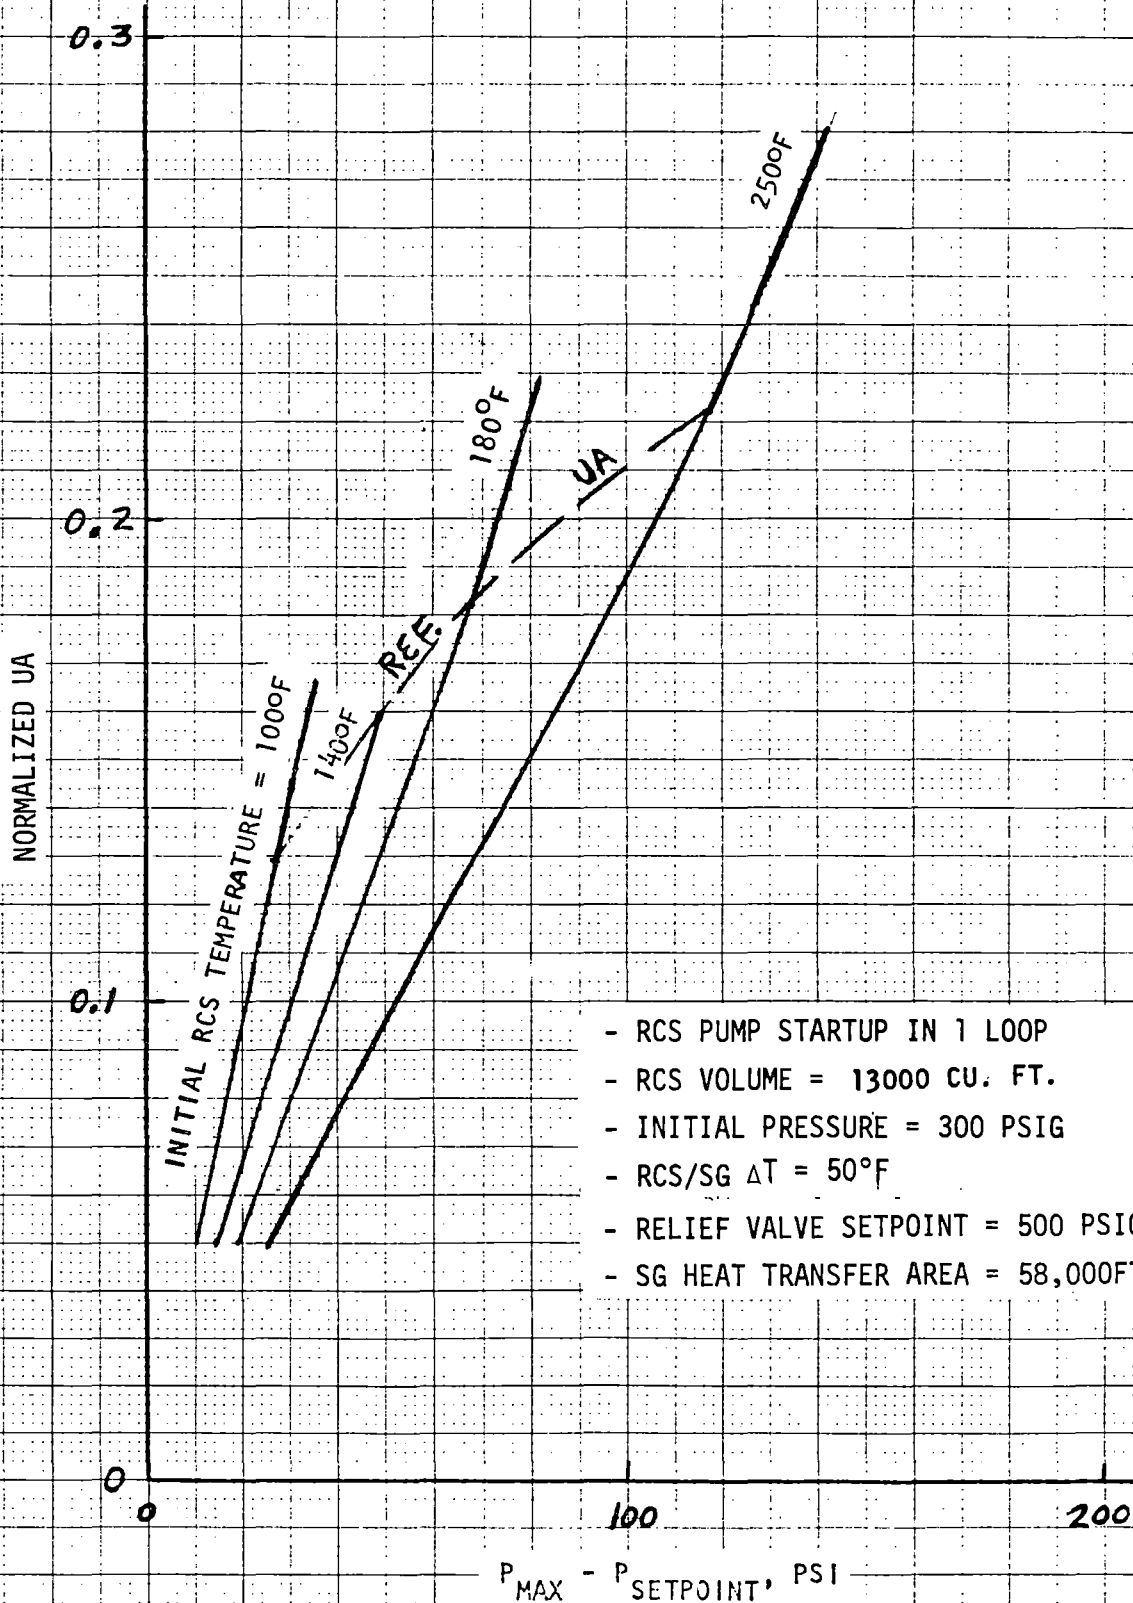


Figure 18

EFFECT OF STEAM GENERATOR UA ON PRESSURE OVERSHOOT

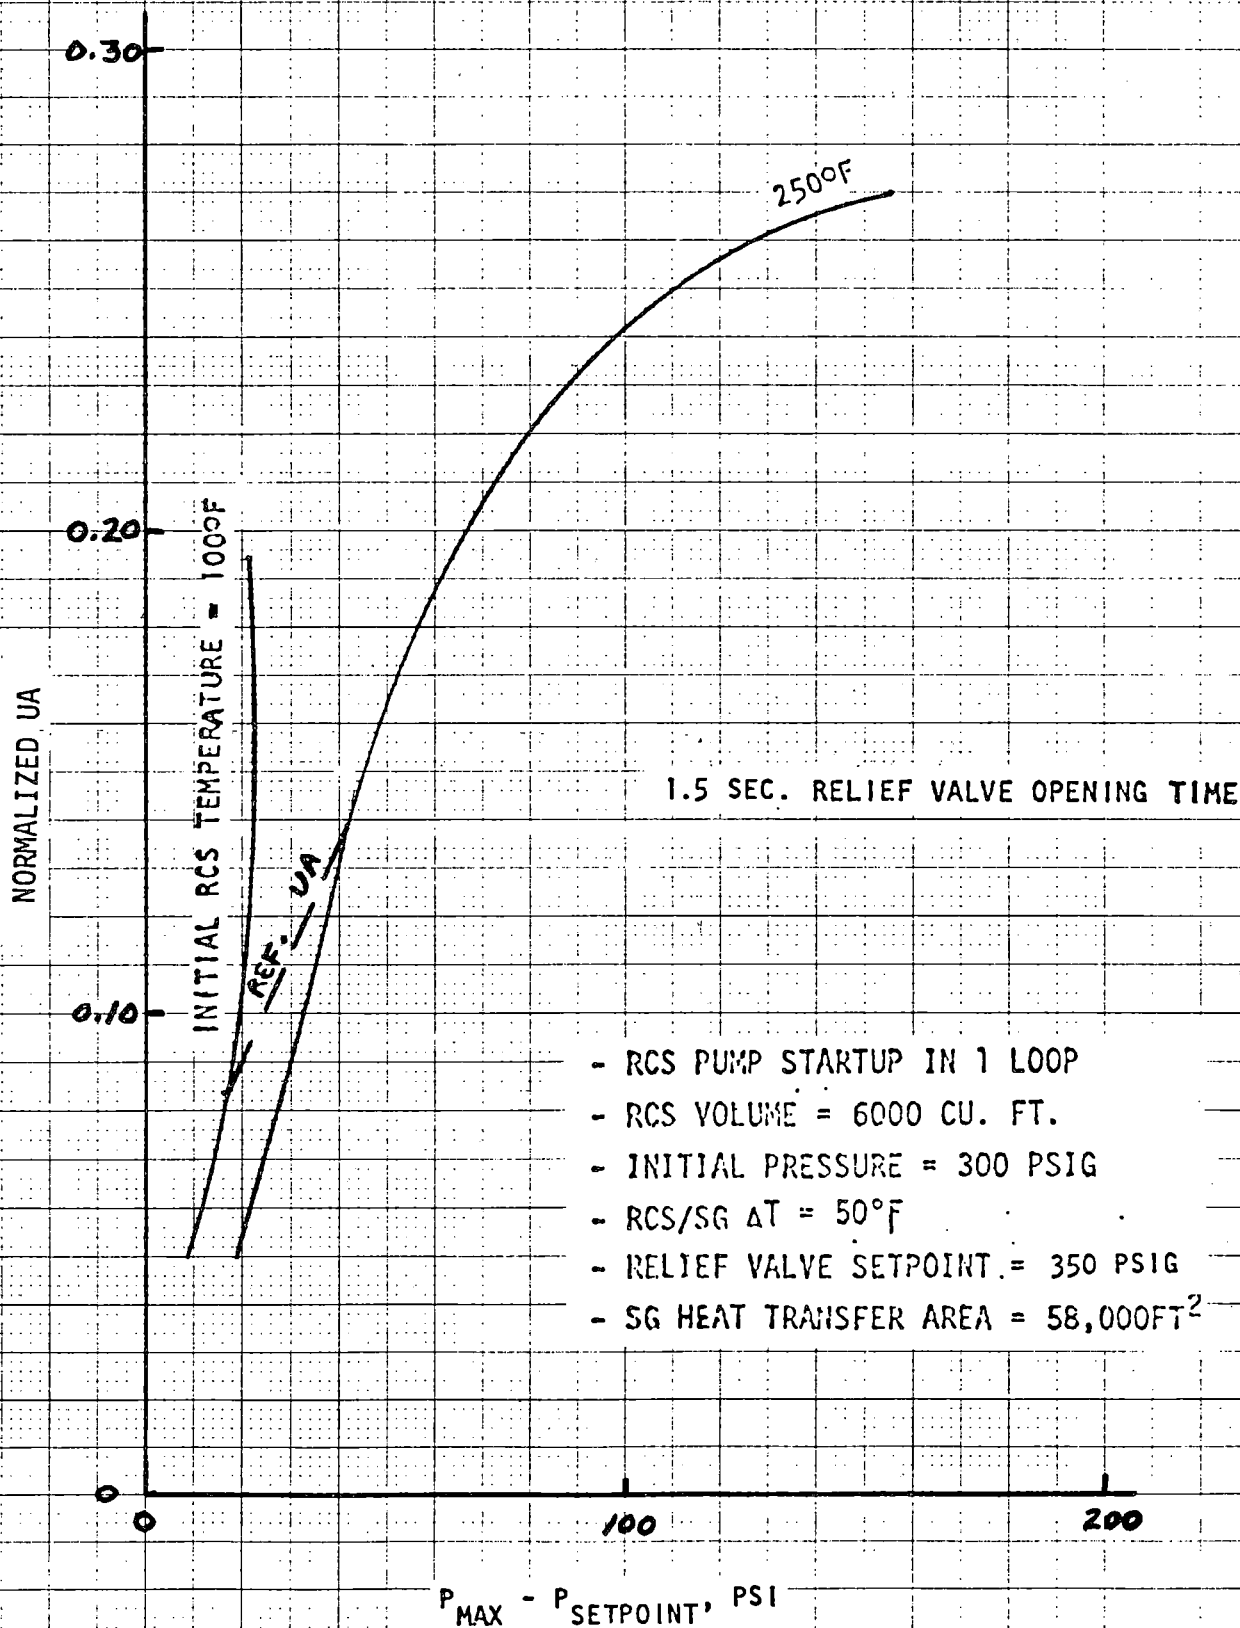


Figure 19

EFFECT OF STEAM GENERATOR UA ON PRESSURE OVERSHOOT

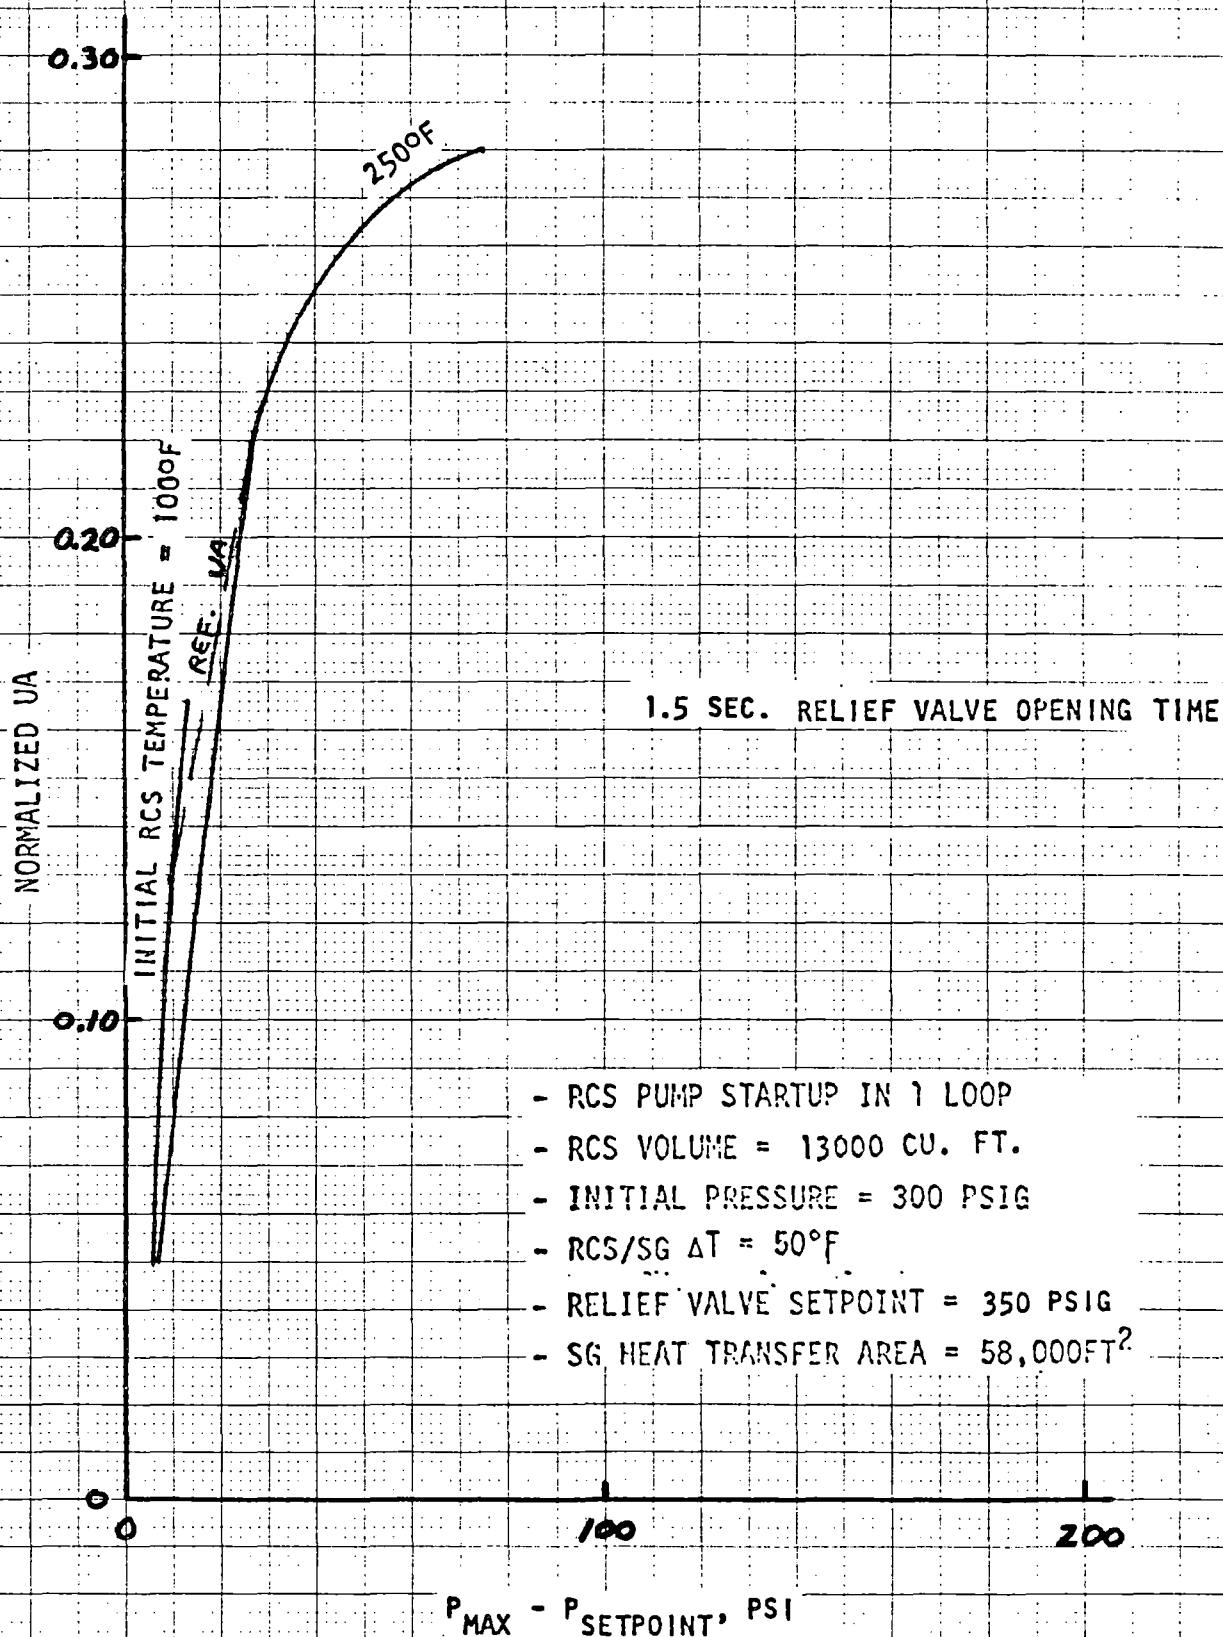


Figure 20

EFFECT OF STEAM GENERATOR UA ON PRESSURE OVERSHOOT

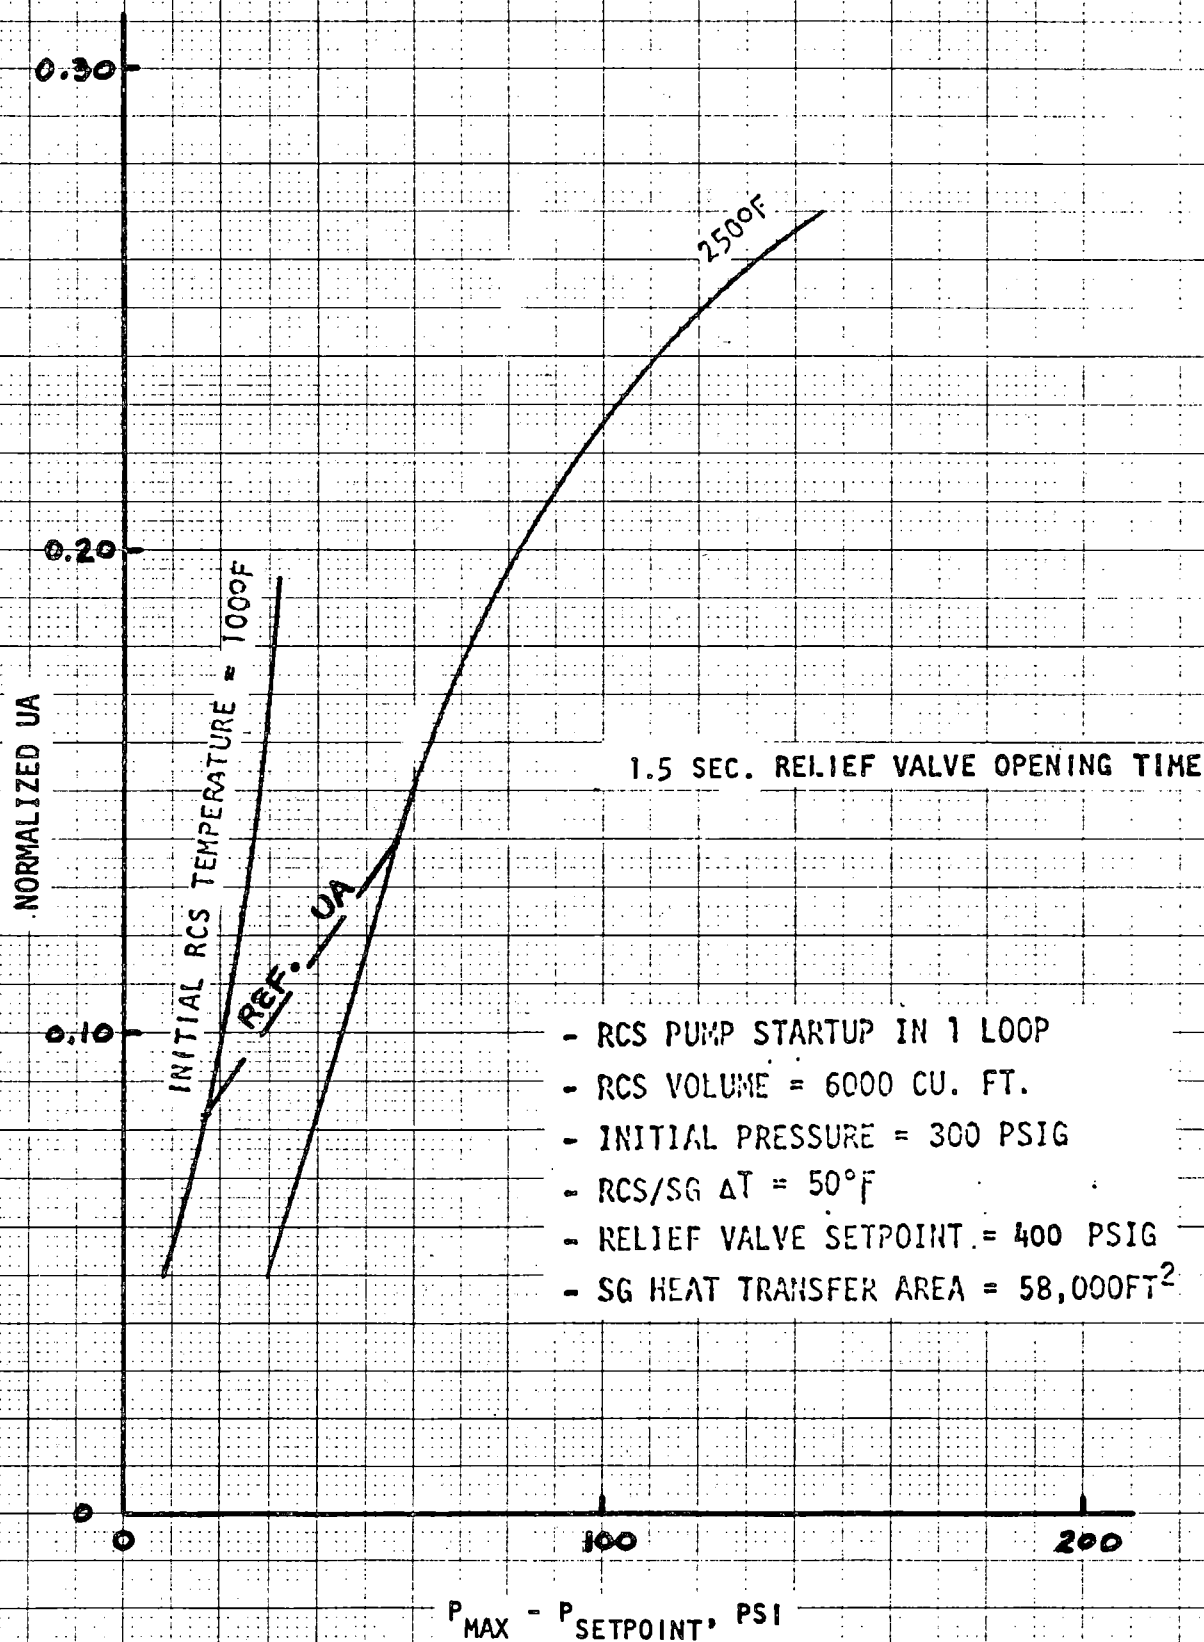


Figure 21

EFFECT OF STEAM GENERATOR UA ON PRESSURE OVERSHOOT

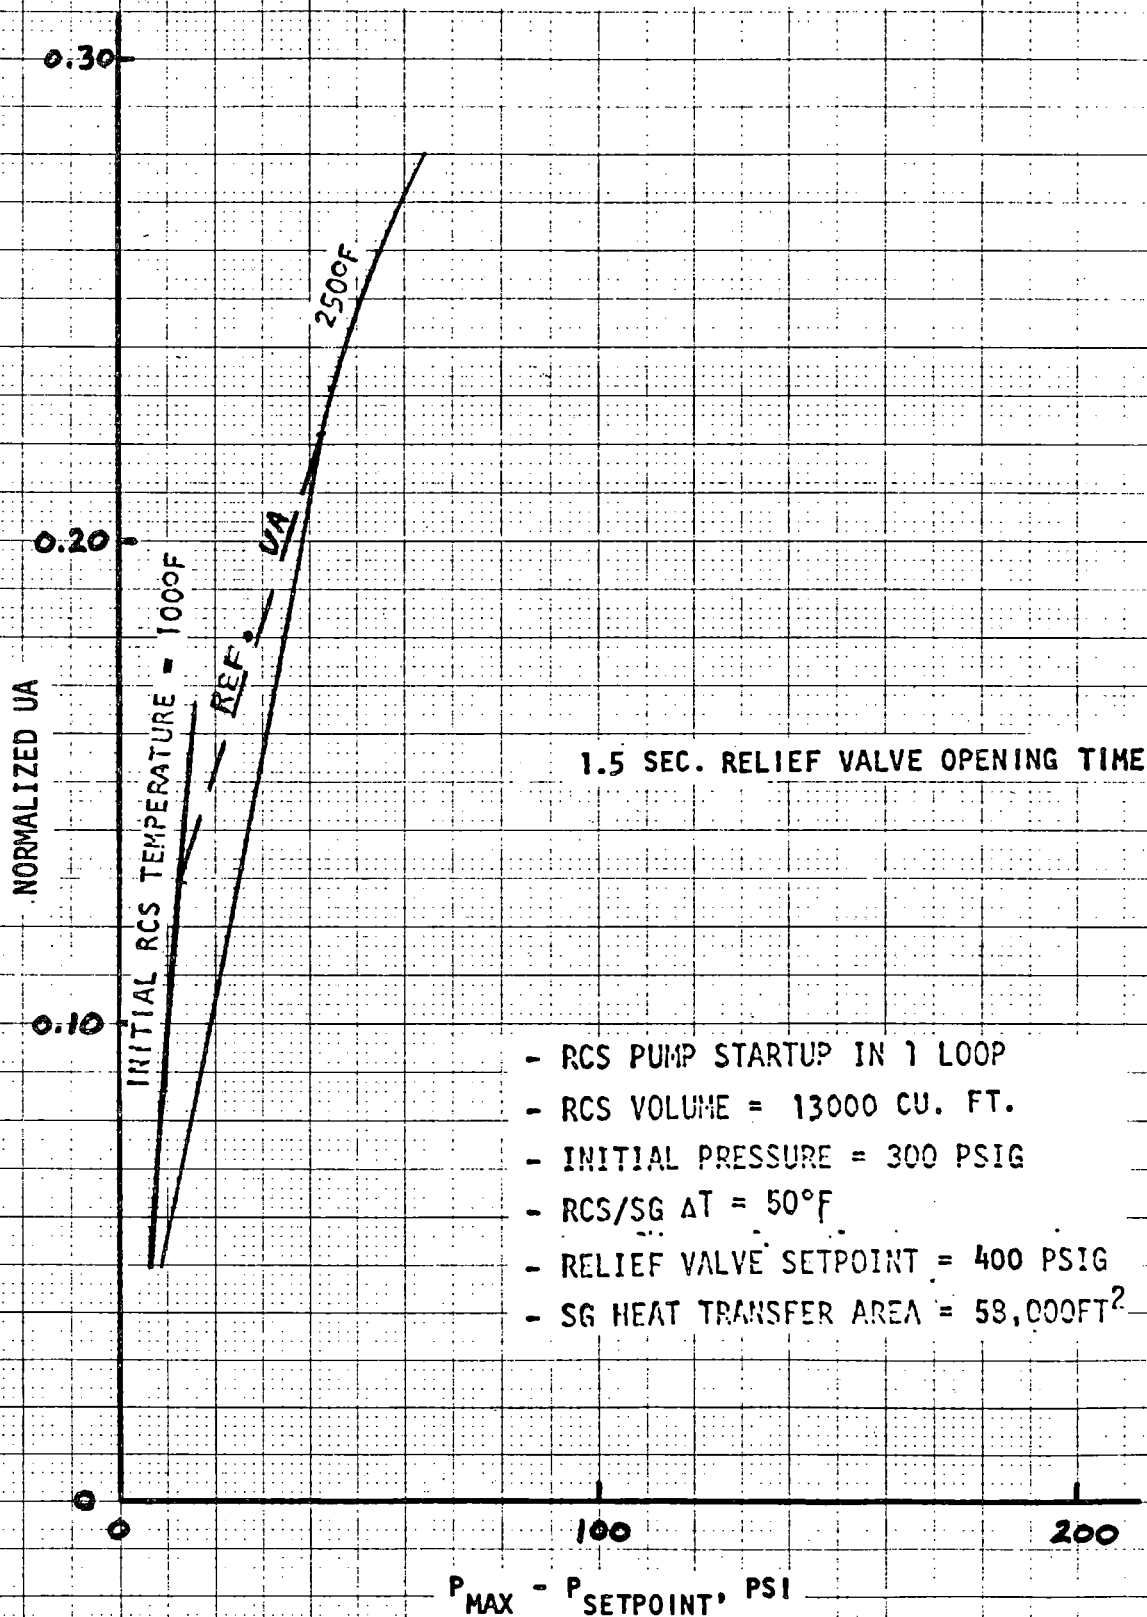


Figure 22

EFFECT OF STEAM GENERATOR UA ON PRESSURE OVERSHOOT


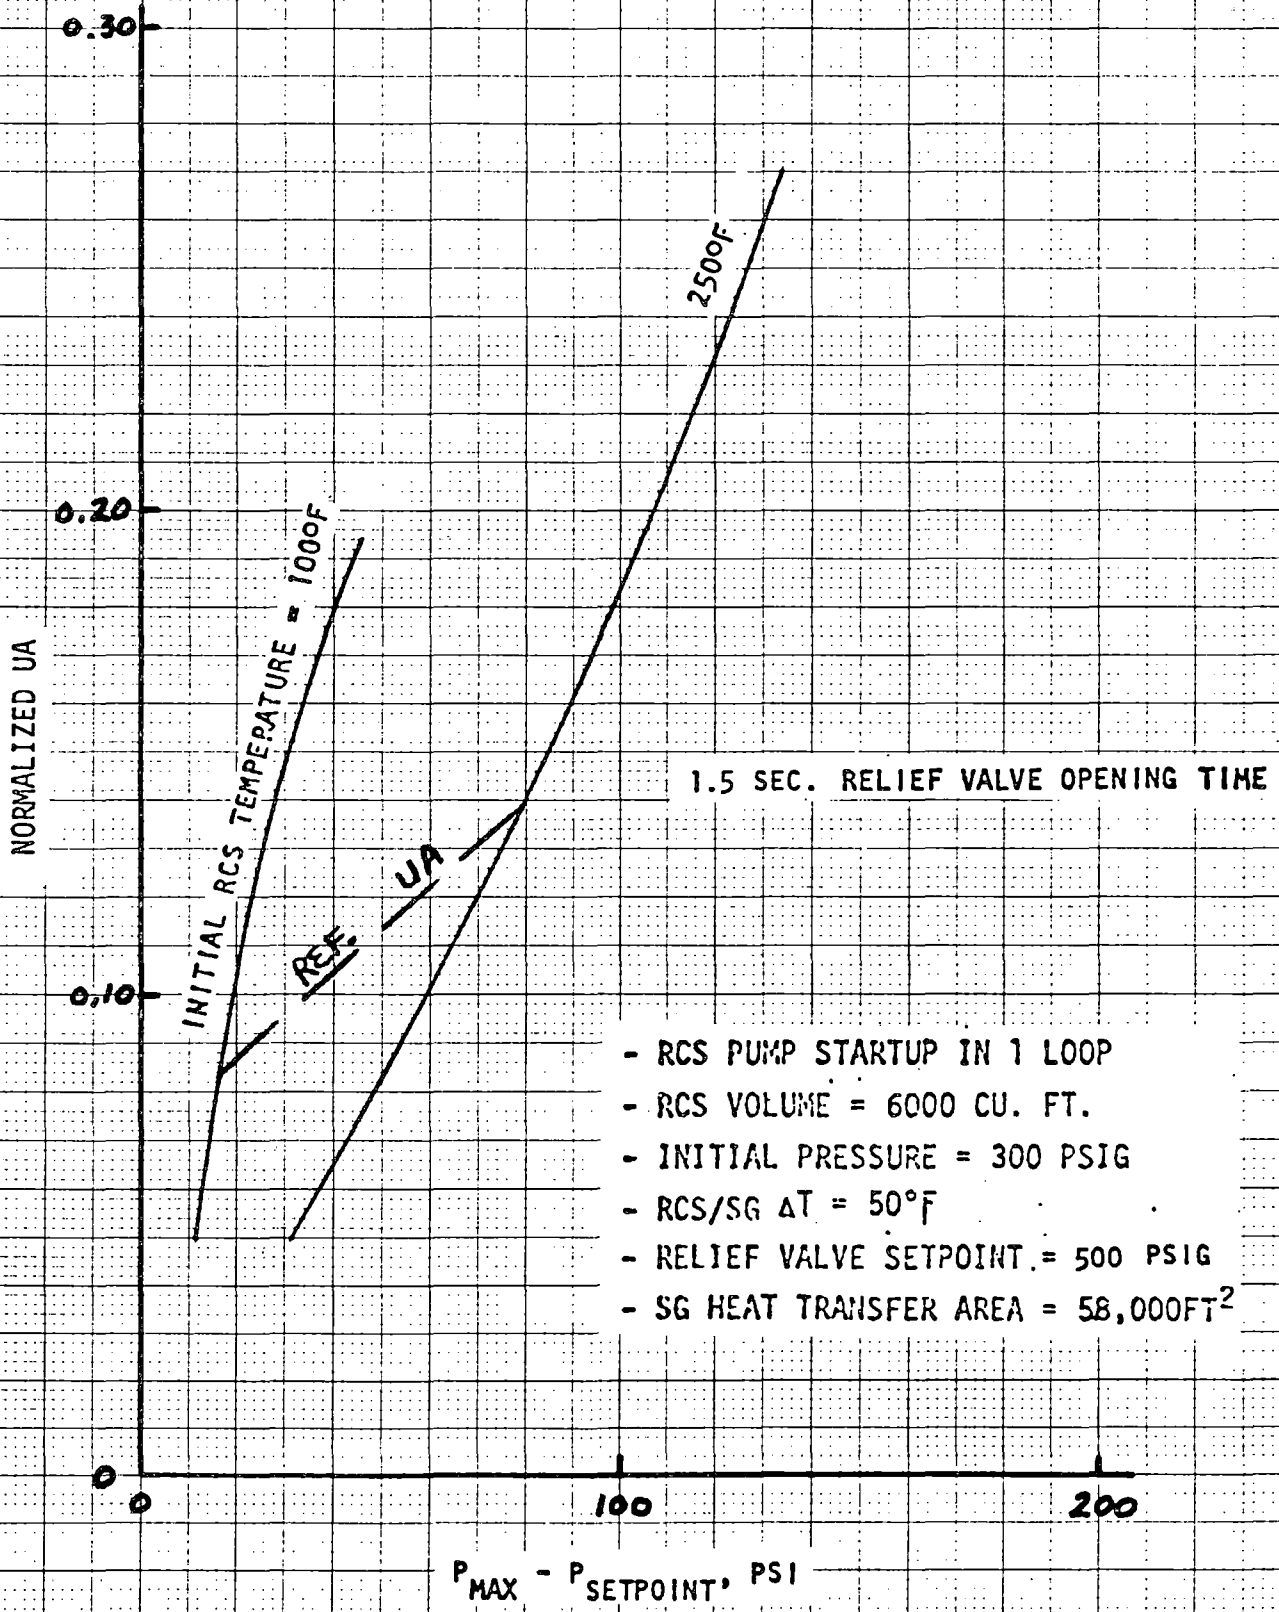


Figure 23

EFFECT OF STEAM GENERATOR UA ON PRESSURE OVERSHOOT

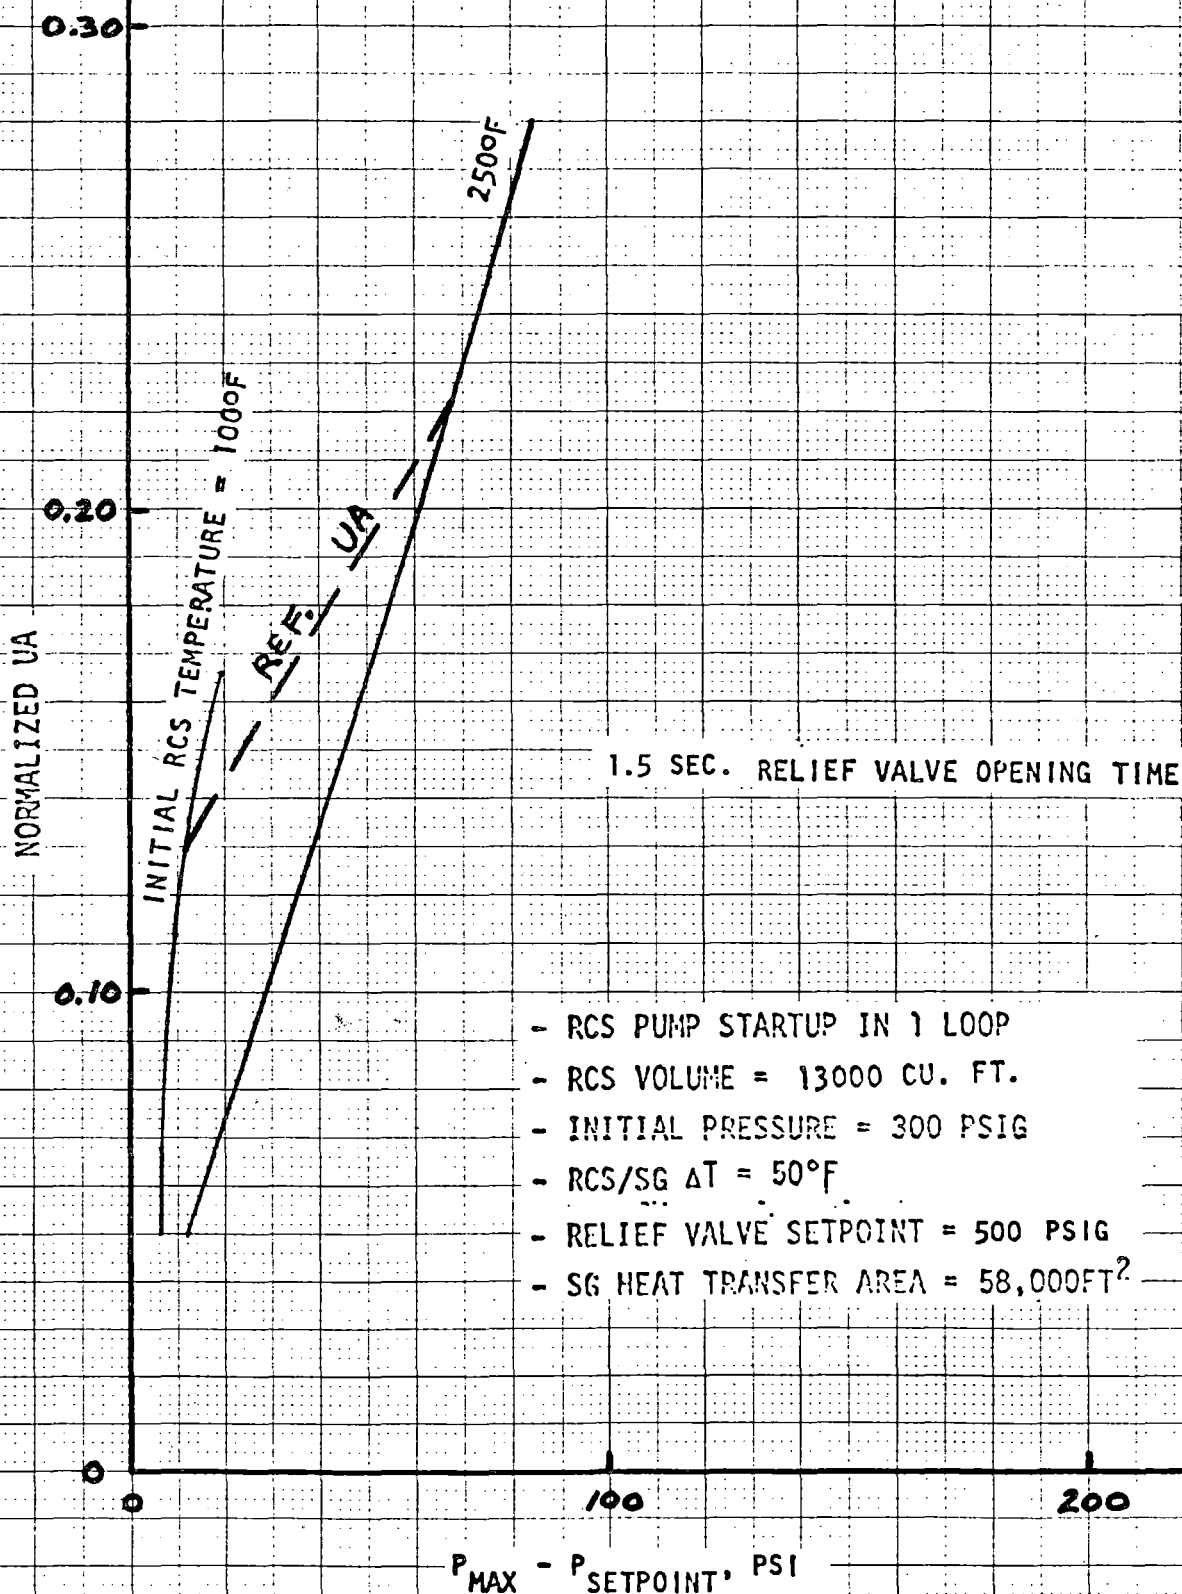

D. SETPOINT OVERSHOOT VARIATION WITH
REACTOR COOLANT SYSTEM TEMPERATURE

Figure 24

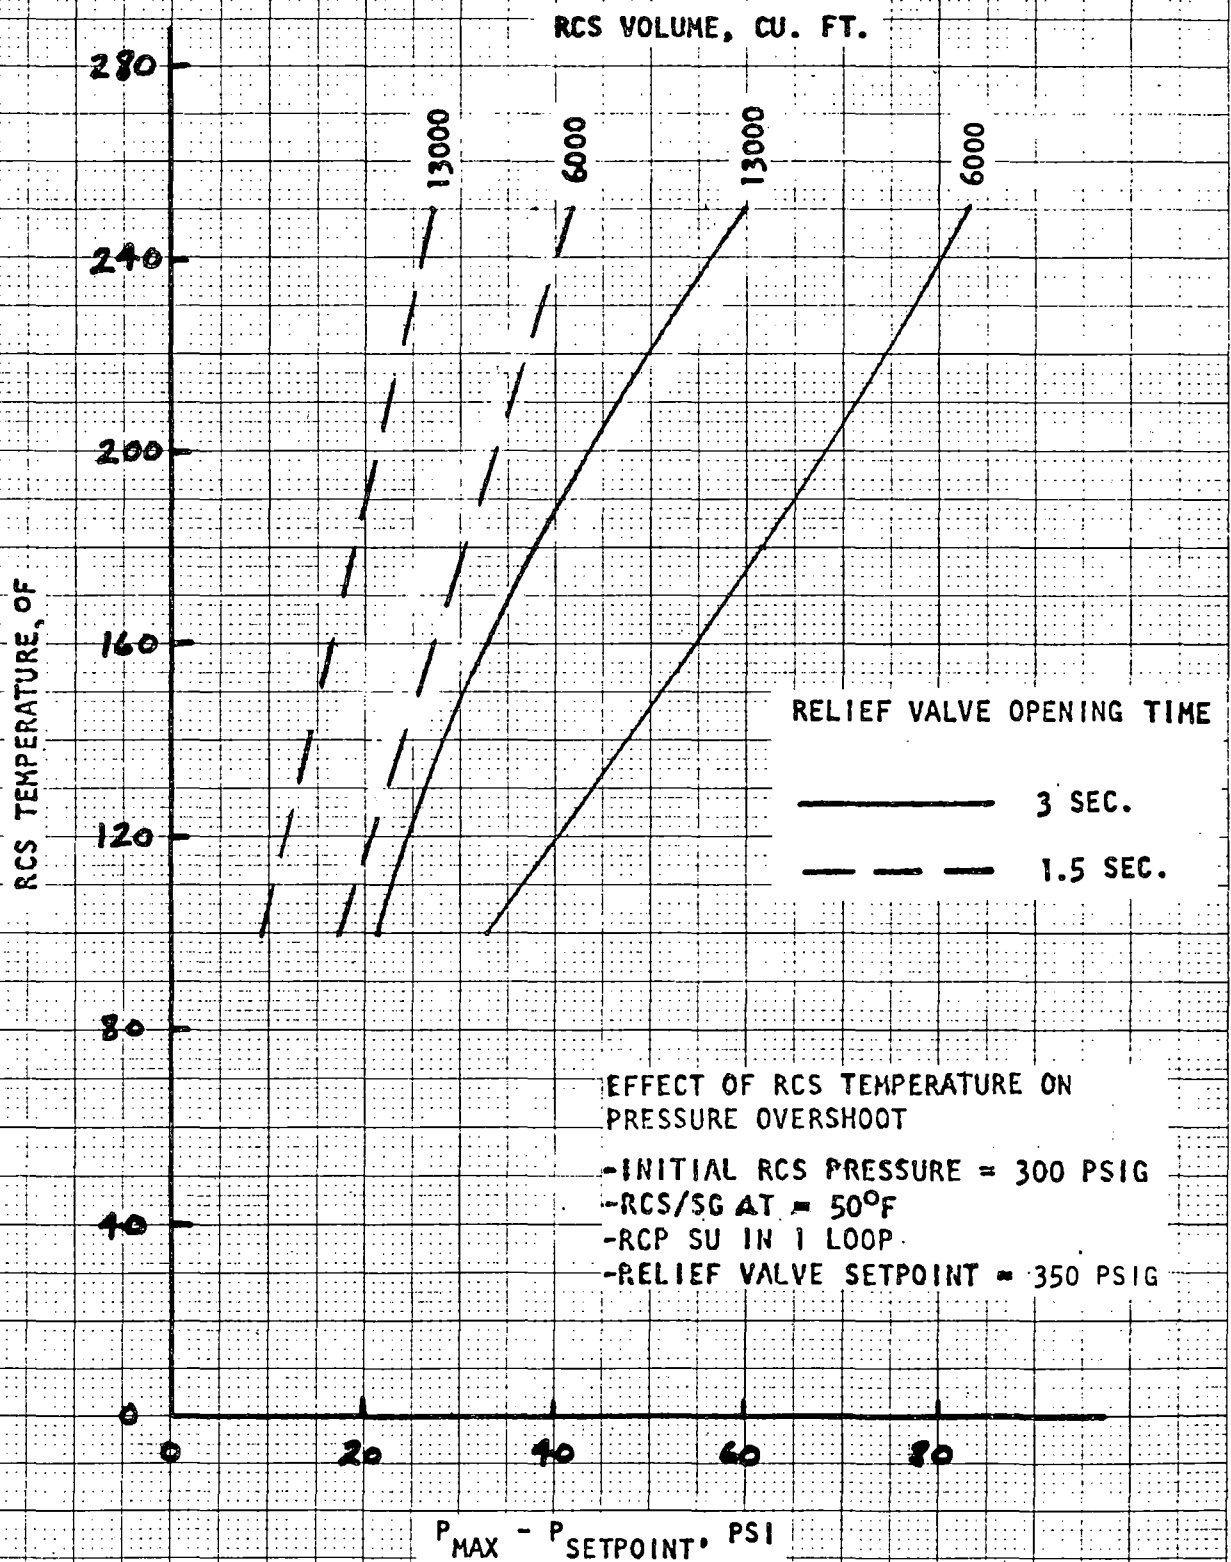


Figure 25


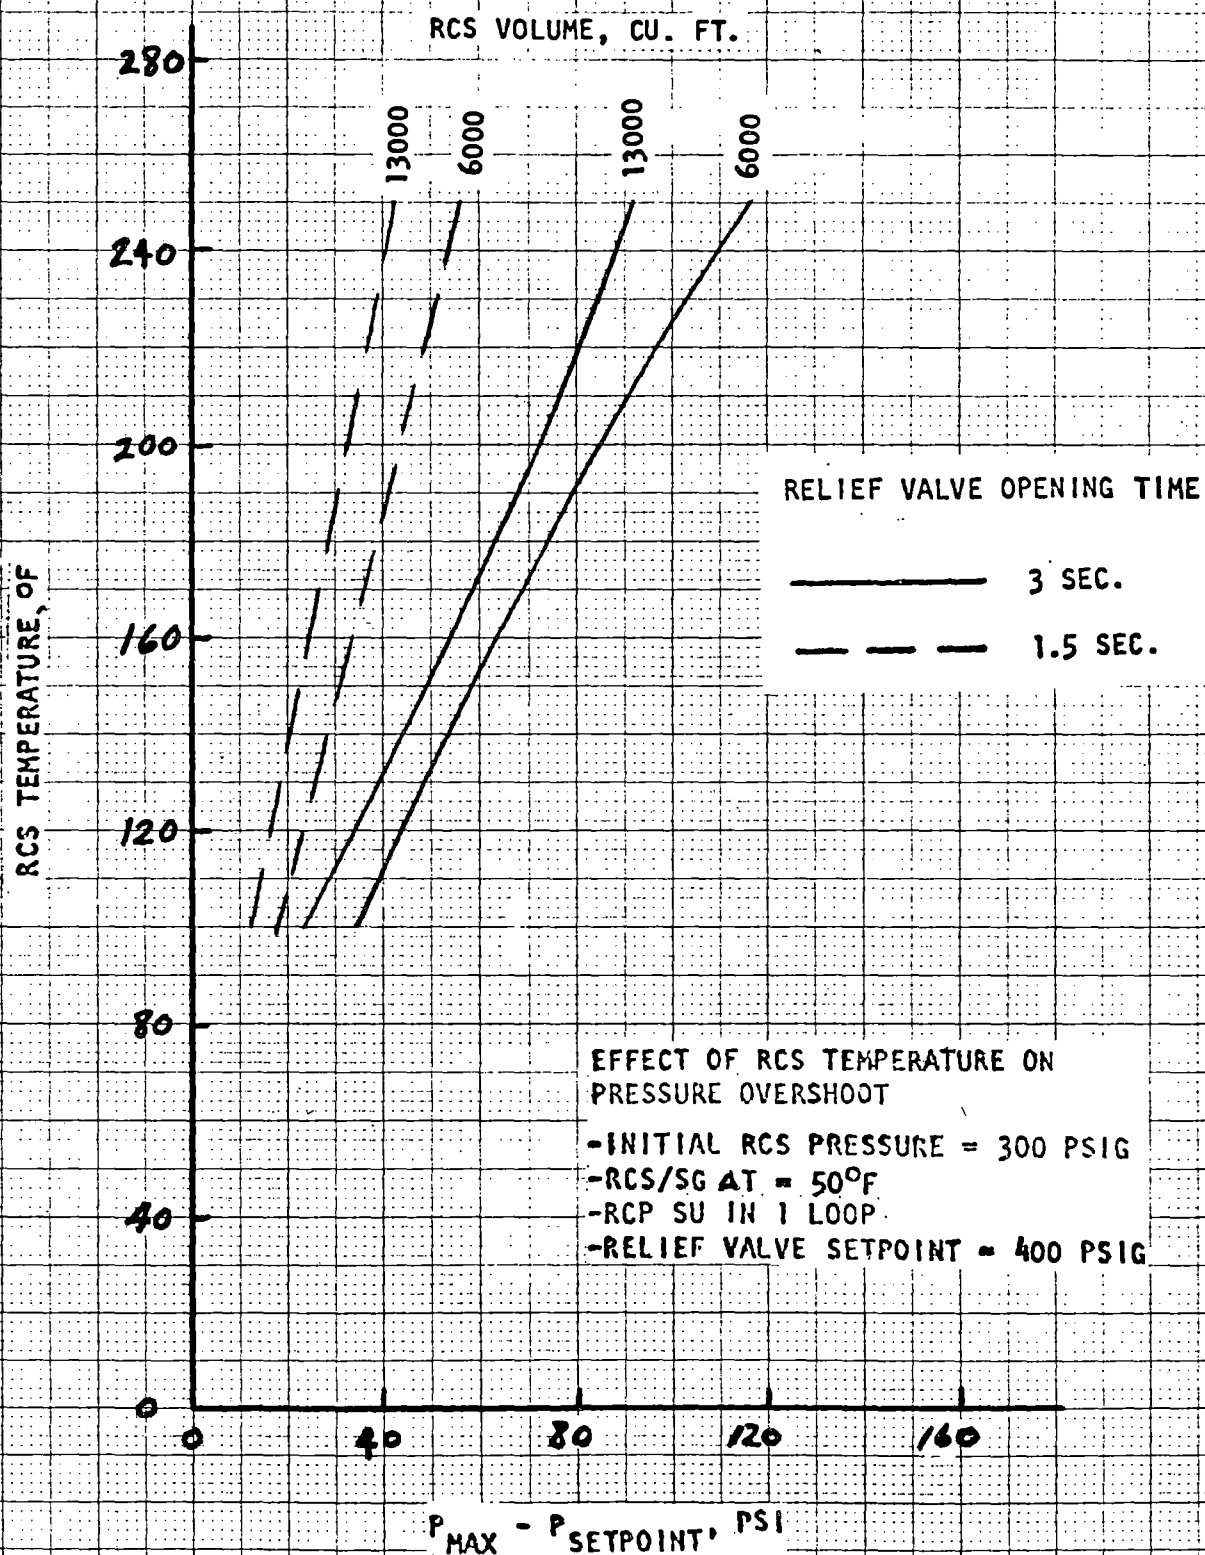


Figure 26

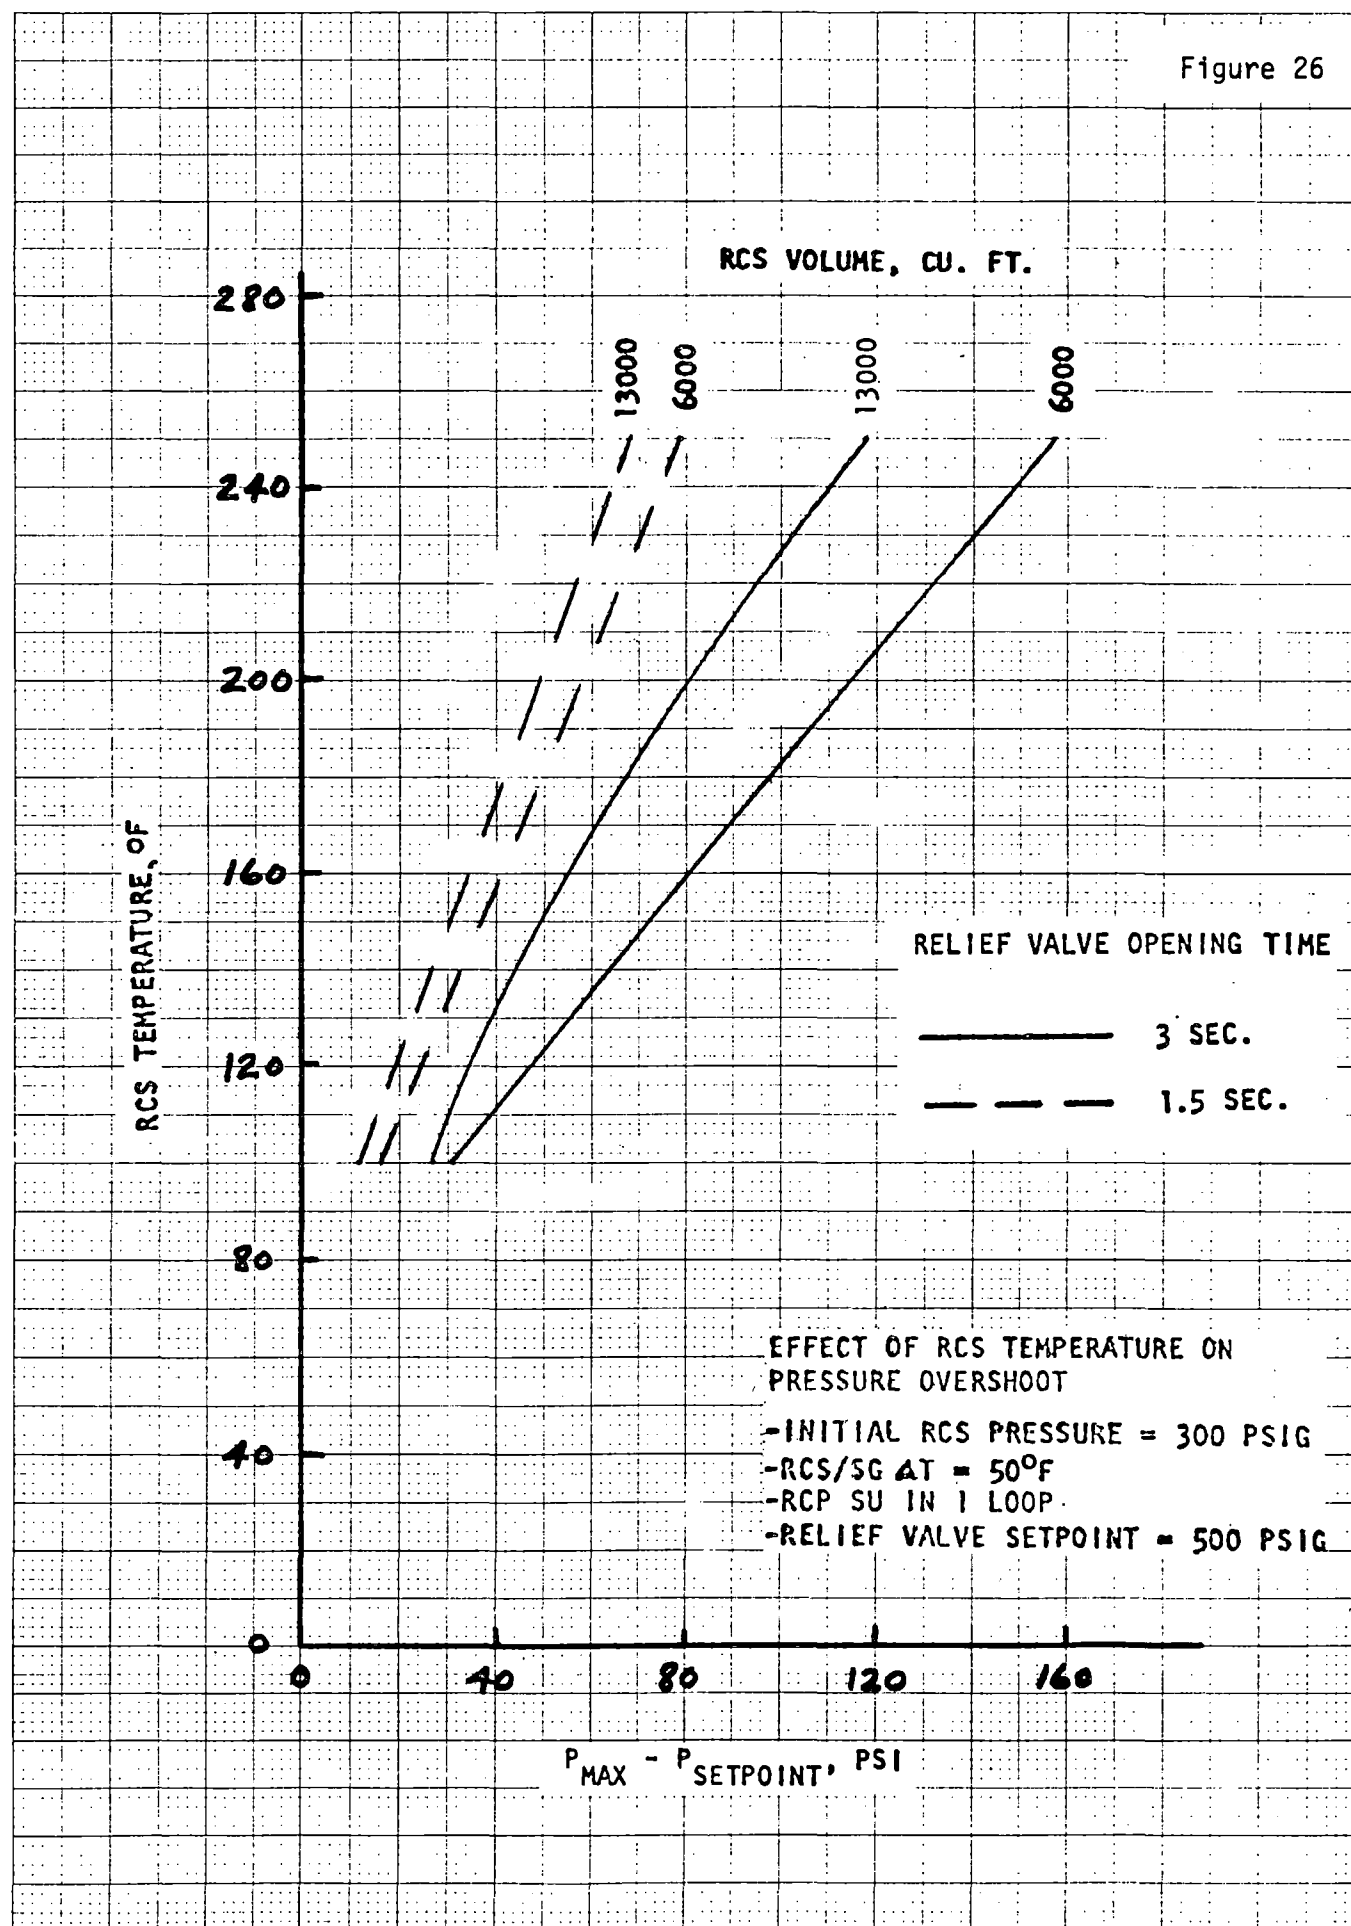

II. INSTRUCTIONAL GUIDE FOR OVERSHOOT DETERMINATION

A. General

The bounding envelope of LOFTRAN RCS Heat Input overpressurization generic results presented in Section I are not generally applicable to any specific plant of the W Owners Group on RCS Overpressurization. To determine a specific relief valve setpoint, a means of interpolating the setpoint overshoot from the generic envelope is required. Depending on the parameters to be interpolated and the correlation envelope available, separate procedures are required to perform the interpolation.

These procedures, similar in format except for the interpolated parameters and figure classification utilized, are developed for six typical heat input examples, listed below.

<u>Example</u>	<u>Parameters to be Interpolated Within Generic Data Envelope</u>	<u>Figure Classification Defining Generic Envelope Correlations</u>
1	Relief Valve Opening Time/ Relief Valve Setpoint	$(P_{MAX} \text{ vs. } P_{SETPOINT})^* \text{ vs. Valve Opening Time}$
2	Relief Valve Opening Time/ RCS Volume	$(P_{MAX} \text{ vs. } P_{SETPOINT}) \text{ vs. Valve Opening Time}$

*Setpoint overshoot

- | | | |
|---|---|---|
| 3 | Relief Valve Setpoint/
RCS Volume | (P_{MAX} vs. $P_{SETPOINT}$) vs.
Relief Valve Setpoint |
| 4 | UA(SG Heat Transfer Area)/
RCS Volume | (P_{MAX} vs. $P_{SETPOINT}$) vs.
Normalized UA |
| 5 | UA(SG Heat Transfer Area)/
Relief Valve Opening Time | (P_{MAX} vs. $P_{SETPOINT}$) vs.
Normalized UA |
| 6 | UA(SG Heat Transfer Area)/
Relief Valve Setpoint | (P_{MAX} vs. $P_{SETPOINT}$) vs.
Normalized UA |

B. Procedures

The procedures developed for the determination of setpoint overshoot are described below for six examples in which specific, typical operating plant parameters are used for interpolation within the operating plant generic data envelope. The results of the sequential application of each step in the procedure to these parameters is noted.

C. Illustrative Examples

1. ILLUSTRATIVE EXAMPLE 1: DETERMINATION OF SETPOINT
OVERSHOOT GIVEN RELIEF VALVE SETPOINT AND RELIEF VALVE
OPENING TIME WITHIN GENERIC ENVELOPE.

To determine setpoint overshoot for a specific relief valve setpoint (S) and relief valve opening time (Δt) within the generic envelope, the following interpolation procedure and Figures 1 and 3 of Section 1A are used.

PARAMETERS FOR HEAT INPUT EXAMPLE 1

Initial RCS Pressure	300 psig
SG Heat Transfer Area	58,000 ft ²
RCS Volume, V _{RCS}	6,000 cu.ft.
Initial RCS Temperature, T _{RCS}	250°F
RCS/SG ΔT	50°F
Relief Valve Opening Time, Δt	<u>2 sec.</u>
Relief Valve Setpoint, S	<u>375 psig</u>

<u>Step</u>	<u>Procedure</u>	<u>Example Application</u>
1	Using Figures C1 and C2 (V _{RCS} = 6000 ft ³), determine the setpoint overshoots ΔP ₃₅₀ and ΔP ₄₀₀ with valve opening time (Δt) equal to 2 seconds and for the initial RCS temperature (T _{RCS}).	For T _{RCS} = 250°F and Δt = 2 seconds, ΔP ₃₅₀ = <u>55.5 psi</u> (Figure C1) and ΔP ₄₀₀ = <u>75.5 psi</u> (Figure C2)
2	For the desired relief valve setpoint, linearly interpolate the setpoint overshoot, ΔP ₃₇₅ , from ΔP ₃₅₀ and ΔP ₄₀₀ using the relationship: $\Delta P_{375} = \Delta P_{350} + \frac{S-350}{400-350} (\Delta P_{400} - \Delta P_{350})$	For S = 375 psig (V _{RCS} = 6000 ft ³), T _{RCS} = 250°F and Δt = 2 seconds, $\Delta P = 55.5 + \frac{375-350}{50} (75.5 - 55.5)$ <u>= 65.5 psi</u>

Figure C1

EFFECT OF RELIEF VALVE
OPENING TIME ON RCS
PRESSURE OVERSHOOT

- RCS PUMP STARTUP IN 1 LOOP
- LINEAR RELIEF VALVE
- VALVE DELAY = 20% OF OPENING TIME
- INITIAL RCS PRESSURE = 300 PSIG
- RCS/SG $\Delta T = 50^\circ F$
- SG HEAT TRANSFER AREA = 58,000 FT^2
- RCS VOLUME = 6,000 CU.FT.


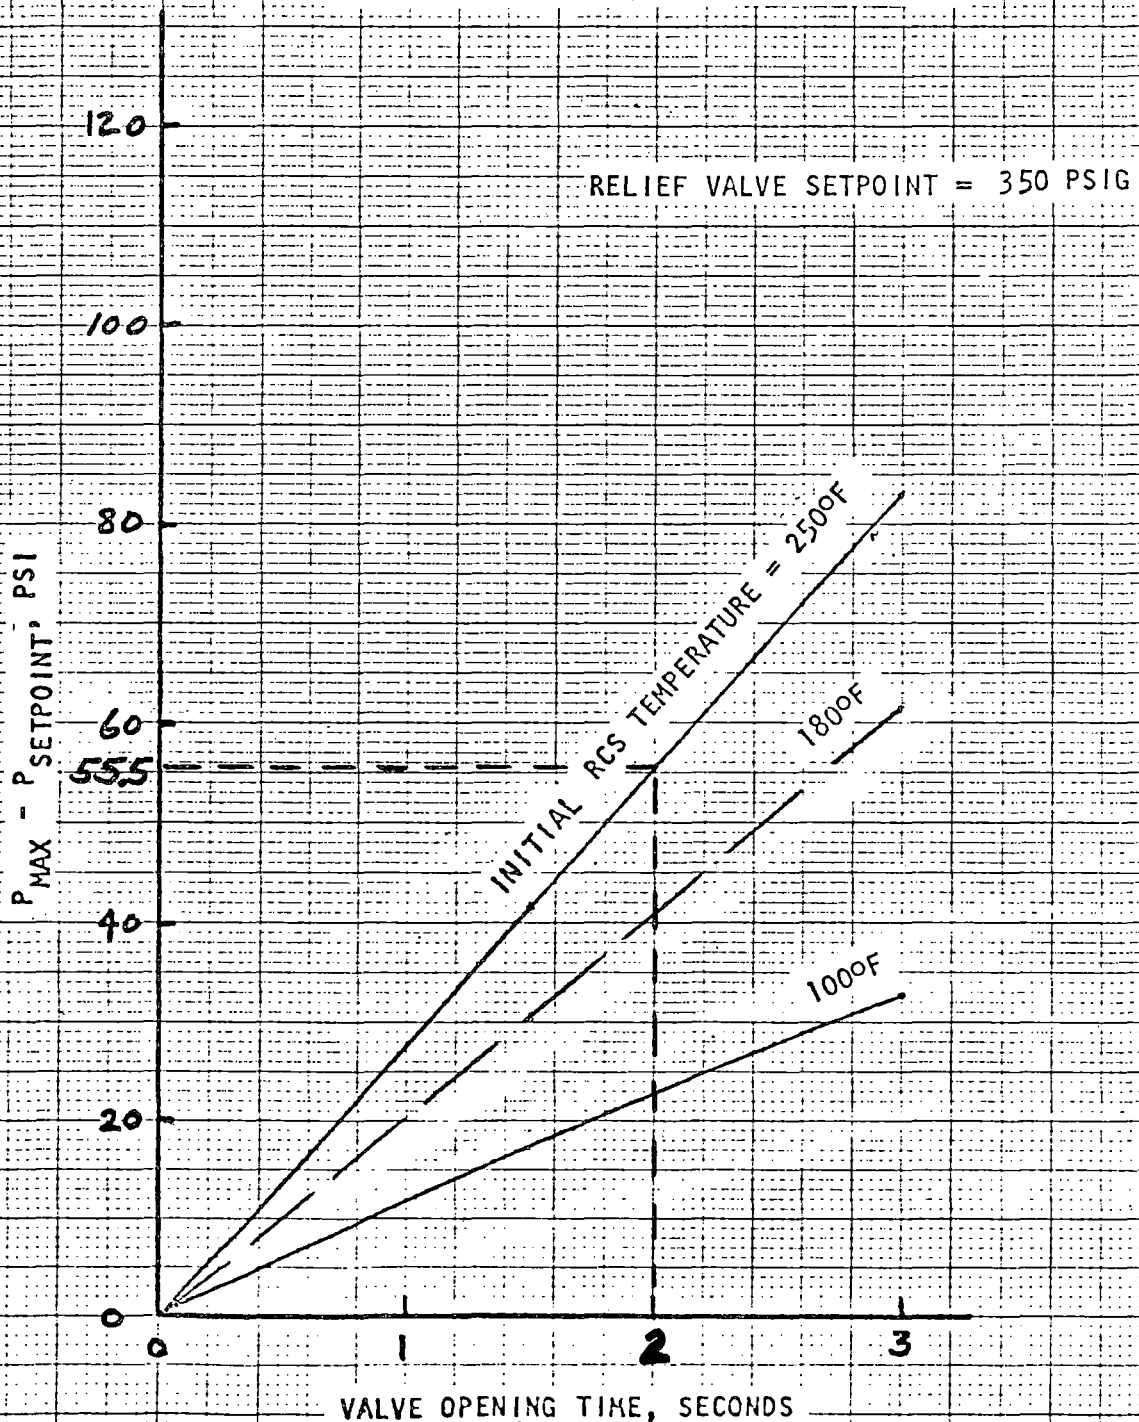


Figure C2

EFFECT OF RELIEF VALVE
OPENING TIME ON RCS
PRESSURE OVERSHOOT

- RCS PUMP STARTUP IN 1 LOOP
- LINEAR RELIEF VALVE
- VALVE DELAY = 20% OF OPENING TIME
- INITIAL RCS PRESSURE = 300 PSIG
- RCS/SG $\Delta T = 50^\circ F$
- SG HEAT TRANSFER AREA = 58,000 FT^2
- RCS VOLUME = 6,000 CU.FT.

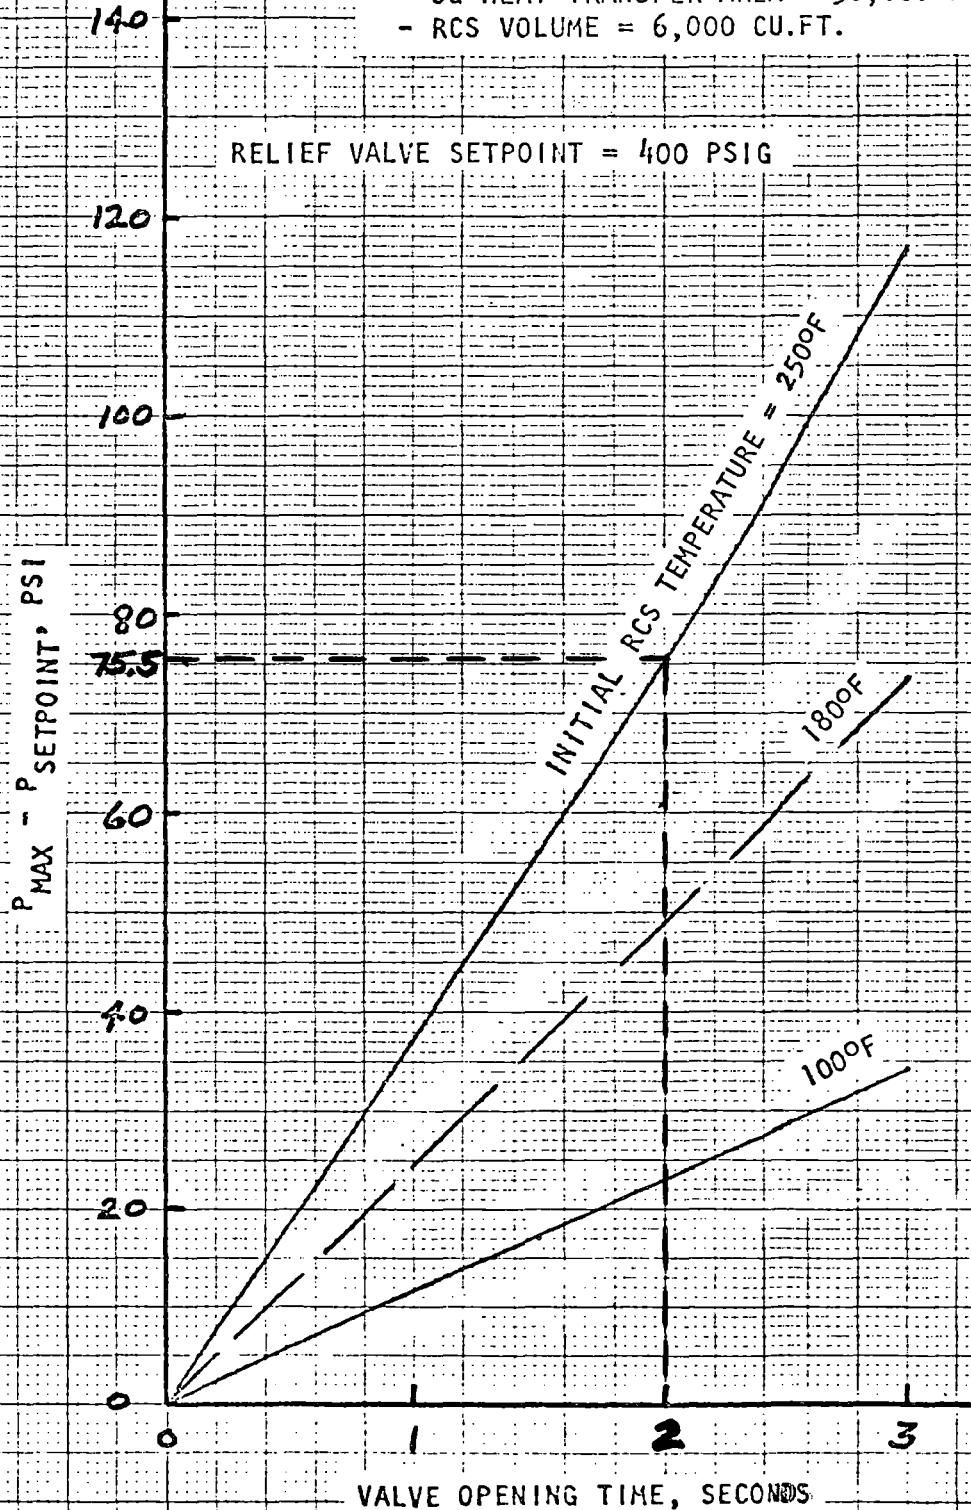

2. ILLUSTRATIVE EXAMPLE 2: DETERMINATION OF SETPOINT
OVERSHOOT GIVEN RCS VOLUME AND RELIEF VALVE OPENING
TIME WITHIN GENERIC ENVELOPE

The following interpolation procedure is used to determine setpoint overshoot for a specified RCS volume (V_{RCS}) and relief valve opening time (Δt) within the generic envelope. By way of illustration, the following example heat input parameters, utilizing Figures 3 and 4 of Section 1.A are used:

PARAMETERS FOR HEAT INPUT EXAMPLE 2

Initial RCS Pressure	300 psig
SG Heat Transfer Area	58,000 ft ²
RCS Volume, V_{RCS}	<u>10,000 cu.ft.</u>
Initial RCS Temperature, T_{RCS}	250°F
RCS/SG ΔT	50°F
Relief Valve Setpoint, S	400 psig
Relief Valve Opening Time, Δt	<u>2 sec.</u>

StepProcedureExample Application

- 1 Using Figures C3 and C4
(S = 400 psig), determine the
setpoint overshoots ΔP_{6K} and
 ΔP_{13K} with valve opening time
(Δt) equal to 2 seconds and
for the initial RCS temperature
(T_{RCS}).

For $T_{RCS} = 250^{\circ}\text{F}$ and
 $\Delta t = 2$ seconds,
 $\Delta P_{6K} = \underline{75.5 \text{ psi}}$
(Figure C3) and $\Delta P_{13K} =$
57.5 psi (Figure C4).

- 2 For the desired RCS volume,
linearly interpolate the set-
point overshoot, ΔP_{10K} , from
 ΔP_{6K} and ΔP_{13K} using the
relationship:

$$\Delta P_{10K} = \Delta P_{6K}$$

$$- \frac{V_{RCS} - 6000}{13,000 - 6,000} (\Delta P_{6K} - \Delta P_{13K})$$

For $V_{RCS} = 10,000 \text{ cu.ft.}$
(S = 400 psig),
 $T_{RCS} = 250^{\circ}\text{F}$ and $\Delta t = 2$ seconds,

$$\Delta P = 75.5$$

$$- \frac{10,000 - 6000}{7000} (75.5 - 57.5)$$

$$= \underline{65.2 \text{ psi}}$$

Figure C3

EFFECT OF RELIEF VALVE
OPENING TIME ON RCS
PRESSURE OVERSHOOT

- RCS PUMP STARTUP IN 1 LOOP
- LINEAR RELIEF VALVE
- VALVE DELAY = 20% OF OPENING TIME
- INITIAL RCS PRESSURE = 300 PSIG
- RCS/SG $\Delta T = 50^\circ F$
- SG HEAT TRANSFER AREA = 58,000 FT^2
- RCS VOLUME = 6,000 CU.FT.


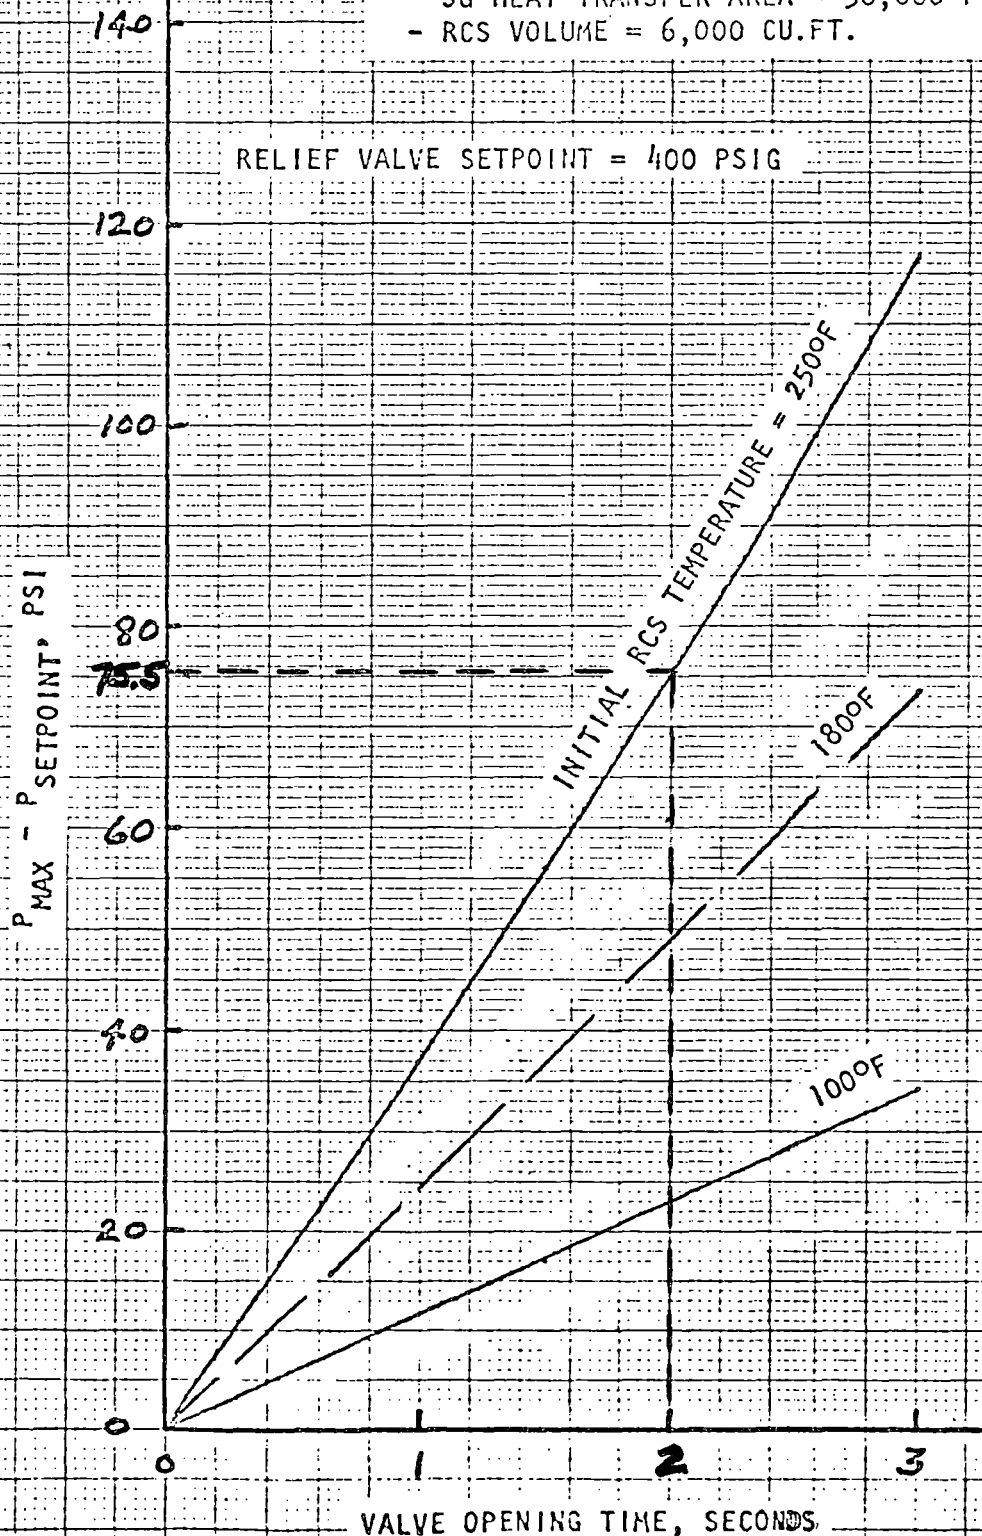


Figure C4

EFFECT OF RELIEF VALVE
OPENING TIME ON RCS
PRESSURE OVERSHOOT

- RCS PUMP STARTUP IN 1 LOOP
- LINEAR RELIEF VALVE
- VALVE DELAY = 20% OF OPENING TIME
- INITIAL RCS PRESSURE = 300 PSIG
- RCS/SG $\Delta T = 50^\circ F$
- SG HEAT TRANSFER AREA = 58,000 FT^2
- RCS VOLUME = 13000 CU. FT.

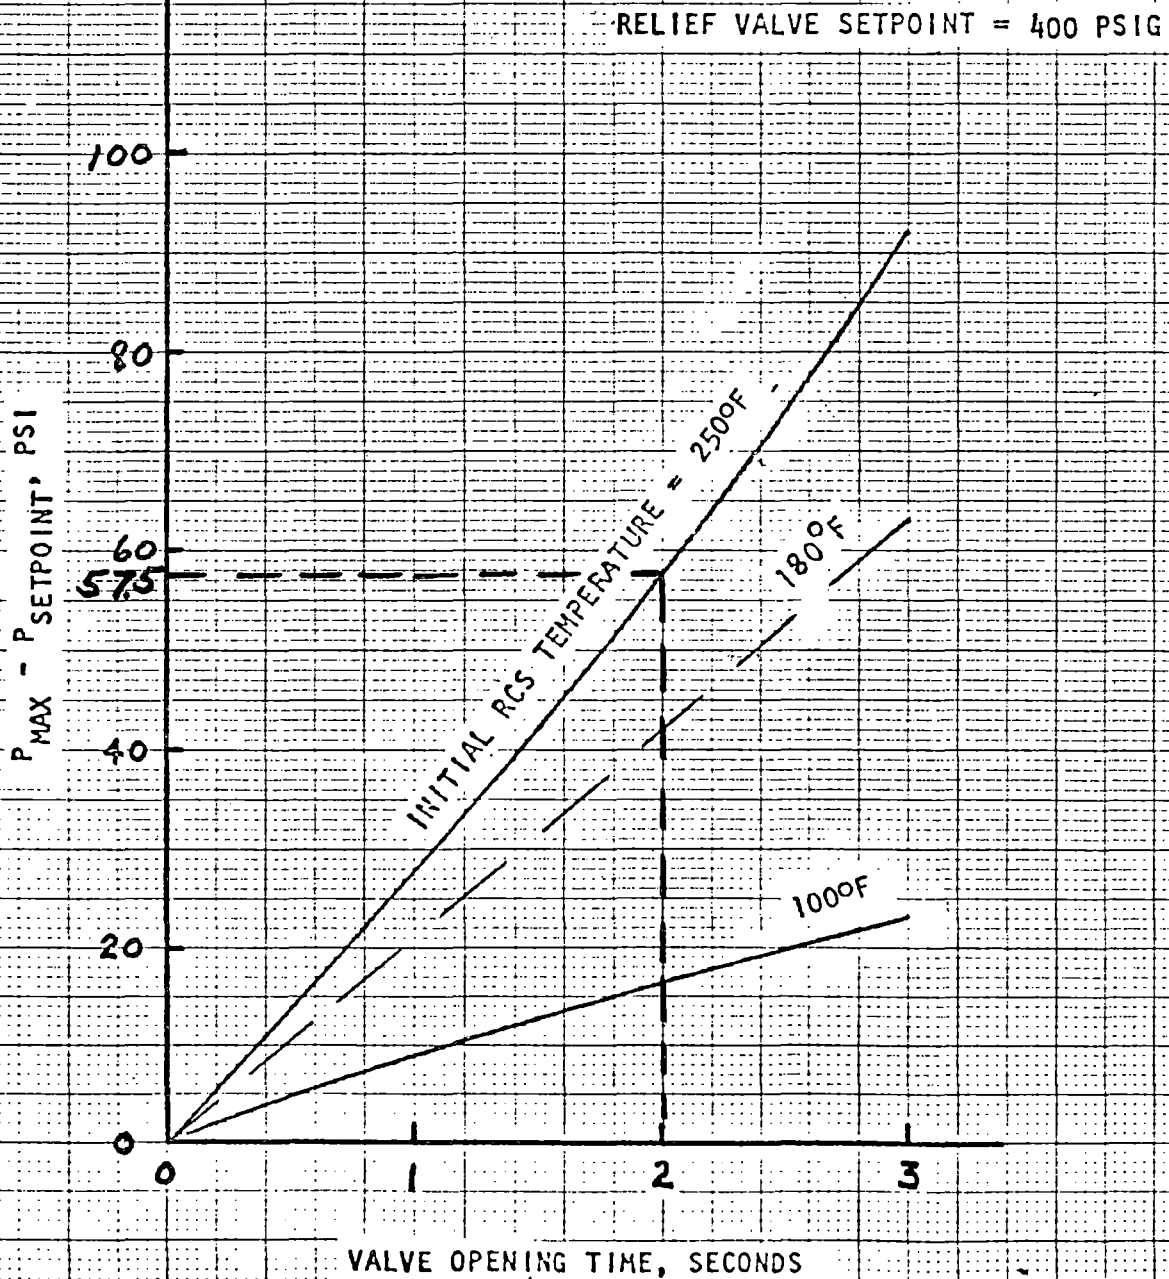

3. ILLUSTRATIVE EXAMPLE 3: DETERMINATION
OF SETPOINT OVERSHOOT GIVEN RELIEF VALVE
SETPOINT AND RCS VOLUME WITHIN GENERIC ENVELOPE

The following interpolative procedure is used to determine setpoint overshoot for a given relief valve setpoint(s) and RCS volume (V_{RCS}) within the generic envelope. By way of illustration, the following example heat input parameters, utilizing Figure 9 of Section 1A are specified:

PARAMETERS FOR HEAT INPUT EXAMPLE 3

Initial RCS Pressure	300 psig
SG Heat Transfer Area	58,000 ft ²
RCS Volume, V_{RCS}	<u>10,000 cu.ft.</u>
Initial RCS Temperature, T_{RCS}	250°F
RCS/SG ΔT	50°F
Relief Valve Setpoint, S	<u>375 psig</u>
Relief Valve Opening Time, Δt	3 sec.

StepProcedureExample Application

- 1 For relief valve setpoint(s) equal to 375 psig (t = 3 seconds), determine the setpoint overshoots P_{6K} and P_{13K} for the initial RCS temperature (T_{RCS}).

For $T_{RCS} = 250^{\circ}\text{F}$,
 $P_{6K} = \underline{101.3 \text{ psi}}$
and $P_{13K} = \underline{78.5 \text{ psi}}$
from Figure C5.

- 2 For the desired RCS volume, linearly interpolate the setpoint overshoot, P_{10K} , from P_{6K} and P_{13K} using the relationship:

For $V_{RCS} = 10,000 \text{ cu.ft.}$
(t = 3 seconds), and
 $T_{RCS} = 250^{\circ}\text{F}$,

$$P_{10K} = P_{6K}$$

$$P = 101.3$$

$$= \frac{V_{RCS} - 6000}{13,000 - 6,000} (P_{6K} - P_{13K})$$

$$= \frac{10,000 - 6,000}{7000} (101.3 - 78.5)$$

$$= \underline{88.3 \text{ psi}}$$

RCS VOLUME, CU. FT.

Figure C5

EFFECT OF RELIEF VALVE SETPOINT
ON PRESSURE OVERSHOOT

$P_{MAX} - P_{SETPOINT}, \text{PSI}$

160

140

120

101.3
100

80
78.5

60

40

20

0

6000

13000

350

375

400

450

500

SETPOINT, PSIG

- RCS PUMP STARTUP IN 1 LOOP
- 3 SEC. RELIEF VALVE OPENING
- INITIAL PRESSURE = 300 PSIG
- RCS/SG $\Delta T = 50^\circ\text{F}$
- INITIAL RCS TEMPERATURE = 250°F
- SG HEAT TRANSFER AREA = $58,000\text{ft}^2$

4. ILLUSTRATIVE EXAMPLE 4: DETERMINATION OF
SETPOINT OVERSHOOT GIVEN SG TUBE HEAT TRANSFER
AREA AND RCS VOLUME WITHIN GENERIC ENVELOPE

For SG tube heat transfer area different from $58,000 \text{ ft}^2$, the determination of setpoint overshoot is made using a slightly modified version of the Heat Input Instructional Guide for Setpoint/Overshoot Determination prescribed in Chapter 4 of the July 1977 Report (Reference 1) and Figures 12 through 23 of Section IA (figures depicting setpoint overshoot variation with normalized steam generator UA). Setpoint overshoots may be obtained for 1.5 sec and 3 sec relief valve opening times (t); for relief valve setpoints (S) equal to 350 psig, 400 psig and 500 psig; and for RCS volumes (V_{RCS}) equal to 6000 cu.ft. and 13,000 cu.ft. Setpoint overshoot may also be obtained for t , S and V_{RCS} values within these envelopes, depending on the combination of Figures 12 through 23 of Section IA selected. Illustrative Example 4 and subsequent examples will illustrate this interpolative procedure for interpolating t , S and V_{RCS} .

Illustration of the use of the modified interpolative procedure of Chapter 4 of Reference 1 is provided below for the determination of setpoint overshoot for a specified SG tube heat transfer

area and RCS volume within the generic envelope. (Illustrative Example 4). Figures 12 and 13 of Section 1A are used in the procedure for the following example heat input parameters:

PARAMETERS FOR HEAT INPUT EXAMPLE 4


Initial RCS Pressure	300 psig
SG Heat Transfer Area	<u>29,000 ft²</u>
RCS Volume, V_{RCS}	<u>10,000 cu.ft.</u>
Initial RCS Temperature, T_{RCS}	250°F
RCS/SG ΔT	50°F
Relief Valve Setpoint, S	350 psig
Relief Valve Opening Time, t	3 sec.

Applying the heat input procedure:

<u>Step</u>	<u>Procedure</u>	<u>Example Application</u>
1	For both the 6000 ft ³ and 13,000 ft ³ RCS volumes (S = 350 psig), obtain the reference normalized UA (UA_{6K} and UA_{13K}) at the initial RCS temperature (T_{RCS}) and relief valve setpoint (S), using Figures C6 and C7.	For $T_{RCS} = 250^{\circ}\text{F}$ and $S = 350$ psig, $UA_{6K} = 0.139$ (Figure C6) and $UA_{13K} = 0.222$ (Figure C7).
2	Determine what fraction, f, of 58,000 ft ² constitutes the actual steam generator heat transfer area.	$29,000 \text{ ft}^2 / 58,000 \text{ ft}^2 = \underline{0.5}$

Figure C6

EFFECT OF STEAM GENERATOR UA ON
PRESSURE OVERSHOOT

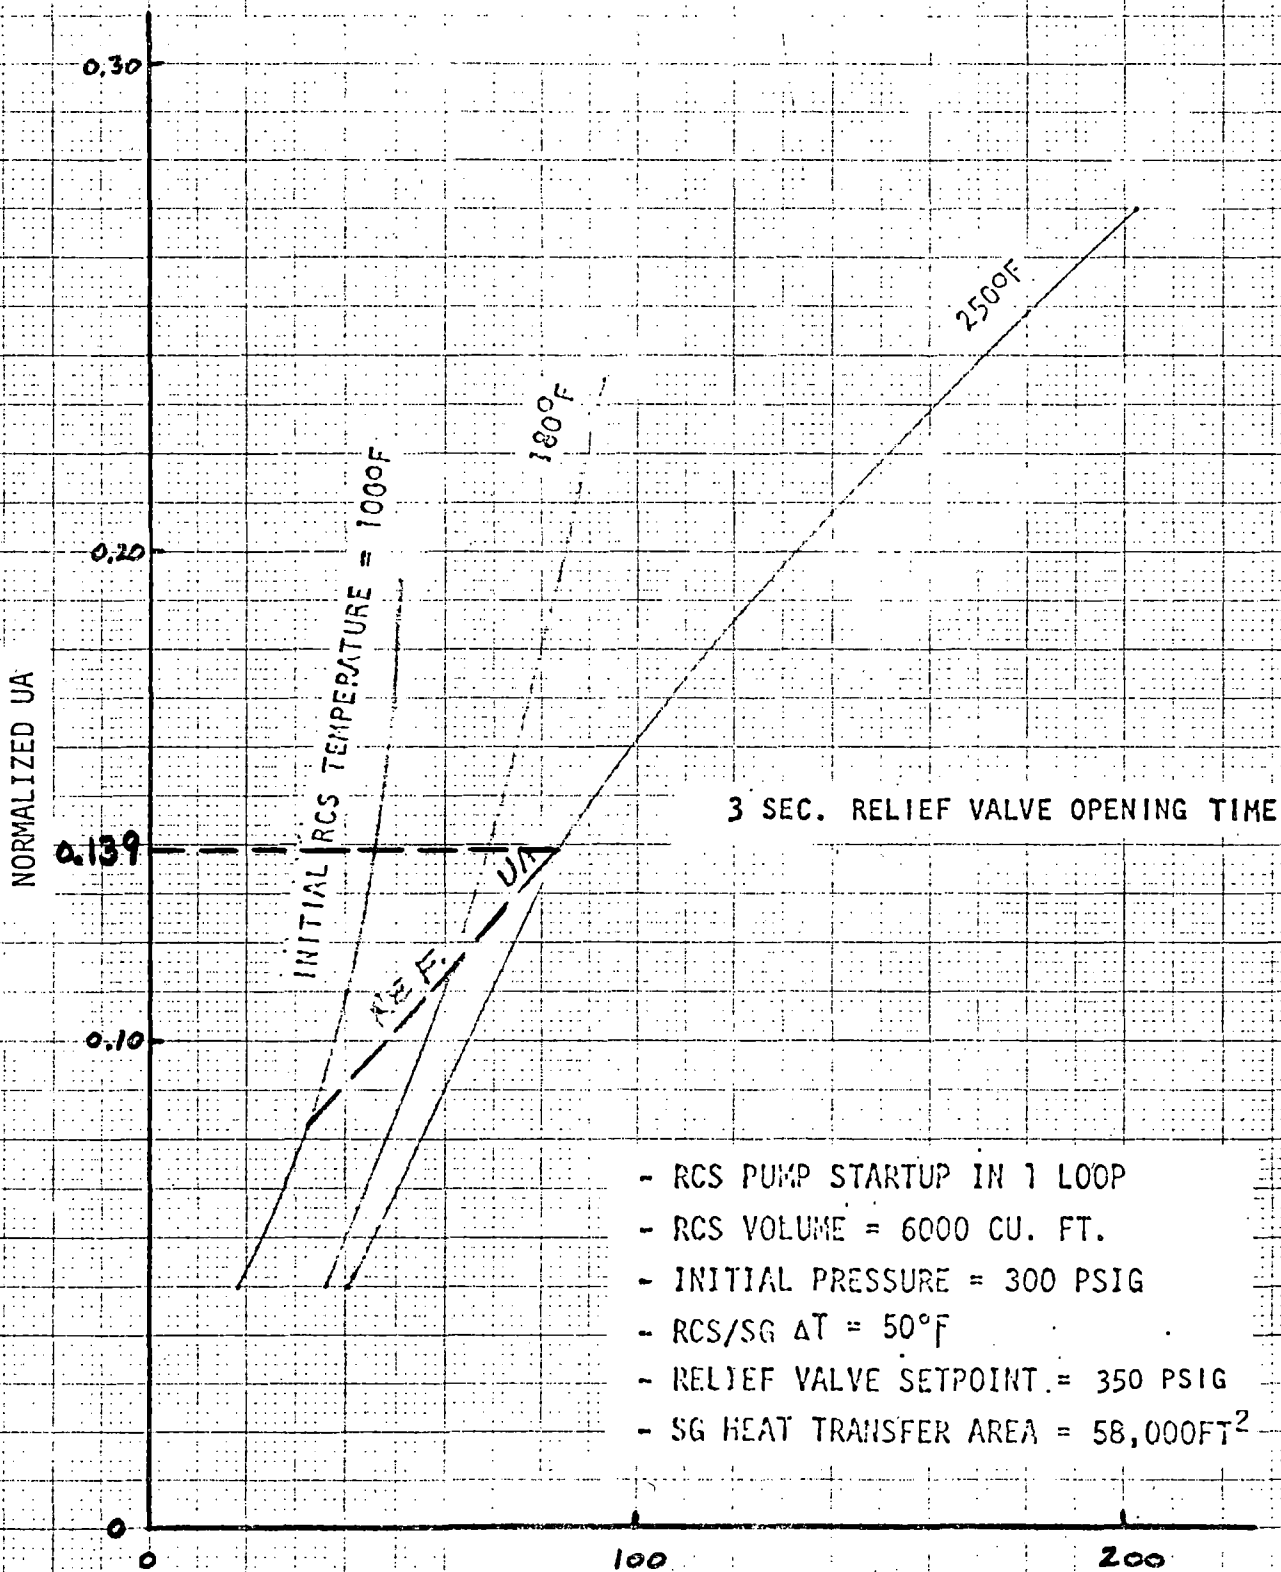


- RCS PUMP STARTUP IN 1 LOOP
- RCS VOLUME = 6000 CU. FT.
- INITIAL PRESSURE = 300 PSIG
- RCS/SG $\Delta T = 50^\circ F$
- RELIEF VALVE SETPOINT = 350 PSIG
- SG HEAT TRANSFER AREA = 58,000FT²

$P_{MAX} - P_{SETPOINT}, PSI$

Figure C7

EFFECT OF STEAM GENERATOR UA ON
PRESSURE OVERSHOOT

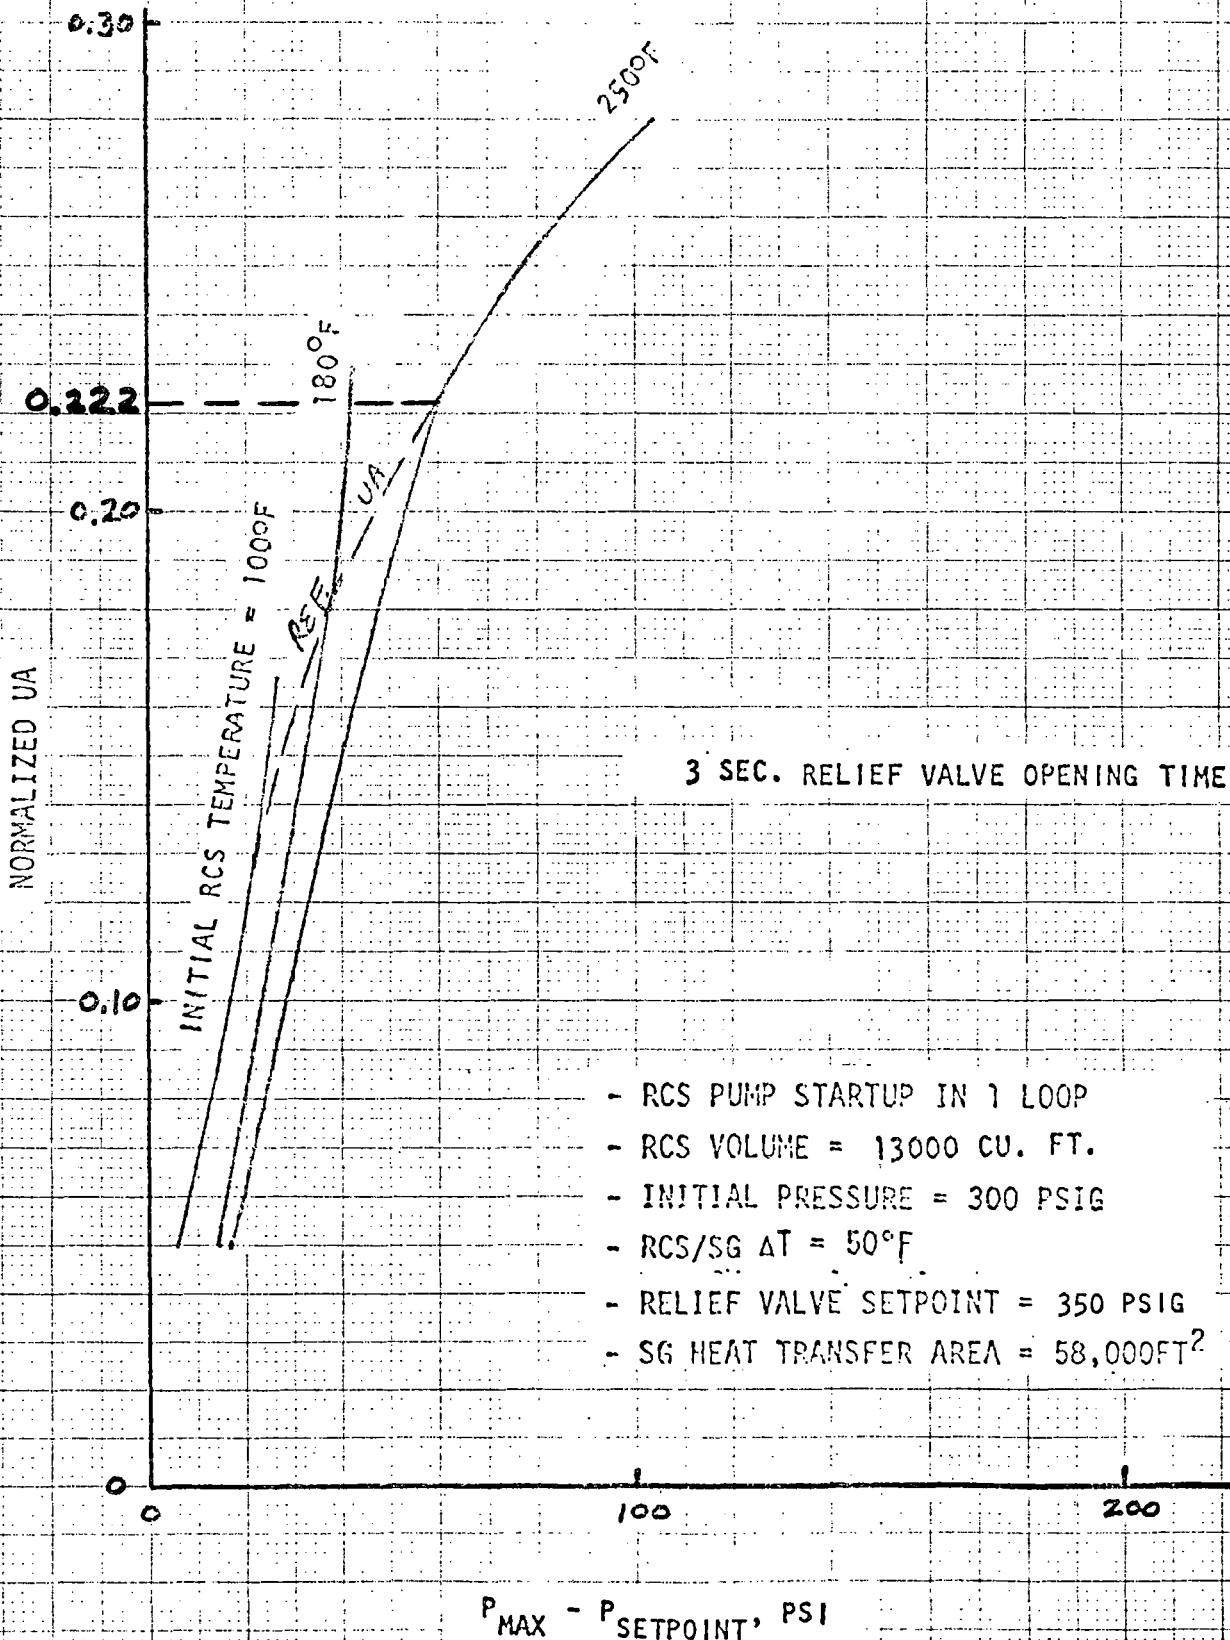

StepProcedureExample Application

- 3 Multiply both UA_{6K} and UA_{13K} (from Step 1) by f (from Step 2) to obtain new normalized UA'_{6K} and UA'_{13K} values.
- 4 For the same isotherm, T_{RCS} , and for UA'_{6K} and UA'_{13K} , obtain new setpoint overshoots P'_{6K} and P'_{13K} for the 6000 ft^3 and 13,000 ft^3 volumes from Figures C8 and C9.
- 5 For the actual volume, V_{RCS} , linearly interpolate the setpoint overshoot, P'_{VRCS} , for the new steam generator UA from the relationship:

$$P'_{VRCS} = P'_{6K}$$

$$- \frac{V_{RCS} - 6000}{7000} (P'_{6K} - P'_{13K})$$

$$UA'_{6K} = 0.139 * 0.5 = \underline{0.0695} \text{ and}$$

$$UA'_{13K} = 0.222 * 0.5 = \underline{0.111}$$

From Figure C8, for $T_{RCS} = 250^{\circ}F$, $S = 350$ psig and $UA'_{6K} = 0.0695$,

$P'_{6K} = \underline{50 \text{ psi}}$. From Figure C9 for $T_{RCS} = 250^{\circ}F$, $S = 350$ psig and $UA'_{13K} = 0.111$, $P'_{13K} = \underline{31 \text{ psi}}$.

For $V_{RCS} = 10,000$ cu.ft.,

$$P'_{6K} = 50 \text{ psi and } P'_{13K} = 31 \text{ psi,}$$

$$P'_{10K} = 50$$

$$- \frac{10,000 - 6000}{7000} (50 - 31)$$

$$= \underline{39.2 \text{ psi}}$$

Figure C8

EFFECT OF STEAM GENERATOR UA ON
PRESSURE OVERSHOOT

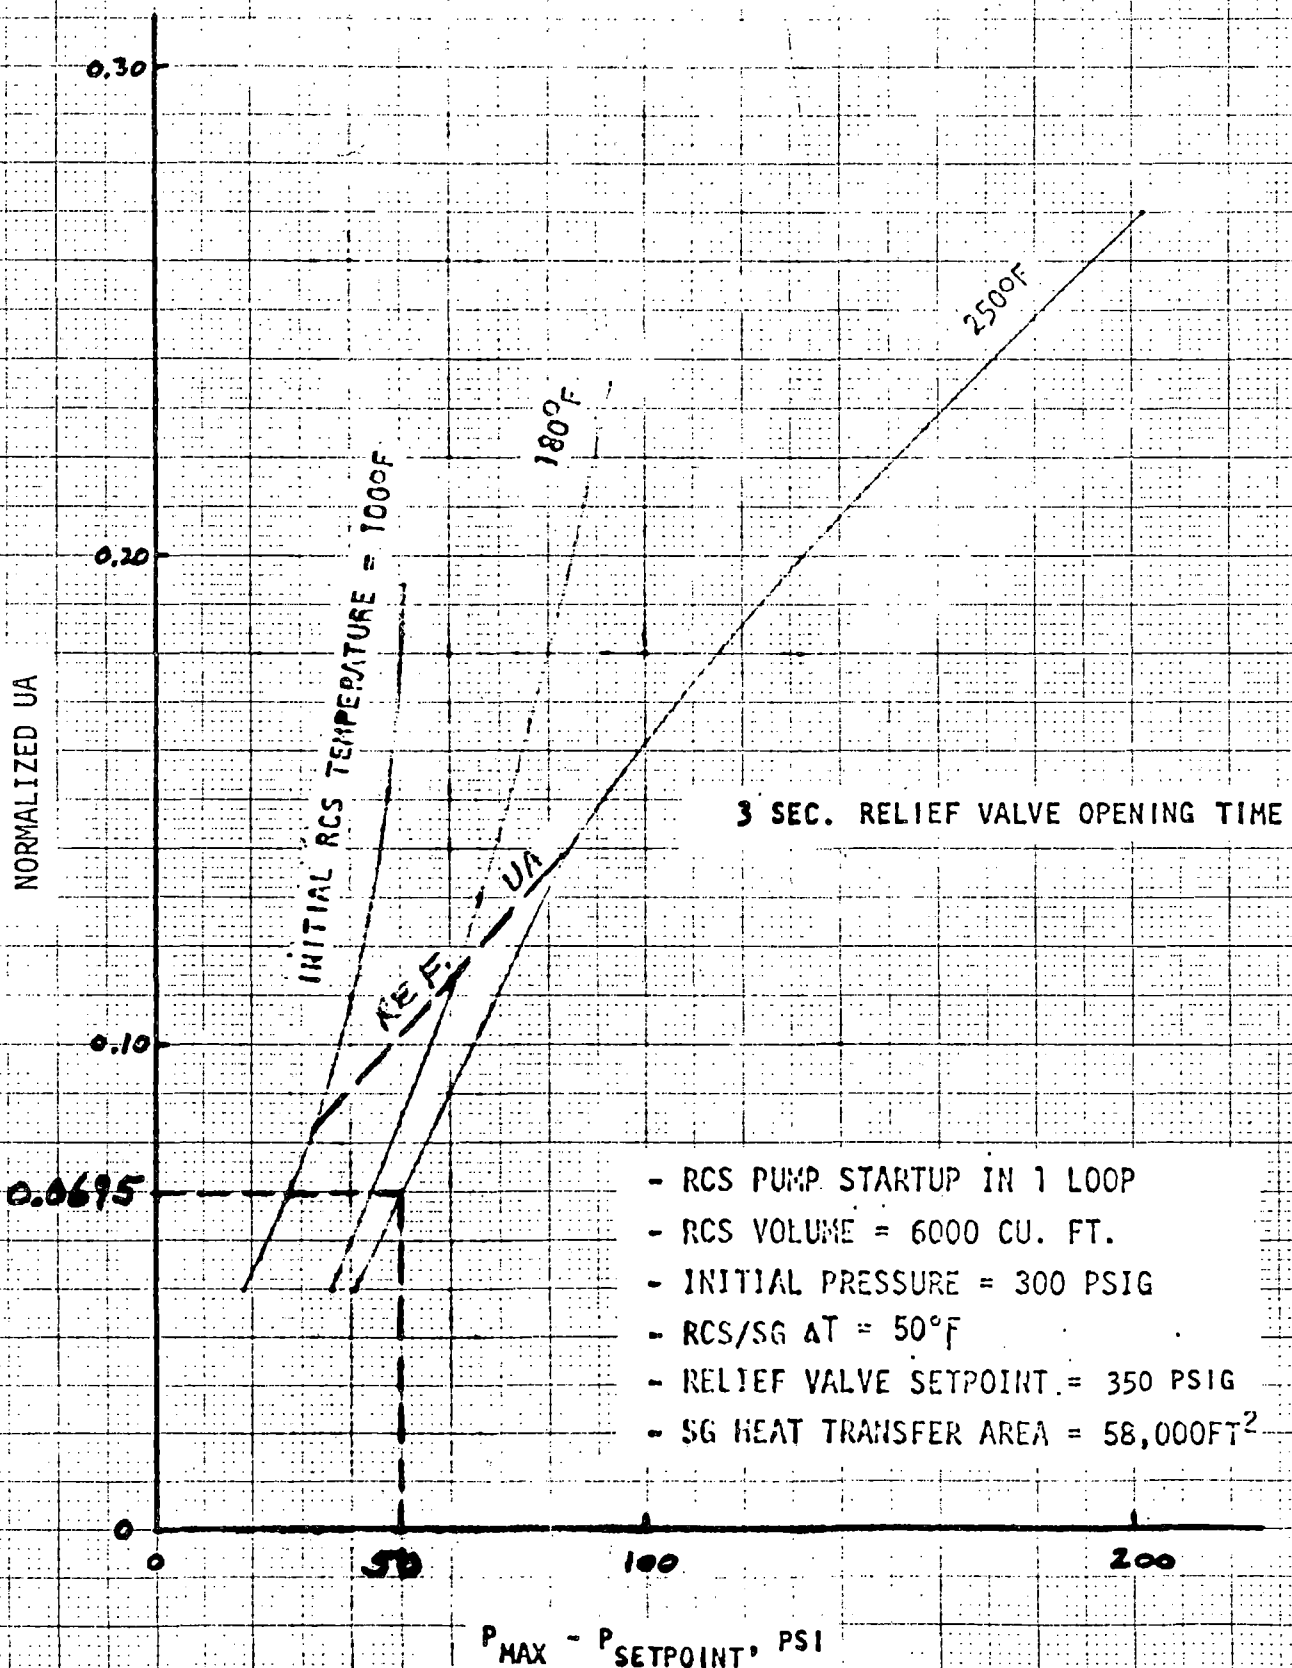
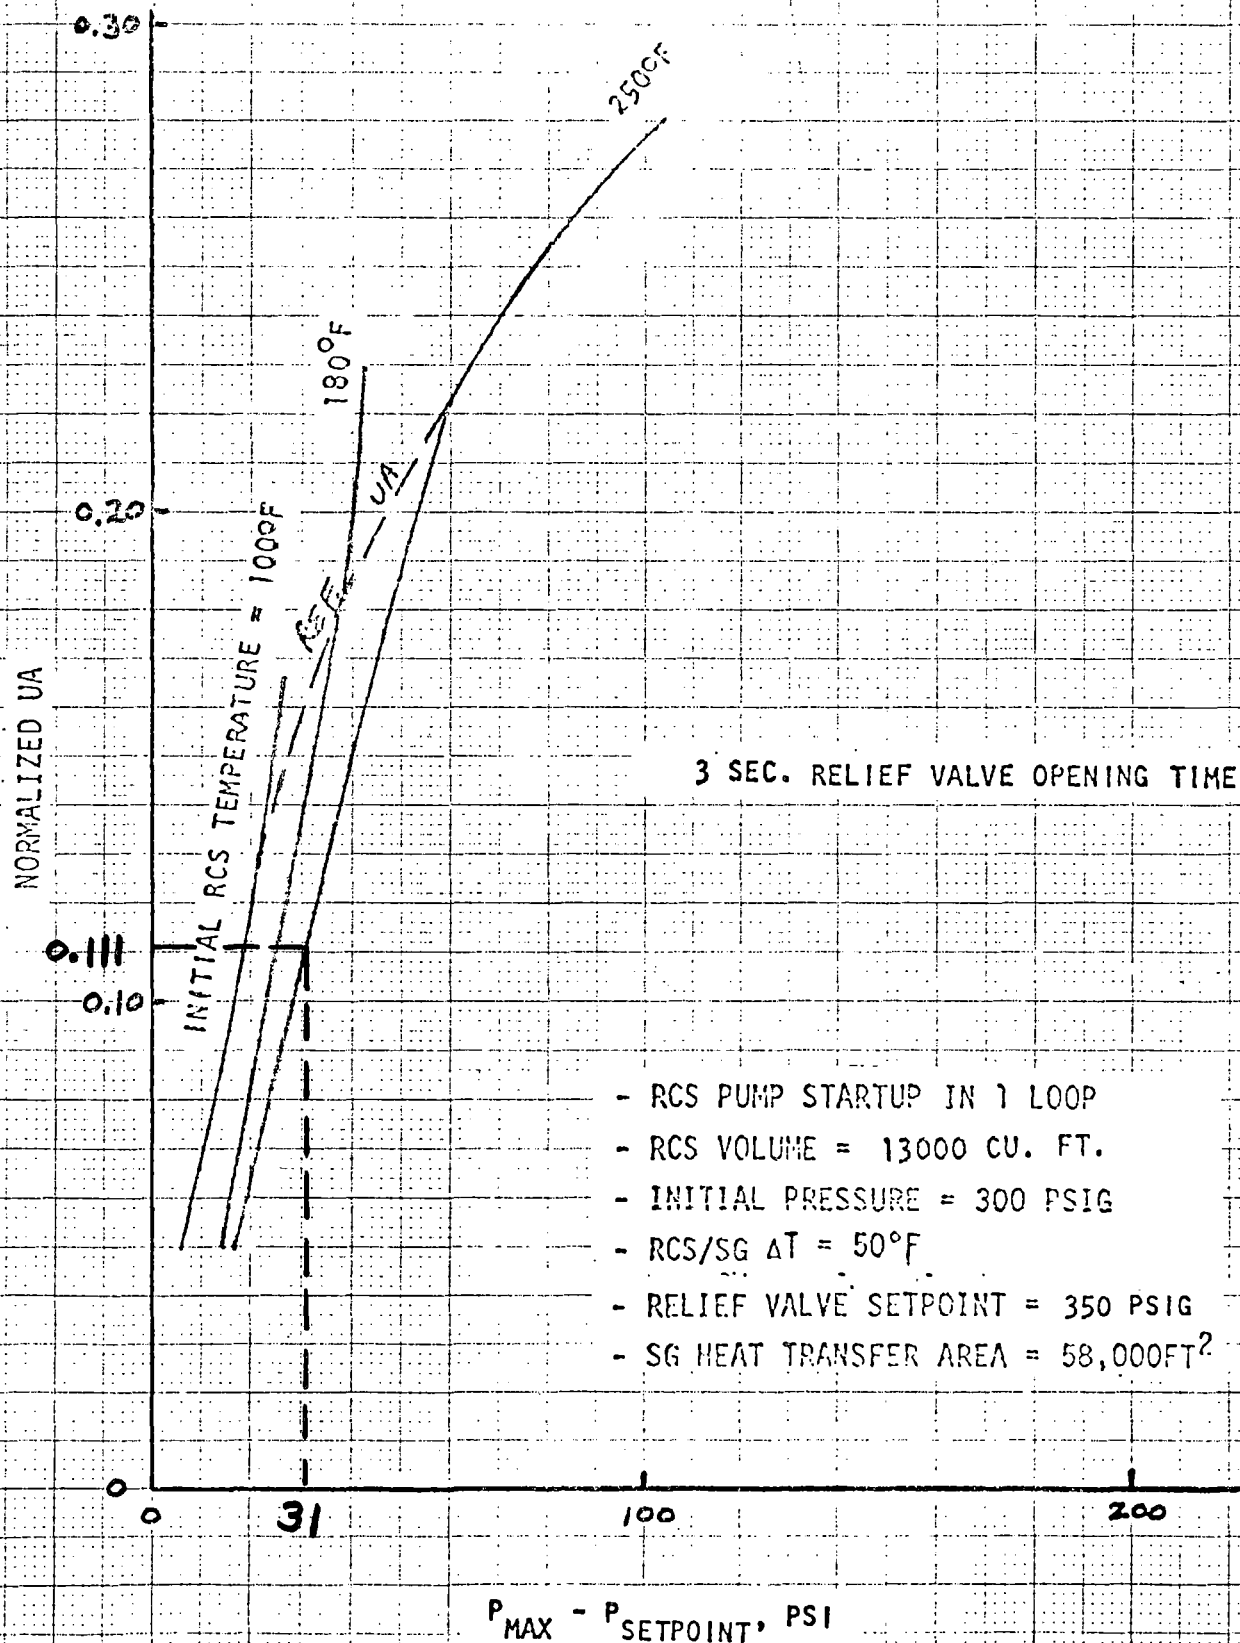


Figure C9

EFFECT OF STEAM GENERATOR UA ON
PRESSURE OVERSHOOT

5. ILLUSTRATIVE EXAMPLE 5: DETERMINATION OF SETPOINT
OVERSHOOT GIVEN SG TUBE HEAT TRANSFER AREA AND RELIEF
VALVE OPENING TIME WITHIN GENERIC ENVELOPE.

The interpolative procedure of Example 5 (modified procedure of Reference 1, Chapter 4) is applied below for the determination of setpoint overshoot for a specified SG tube heat transfer area and relief valve opening time within the generic envelope.

Figures 12 and 18 of Section 1A are used in the procedure for the following example heat input parameters:

PARAMETERS FOR HEAT INPUT EXAMPLE 5


Initial RCS Pressure	300 psig
SG Heat Transfer Area	<u>29,000 ft²</u>
RCS Volume, V_{RCS}	6,000 cu.ft.
Initial RCS Temperature, T_{RCS}	250°F
RCS/SG ΔT	50°F
Relief Valve Setpoint, S	350 psig
Relief Valve Opening Time, t	<u>2 sec.</u>

Applying the heat input procedure:

<u>Step</u>	<u>Procedure</u>	<u>Example Application</u>
1	For both the 3 second and 1.5 second relief valve opening times, obtain the reference normalized UA (UA_3 and $UA_{1.5}$) for the initial RCS temperature (T_{RCS}) and relief valve setpoint (S), using Figures C10 and C11.	For $T_{RCS} = 250^{\circ}\text{F}$ and $S = 350$ psig, $UA_3 = UA_{1.5} = \underline{0.139}$ from Figures C10 and C11. ($V_{RCS} = 6000$ cu.ft.)
2	Determine what fraction, f, of $58,000 \text{ ft}^2$ constitutes the actual steam generator heat transfer area.	$29,000 \text{ ft}^2 / 58,000 \text{ ft}^2 = \underline{0.5}$
3	Multiply both UA_3 and $UA_{1.5}$ (from step 1) by f (from Step 2) to obtain new normalized UA_3^1 and $UA_{1.5}^1$ valves.	$UA_3^1 = UA_{1.5}^1 = 0.139 * 0.5$ $= \underline{0.0695}$

Figure C10

EFFECT OF STEAM GENERATOR UA ON
PRESSURE OVERSHOOT

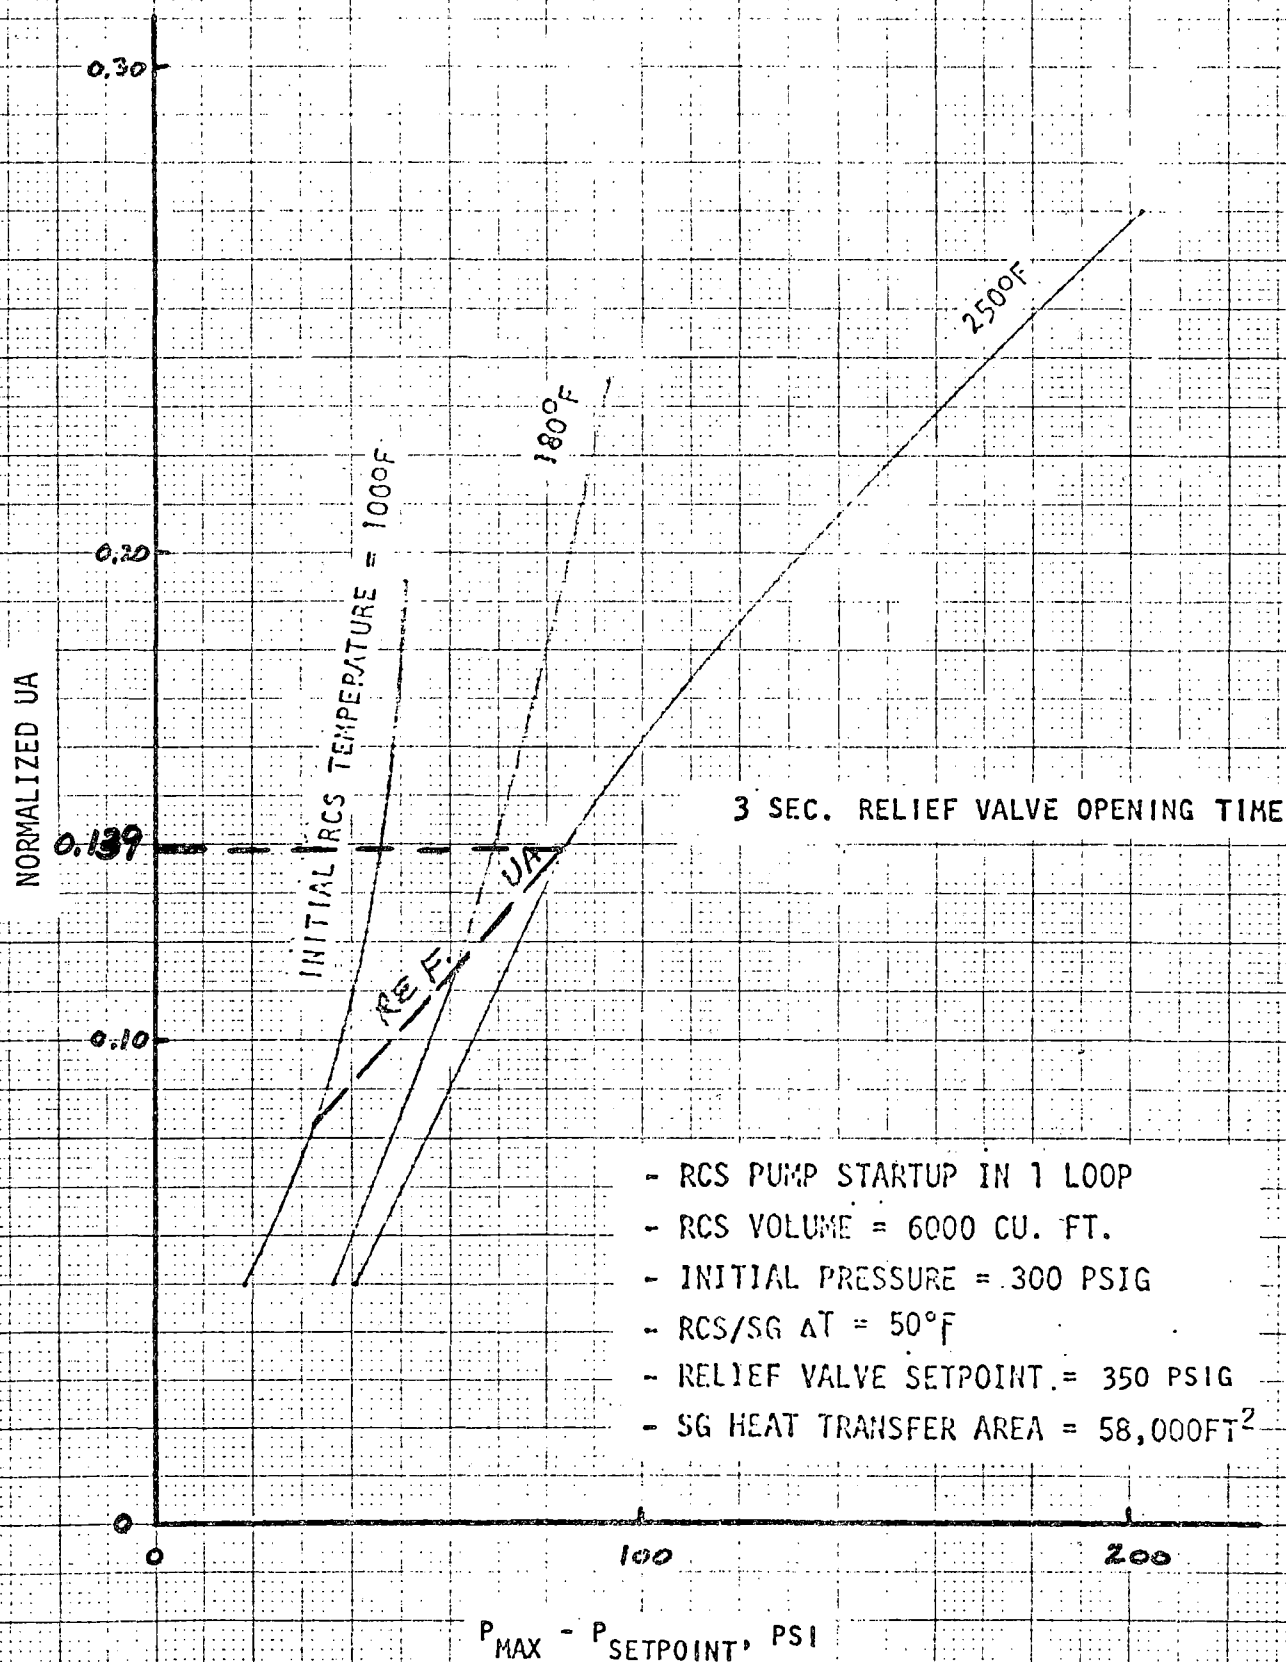


- RCS PUMP STARTUP IN 1 LOOP
- RCS VOLUME = 6000 CU. FT.
- INITIAL PRESSURE = 300 PSIG
- RCS/SG $\Delta T = 50^\circ F$
- RELIEF VALVE SETPOINT = 350 PSIG
- SG HEAT TRANSFER AREA = 58,000 FT²

$P_{MAX} - P_{SETPOINT}$, PSI

Figure C11

EFFECT OF STEAM GENERATOR UA ON
PRESSURE OVERSHOOT

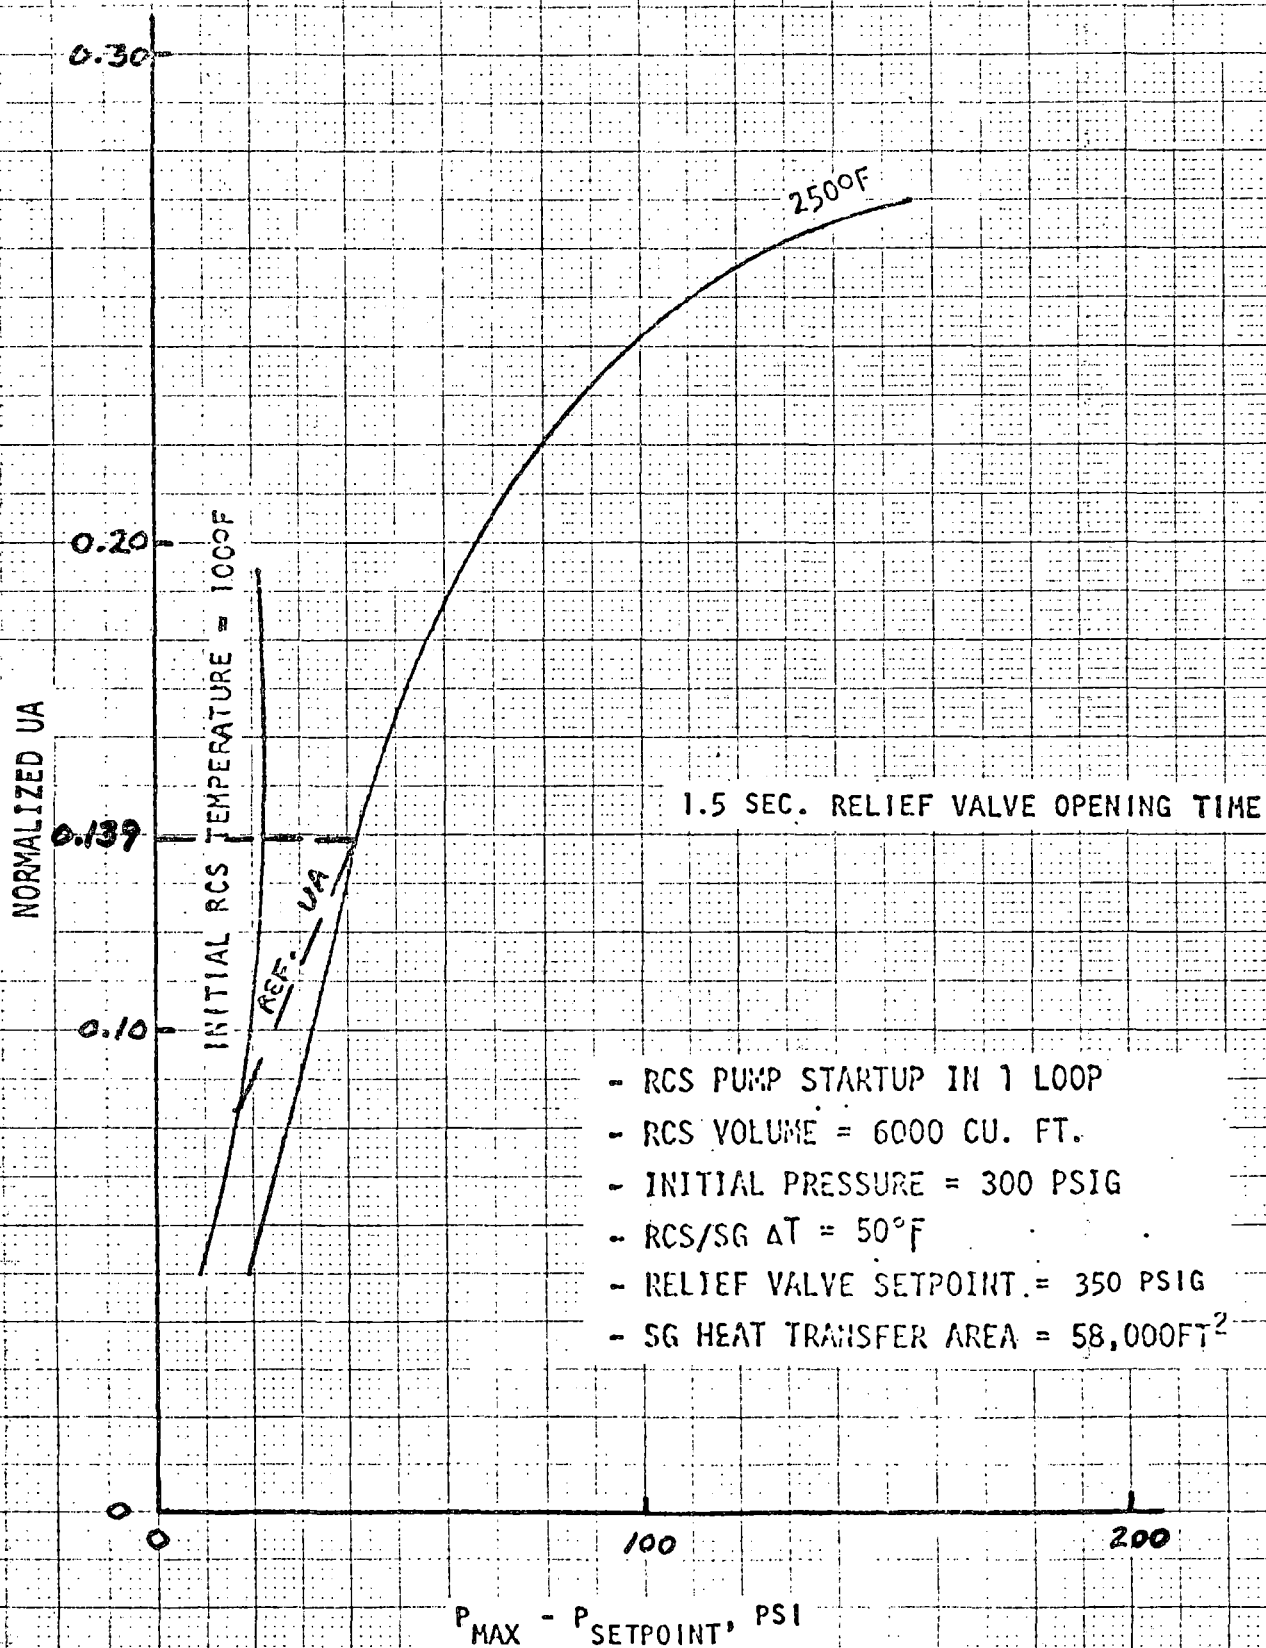

- RCS PUMP STARTUP IN 1 LOOP
- RCS VOLUME = 6000 CU. FT.
- INITIAL PRESSURE = 300 PSIG
- RCS/SG $\Delta T = 50^\circ F$
- RELIEF VALVE SETPOINT = 350 PSIG
- SG HEAT TRANSFER AREA = 58,000FT²

StepProcedureExample Application

- 4 For the same isotherm, T_{RCS} , and for UA_3^1 and $UA_{1.5}^1$ obtain new setpoint overshoots ΔP_3^1 and $P_{1.5}^1$ for the 3 second and 1.5 second relief valve opening times, using Figures C12 and C13.

- 5 For the actual relief valve opening time, t , linearly interpolate the setpoint overshoot, P_t^1 , for the new steam generator UA from the relationship:

$$P_{\Delta t}^1 = P_{1.5}^1 + \frac{t - 1.5}{3 - 1.5} (P_3^1 - P_{1.5}^1)$$

From Figure C12, for $T_{RCS} = 250^\circ\text{F}$, $S = 350$ psig and $UA_3^1 = 0.0695$, $P_3^1 = \underline{50 \text{ psi}}$. From Figure C13, for $T_{RCS} = 250^\circ\text{F}$, $S = 350$ psig and $UA_{1.5}^1 = 0.0695$, $P_{1.5}^1 = \underline{25 \text{ psi}}$

For, $t = 2$ seconds,

$$P_3^1 = 50 \text{ psi and}$$

$$P_{1.5}^1 = 25 \text{ psi,}$$

$$P_2^1 = 25$$

$$+ \frac{2 - 1.5}{3 - 1.5} (50 - 25)$$

$$= \underline{33.4 \text{ psi}}$$

Figure C12

EFFECT OF STEAM GENERATOR UA ON
PRESSURE OVERSHOOT


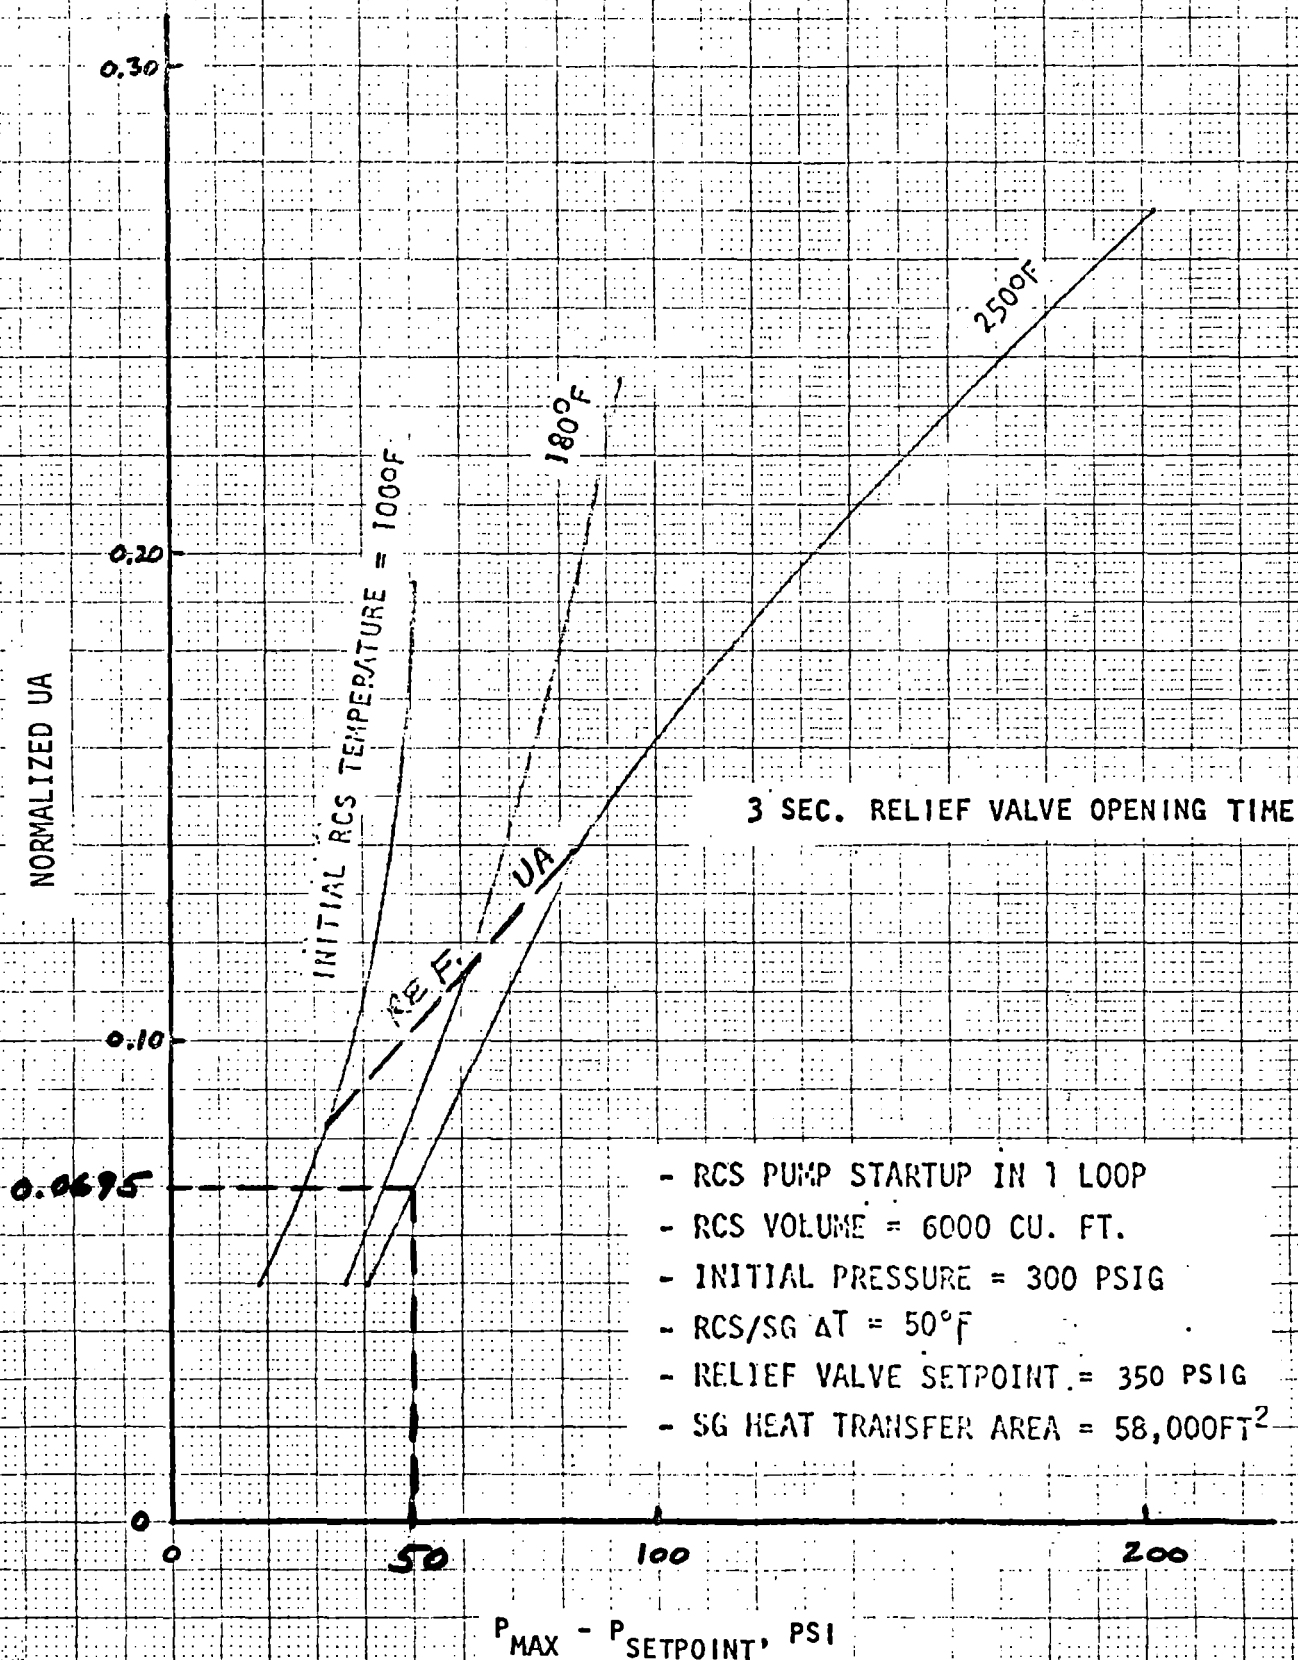


Figure C13
EFFECT OF STEAM GENERATOR UA ON
PRESSURE OVERSHOOT

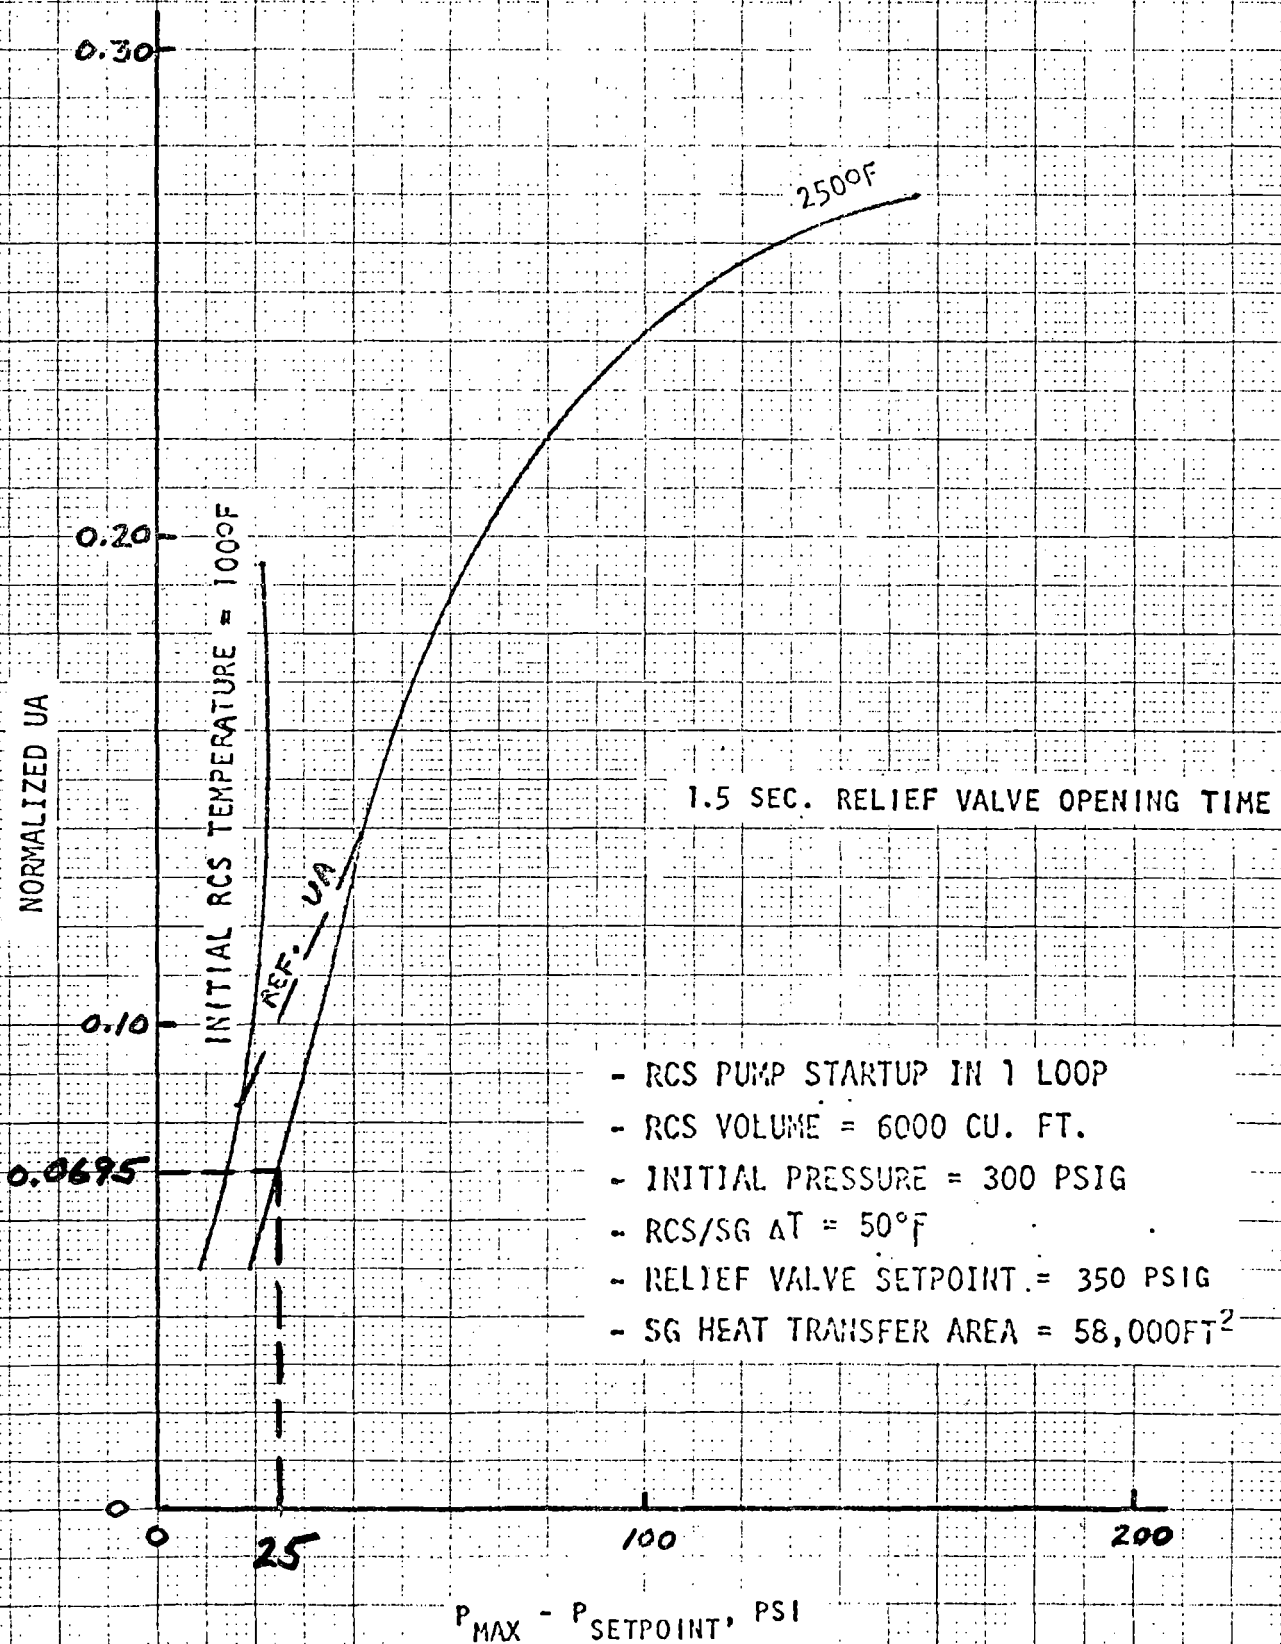

6. ILLUSTRATIVE EXAMPLE 6: DETERMINATION OF SETPOINT
OVERSHOOT GIVEN SG TUBE HEAT TRANSFER AREA AND
RELIEF VALVE SETPOINT WITHIN GENERIC ENVELOPE.

The interpolative procedure of Example 6 (modified procedure of Reference 1, Chapter 4) is applied below for the determination of setpoint overshoot for a specified SG tube heat transfer area and relief valve setpoint within the generic envelope. Figures 12 and 14 of Section 1A are used in the procedure for the following example heat input parameters:

PARAMETERS FOR HEAT INPUT EXAMPLE 6


Initial RCS Pressure	300 psig
SG Heat Transfer Area	<u>29,000 ft²</u>
RCS Volume, V_{RCS}	6,000 cu.ft.
Initial RCS Temperature, T_{RCS}	250°F
RCS/SG ΔT	50°F
Relief Valve Setpoint, S	<u>375 psig</u>
Relief Valve Opening Time, t	3 sec.

Applying the heat input procedure:

<u>Step</u>	<u>Procedure</u>	<u>Example Application</u>
1	For both the 350 psig and 400 psig relief valve setpoints, obtain the reference normalized UA (UA_{350} and UA_{400}) for the initial RCS temperature (T_{RCS}) and relief valve opening time (t), using Figures C14 and C15.	For $T_{RCS} = 250^{\circ}\text{F}$ and $t = 3$ seconds, $UA_{350} = UA_{400} = \underline{0.139}$ from Figures C14 and C15. ($V_{RCS} = 6000 \text{ cu.ft.}$)
2	Determine what fraction, f , of $58,000 \text{ ft}^2$ constitutes the actual steam generator heat transfer area.	$29,000 \text{ ft}^2 / 58,000 \text{ ft}^2 = \underline{0.5}$
3	Multiply both UA_{350} and UA_{400} (from Step 1) by f (from Step 2) to obtain new normalized UA_{350}^1 and UA_{400}^1 values.	$UA_{350}^1 = UA_{400}^1 = 0.139 * 0.5 = \underline{0.0695}$

Figure C14

EFFECT OF STEAM GENERATOR UA ON PRESSURE OVERSHOOT

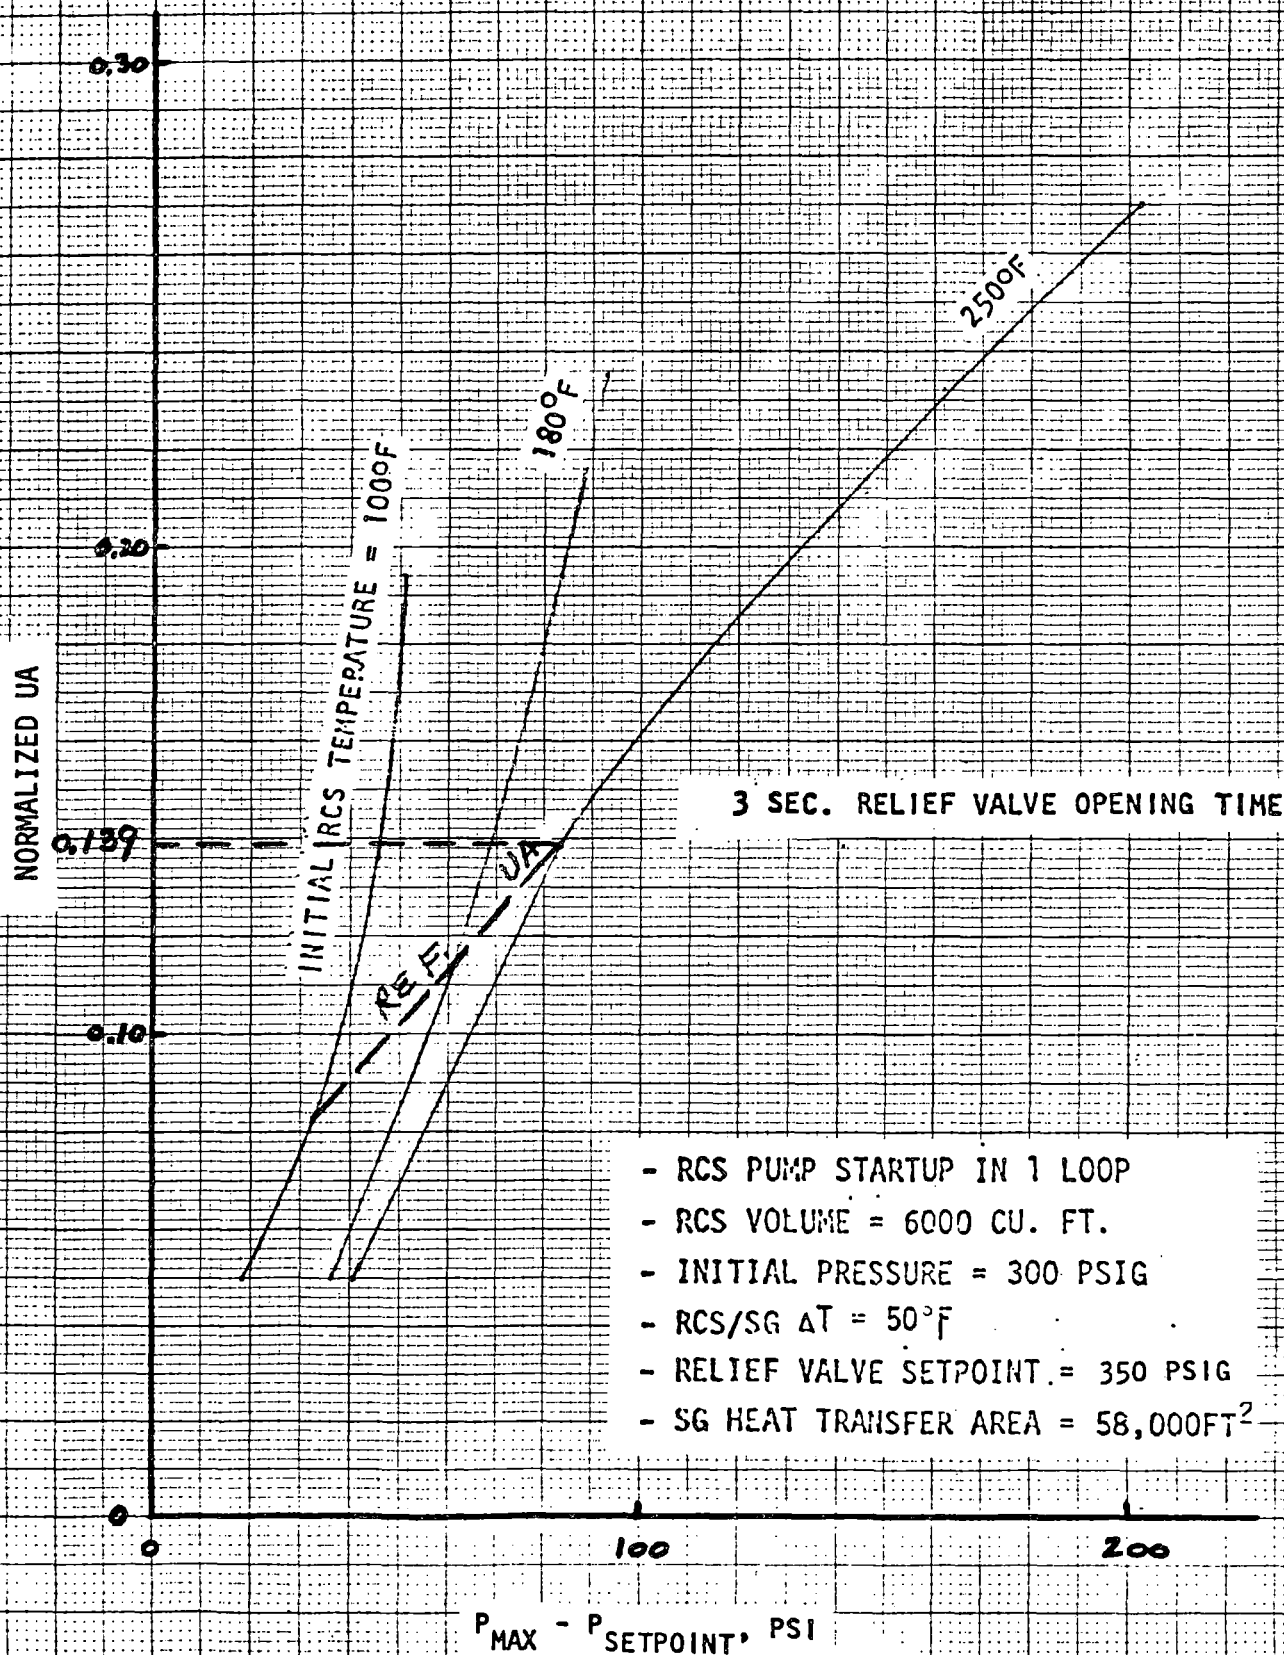

- RCS PUMP STARTUP IN 1 LOOP
- RCS VOLUME = 6000 CU. FT.
- INITIAL PRESSURE = 300 PSIG
- RCS/SG $\Delta T = 50^\circ F$
- RELIEF VALVE SETPOINT = 350 PSIG
- SG HEAT TRANSFER AREA = 58,000FT²

Figure C15

EFFECT OF STEAM GENERATOR UA ON
PRESSURE OVERSHOOT


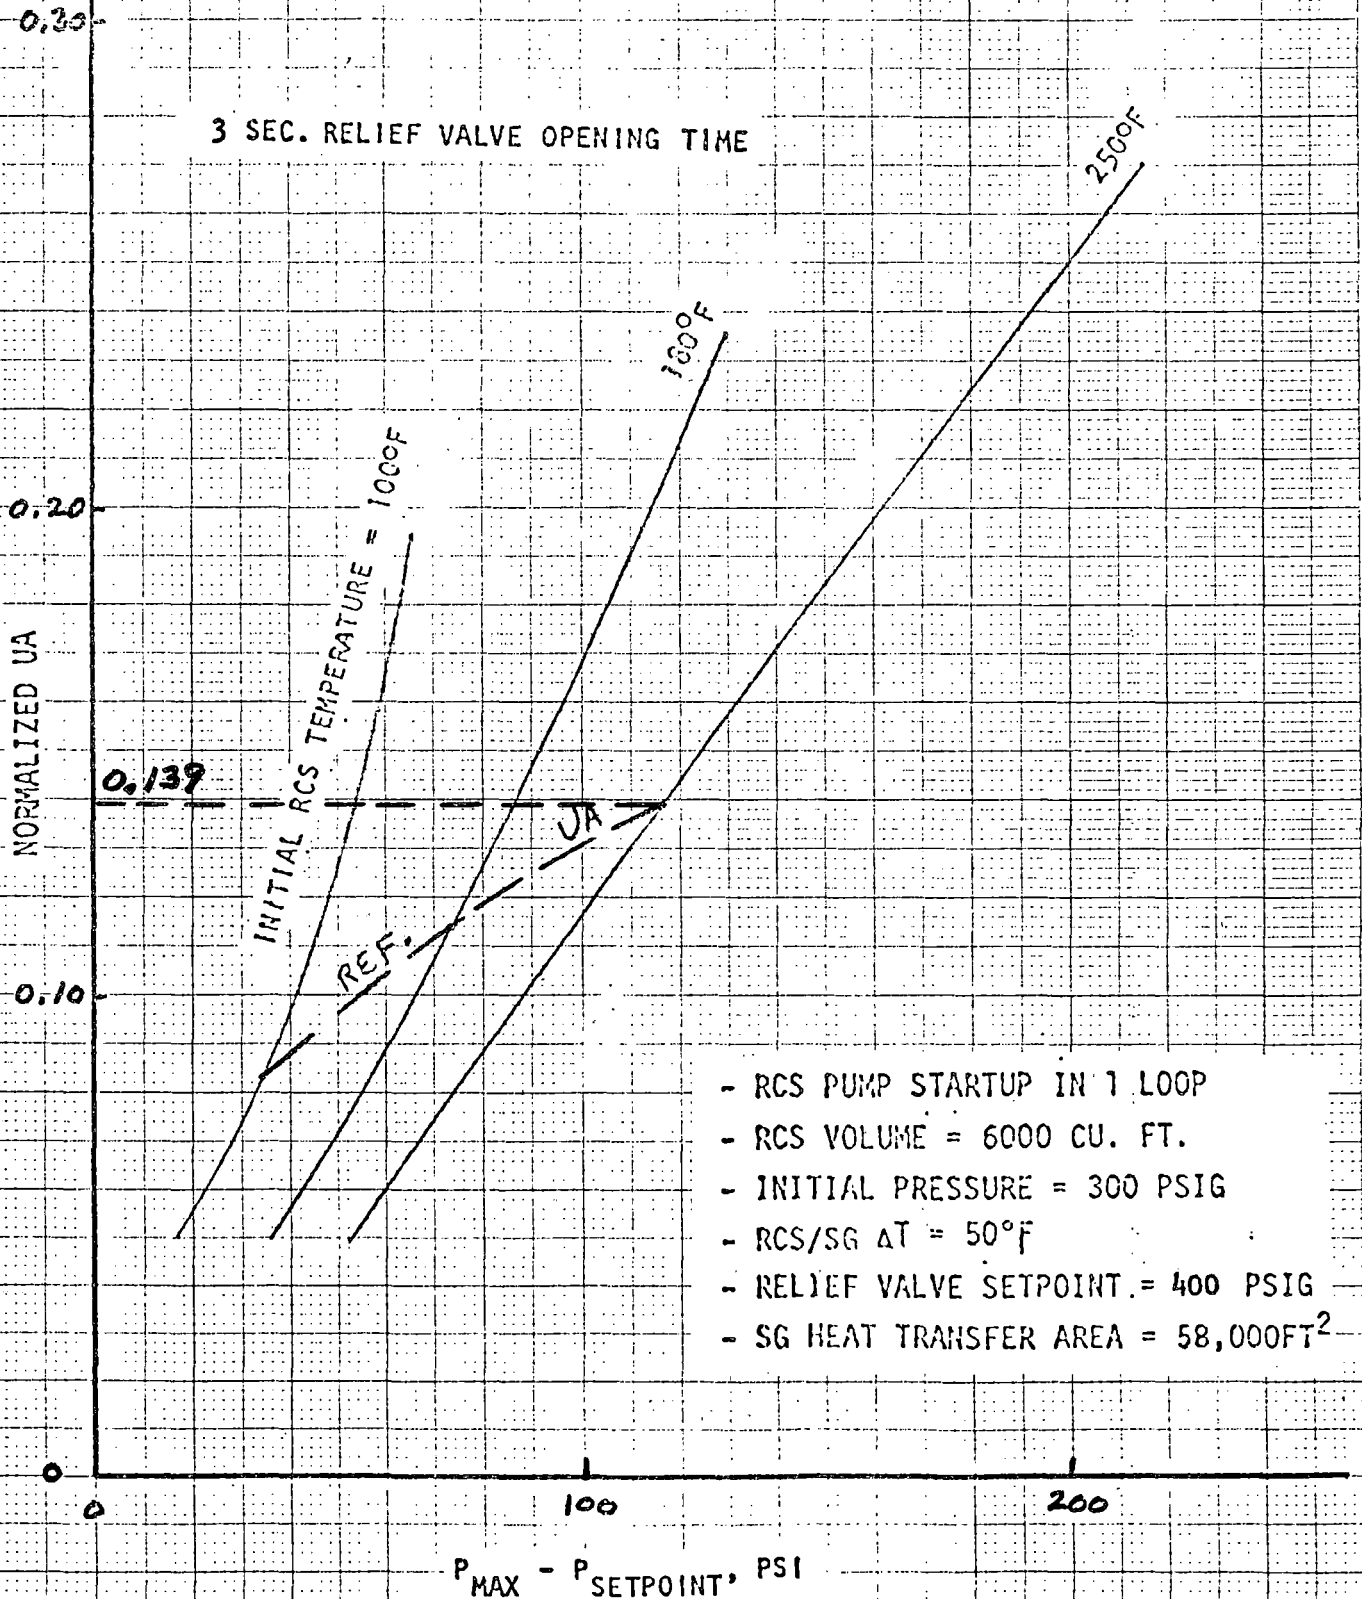


Figure C16


EFFECT OF STEAM GENERATOR UA ON PRESSURE OVERSHOOT

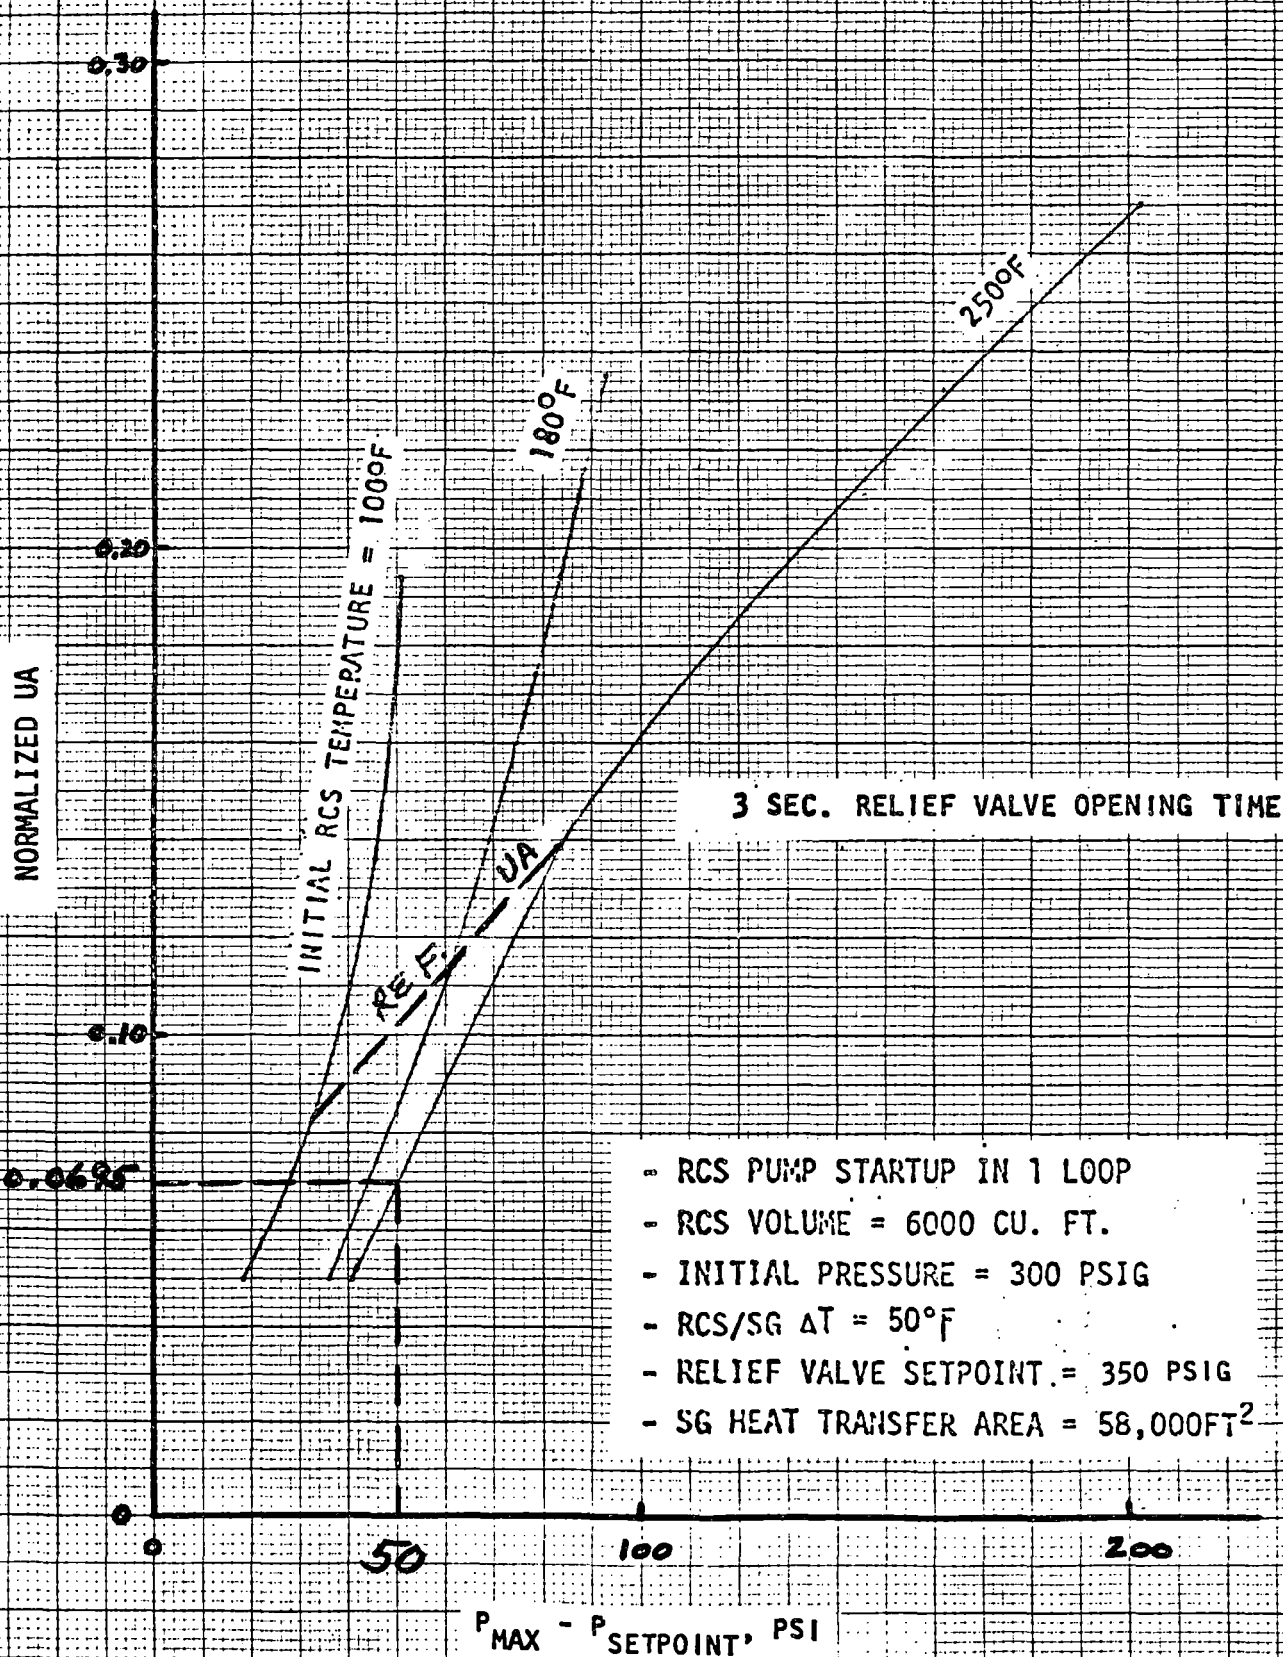

- RCS PUMP STARTUP IN 1 LOOP
- RCS VOLUME = 6000 CU. FT.
- INITIAL PRESSURE = 300 PSIG
- RCS/SG $\Delta T = 50^\circ F$
- RELIEF VALVE SETPOINT = 350 PSIG
- SG HEAT TRANSFER AREA = 58,000FT²

Figure C17

EFFECT OF STEAM GENERATOR UA ON
PRESSURE OVERSHOOT

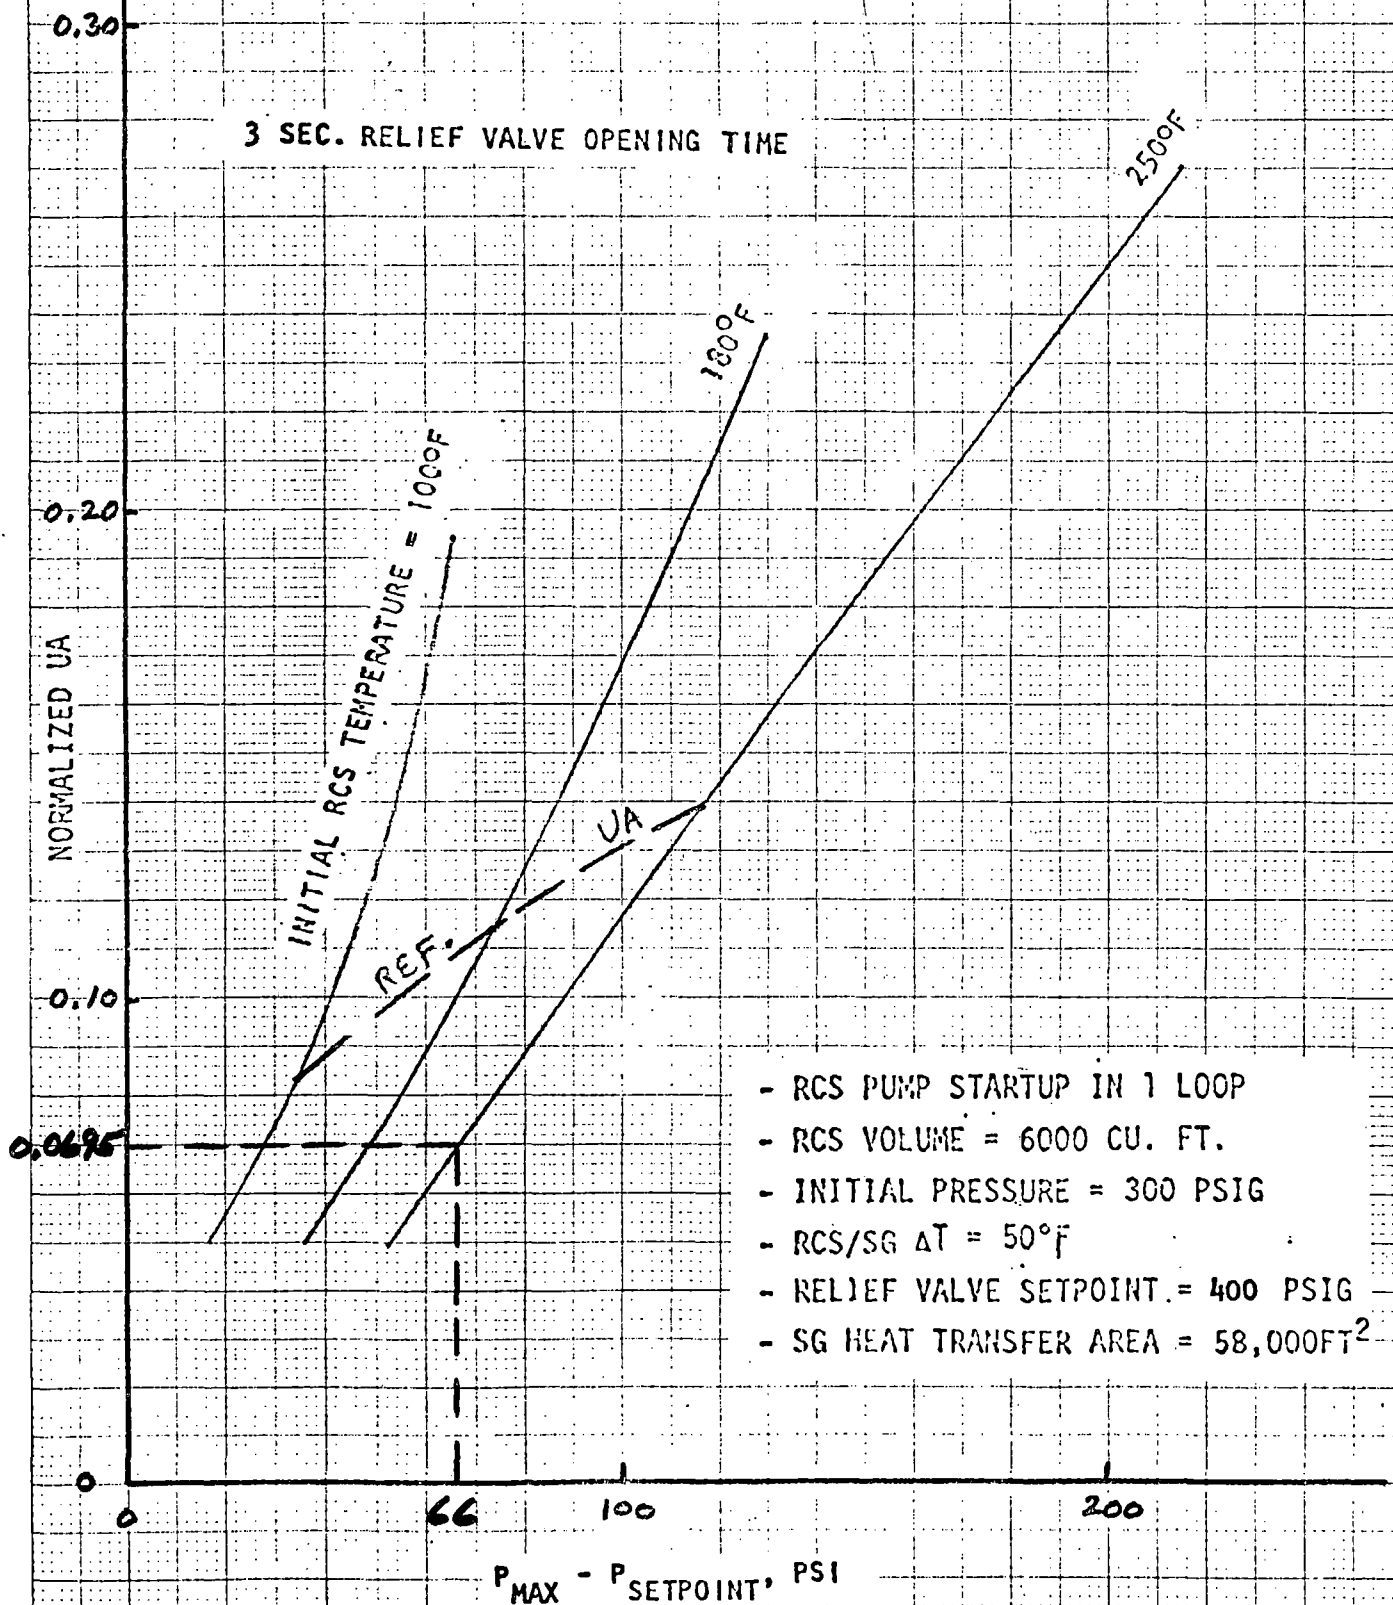

REFERENCE

1. "Pressure Mitigating Systems Transient Analysis Results," July 1977.
(Westinghouse Report on RCS Solid Water Overpressurization prepared
for the W Owners Group on RCS Overpressurization.)

— NOTICE —

THE ATTACHED FILES ARE OFFICIAL RECORDS OF THE DIVISION OF DOCUMENT CONTROL. THEY HAVE BEEN CHARGED TO YOU FOR A LIMITED TIME PERIOD AND MUST BE RETURNED TO THE RECORDS FACILITY BRANCH 016. PLEASE DO NOT SEND DOCUMENTS CHARGED OUT THROUGH THE MAIL. REMOVAL OF ANY PAGE(S) FROM DOCUMENT FOR REPRODUCTION MUST BE REFERRED TO FILE PERSONNEL.

DEADLINE RETURN DATE _____

~~REGULATORY DOCKET FILE COPY~~

RECORDS FACILITY BRANCH