



UNITED STATES  
NUCLEAR REGULATORY COMMISSION  
WASHINGTON, D. C. 20555-0001

THE CLEVELAND ELECTRIC ILLUMINATING COMPANY, ET AL.

DOCKET NO. 50-440

PERRY NUCLEAR POWER PLANT, UNIT NO. 1

AMENDMENT TO FACILITY OPERATING LICENSE

Amendment No.58  
License No. NPF-58


1. The Nuclear Regulatory Commission (the Commission) has found that:
  - A. The application for amendment by The Cleveland Electric Illuminating Company, Centerior Service Company, Duquesne Light Company, Ohio Edison Company, Pennsylvania Power Company, and Toledo Edison Company (the licensees) dated September 28, 1992, complies with the standards and requirements of the Atomic Energy Act of 1954, as amended (the Act), and the Commission's rules and regulations set forth in 10 CFR Chapter I;
  - B. The facility will operate in conformity with the application, the provisions of the Act, and the rules and regulations of the Commission;
  - C. There is reasonable assurance (i) that the activities authorized by this amendment can be conducted without endangering the health and safety of the public, and (ii) that such activities will be conducted in compliance with the Commission's regulations;
  - D. The issuance of this amendment will not be inimical to the common defense and security or to the health and safety of the public; and
  - E. The issuance of this amendment is in accordance with 10 CFR Part 51 of the Commission's regulations and all applicable requirements have been satisfied.
2. Accordingly, the license is amended by changes to the Technical Specifications as indicated in the attachment to this license amendment, and paragraph 2.C.(2) of Facility Operating License No. NPF-58 is hereby amended to read as follows:

(2) Technical Specifications

The Technical Specifications contained in Appendix A and the Environmental Protection Plan contained in Appendix B, as revised through Amendment No. 58 are hereby incorporated into this license. The Cleveland Electric Illuminating Company shall operate the facility in accordance with the Technical Specifications and the Environmental Protection Plan.

3. This license amendment is effective as of its date of issuance and shall be implemented not later than 90 days after issuance.

FOR THE NUCLEAR REGULATORY COMMISSION

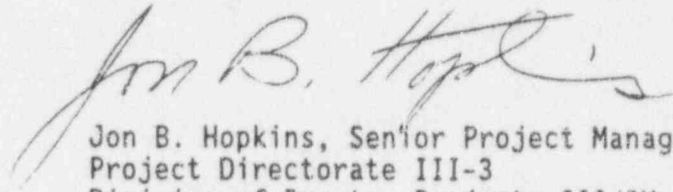

Jon B. Hopkins, Senior Project Manager  
Project Directorate III-3  
Division of Reactor Projects III/IV  
Office of Nuclear Reactor Regulation

Attachment:  
Changes to the Technical  
Specifications

Date of issuance: April 22, 1994

ATTACHMENT TO LICENSE AMENDMENT NO. 58

FACILITY OPERATING LICENSE NO. NPF-58

DOCKET NO. 50-440

Replace the following pages of the Appendix "A" Technical Specifications with the attached pages. The revised pages are identified by Amendment number and contain vertical lines indicating the area of change. Overleaf pages are provided to maintain document completeness.

<u>Remove</u>	<u>Insert</u>
2-4	2-4
B 2-8	B 2-8
3/4 3-2	3/4 3-2
3/4 3-4	3/4 3-4
3/4 3-6	3/4 3-6
3/4 3-7	3/4 3-7
3/4 3-11	3/4 3-11
3/4 3-15	3/4 3-15
3/4 3-16	3/4 3-16
3/4 3-21	3/4 3-21
3/4 3-23	3/4 3-23
3/4 3-26	3/4 3-26

TABLE 2.2.1-1  
REACTOR PROTECTION SYSTEM INSTRUMENTATION SETPOINTS

<u>FUNCTIONAL UNIT</u>	<u>TRIP SETPOINT</u>	<u>ALLOWABLE VALUES</u>
1. Intermediate Range Monitor		
a. Neutron Flux-High	< 120/125 divisions of full scale	< 122/125 divisions of full scale
b. Inoperative	NA	NA
2. Average Power Range Monitor:		
a. Neutron Flux-High Setdown	< 15% of RATED THERMAL POWER	< 20% of RATED THERMAL POWER
b. Flow Biased Simulated Thermal Power-High		
1) Flow Biased	< 0.66 W+64%, with a maximum of < 111.0% of RATED THERMAL POWER	< 0.66 W+67%, with a maximum of < 113.0% of RATED THERMAL POWER
2) High Flow Clamped	< 118.0% of RATED THERMAL POWER	< 120.0% of RATED THERMAL POWER
c. Neutron Flux-High	NA	NA
d. Inoperative		
3. Reactor Vessel Steam Dome Pressure - High	≤ 1064.7 psig	≤ 1079.7 psig
4. Reactor Vessel Water Level - Low, Level 3	> 177.7 inches above top of active fuel*	> 177.1 inches above top of active fuel*
5. Reactor Vessel Water Level-High, Level 8	< 219.5 inches above top of active fuel*	< 220.1 inches above top of active fuel*
6. Main Steam Line Isolation Valve - Closure	≤ 8% closed	≤ 12% closed
7. Deleted		
8. Drywell Pressure - High	≤ 1.68 psig	≤ 1.88 psig

\*See Bases Figure B 3/4 3-1.

## 2.0 SAFETY LIMITS AND LIMITING SAFETY SYSTEM SETTINGS

---

### 2.2 LIMITING SAFETY SYSTEM SETTINGS

#### REACTOR PROTECTION SYSTEM INSTRUMENTATION SETPOINTS

2.2.1 The reactor protection system instrumentation setpoints shall be set consistent with the Trip Setpoint values shown in Table 2.2.1-1.

APPLICABILITY: As shown in Table 3.3.1-1.

#### ACTION:

With a reactor protection system instrumentation setpoint less conservative than the value shown in the Allowable Values column of Table 2.2.1-1, declare the channel inoperable and apply the applicable ACTION statement requirement of Specification 3.3.1 until the channel is restored to OPERABLE status with its setpoint adjusted consistent with the Trip Setpoint value.

## LIMITING SAFETY SYSTEM SETTINGS

### BASES

---

---

#### REACTOR PROTECTION SYSTEM INSTRUMENTATION SETPOINTS (Continued)

##### Average Power Range Monitor (Continued)

5% of RATED THERMAL POWER per minute and the APRM system would be more than adequate to assure shutdown before the power could exceed the Safety Limit. The 15% neutron flux trip remains active until the mode switch is placed in the Run position.

The APRM trip system is calibrated using heat balance data taken during steady state conditions. Fission chambers provide the basic input to the system and therefore the monitors respond directly and quickly to changes due to transient operation for the case of the Neutron Flux-High setpoint; i.e., for a power increase, the THERMAL POWER of the fuel will be less than that indicated by the neutron flux due to the time constants of the heat transfer associated with the fuel. For the Flow Biased Simulated Thermal Power-High setpoint, a time constant specified in the COLR is introduced into the flow biased APRM in order to simulate the fuel thermal transient characteristics. A more conservative maximum value is used for the flow biased setpoint as shown in Table 2.2.1-1.

The APRM setpoints were selected to provide adequate margin for the Safety Limits and yet allow operating margin that reduces the possibility of unnecessary shutdown.

##### 3. Reactor Vessel Steam Dome Pressure-High

High pressure in the nuclear system could cause a rupture to the nuclear system process barrier resulting in the release of fission products. A pressure increase while operating will also tend to increase the power of the reactor by compressing voids thus adding reactivity. The trip will quickly reduce the neutron flux, counteracting the pressure increase. The trip setting is slightly higher than the operating pressure to permit normal operation without spurious trips. The setting provides for a wide margin to the maximum allowable design pressure and takes into account the location of the pressure measurement compared to the highest pressure that occurs in the system during a transient. This trip setpoint is effective at low power/flow conditions when the turbine control valve fast closure and turbine stop valve closure trips are bypassed. For a load rejection or turbine trip under these conditions, the transient analysis indicated an adequate margin to the thermal hydraulic limit.

# LIMITING SAFETY SYSTEM SETTINGS

## BASES

### REACTOR PROTECTION SYSTEM INSTRUMENTATION SETPOINTS (Continued)

#### 4. Reactor Vessel Water Level-Low

The reactor vessel water level trip setpoint has been used in transient analyses dealing with coolant inventory decrease. The scram setting was chosen far enough below the normal operating level to avoid spurious trips but high enough above the fuel to assure that there is adequate protection for the fuel and pressure limits.

#### 5. Reactor Vessel Water Level-High

A reactor scram from high reactor water level, approximately two feet above normal operating level is intended to offset the addition of reactivity effect associated with the introduction of a significant amount of relatively cold feedwater. An excess of feedwater entering the vessel would be detected by the level increase in a timely manner. This scram feature is only effective when the reactor mode switch is in the Run position because at THERMAL POWER levels below 10% to 15% of RATED THERMAL POWER, the approximate range of power level for changing to the Run position, the safety margins are more than adequate without a reactor scram.

#### 6. Main Steam Line Isolation Valve-Closure

The main steam line isolation valve closure trip was provided to limit the amount of fission product release for certain postulated events. The MSIV's are closed automatically from measured parameters such as high steam flow, low reactor water level, high steam tunnel temperature and low steam line pressure. The MSIV's closure scram anticipates the pressure and flux transients which could follow MSIV closure and thereby protects reactor vessel pressure and fuel thermal/hydraulic Safety Limits.

#### 7. Deleted

### 3/4.3 INSTRUMENTATION

#### 3/4.3.1 REACTOR PROTECTION SYSTEM INSTRUMENTATION

##### LIMITING CONDITION FOR OPERATION

---

3.3.1 As a minimum, the reactor protection system instrumentation channels shown in Table 3.3.1-1 shall be OPERABLE with the REACTOR PROTECTION SYSTEM RESPONSE TIME as shown in Table 3.3.1-2.

APPLICABILITY: As shown in Table 3.3.1-1.

##### ACTION:

- a. With the number of OPERABLE channels less than required by the Minimum OPERABLE Channels per Trip System requirement for one trip system, place the inoperable channel(s) and/or that trip system in the tripped condition\* within 1 hour. The provisions of Specification 3.0.4 are not applicable.
- b. With the number of OPERABLE channels less than required by the Minimum OPERABLE Channels per Trip System requirement for both trip systems, place at least one trip system\*\* in the tripped condition within one hour and take the ACTION required by Table 3.3.1-1.

##### SURVEILLANCE REQUIREMENTS

---

4.3.1.1 Each reactor protection system instrumentation channel shall be demonstrated OPERABLE by the performance of the CHANNEL CHECK, CHANNEL FUNCTIONAL TEST and CHANNEL CALIBRATION operations for the OPERATIONAL CONDITIONS and at the frequencies shown in Table 4.3.1.1-1.

4.3.1.2 LOGIC SYSTEM FUNCTIONAL TESTS and simulated automatic operation of all channels shall be performed at least once per 18 months.

4.3.1.3 The REACTOR PROTECTION SYSTEM RESPONSE TIME of each reactor trip functional unit shown in Table 3.3.1-2 shall be demonstrated to be within its limit at least once per 18 months. Each test shall include at least one channel per trip system such that all channels are tested at least once every N times 18 months where N is the total number of redundant channels in a specific reactor trip system.

4.3.1.4 The provisions of Specification 4.0.4 are not applicable to the CHANNEL FUNCTIONAL TEST and CHANNEL CALIBRATION surveillances for the Intermediate Range Monitors for entry into their applicable OPERATIONAL CONDITIONS (as shown in Table 4.3.1.1-1) from OPERATIONAL CONDITION 1, provided the surveillances are performed within 12 hours after such entry.

\*An inoperable channel need not be placed in the tripped condition where this would cause the Trip Function to occur. In these cases, the inoperable channel shall be restored to OPERABLE status within 2 hours or the ACTION required by Table 3.3.1-1 for that Trip Function shall be taken.

\*\*The trip system need not be placed in the tripped condition if this would cause the Trip Function to occur. When a trip system can be placed in the tripped condition without causing the Trip Function to occur, place the trip system with the most inoperable channels in the tripped condition; if both systems have the same number of inoperable channels, place either trip system in the tripped condition.

TABLE 3.3.1-1  
 REACTOR PROTECTION SYSTEM INSTRUMENTATION

FUNCTIONAL UNIT	APPLICABLE OPERATIONAL CONDITIONS	MINIMUM OPERABLE CHANNELS PER TRIP SYSTEM (a)	ACTION
1. Intermediate Range Monitors:			
a. Neutron Flux - High	2 3, 4 5 <sup>(b)</sup>	3 3 3	1 2 3
b. Inoperative	2 3, 4 5	3 3 3	1 2 3
2. Average Power Range Monitor <sup>(c)</sup> :			
a. Neutron Flux - High, Setdown	2 3 5 <sup>(b)</sup>	3 3 3	1 2 3
b. Flow Biased Simulated Thermal Power - High	1	3	4
c. Neutron Flux - High	1	3	4
d. Inoperative	1, 2 3 5	3 3 3	1 2 3
3. Reactor Vessel Steam Dome Pressure - High	1, 2 <sup>(d)</sup>	2	1
4. Reactor Vessel Water Level - Low, Level 3	1, 2	2	1
5. Reactor Vessel Water Level - High, Level 8	1 <sup>(e)</sup>	2	4
6. Main Steam Line Isolation Valve - Closure	1 <sup>(e)</sup>	4	4
7. Deleted			
8. Drywell Pressure - High	1, 2 <sup>(f)</sup>	2	

TABLE 3.3.1-1 (Continued)  
REACTOR PROTECTION SYSTEM INSTRUMENTATION

<u>FUNCTIONAL UNIT</u>	<u>APPLICABLE OPERATIONAL CONDITIONS</u>	<u>MINIMUM OPERABLE CHANNELS PER TRIP SYSTEM (a)</u>	<u>ACTION</u>
9. Scram Discharge Volume Water Level - High			
a. Level Transmitter	1, 2 5(g)	2 2	1 3
b. Float Switches	1, 2 5(g)	2 2	1 3
10. Turbine Stop Valve - Closure	1(h)	4	6
11. Turbine Control Valve Fast Closure, Valve Trip System Oil Pressure - Low	1(h)	2	6
12. Reactor Mode Switch Shutdown Position	1, 2 3, 4 5	2 2 2	1 7 3
13. Manual Scram	1, 2 3, 4 5	2 2 2	1 8 9

TABLE 3.3.1-1 (Continued)

REACTOR PROTECTION SYSTEM INSTRUMENTATION

ACTION

- ACTION 1 - Be in at least HOT SHUTDOWN within 12 hours.
- ACTION 2 - Verify all insertable control rods to be inserted in the core and lock the reactor mode switch in the Shutdown position within one hour.
- ACTION 3 - Suspend all operations involving CORE ALTERATIONS\* and insert all insertable control rods within one hour.
- ACTION 4 - Be in at least STARTUP within 6 hours.
- ACTION 5 - Deleted.
- ACTION 6 - Initiate a reduction in THERMAL POWER within 15 minutes and reduce turbine first stage pressure to less than the automatic bypass setpoint within 2 hours.
- ACTION 7 - Verify all insertable control rods to be inserted within one hour.
- ACTION 8 - Lock the reactor mode switch in the Shutdown position within one hour.
- ACTION 9 - Suspend all operations involving CORE ALTERATIONS\* and insert all insertable control rods and lock the reactor mode switch in the Shutdown position within one hour.

\*Except replacement of LPRM strings provided SRM instrumentation is OPERABLE per Specification 3.9.2.

TABLE 3.3.1-1 (Continued)

REACTOR PROTECTION SYSTEM INSTRUMENTATION

TABLE NOTATIONS

- (a) A channel may be placed in an inoperable status for up to 2 hours for required surveillance without placing the trip system in the tripped condition provided at least one OPERABLE channel in the same trip system is monitoring that parameter.
- (b) Unless adequate shutdown margin has been demonstrated per Specification 3.1.1 and the "one-rod-out" Refuel position interlock has been demonstrated OPERABLE per Specification 3.9.1, the shorting links shall be removed from the RPS circuitry prior to and during the time any control rod is withdrawn.\*
- (c) An APRM channel is inoperable if there are less than 2 LPRM inputs per level or less than 14 LPRM inputs to an APRM channel.
- (d) This function is not required to be OPERABLE when the reactor pressure vessel head is removed per Specification 3.10.1.
- (e) This function shall be automatically bypassed when the reactor mode switch is not in the Run position.
- (f) This function is not required to be OPERABLE when DRYWELL INTEGRITY is not required.
- (g) With any control rod withdrawn. Not applicable to control rods removed per Specification 3.9.10.1 or 3.9.10.2.
- (h) This function is automatically bypassed when turbine first stage pressure is less than the value of turbine first stage pressure corresponding to 40%\*\* of RATED THERMAL POWER.

\*Not required for control rods removed per Specification 3.9.10.1 or 3.9.10.2.

\*\*The Turbine First Stage Pressure Bypass Setpoints and corresponding Allowable Values are adjusted based on Feedwater temperatures (see 3/4.2.2 for definition of  $\Delta T$ ). The Setpoints and Allowable Values for various  $\Delta T$ s are as follows:

<u>T(°F)</u>	<u>Setpoint (psig)</u>	<u>Allowable Value (psig)</u>
0 = T	$\leq 212$	$\leq 218$
7 < $\Delta T \leq 50$	$\leq 190$	$\leq 196$
50 < $\Delta T \leq 100$	$\leq 168$	$\leq 174$
100 < $\Delta T \leq 170$	$\leq 146$	$\leq 152$

TABLE 3.3.1-2

REACTOR PROTECTION SYSTEM RESPONSE TIMES

FUNCTIONAL UNIT	RESPONSE TIME (Seconds)
1. Intermediate Range Monitors:	
a. Neutron Flux - High	NA
b. Inoperative	NA
2. Average Power Range Monitor*:	
a. Neutron Flux - High, Setdown	NA
b. Flow Biased Simulated Thermal Power - High	≤ 0.09**
c. Neutron Flux - High	≤ 0.09
d. Inoperative	NA
3. Reactor Vessel Steam Dome Pressure - High	≤ 0.35
4. Reactor Vessel Water Level - Low, Level 3	≤ 1.05
5. Reactor Vessel Water Level - High, Level 8	≤ 1.05
6. Main Steam Line Isolation Valve - Closure	≤ 0.06
7. Deleted	
8. Drywell Pressure - High	NA
9. Scram Discharge Volume Water Level - High	NA
10. Turbine Stop Valve - Closure	≤ 0.06
11. Turbine Control Valve Fast Closure, Valve Trip System	
Oil Pressure - Low	≤ 0.07#
12. Reactor Mode Switch Shutdown Position	NA
13. Manual Scram	NA

\*Neutron detectors are exempt from response time testing. Response time shall be measured from the detector output or from the input of the first electronic component in the channel.

\*\*Not including the simulated thermal power time constant specified in the COLR.

#Measured from start of turbine control valve fast closure.

TABLE 4.3.1.1-1

REACTOR PROTECTION SYSTEM INSTRUMENTATION SURVEILLANCE REQUIREMENTS

FUNCTIONAL UNIT	CHANNEL CHECK	CHANNEL FUNCTIONAL TEST	CHANNEL CALIBRATION <sup>(a)</sup>	OPERATIONAL CONDITIONS IN WHICH SURVEILLANCE REQUIRED
1. Intermediate Range Monitors:				
a. Neutron Flux - High	S/U,S,(b) S	W W	R R	2 3, 4
b. Inoperative	NA	W	NA	2, 3, 5
2. Average Power Range Monitor:(f)				
a. Neutron Flux - High, Setdown	S/U,S,(b) S	W W	SA SA	2 3, 5
b. Flow Biased Simulated Thermal Power - High	S,D <sup>(h)</sup>	W	W <sup>(d)(e)</sup> , SA <sup>(m)</sup> , R <sup>(l)</sup>	1
c. Neutron Flux - High	S	W	W <sup>(d)</sup> , SA	1
d. Inoperative	NA	W	NA	1, 2, 3, 5
3. Reactor Vessel Steam Dome Pressure - High	S	M	R <sup>(g)</sup>	1, 2 <sup>(j)</sup>
4. Reactor Vessel Water Level - Low, Level 3	S	M	R <sup>(g)</sup>	1, 2
5. Reactor Vessel Water Level - High, Level 8	S	M	R <sup>(g)</sup>	1
6. Main Steam Line Isolation Valve - Closure	NA	M	R	1
7. Deleted				
8. Drywell Pressure - High	S	M	R <sup>(g)</sup>	1, 2 <sup>(l)</sup>
9. Scram Discharge Volume Water Level - High				
a. Level Transmitter	S	M	R <sup>(g)</sup>	1, 2, 5 <sup>(k)</sup>
b. Float Switches	NA	M	R	1, 2, 5 <sup>(k)</sup>

3/4 3-7

Amendment No. 47,58

TABLE 4.3.1.1-1 (Continued)

REACTOR PROTECTION SYSTEM INSTRUMENTATION SURVEILLANCE REQUIREMENTS

FUNCTIONAL UNIT	CHANNEL CHECK	CHANNEL FUNCTIONAL TEST	CHANNEL CALIBRATION	OPERATIONAL CONDITIONS FOR WHICH SURVEILLANCE REQUIRED
10. Turbine Stop Valve - Closure	NA	M	R	1
11. Turbine Control Valve Fast Closure Valve Trip System Oil Pressure - Low	NA	M	R	1
12. Reactor Mode Switch Shutdown Position	NA	R	NA	1, 2, 3, 4, 5
13. Manual Scram	NA	M	NA	1, 2, 3, 4, 5

(a) neutron detectors may be excluded from CHANNEL CALIBRATION.

(b) The IRM and SRM channels shall be determined to overlap for at least 1/2 decades during each startup after entering OPERATIONAL CONDITION 2 and the IRM and APRM channels shall be determined to overlap for at least 1/2 decades during each controlled shutdown, if not performed within the previous 7 days.

(c) Deleted

(d) This calibration shall consist of the adjustment of the APRM channel to conform to the power values calculated by a heat balance during OPERATIONAL CONDITION 1 when THERMAL POWER > 25% of RATED THERMAL POWER. Adjust the APRM channel if the absolute difference is greater than 2% of RATED THERMAL POWER. The provisions of Specification 4.0.4 are not applicable provided the surveillance is performed within 12 hours after reaching 25% of RATED THERMAL POWER.

(e) This calibration shall consist of the adjustment of the APRM flow biased channel to conform to a calibrated flow signal.

(f) The LPRMs shall be calibrated at least once per 1000 PWD/T using the TIP system.

(g) Calibrate trip unit setpoint at least once per 31 days.

(h) Verify measured core flow (total core flow) to be greater than or equal to established core flow at the existing loop flow (APRM % flow).

(i) This calibration shall consist of verifying that the simulated thermal power time constant is within the limits specified in the COLR.

(j) This function is not required to be OPERABLE when the reactor pressure vessel head is removed per Specification 3.10.1.

(k) With any control rod withdrawn. Not applicable to control rods removed per Specification 3.9.10.1 or 3.9.10.2.

(l) This function is not required to be OPERABLE when Drywell Integrity is not required.

(m) The CHANNEL CALIBRATION shall exclude the flow reference transmitters, these transmitters shall be calibrated at least once per 18 months.

PERRY - UNIT 1

3/4 3-8

Amendment No. 47, 48

TABLE 3.3.2-1

## ISOLATION ACTUATION INSTRUMENTATION

TRIP FUNCTION	MINIMUM OPERABLE CHANNELS PER TRIP SYSTEM (a)	APPLICABLE OPERATIONAL CONDITION	ACTION
<u>1. PRIMARY CONTAINMENT ISOLATION</u>			
a. Reactor Vessel Water Level - Low, Level 2 (Division 1 & 2)	2	1, 2, 3 and #	20
b. Reactor Vessel Water Level - Low, Level 2 (Division 3)	4 <sup>(d)</sup>	1, 2, 3 and #	28
c. Drywell Pressure - High (Division 1 & 2)	2	1, 2, 3	20
d. Drywell Pressure - High (Division 3)	4 <sup>(d)</sup>	1, 2, 3	28
e. Containment and Drywell Purge Exhaust Plenum Radiation - High	2 <sup>(b)</sup>	1, 2, 3 and *	21
f. Reactor Vessel Water Level - Low, Level 1	2	1, 2, 3 and #	20
g. Manual Initiation (Division 1 & 2)	2 <sup>(c)</sup>	1, 2, 3 and *	22
h. Manual Initiation (Division 3)	1 <sup>(e)</sup>	1, 2, 3 and *	28
<u>2. MAIN STEAM ISOLATION</u>			
a. Reactor Vessel Water Level - Low, Level 1	2	1, 2, 3	20
b. Main Steam Line Radiation - High	2 <sup>(f)</sup>	***	29
c. Main Steam Line Pressure - Low	2	1	24
d. Main Steam Line Flow - High	2/line	1, 2, 3	23
e. Condenser Vacuum - Low	2	1, 2, 3	23
f. Main Steam Line Tunnel Temperature - High	2	1, 2, 3	23
g. Main Steam Line Tunnel $\Delta$ Temperature - High	2	1, 2, 3	23
h. Turbine Building Main Steam Line Temperature - High	2	1, 2, 3	23
i. Manual Initiation	2	1, 2, 3	22

PERRY - UNIT 1

3/4 3-11

Amendment No. AA, pp. 58

TABLE 3.3.2-1 (Continued)

ISOLATION ACTUATION INSTRUMENTATION

TRIP FUNCTION	MINIMUM OPERABLE CHANNELS PER TRIP SYSTEM (a)	APPLICABLE OPERATIONAL CONDITION	ACTION
<b>3. SECONDARY CONTAINMENT ISOLATION</b>			
a. Reactor Vessel Water Level - Low, Level 2	2	1, 2, 3 and 8	25
b. Drywell Pressure - High	2	1, 2, 3	25
c. Manual Initiation	2	1, 2, 3	22
<b>4. REACTOR WATER CLEANUP SYSTEM ISOLATION</b>			
a. Δ Flow - High	1	1, 2, 3	27
b. Δ Flow Timer	1	1, 2, 3	27
c. Equipment Area Temperature - High	1	1, 2, 3	27
d. Equipment Area Δ Temperature - High	1	1, 2, 3	27
e. Reactor Vessel Water Level - Low, Level 2	1	1, 2, 3	27
f. Main Steam Line Tunnel Ambient Temperature - High	2	1, 2, 3	27
g. Main Steam Line Tunnel Δ Temperature - High	1	1, 2, 3	27
h. SLCS Initiation	1	1, 2, 3	27
i. Manual Initiation	2	1, 2, 3	26

TABLE 3.3.2-1 (Continued)

ISOLATION ACTUATION INSTRUMENTATION  
ACTION

- ACTION 20 - In OPERATIONAL CONDITION 1, 2 or 3, be in at least HOT SHUTDOWN within 12 hours and in COLD SHUTDOWN within the next 24 hours. In OPERATIONAL CONDITION #, suspend CORE ALTERATIONS and operations with a potential for draining the reactor vessel.
- ACTION 21 - Close the affected system isolation valve(s) within one hour or:  
 a. In OPERATIONAL CONDITION 1, 2 or 3, be in at least HOT SHUTDOWN within the next 12 hours and in COLD SHUTDOWN within the following 24 hours.  
 b. In Operational Condition \*, suspend CORE ALTERATIONS, handling of irradiated fuel in the primary containment and operations with a potential for draining the reactor vessel.
- ACTION 22 - Restore the manual initiation function to OPERABLE status within 48 hours or:  
 a. In OPERATIONAL CONDITION 1, 2, or 3, be in at least HOT SHUTDOWN within the next 12 hours and in COLD SHUTDOWN within the following 24 hours.  
 b. In OPERATIONAL CONDITION \*, suspend CORE ALTERATIONS, operations with a potential for draining the reactor vessel, and handling of irradiated fuel in the primary containment.
- ACTION 23 - Be in at least STARTUP with the associated isolation valves closed within 6 hours or be in at least HOT SHUTDOWN within 12 hours and in COLD SHUTDOWN within the next 24 hours.
- ACTION 24 - Be in at least STARTUP within 6 hours.
- ACTION 25 - Verify SECONDARY CONTAINMENT INTEGRITY with the annulus exhaust gas treatment system operating within one hour.
- ACTION 26 - Restore the manual initiation function to OPERABLE status within 8 hours or close the affected system isolation valves within 1 hour and declare the affected system inoperable.
- ACTION 27 - Close the affected system isolation valves within one hour and declare the affected system inoperable.
- ACTION 28 - Within one hour lock the affected system isolation valves closed, or verify, by remote indication, that the valve(s) is closed and electrically disarmed, or isolate the penetration(s), and declare the affected system inoperable.
- ACTION 29 - Close the associated isolation valves within 6 hours or be in at least HOT SHUTDOWN within 12 hours.

NOTES

- \* When handling irradiated fuel in the primary containment and during CORE ALTERATIONS and operations with a potential for draining the reactor vessel.
- \*\* When any turbine stop valve is greater than 90% open and/or the key locked Condenser Low Vacuum Bypass Switch is in the normal position.
- # During CORE ALTERATIONS and operations with a potential for draining the reactor vessel.
- \*\*\* OPERATIONAL CONDITION 1 or 2 when the mechanical vacuum pump lines are not isolated.

TABLE 3.3.2-1 (Continued)

ISOLATION ACTUATION INSTRUMENTATION  
ACTION

NOTES (Continued)

- (a) A channel may be placed in an inoperable status for up to 2 hours for required surveillance without placing the trip system in the tripped condition provided at least one other OPERABLE channel in the same trip system is monitoring that parameter.
- (b) Containment and Drywell Purge System inboard and outboard isolation valves each use a separate two out of two isolation logic.
- (c) There is only one (1) RCIC manual initiation channel for RCIC system containment isolation valves.
- (d) Division 3 has only one trip system consisting of four channels logically combined in a one-out-of-two-twice configuration which only closes the HPCS Suppression Pool Test Return Valve (1E22-F023).
- (e) Division 3 Manual Initiation consists of a single channel in a single trip system.
- (f) This Trip Function no longer isolates the Main Steam Lines. The only isolation is of the mechanical pump lines (valves IN62-F130A and B), using a single trip system consisting of two channels configured in a one-out-of-two logic.

TABLE 3.3.2-3

ISOLATION SYSTEM INSTRUMENTATION RESPONSE TIME

<u>TRIP FUNCTION</u>	<u>RESPONSE TIME (Seconds)#</u>
<u>1. PRIMARY CONTAINMENT ISOLATION</u>	
a. Reactor Vessel Water Level - Low, Level 2	NA
b. Drywell Pressure - High	NA
c. Containment and Drywell Purge Exhaust Plenum Radiation - High <sup>(b)</sup>	≤ 10 <sup>(a)</sup>
d. Reactor Vessel Water Level - Low, Level 1	NA
e. Manual Initiation	NA
<u>2. MAIN STEAM LINE ISOLATION</u>	
a. Reactor Vessel Water Level - Low, Level 1	≤ 1.0*/≤ 10 <sup>(a)**</sup>
b. Main Steam Line Radiation - High	NA
c. Main Steam Line Pressure - Low	≤ 1.0*/≤ 10 <sup>(a)**</sup>
d. Main Steam Line Flow - High	≤ 0.5*/≤ 10 <sup>(a)**</sup>
e. Condenser Vacuum - Low	NA
f. Main Steam Line Tunnel Temperature - High	NA
g. Main Steam Line Tunnel Δ Temperature - High	NA
h. Turbine Building Main Steam Line Temperature - High	NA
i. Manual Initiation	NA
<u>3. SECONDARY CONTAINMENT ISOLATION</u>	
a. Reactor Vessel Water Level - Low, Level 2	NA
b. Drywell Pressure - High	NA
c. Manual Initiation	NA
<u>4. REACTOR WATER CLEANUP SYSTEM ISOLATION</u>	
a. Δ Flow - High	NA
b. Δ Flow Timer	NA
c. Equipment Area Temperature - High	NA
d. Equipment Area Δ Temperature - High	NA
e. Reactor Vessel Water Level - Low, Level 2	NA
f. Main Steam Line Tunnel Ambient Temperature - High	NA
g. Main Steam Line Tunnel Δ Temperature - High	NA
h. SLCS Initiation	NA
i. Manual Initiation	NA

TABLE 3.3.2-3 (Continued)

ISOLATION SYSTEM INSTRUMENTATION RESPONSE TIME

TRIP FUNCTION

RESPONSE TIME (Seconds)#

5. REACTOR CORE ISOLATION COOLING SYSTEM ISOLATION

a.	RCIC Steam Line Flow - High	NA
b.	RCIC Steam Supply Pressure - Low	NA
c.	RCIC Turbine Exhaust Diaphragm Pressure - High	NA
d.	RCIC Equipment Room Ambient Temperature - High	NA
e.	RCIC Equipment Room Δ Temperature - High	NA
f.	Main Steam Line Tunnel Ambient Temperature - High	NA
g.	Main Steam Line Tunnel Δ Temperature - High	NA
h.	Main Steam Line Tunnel Temperature Timer	NA
i.	RHR Equipment Room Ambient Temperature - High	NA
j.	RHR Equipment Room Δ Temperature - High	NA
k.	RCIC Steam Line Flow High Timer	NA
l.	Drywell Pressure - High	NA
m.	Manual Initiation	NA

6. RHR SYSTEM ISOLATION

a.	RHR Equipment Area Ambient Temperature - High	NA
b.	RHR Equipment Area Δ Temperature - High	NA
c.	RHR/RCIC Steam Line Flow - High	NA
d.	Reactor Vessel Water Level - Low, Level 3	NA
e.	Reactor Vessel (RHR Cut-in Permissive) Pressure - High	NA
f.	Drywell Pressure - High	NA
g.	Manual Initiation	NA

(a) Isolation system instrumentation response time specified includes the diesel generator starting and sequence loading delays.

(b) Radiation detectors are exempt from response time testing. Response time shall be measured from detector output or the input of the first electronic component in the channel.

\*Isolation system instrumentation response time for MSIVs only. No diesel generator delays assumed.

\*\*Isolation system instrumentation response time for associated valves except MSIVs.

#Isolation system instrumentation response time specified for the Trip Function actuating each containment isolation valve shall be added to the isolation time for each valve to obtain ISOLATION SYSTEM RESPONSE TIME for each valve.

TABLE 4.3.2.1-1  
ISOLATION ACTUATION INSTRUMENTATION SURVEILLANCE REQUIREMENTS

TRIP FUNCTION	CHANNEL CHECK	CHANNEL FUNCTIONAL TEST	CHANNEL CALIBRATION	OPERATIONAL CONDITIONS IN WHICH SURVEILLANCE REQUIRED
<b>1. PRIMARY CONTAINMENT ISOLATION</b>				
a. Reactor Vessel Water Level - Low, Level 2	S	M	R <sup>(b)</sup>	1, 2, 3 and #
b. Drywell Pressure - High	S	M	R <sup>(b)</sup>	1, 2, 3
c. Containment and Drywell Purge Exhaust Plenum Radiation - High	S	M	R	1, 2, 3 and *
d. Reactor Vessel Water Level - Low, Level 1	S	M	R <sup>(b)</sup>	1, 2, 3 and #
e. Manual Initiation	NA	R	NA	1, 2, 3 and *
<b>2. MAIN STEAM LINE ISOLATION</b>				
a. Reactor Vessel Water Level - Low, Level 1	S	M	R <sup>(b)</sup>	1, 2, 3
b. Main Steam Line Radiation - High	S	M	R	***
c. Main Steam Line Pressure - Low	S	M	R <sup>(b)</sup>	1
d. Main Steam Line Flow - High	S	M	R <sup>(b)</sup>	1, 2, 3
e. Condenser Vacuum - Low	S	M	R <sup>(b)</sup>	1, 2 <sup>**</sup> , 3 <sup>**</sup>
f. Main Steam Line Tunnel Temperature - High	S	M	R	1, 2, 3
g. Main Steam Line Tunnel Δ Temperature - High	S	M	R	1, 2, 3
h. Turbine Building Main Steam Line Temperature - High	S	M	R	1, 2, 3
i. Manual Initiation	NA	R	NA	1, 2, 3

PERRY - UNIT 1

3/4 3-23

Amendment No.58

TABLE 4.3.2.1-1 (Continued)  
ISOLATION ACTUATION INSTRUMENTATION SURVEILLANCE REQUIREMENTS

<u>TRIP FUNCTION</u>	<u>CHANNEL CHECK</u>	<u>CHANNEL FUNCTIONAL TEST</u>	<u>CHANNEL CALIBRATION</u>	<u>OPERATIONAL CONDITIONS IN WHICH SURVEILLANCE REQUIRED</u>
3. <u>SECONDARY CONTAINMENT ISOLATION</u>				
a. Reactor Vessel Water Level - Low, Level 2	S	M	R <sup>(b)</sup>	1, 2, 3 and #
b. Drywell Pressure - High	S	M	R <sup>(b)</sup>	1, 2, 3
c. Manual Initiation	NA	R	NA	1, 2, 3 and *
4. <u>REACTOR WATER CLEANUP SYSTEM ISOLATION</u>				
a. $\Delta$ Flow - High	S	M	R	1, 2, 3
b. $\Delta$ Flow Timer	NA	M	R	1, 2, 3
c. Equipment Area Temperature - High	S	M	R	1, 2, 3
d. Equipment Area Ventilation $\Delta$ Temperature - High	S	M	R	1, 2, 3
e. Reactor Vessel Water Level - Low, Level 2	S	M	R <sup>(b)</sup>	1, 2, 3
f. Main Steam Line Tunnel Ambient Temperature - High	S	M	R	1, 2, 3
g. Main Steam Line Tunnel $\Delta$ Temperature - High	S	M	R	1, 2, 3
h. SLCS Initiation	NA	M <sup>(a)</sup>	NA	1, 2, 3
i. Manual Initiation	NA	R	NA	1, 2, 3

TABLE 4.3.2.1-1 (Continued)

ISOLATION ACTUATION INSTRUMENTATION SURVEILLANCE REQUIREMENTS

<u>TRIP FUNCTION</u>	<u>CHANNEL CHECK</u>	<u>CHANNEL FUNCTIONAL TEST</u>	<u>CHANNEL CALIBRATION</u>	<u>OPERATIONAL CONDITIONS IN WHICH SURVEILLANCE REQUIRED</u>
5. <u>REACTOR CORE ISOLATION COOLING SYSTEM ISOLATION</u>				
a. RCIC Steam Line Flow - High	S	M	R <sup>(b)</sup>	1, 2, 3
b. RCIC Steam Supply Pressure - Low	S	M	R <sup>(b)</sup>	1, 2, 3
c. RCIC Turbine Exhaust Diaphragm Pressure - High	S	M	R <sup>(b)</sup>	1, 2, 3
d. RCIC Equipment Room Ambient Temperature - High	S	M	R	1, 2, 3
e. RCIC Equipment Room $\Delta$ Temperature - High	S	M	R	1, 2, 3
f. Main Steam Line Tunnel Ambient Temperature - High	S	M	R	1, 2, 3
g. Main Steam Line Tunnel $\Delta$ Temperature - High	S	M	R	1, 2, 3
h. Main Steam Line Tunnel Temperature Timer	NA	M	R	1, 2, 3
i. RHR Equipment Room Ambient Temperature - High	S	M	R	1, 2, 3
j. RHR Equipment Room $\Delta$ Temperature - High	S	M	R	1, 2, 3
k. RCIC Steam Line Flow High Timer	NA	M	R	1, 2, 3
l. Drywell Pressure - High	S	M	R <sup>(b)</sup>	1, 2, 3
m. Manual Initiation	NA	R	NA	1, 2, 3

TABLE 4.3.2.1-1 (Continued)  
ISOLATION ACTUATION INSTRUMENTATION SURVEILLANCE REQUIREMENTS

TRIP FUNCTION	CHANNEL CHECK	CHANNEL FUNCTIONAL TEST	CHANNEL CALIBRATION	OPERATIONAL CONDITIONS IN WHICH SURVEILLANCE REQUIRED
6. RHR SYSTEM ISOLATION				
a. RHR Equipment Area Ambient Temperature - High	S	M	R	1, 2, 3
b. RHR Equipment Area $\Delta$ Temperature - High	S	M	R	1, 2, 3
c. RHR/RCIC Steam Line Flow - High	S	M	R <sup>(b)</sup>	1, 2, 3
d. Reactor Vessel Water Level - Low, Level 3	S	M	R <sup>(b)</sup>	1, 2, 3
e. Reactor Vessel (RHR Cut-in Permissive) Pressure - High	S	M	R <sup>(b)</sup>	1, 2, 3
f. Drywell Pressure - High	S	M	R <sup>(b)</sup>	1, 2, 3
g. Manual Initiation	NA	R	NA	1, 2, 3

\* When handling irradiated fuel in the primary containment and during CORE ALTERATIONS and operations with a potential for draining the reactor vessel.

\*\* When any turbine stop valve is greater than 90% open and/or the key locked bypass switch is in the normal position.

# During CORE ALTERATION and operations with a potential for draining the reactor vessel.

(a) Each train or logic channel shall be tested at least every other 31 days.

(b) Calibrate trip unit setpoint at least once per 31 days.

\*\*\* OPERATIONAL CONDITION 1 or 2 when the mechanical vacuum pump lines are not isolated.