

Determination of the SDF Inventory through 9/30/2019

January 29, 2020

Prepared by: Savannah River Remediation LLC
Waste Disposal Authority
Aiken, SC 29808



APPROVALS

Author:



K.D. Dixon
Waste Disposal Authority
Savannah River Remediation LLC

1-29-2020

Date

Technical Review (per ENG.51):




W.B. Dean
Waste Disposal Authority
Savannah River Remediation LLC

1/29/2020

Date

Management Review:



K.H. Rosenberger
Waste Disposal Authority
Savannah River Remediation LLC

1/29/2020

Date

EXECUTIVE SUMMARY

This document provides the annual assessment of radionuclide inventory that has been received and disposed of (hereinafter referred to as: disposed inventory) at the Saltstone Disposal Facility (SDF). In addition, this document provides the actual inventory of radionuclides in the SDF accounting for decay of the radionuclides and the ingrowth of daughter products (hereinafter referred to as: current inventory). The inventories provided include all material sent to the SDF through the end of Fiscal Year (FY) 2019 (i.e., September 30, 2019). The current inventory in the SDF is significantly less than the disposed inventory due to the fact that the majority of the curies disposed of in the SDF are associated with Cs-137, which has an approximate 30-year half-life, along with its short-lived daughter product, Ba-137m, as well as short-lived radionuclides such as Ce-144 and Pr-144.

In FY2019 alone, 703 kilogallons (kgal) of low-level salt waste was transferred from Tank 50 to the Saltstone Production Facility (SPF). A total of 1,110 kgal of saltstone containing 3.92 kilocuries (kCi) was emplaced in the SDF. Saltstone was emplaced in Saltstone Disposal Unit (SDU) 6. Cesium-137 and its daughter product Ba-137m made up 89% and Sr-90 and its daughter product Y-90 made up 5% of the curies disposed of in FY2019. Table ES-1 summarizes these activities. During FY2019, 8.67 kCi decayed from the SDF inventory, resulting in a net decrease of 4.75 kCi to the SDF current inventory at the end of FY2019.

Table ES-1: FY2019 Saltstone Processing Summary

	SDU 6	Total
FY2019 Volume of Salt Waste Disposed (kgal)	703	703
FY2019 Volume of Saltstone Emplaced (kgal)	1,110 ^{a,b}	1,110
FY2019 Curies Disposed (kCi)	3.92	3.92


^a The volume of saltstone grout emplaced in SDU 6 is based on the ratio of salt solution to grout (0.633) per the methodology in X-CLC-Z-00086.

^b The volume of saltstone grout emplaced in SDU 6 does not include the minimal volume of non-radioactive grout (i.e., clean cap) that was placed into SDU 6 during start-up testing outside of this reporting period. [X-CLC-Z-00085]

Since initiation of operations in June 1990, the SDF has received and disposed of a combined total of 738 kCi in SDU 1 (Vault 1), SDU 2A, SDU 2B, SDU 3A, SDU 4 (Vault 4), SDU 5A, SDU 5B, and SDU 6. The current inventory in the SDF as of September 30, 2019 is 383 kCi. In FY2019, SDF received and disposed of 585 Ci of Cs-137/Ba-137m associated with the Tank Closure Cesium Removal (TCCR) process. [G-CLC-H-00138] The difference between the disposed inventory and current inventory is due to ongoing radioactive decay, principally of Cs-137 and Ba-137m which make up 96% of the SDF current inventory and Ce-144 and Pr-144 which comprised nearly 100% of curies disposed in SDU 1. Figure ES-1 shows the disposed inventory and the current inventory in each of the SDUs as of the end of FY2019. SDUs 1 and 4 have remaining disposal space but a decision has been made to discontinue future saltstone emplacement

operations to these units. [SRR-LWP-2009-00001] In FY2014, SDUs 2A and 2B were filled to their operational capacity; no further disposal to these units is anticipated. In FY2016 and FY2017, SDU 5A and SDU 5B, respectively, were filled to their operational capacity; no further disposal to these units is anticipated. At the beginning of FY2019, all of SDU Cell 3B and the remaining operational volume of SDU Cell 3A and SDU 6 were available to emplace saltstone. No saltstone grout was emplaced in SDU Cell 3A and Cell 3B in FY2019.

Figure ES-1: SDF Disposed Inventory and Current Inventory per SDU through FY2019

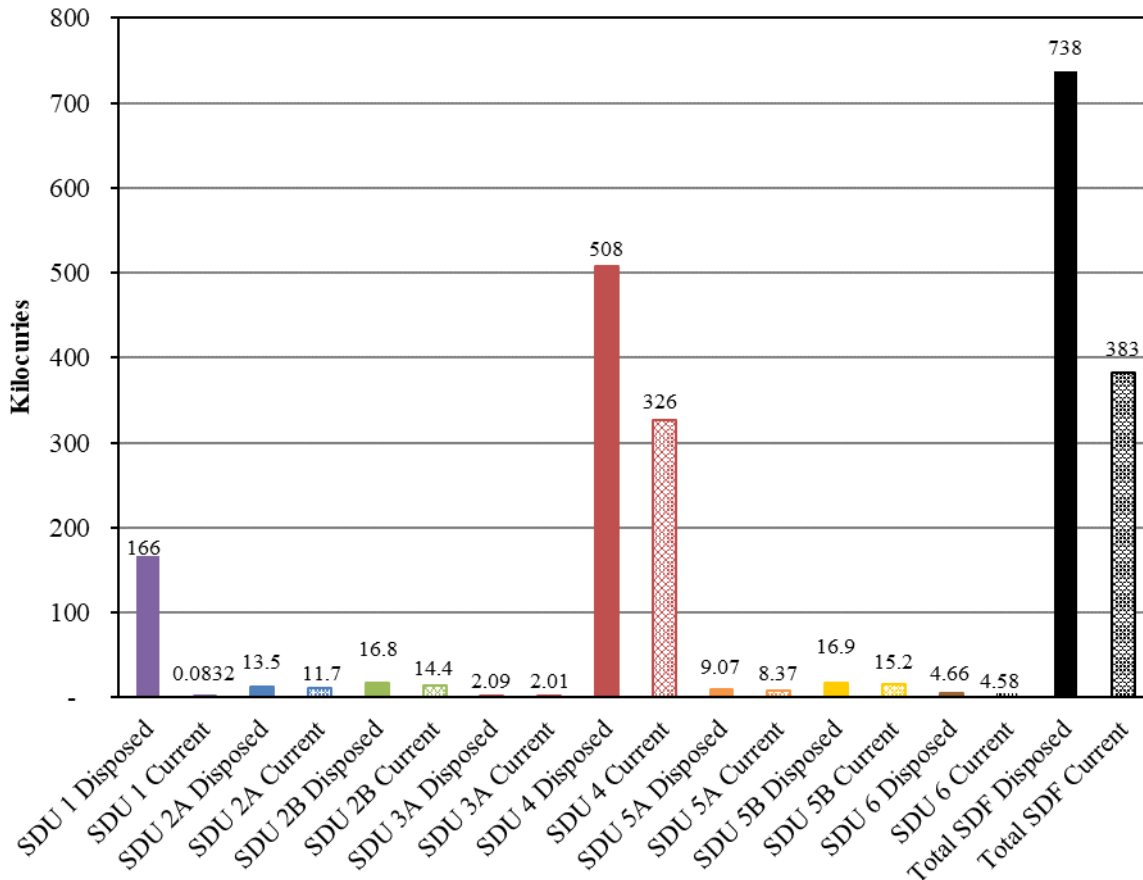

Note: SDU 4 inventory includes the inventory of 10,032 United States Naval Fuel Material Facility 55-gallon drums emplaced in Cell A. Additionally, radionuclides Ca-41, Mo-93, Ag-108m, Sm-147, Gd-152, Lu-174, Bi-210m, Pb-210, Am-242 and Cm-246 which were previously reported are included as part of the SDU 1 and 4 total inventories here as they were input into the SDF-WIDE model, but totals shown in Tables 2-1 and 2-5 no longer include these radionuclides since they are no longer measured or reported after being screened out as modeled SDF Inventory Radionuclides in SRR-CWDA-2009-00017.

In March 2007, the SDF began emplacing saltstone produced with decontaminated salt solution (DSS), a type of low-level salt waste associated with Interim Salt Processing (ISP). Interim Salt Processing includes salt treatment utilizing the Deliquification, Dissolution, and Adjustment (DDA) process and Actinide Removal Process (ARP) / Modular Caustic Side Solvent Extraction Unit (MCU) processes. Through September 30, 2019, 476 kCi associated with ISP have been disposed of in the SDF. As shown in Table ES-2, the current inventory in the SDF as of September 30, 2019 associated with ISP is 383 kCi. At the end of FY2019 there was a difference of less than three hundred Ci between the current inventory in the SDF since initiation of operations in 1990

(382.8 kCi), including ISP operations, and the current inventory in the SDF associated with ISP alone (382.5 kCi).

Table ES-2: SDF Inventory Summary FY1990 through FY2019

	All Salt Processing ^a FY1990-FY2019 kCi		Interim Salt Processing FY2007-FY2019 kCi	
	Disposed	Current	Disposed	Current
SDF Total	738	383	476	382
SDU 1	166	0.0832	0	0
SDU 2A	13.5	11.7	13.5	11.7
SDU 2B	16.8	14.4	16.8	14.4
SDU 3A	2.09	2.01	2.09	2.01
SDU 4 ^b	508	326	413	326
SDU 5A	9.07	8.37	9.07	8.37
SDU 5B	16.9	15.2	16.9	15.2
SDU 6	4.66	4.58	4.66	4.58

^a Includes Interim Salt Processing.

^b SDU 4 inventory includes the inventory of 10,032 United States Naval Fuel Material Facility 55-gallon drums emplaced in Cell A. [OPS-DTZ-90-0027]

TABLE OF CONTENTS

APPROVALS	i
EXECUTIVE SUMMARY	ii
TABLE OF CONTENTS.....	v
LIST OF TABLES.....	vi
LIST OF FIGURES	vii
ACRONYMS.....	viii
1.0 METHODOLOGY	1
2.0 SDF INVENTORY	2
2.1 <i>SDF Processing History</i>	2
2.2 <i>Current Inventory</i>	3
2.3 <i>Disposed Inventory</i>	13
2.3.1 FY2019 Saltstone Processing	14
2.3.2 Inventory Disposed During Interim Salt Processing	17
2.4 <i>Comparison of Current and Disposed Inventory</i>	19
3.0 REFERENCES	24

LIST OF TABLES

Table ES-1: FY2019 Saltstone Processing Summary.....	ii
Table ES-2: SDF Inventory Summary FY1990 through FY2019	iv
Table 1-1: Crosswalk for FY2019 Inputs	1
Table 2-1: SDU 1 Current Inventory on September 30, 2019.....	5
Table 2-2: SDU 2 Cell A Current Inventory on September 30, 2019.....	6
Table 2-3: SDU 2 Cell B Current Inventory on September 30, 2019.....	7
Table 2-4: SDU 3 Cell A Current Inventory on September 30, 2019.....	8
Table 2-5: SDU 4 Current Inventory on September 30, 2019	9
Table 2-6: SDU 5 Cell A Current Inventory on September 30, 2019.....	10
Table 2-7: SDU 5 Cell B Current Inventory on September 30, 2019.....	11
Table 2-8: SDU 6 Current Inventory on September 30, 2019	12
Table 2-9: FY2019 Saltstone Processing Summary	15
Table 2-10: SDU 6 Disposed Inventory in FY2019	16

LIST OF FIGURES

Figure ES-1: SDF Disposed Inventory and Current Inventory per SDU through FY2019	iii
Figure 2-1: SDF Current Inventory through FY2019	4
Figure 2-2: Current Inventory of SDUs on September 30, 2019	4
Figure 2-3: SDF Disposed Inventory through FY2019	13
Figure 2-4: Disposed Inventory of SDUs through FY2019	14
Figure 2-5: Cs-137 and Ba-137m and Sr-90 and Y-90 in Disposed Inventory during FY2019...	17
Figure 2-6: SDF Disposed Curies through FY2019 – Beginning with Start of Interim Salt Processing (DDA & ARP/MCU).....	18
Figure 2-7: Salt Waste Disposed through FY2019 – Beginning with Start of Interim Salt Processing (DDA & ARP/MCU).....	18
Figure 2-8: SDU 1 Disposed and Current Inventories through FY2019	19
Figure 2-9: SDU 2 Disposed and Current Inventories through FY2019	20
Figure 2-10: SDU 3 Disposed and Current Inventories through FY2019	20
Figure 2-11: SDU 4 Disposed and Current Inventories through FY2019	21
Figure 2-12: SDU 5 Disposed and Current Inventories through FY2019	21
Figure 2-13: SDU 6 Disposed and Current Inventories through FY2019	22
Figure 2-14: SDF Disposed/Current Inventory and Salt Waste Disposed through FY2019	23

ACRONYMS

ARP	Actinide Removal Process
DDA	Deliquification, Dissolution, and Adjustment
DOE	U.S. Department of Energy
DSS	Decontaminated Salt Solution
ETF	Effluent Treatment Facility
FY	Fiscal Year
HLW	High Level Waste
kCi	kilocuries
kgal	kilogallons
ISP	Interim Salt Processing
ITP	In-Tank Precipitation
MCU	Modular Caustic Side Solvent Extraction Unit
MST	Monosodium Titanate
SCDHEC	South Carolina Department of Health and Environmental Control
SDF	Saltstone Disposal Facility
SDF-WIDE	Saltstone Disposal Facility Waste Inventory Disposed Estimator
SDU	Saltstone Disposal Unit
SPF	Saltstone Production Facility
TCCR	Tank Closure Cesium Removal

1.0 METHODOLOGY

The Saltstone Disposal Facility (SDF) inventory presented in this document was determined using the Saltstone Disposal Facility Waste Inventory Disposed Estimator (SDF-WIDE) model. The SDF-WIDE model uses GoldSim software to perform inventory calculations and to track the volume and curies disposed of (with and without decay and ingrowth) within each Saltstone Disposal Unit (SDU). The *Saltstone Disposal Facility Waste Inventory Disposed Estimator Model Report* provides a detailed description of the approach and methodology used in the SDF-WIDE model. [SRR-CWDA-2015-00003]

The inputs for the SDF-WIDE model are the Tank 50 sample concentrations and the Tank 50 transfer volumes from Tank 50 to the Saltstone Production Facility (SPF). Table 1-1 below provides a crosswalk of the source information that was used to develop the inventory (i.e., disposed of and current) attributed to Fiscal Year (FY) 2019 processing. All historical SDF inputs used to develop the inventory (i.e., disposed of and current) since the beginning of SDF processing (i.e., 1990) through FY2014 can be found in the SDF-WIDE model report (SRR-CWDA-2015-00003) and subsequent inventory determinations (SRR-CWDA-2015-00149, SRR-CWDA-2016-00111, SRR-CWDA-2017-00079, SRR-CWDA-2018-00041, SRR-CWDA-2018-00072). All SDF inventory presented in this document was determined using SDF-WIDE model Version 1.11.

Table 1-1: Crosswalk for FY2019 Inputs

Source for Tank 50 Concentration Data	Sample Date	Source for Tank 50 Transfer Volume and Saltstone Volume Data ^a	Transfer Period
SRNL-STI-2018-00650	9/20/2018	X-CLC-Z-00086	10/1/2018 – 10/31/2018
SRNL-STI-2019-00148	11/6/2019	X-CLC-Z-00087	11/1/2018 – 1/31/2019
SRNL-STI-2019-00184	2/5/2019	X-CLC-Z-00088	2/1/2019 – 4/30/2019
SRNL-STI-2019-00381	5/7/2019	X-CLC-Z-00089	5/1/2019 – 7/31/2019

^a To alleviate some of the difficulties involved with sampling during the first month of the calendar quarters, Savannah River Remediation shifted the SDF Quarterly Report reporting period by one month beginning in the second quarter of FY2018. [SRR-ESH-2017-00130]

2.0 SDF INVENTORY

2.1 SDF Processing History

The SDF was originally permitted to receive treated salt solution from the In-Tank Precipitation (ITP) process. The permits were subsequently modified to provide for the treatment of residues from the Effluent Treatment Facility (ETF). The ITP process was designed to remove targeted radioisotopes from salt solution originating from High Level Waste (HLW) tanks prior to disposal at the SDF. The SPF began receiving radioactive waste for treatment in June 1990 with transfers from Tank 50; the resultant saltstone was emplaced in SDU 1. Saltstone operations continued through August 1998 with emplacement in SDU 1 and SDU 4 until the facility was put in “lay up” mode because of difficulties with the ITP process. [WSRC-RP-2008-00390] In addition to emplaced saltstone, SDU 4 contains 10,032 United States Naval Fuel Material Facility 55-gallon drums emplaced in Cell A in 1990. [OPS-DTZ-90-0027]

In early 2002, efforts began to restart saltstone production. In 2007, U.S. Department of Energy (DOE) received concurrence from the South Carolina Department of Health and Environmental Control (SCDHEC) to treat and dispose of low activity salt waste. This treatment included processing lower activity salt waste by Deliquification, Dissolution, and Adjustment (DDA) and processing slightly higher activity waste using an Actinide Removal Process (ARP) and a Modular Caustic Side Solvent Extraction Unit (MCU). The treated salt solution resulting from these processes is referred to as decontaminated salt solution (DSS). The two treatment methods, DDA and ARP/MCU, are collectively referred to as Interim Salt Processing (ISP). [WSRC-RP-2008-00390, DOE-WD-2005-001]

In March 2007, the first DDA material was transferred into Tank 50 and subsequently processed at the SPF and disposed of in SDU 4. [SPD-07-153] In April 2008, Tank 50 began receiving DSS from ARP/MCU, in addition to receipts of DDA material. Tank 50 continued to receive material from both DDA and ARP/MCU until September 2009 when the last DDA transfer into Tank 50 was completed. [LWO-PIT-2007-00083, SRR-LWP-2010-00007] Treatment of salt waste through ARP/MCU has continued through the end of FY2019. In May 2011, DOE formally declared that the DDA processing was complete at SPF. [OCC-11-0070]

As a part of ISP, the ARP was designed to have the capability to perform a single monosodium titanate (MST) strike. When mixed with liquid salt waste, MST sorbs to strontium and soluble actinides which allows them to be removed from the liquid waste stream via crossflow filtration. Experience from ARP operations showed that the crossflow filter often plugged with solids, limiting flow rates and requiring regular filter cleaning. The degraded filter throughput rate limited salt waste processing rates and also resulted in a higher volume and activity of radioactive material being disposed of in the SDF. In 2014, ARP/MCU operations began evaluating discontinuing MST strikes in the ARP to increase effectiveness of ARP/MCU. As filter cleaning activities contributed significantly more curies than that of the soluble strontium and actinides removed through MST strikes to be disposed in the SDF, it was expected and confirmed that discontinuing MST strikes as a part of ARP treatment would result not only in an increase in salt processing throughput but would have the added benefit of decreasing the overall curies disposed of in the SDF throughout the life of ISP. The quantity of soluble Sr-90 and soluble actinides in salt batches following MST suspension is anticipated to remain relatively low and the addition of these curies

to the SDF inventory will be insignificant from a risk perspective. In January 2016, MST strikes were discontinued in ARP/MCU. [SRR-CWDA-2015-00033, SRR-CWDA-2017-00030]

In 2019 SDF began receiving and disposing of material as part of the Tank Closure Cesium Removal (TCCR) process. TCCR is a demonstration project designed to support tank farm closure by removing cesium and suspended solids via filtering from salt waste. TCCR uses filters, ion exchange columns, and a specially engineered resin to remove cesium. Currently, waste from Tank 10 passes through the TCCR process capturing cesium within the resin. The decontaminated salt solution (DSS) from the TCCR process is transferred to Tank 11 and then transferred to SPF via Tank 50. In March and April of 2019, 158,000 gallons of DSS was transferred from Tank 11 to Tank 50 containing 585 Ci of Cs-137/Ba-137m. [G-CLC-H-00138] These 585 Ci were disposed of as part of the FY2019 SDF inventory.

This document provides the current inventory of the SDF through FY2019. The current inventory takes into account decay and ingrowth of daughter products. This document also provides the overall disposed inventory at the SDF through FY2019 and the disposed inventory specifically associated with ISP during the period from March 2007 through FY2019.

2.2 Current Inventory

The current inventory at the SDF is the inventory for all waste disposed from June 1990 through FY2019 taking into account radioactive decay and ingrowth. There was no material added to SDU 1, SDU 2A, SDU 2B, SDU 3A, SDU 4, SDU 5A, or SDU 5B in FY2019, therefore, the changes to those inventories since September 30, 2018 were only due to decay and ingrowth. There have been no waste receipts into SDU 3B as of FY2019. SDU 1 last received waste in September 1996, SDU 2A last received waste in June 2014, SDU 2B last received waste in July 2014, SDU 3A last received waste in May 2018, SDU 4 last received waste in November 2011, SDU 5A last received waste in August 2016, and SDU 5B last received waste in February 2017. There are no plans to receive any additional waste in SDU 1, SDU 2A, SDU 2B, SDU 4, SDU 5A and SDU 5B. [SRR-LWP-2009-00001, X-CLC-Z-00070, X-CLC-Z-00078, X-CLC-Z-00081, X-CLC-Z-00085] The SDF inputs for FY2019 processing are provided in Table 1-1. The SDF inputs from facility startup through FY2014 are provided in *Saltstone Disposal Facility Waste Inventory Disposed Estimator Model Report*, SRR-CWDA-2015-00003. FY2015, FY2016, FY2017, and FY2018 inputs are provided in annual inventory determination reports, SRR-CWDA-2015-00149, SRR-CWDA-2016-00111, SRR-CWDA-2017-00079, and SRR-CWDA-2018-00072, respectively, as well as in *Determination of Inventory for FY2019 Performance Assessment Modeling*, SRR-CWDA-2018-00041.

Figure 2-1 shows the current inventory at the SDF from FY1990 through FY2019. The current inventory (which includes decay and ingrowth) for the SDF through FY2019 is 383 kCi. The current inventory for each SDU on September 30, 2019 is presented in Figure 2-2.

The current inventory through FY2019 for each radionuclide within each SDU is provided in Tables 2-1 through 2-8. As shown in these tables, the largest contributors to the current inventory in SDUs 2A, 2B, 3A, 4, 5A, 5B, and 6 are Cs-137 and Ba-137m. Cs-137 and Ba-137m make up 99% of the current inventory in SDU 2A and SDU 2B, 98% of the current inventory in SDU 4, 97% of the current inventory in SDU 5B, 91% of the current inventory in SDU 3A, 89% of the current inventory in SDU 6, and 85% of the current inventory in SDU 5A. Tc-99 and H-3 are the largest contributors to the current inventory in SDU 1, with 60% of the inventory being Tc-99 and 15% of the inventory being H-3.

Figure 2-1: SDF Current Inventory through FY2019


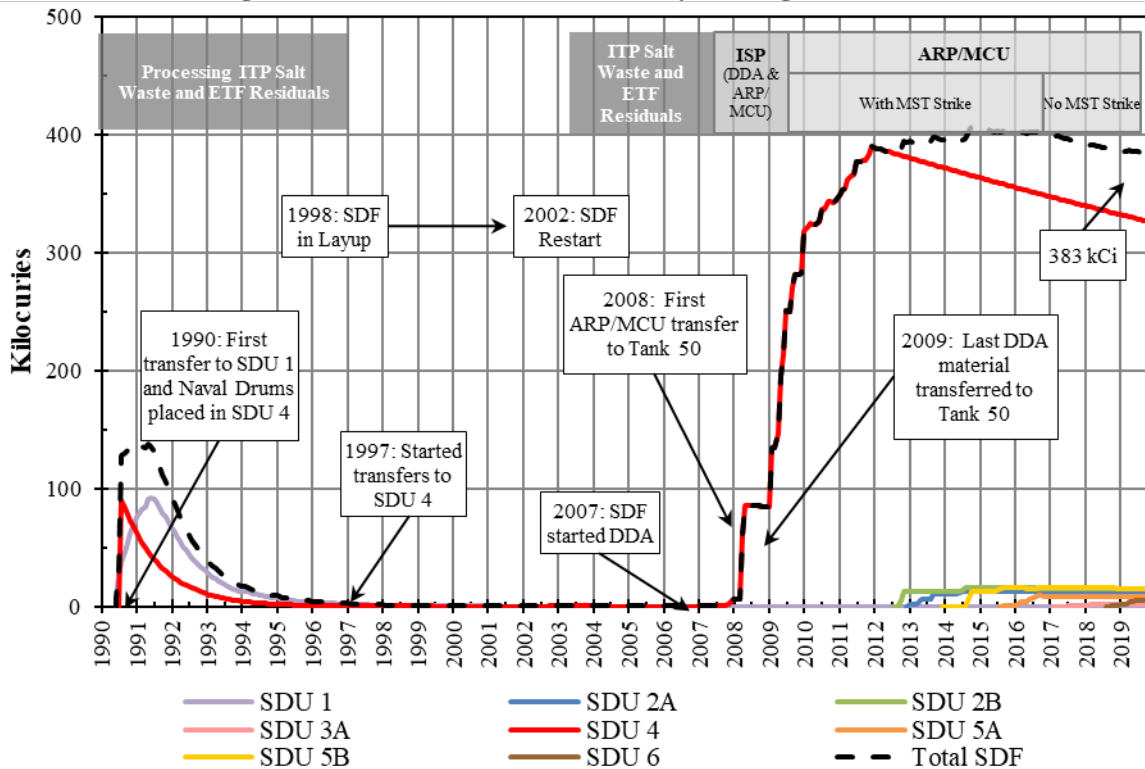


Figure 2-2: Current Inventory of SDUs on September 30, 2019

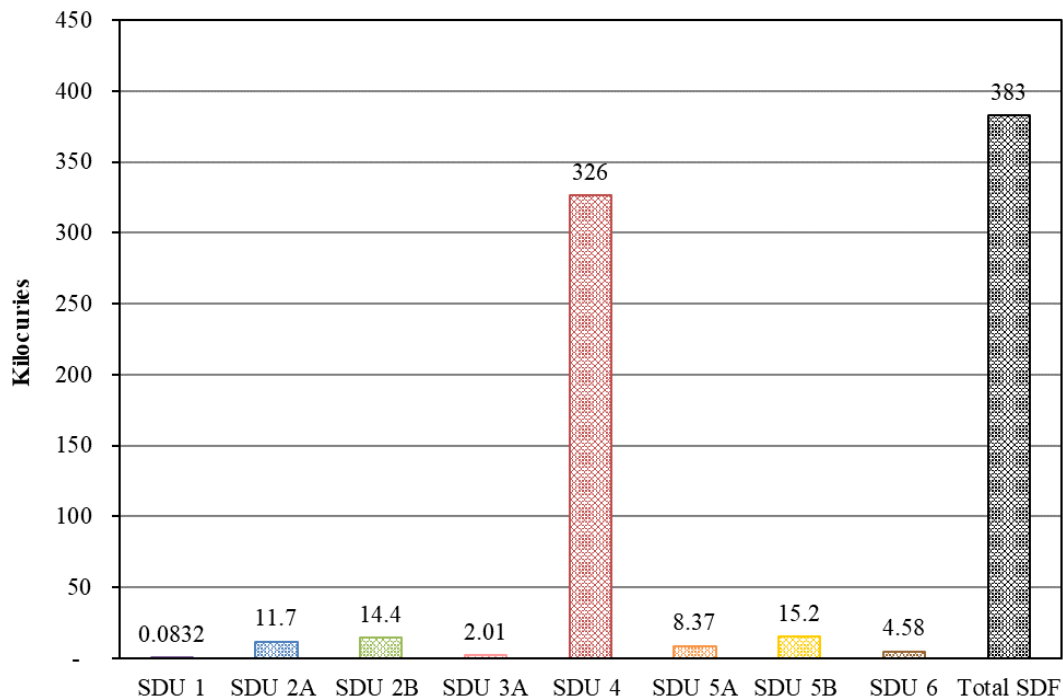

Note: Radionuclides Ca-41, Mo-93, Ag-108m, Sm-147, Gd-152, Lu-174, Bi-210m, Pb-210, Am-242 and Cm-246 which were previously reported are included as part of the SDU 1 and 4 total inventories here as they were input into the SDF-WIDE model, but totals shown in Tables 2-1 and 2-5 no longer include these radionuclides since they are no longer measured or reported after being screened out as modeled SDF Inventory Radionuclides in SRR-CWDA-2009-00017.

Table 2-1: SDU 1 Current Inventory on September 30, 2019

Radionuclide	Activity (Ci)	Radionuclide	Activity (Ci)
H-3	1.22E+01	Eu-155	2.84E-04
C-14	1.31E+00	Pt-193	1.61E+00
Na-22	8.88E-01	Ra-226	5.33E-07
Al-26	2.62E-01	Ra-228	7.68E-06
Cl-36	9.75E-08	Ac-227	1.74E-06
K-40	9.75E-08	Th-229	4.17E-04
Co-60	3.38E-04	Th-230	4.91E-05
Ni-59	2.30E-03	Th-232	7.69E-06
Ni-63	1.18E-01	Pa-231	3.16E-06
Se-79	3.44E-01	U-232	6.42E-04
Y-90	1.47E-02	U-233	7.76E-02
Sr-90	1.47E-02	U-234	9.93E-02
Zr-93	7.69E-01	U-235	2.51E-03
Nb-93m	7.55E-01	U-236	6.49E-03
Nb-94	2.03E-03	U-238	1.07E-02
Tc-99	4.93E+01	Np-237	3.94E-03
Ru-106	1.15E-07	Pu-238	7.08E-03
Rh-106	1.15E-07	Pu-239	1.43E-02
Pd-107	8.38E-03	Pu-240	1.35E-02
Sn-126	1.22E+00	Pu-241	1.86E-02
Sb-125	1.40E-02	Pu-242	1.57E-03
Sb-126	1.71E-01	Pu-244	1.01E-05
Sb-126m	1.22E+00	Am-241	2.01E-03
Te-125m	3.44E-03	Am-242m	6.75E-05
I-129	2.01E-01	Am-243	1.42E-03
Cs-134	4.34E-04	Cm-242	7.06E-06
Cs-135	4.95E-02	Cm-243	4.43E-04
Cs-137	6.06E+00	Cm-244	2.80E-03
Ba-137m	5.72E+00	Cm-245	2.72E-04
Pr-144	1.25E-06	Cm-247	1.59E-13
Ce-144	1.26E-06	Cm-248	1.66E-13
Pm-147	1.70E-03	Bk-249	3.39E-25
Sm-151	5.46E-03	Cf-249	8.76E-13
Eu-152	1.40E-03	Cf-251	3.08E-14
Eu-154	4.53E-04	Cf-252	2.83E-17
		Total	8.25E+01^a

^a Radionuclides Ca-41, Mo-93, Ag-108m, Sm-147, Gd-152, Lu-174, Bi-210m, Pb-210, Am-242 and Cm-246 which were previously reported as part of the SDU 1 total inventory and are included in the total inventory in other sections of this document equaling (8.31E+01 Ci); are no longer measured or reported as they were screened out as modeled SDF Inventory Radionuclides in SRR-CWDA-2009-00017 and are not included in this total. .

Table 2-2: SDU 2 Cell A Current Inventory on September 30, 2019

Radionuclide	Activity (Ci)	Radionuclide	Activity (Ci)
H-3	2.10E+00	Eu-155	2.62E-03
C-14	2.41E+00	Pt-193	1.53E+00
Na-22	6.08E-01	Ra-226	2.23E-06
Al-26	8.98E-04	Ra-228	1.26E-05
Cl-36	1.06E-04	Ac-227	6.94E-07
K-40	1.06E-04	Th-229	2.85E-03
Co-60	7.22E-04	Th-230	8.03E-04
Ni-59	9.16E-04	Th-232	1.26E-05
Ni-63	4.39E-02	Pa-231	1.25E-06
Se-79	1.34E-01	U-232	1.35E-02
Y-90	1.60E+01	U-233	9.51E-01
Sr-90	1.60E+01	U-234	6.16E-01
Zr-93	2.64E-01	U-235	9.93E-04
Nb-93m	2.77E-01	U-236	6.37E-03
Nb-94	1.90E-03	U-238	2.24E-02
Tc-99	1.14E+02	Np-237	1.60E-01
Ru-106	2.06E-04	Pu-238	5.63E+00
Rh-106	2.06E-04	Pu-239	5.28E-01
Pd-107	6.03E-03	Pu-240	5.28E-01
Sn-126	7.62E-01	Pu-241	1.53E+00
Sb-125	5.78E-02	Pu-242	3.76E-01
Sb-126	1.07E-01	Pu-244	1.74E-03
Sb-126m	7.62E-01	Am-241	6.44E-02
Te-125m	1.42E-02	Am-242m	9.89E-03
I-129	7.31E-02	Am-243	4.21E-03
Cs-134	5.83E-02	Cm-242	2.36E-04
Cs-135	3.36E-02	Cm-243	5.15E-04
Cs-137	5.93E+03	Cm-244	1.83E-01
Ba-137m	5.60E+03	Cm-245	1.45E-02
Pr-144	7.36E-07	Cm-247	1.67E-02
Ce-144	7.43E-07	Cm-248	1.20E-13
Pm-147	4.53E-02	Bk-249	2.06E-25
Sm-151	1.64E-01	Cf-249	1.78E-02
Eu-152	2.36E-04	Cf-251	1.34E-02
Eu-154	7.12E-03	Cf-252	1.94E-17
		Total	1.17E+04

Table 2-3: SDU 2 Cell B Current Inventory on September 30, 2019

Radionuclide	Activity (Ci)	Radionuclide	Activity (Ci)
H-3	1.78E+00	Eu-155	2.63E-03
C-14	2.44E+00	Pt-193	1.53E+00
Na-22	6.12E-01	Ra-226	1.31E-06
Al-26	8.56E-04	Ra-228	1.92E-05
Cl-36	1.30E-04	Ac-227	8.89E-07
K-40	1.30E-04	Th-229	6.26E-03
Co-60	8.08E-04	Th-230	4.20E-04
Ni-59	7.32E-04	Th-232	1.92E-05
Ni-63	3.50E-02	Pa-231	1.60E-06
Se-79	1.23E-01	U-232	1.31E-02
Y-90	1.97E+01	U-233	1.32E+00
Sr-90	1.97E+01	U-234	8.54E-01
Zr-93	3.83E-01	U-235	1.27E-03
Nb-93m	4.20E-01	U-236	8.85E-03
Nb-94	1.63E-03	U-238	2.65E-02
Tc-99	1.37E+02	Np-237	9.61E-02
Ru-106	1.50E-04	Pu-238	5.35E+00
Rh-106	1.50E-04	Pu-239	5.19E-01
Pd-107	6.06E-03	Pu-240	5.19E-01
Sn-126	6.83E-01	Pu-241	1.44E+00
Sb-125	1.83E-01	Pu-242	5.21E-01
Sb-126	9.56E-02	Pu-244	2.42E-03
Sb-126m	6.83E-01	Am-241	7.83E-02
Te-125m	4.48E-02	Am-242m	6.29E-03
I-129	6.83E-02	Am-243	4.88E-03
Cs-134	4.62E-02	Cm-242	1.50E-04
Cs-135	3.38E-02	Cm-243	5.12E-04
Cs-137	7.30E+03	Cm-244	2.08E-01
Ba-137m	6.89E+03	Cm-245	2.22E-02
Pr-144	7.44E-07	Cm-247	1.41E-02
Ce-144	7.51E-07	Cm-248	1.20E-13
Pm-147	3.51E-02	Bk-249	2.08E-25
Sm-151	1.44E-01	Cf-249	1.46E-02
Eu-152	2.37E-04	Cf-251	1.08E-02
Eu-154	1.28E-02	Cf-252	1.95E-17
		Total	1.44E+04

Table 2-4: SDU 3 Cell A Current Inventory on September 30, 2019

Radionuclide	Activity (Ci)	Radionuclide	Activity (Ci)
H-3	1.50E+00	Eu-155	3.14E-03
C-14	7.02E-01	Pt-193	3.67E-01
Na-22	1.38E-01	Ra-226	4.84E-08
Al-26	1.32E-04	Ra-228	2.21E-06
Cl-36	2.50E-04	Ac-227	3.08E-05
K-40	2.50E-04	Th-229	1.35E-04
Co-60	3.92E-04	Th-230	2.51E-05
Ni-59	3.04E-04	Th-232	2.21E-06
Ni-63	1.50E-02	Pa-231	3.28E-07
Se-79	4.18E-02	U-232	3.37E-03
Y-90	3.80E+01	U-233	1.95E-01
Sr-90	3.80E+01	U-234	1.26E-01
Zr-93	6.08E-02	U-235	2.60E-04
Nb-93m	1.21E-01	U-236	1.39E-03
Nb-94	4.45E-04	U-238	4.75E-03
Tc-99	5.70E+01	Np-237	1.42E-02
Ru-106	1.75E-03	Pu-238	3.16E+01
Rh-106	1.75E-03	Pu-239	7.86E-01
Pd-107	1.36E-03	Pu-240	7.86E-01
Sn-126	5.67E-01	Pu-241	1.01E+01
Sb-125	7.48E-03	Pu-242	7.69E-02
Sb-126	7.94E-02	Pu-244	3.57E-04
Sb-126m	5.67E-01	Am-241	4.40E-02
Te-125m	1.84E-03	Am-242m	5.36E-05
I-129	4.36E-02	Am-243	3.77E-04
Cs-134	3.90E-02	Cm-242	3.82E-06
Cs-135	7.58E-03	Cm-243	1.29E-04
Cs-137	9.42E+02	Cm-244	8.80E-03
Ba-137m	8.90E+02	Cm-245	2.05E-03
Pr-144	1.68E-07	Cm-247	8.39E-04
Ce-144	1.70E-07	Cm-248	2.70E-14
Pm-147	3.22E-02	Bk-249	4.65E-26
Sm-151	3.95E-02	Cf-249	8.79E-04
Eu-152	5.33E-05	Cf-251	6.09E-04
Eu-154	1.46E-03	Cf-252	4.38E-18
		Total	2.01E+03

Table 2-5: SDU 4 Current Inventory on September 30, 2019

Radionuclide	Activity (Ci)	Radionuclide	Activity (Ci)
H-3	3.23E+01	Eu-155	5.08E-01
C-14	6.51E+00	Pt-193	8.68E+00
Na-22	2.89E+00	Ra-226	4.12E-05
Al-26	9.75E-01	Ra-228	2.10E-04
Cl-36	1.49E-02	Ac-227	6.53E-05
K-40	1.49E-02	Th-229	3.63E+00
Co-60	5.53E-02	Th-230	4.90E-03
Ni-59	7.89E-02	Th-232	2.10E-04
Ni-63	3.09E+00	Pa-231	1.18E-04
Se-79	9.75E+00	U-232	1.16E-01
Y-90	2.27E+03	U-233	8.86E+00
Sr-90	2.27E+03	U-234	8.97E+00
Zr-93	8.15E+00	U-235	9.37E-02
Nb-93m	1.00E+03	U-236	8.34E-02
Nb-94	8.93E-02	U-238	7.93E-02
Tc-99	6.34E+02	Np-237	5.76E-01
Ru-106	8.49E-04	Pu-238	3.08E+02
Rh-106	8.49E-04	Pu-239	5.86E+01
Pd-107	3.75E-02	Pu-240	7.28E+01
Sn-126	2.22E+00	Pu-241	8.21E+01
Sb-125	1.69E+01	Pu-242	4.12E+00
Sb-126	3.11E-01	Pu-244	1.68E-02
Sb-126m	2.22E+00	Am-241	2.07E+01
Te-125m	4.14E+00	Am-242m	1.89E-02
I-129	2.77E-01	Am-243	5.18E-01
Cs-134	7.58E-01	Cm-242	7.75E-04
Cs-135	1.73E+00	Cm-243	7.96E-03
Cs-137	1.63E+05	Cm-244	3.02E+01
Ba-137m	1.54E+05	Cm-245	7.78E-01
Pr-144	5.34E-05	Cm-247	1.06E-01
Ce-144	5.39E-05	Cm-248	7.43E-13
Pm-147	2.21E+00	Bk-249	3.60E-24
Sm-151	1.94E+01	Cf-249	2.76E-01
Eu-152	6.69E-02	Cf-251	9.29E-02
Eu-154	2.70E+00	Cf-252	1.43E-16
		Total	3.23E+05^a

Note: SDU 4 inventory includes the inventory of 10,032 United States Naval Fuel Material Facility 55-gallon drums emplaced in Cell A. [OPS-DTZ-90-0027]

^a Radionuclides Ca-41, Mo-93, Ag-108m, Sm-147, Gd-152, Lu-174, Bi-210m, Pb-210, Am-242 and Cm-246, which were previously reported as part of the SDU 4 total inventory and are included in the total inventory in other sections of this document (3.26E+05 Ci), are no longer measured or reported as they were screened out as modeled SDF Inventory Radionuclides in SRR-CWDA-2009-00017 and are not included in this total.

Table 2-6: SDU 5 Cell A Current Inventory on September 30, 2019

Radionuclide	Activity (Ci)	Radionuclide	Activity (Ci)
H-3	5.12E+00	Eu-155	1.25E-02
C-14	3.18E+00	Pt-193	1.70E+00
Na-22	6.50E-01	Ra-226	4.19E-07
Al-26	1.02E-03	Ra-228	1.35E-05
Cl-36	3.10E-03	Ac-227	4.13E-05
K-40	3.10E-03	Th-229	5.33E-04
Co-60	1.90E-02	Th-230	1.93E-04
Ni-59	1.26E-03	Th-232	1.35E-05
Ni-63	6.14E-02	Pa-231	1.93E-06
Se-79	2.72E-01	U-232	1.42E-02
Y-90	4.70E+02	U-233	1.17E+00
Sr-90	4.70E+02	U-234	7.56E-01
Zr-93	3.05E-01	U-235	1.53E-03
Nb-93m	5.23E-01	U-236	7.82E-03
Nb-94	2.66E-03	U-238	3.28E-02
Tc-99	1.75E+02	Np-237	8.51E-02
Ru-106	2.43E-03	Pu-238	7.47E+01
Rh-106	2.43E-03	Pu-239	1.86E+00
Pd-107	6.46E-03	Pu-240	1.86E+00
Sn-126	1.65E+00	Pu-241	2.42E+01
Sb-125	2.63E-02	Pu-242	4.61E-01
Sb-126	2.31E-01	Pu-244	2.14E-03
Sb-126m	1.65E+00	Am-241	1.64E-01
Te-125m	6.44E-03	Am-242m	9.99E-04
I-129	1.39E-01	Am-243	3.91E-03
Cs-134	1.49E-01	Cm-242	1.59E-05
Cs-135	3.60E-02	Cm-243	5.90E-04
Cs-137	3.67E+03	Cm-244	9.05E-02
Ba-137m	3.47E+03	Cm-245	1.50E-02
Pr-144	7.81E-07	Cm-247	2.13E-02
Ce-144	7.89E-07	Cm-248	1.28E-13
Pm-147	1.06E-01	Bk-249	2.17E-25
Sm-151	2.54E-01	Cf-249	2.22E-02
Eu-152	2.53E-04	Cf-251	1.68E-02
Eu-154	3.68E-03	Cf-252	2.07E-17
		Total	8.37E+03

Table 2-7: SDU 5 Cell B Current Inventory on September 30, 2019

Radionuclide	Activity (Ci)	Radionuclide	Activity (Ci)
H-3	3.14E+00	Eu-155	5.75E-03
C-14	3.78E+00	Pt-193	1.67E+00
Na-22	6.54E-01	Ra-226	4.45E-07
Al-26	8.59E-04	Ra-228	2.26E-05
Cl-36	7.71E-04	Ac-227	6.83E-05
K-40	1.72E-03	Th-229	4.99E-04
Co-60	8.78E-04	Th-230	1.78E-04
Ni-59	5.15E-04	Th-232	2.26E-05
Ni-63	2.50E-02	Pa-231	1.60E-06
Se-79	1.68E-01	U-232	1.94E-02
Y-90	1.17E+02	U-233	1.07E+00
Sr-90	1.17E+02	U-234	6.87E-01
Zr-93	2.86E-01	U-235	1.27E-03
Nb-93m	3.13E-01	U-236	7.18E-03
Nb-94	2.06E-03	U-238	2.85E-02
Tc-99	1.20E+02	Np-237	7.76E-02
Ru-106	1.12E-03	Pu-238	2.58E+01
Rh-106	1.12E-03	Pu-239	7.39E-01
Pd-107	6.42E-03	Pu-240	7.39E-01
Sn-126	9.47E-01	Pu-241	8.00E+00
Sb-125	1.89E-02	Pu-242	4.21E-01
Sb-126	1.33E-01	Pu-244	1.95E-03
Sb-126m	9.47E-01	Am-241	6.56E-02
Te-125m	4.62E-03	Am-242m	8.24E-04
I-129	8.68E-02	Am-243	9.21E-03
Cs-134	1.35E-01	Cm-242	1.37E-05
Cs-135	3.58E-02	Cm-243	5.73E-04
Cs-137	7.59E+03	Cm-244	1.03E-01
Ba-137m	7.16E+03	Cm-245	1.31E-02
Pr-144	8.10E-07	Cm-247	1.77E-02
Ce-144	8.18E-07	Cm-248	1.27E-13
Pm-147	8.42E-02	Bk-249	2.25E-25
Sm-151	2.10E-01	Cf-249	1.83E-02
Eu-152	2.52E-04	Cf-251	1.51E-02
Eu-154	3.84E-03	Cf-252	2.08E-17
		Total	1.52E+04

Table 2-8: SDU 6 Current Inventory on September 30, 2019

Radionuclide	Activity (Ci)	Radionuclide	Activity (Ci)
H-3	3.50E+00	Eu-155	7.10E-04
C-14	1.29E+00	Pt-193	9.26E-01
Na-22	3.41E-01	Ra-226	1.25E-07
Al-26	4.80E-04	Ra-228	8.45E-06
Cl-36	8.09E-04	Ac-227	4.21E-07
K-40	2.27E-03	Th-229	2.25E-03
Co-60	4.81E-04	Th-230	1.76E-04
Ni-59	6.51E-04	Th-232	8.45E-06
Ni-63	3.24E-02	Pa-231	7.58E-07
Se-79	7.76E-02	U-232	6.43E-03
Y-90	1.23E+02	U-233	5.50E-01
Sr-90	1.23E+02	U-234	3.62E-01
Zr-93	2.49E-01	U-235	6.01E-04
Nb-93m	3.08E-01	U-236	3.83E-03
Nb-94	8.52E-04	U-238	1.00E-02
Tc-99	1.35E+02	Np-237	4.00E-02
Ru-106	3.87E-03	Pu-238	7.47E+01
Rh-106	3.88E-03	Pu-239	1.92E+00
Pd-107	3.38E-03	Pu-240	1.92E+00
Sn-126	1.34E+00	Pu-241	2.35E+01
Sb-125	2.03E-02	Pu-242	2.17E-01
Sb-126	1.87E-01	Pu-244	1.01E-03
Sb-126m	1.34E+00	Am-241	3.76E-02
Te-125m	6.34E-03	Am-242m	7.43E-05
I-129	8.96E-02	Am-243	7.38E-04
Cs-134	1.58E-01	Cm-242	2.03E-05
Cs-135	1.15E-02	Cm-243	3.30E-04
Cs-137	2.10E+03	Cm-244	3.60E-02
Ba-137m	1.99E+03	Cm-245	1.93E-03
Pr-144	4.10E-07	Cm-247	6.43E-14
Ce-144	4.14E-07	Cm-248	6.71E-14
Pm-147	9.59E-02	Bk-249	1.14E-25
Sm-151	1.11E-01	Cf-249	3.72E-13
Eu-152	1.32E-04	Cf-251	1.27E-14
Eu-154	1.51E-03	Cf-252	1.08E-17
		Total	4.58E+03

2.3 Disposed Inventory

The disposed inventory at the SDF from startup in FY1990 through FY2019 is presented in Figures 2-3 and 2-4. The disposed inventory does not take into account decay or ingrowth and represents the number of curies transferred into the SDF. The total SDF disposed inventory through FY2019 is 738 kCi. The majority of this inventory was emplaced in SDU 4.

Figure 2-3: SDF Disposed Inventory through FY2019


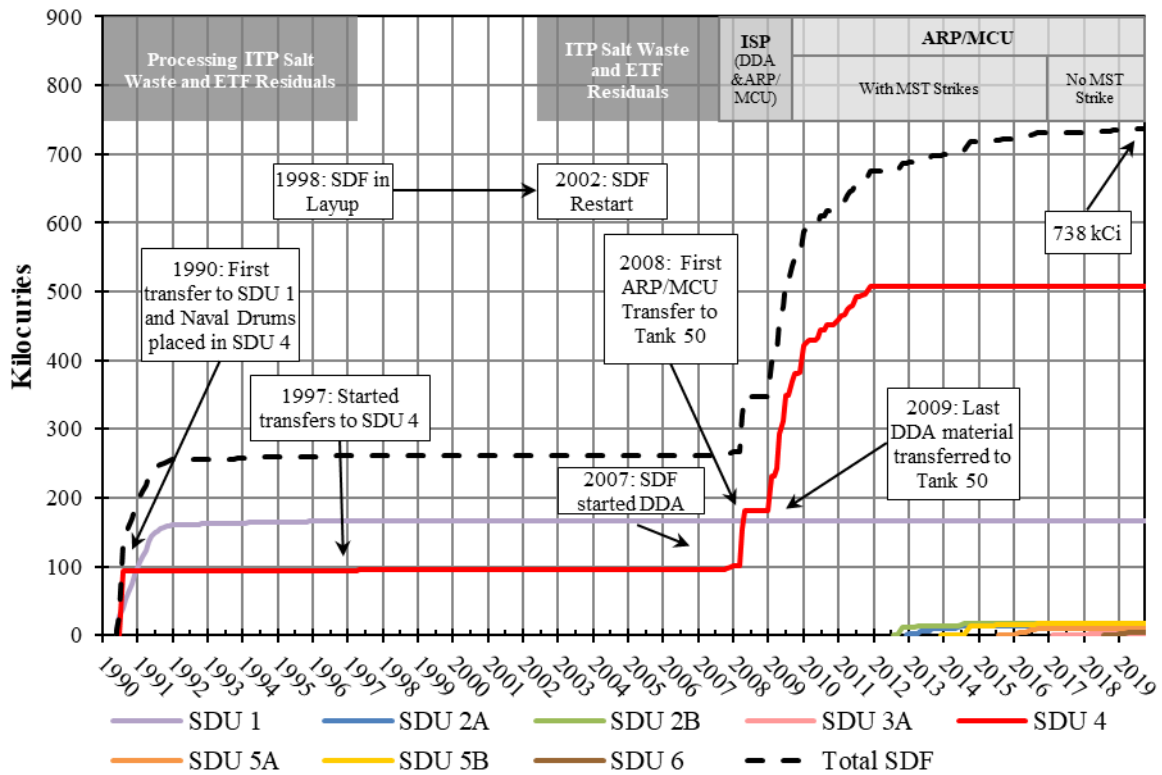


Figure 2-4: Disposed Inventory of SDUs through FY2019

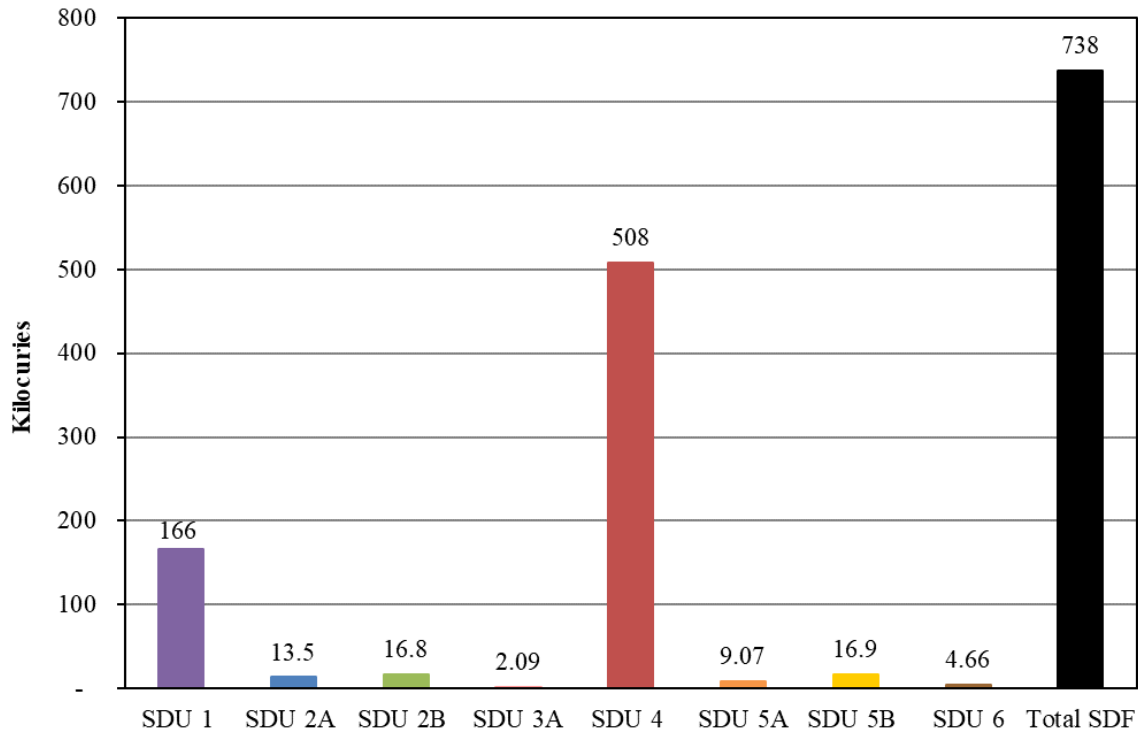

Note: Radionuclides Ca-41, Mo-93, Ag-108m, Sm-147, Gd-152, Lu-174, Bi-210m, Pb-210, Am-242 and Cm-246 are included as part of the SDU 1 and 4 total disposed inventory here as they were previously reported and input into the SDF-WIDE model. Additionally, SDU 4 inventory includes the inventory of 10,032 United States Naval Fuel Material Facility 55-gallon drums emplaced in Cell A. [OPS-DTZ-90-0027]

2.3.1 FY2019 Saltstone Processing

In FY2019 alone, 703 kgal of low-level salt waste was transferred from Tank 50 to the SPF. A total of 1,110 kgal of saltstone containing 3.92 kCi was emplaced in the SDF. Saltstone was emplaced in SDU 6. Input for these transfers is shown in Table 1-1. The entire SDF inventory underwent a total of 8.67 kCi of decay during FY2019, resulting in a net decrease of 4.75 kCi to the SDF current inventory at the end of FY2019.

Table 2-9 presents a summary of the processing done in FY2019. Table 2-10 presents the disposed inventory for each radionuclide within SDU 6 associated with FY2019 processing alone. As seen in Table 2-10 and Figure 2-5, Cs-137 and its daughter product Ba-137m make up 89% and Sr-90 and its daughter product Y-90 make up 5% of the curies disposed in FY2019.

Table 2-9: FY2019 Saltstone Processing Summary

	SDU 6	Total
FY2019 Volume of Salt Waste Disposed (kgal)	703	703
FY2019 Volume of Saltstone Emplaced (kgal)	1,110 ^{a,b}	1,110
FY2019 Curies Disposed (kCi)	3.92	3.92


^a The volume of saltstone grout emplaced in SDU 6 is based on the ratio of salt solution to grout (0.633) per the methodology in X-CLC-Z-00086.

^b The volume of saltstone grout emplaced in SDU 6 does not include the minimal volume of non-radioactive grout (i.e., clean cap) that was placed into SDU 6 during start-up testing outside of this reporting period. [X-CLC-Z-00085]

Table 2-10: SDU 6 Disposed Inventory in FY2019

Radionuclide	Activity (Ci)	Radionuclide	Activity (Ci)
H-3	3.64E+00	Eu-155	8.19E-04
C-14	1.29E+00	Pt-193	9.35E-01
Na-22	4.08E-01	Ra-226	7.86E-08
Al-26	4.80E-04	Ra-228	8.45E-06
Cl-36	8.09E-04	Ac-227	4.13E-07
K-40	2.27E-03	Th-229	2.21E-03
Co-60	5.28E-04	Th-230	1.74E-04
Ni-59	6.51E-04	Th-232	8.45E-06
Ni-63	3.26E-02	Pa-231	7.49E-07
Se-79	7.76E-02	U-232	6.47E-03
Y-90	1.25E+02	U-233	5.50E-01
Sr-90	1.25E+02	U-234	3.62E-01
Zr-93	2.49E-01	U-235	6.01E-04
Nb-93m	3.11E-01	U-236	3.83E-03
Nb-94	8.52E-04	U-238	1.00E-02
Tc-99	1.35E+02	Np-237	4.00E-02
Ru-106	6.13E-03	Pu-238	7.51E+01
Rh-106	6.13E-03	Pu-239	1.92E+00
Pd-107	3.38E-03	Pu-240	1.92E+00
Sn-126	1.34E+00	Pu-241	2.43E+01
Sb-125	2.39E-02	Pu-242	2.17E-01
Sb-126	1.87E-01	Pu-244	1.01E-03
Sb-126m	1.34E+00	Am-241	1.19E-02
Te-125m	2.39E-02	Am-242m	7.46E-05
I-129	8.96E-02	Am-243	7.38E-04
Cs-134	1.96E-01	Cm-242	6.11E-05
Cs-135	1.15E-02	Cm-243	3.35E-04
Cs-137	2.14E+03	Cm-244	3.68E-02
Ba-137m	2.02E+03	Cm-245	1.93E-03
Pr-144	7.63E-07	Cm-247	6.43E-14
Ce-144	7.63E-07	Cm-248	6.71E-14
Pm-147	1.15E-01	Bk-249	1.92E-25
Sm-151	1.11E-01	Cf-249	3.73E-13
Eu-152	1.37E-04	Cf-251	1.27E-14
Eu-154	1.59E-03	Cf-252	1.29E-17
		Total	4.66E+03

Figure 2-5: Cs-137 and Ba-137m and Sr-90 and Y-90 in Disposed Inventory during FY2019

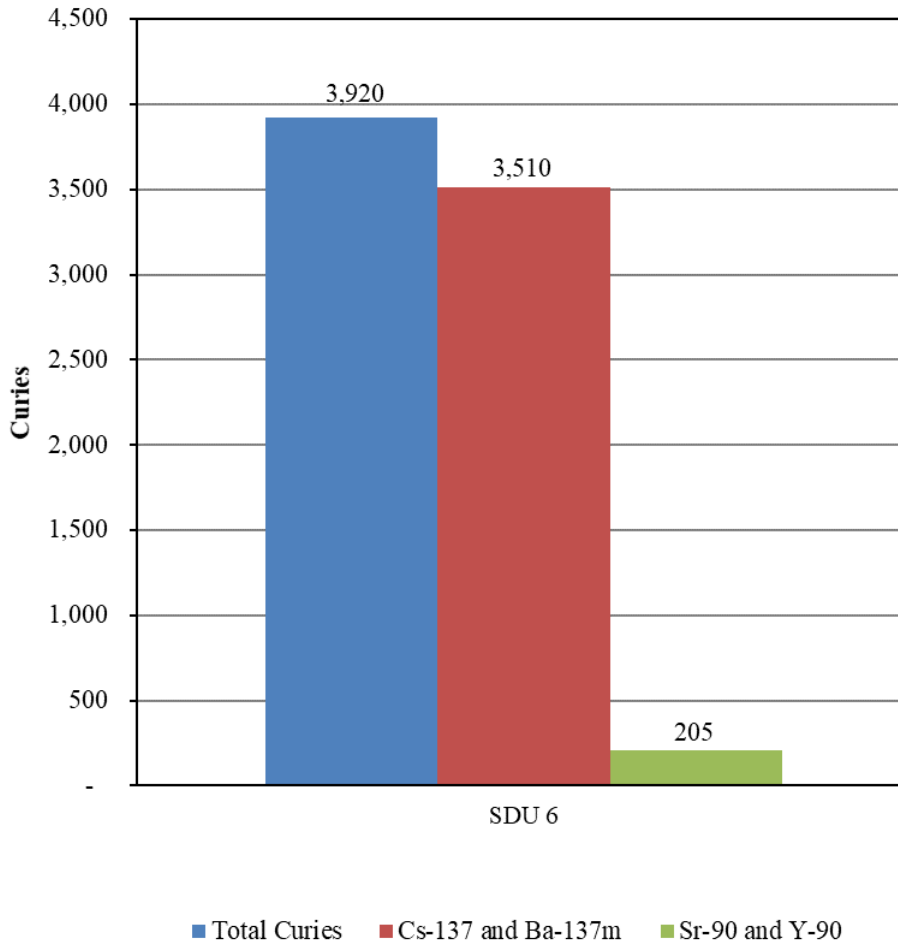

2.3.2 Inventory Disposed During Interim Salt Processing

In March 2007, the SDF began emplacing saltstone containing DSS associated with ISP. Figure 2-6 shows the SDF inventory disposed of during the ISP period. SDU 1 is not included because processing to SDU 1 ended in 1996, prior to the start of DDA. As shown in the figure, the total curies disposed from March 2007 through FY2019 is 476 kCi.

Note that although SDU 4 is the dominant disposal unit with respect to the total number of curies disposed since 2007 (see Figure 2-3), the other SDUs (SDU 2A, SDU 2B, SDU 3A, SDU 5A, SDU 5B, and SDU 6) have each received a considerable volume of DSS. SDUs 2A, 2B, 5A, and 5B are considered completely filled. Figure 2-7 depicts the total number of gallons of salt waste disposed at the SDF from March 2007 through FY2019. As shown in the figure, the total volume of salt waste disposed from March 2007 through FY2019 is 13,600 gal.

Figure 2-6: SDF Disposed Curies through FY2019 – Beginning with Start of Interim Salt Processing (DDA & ARP/MCU)


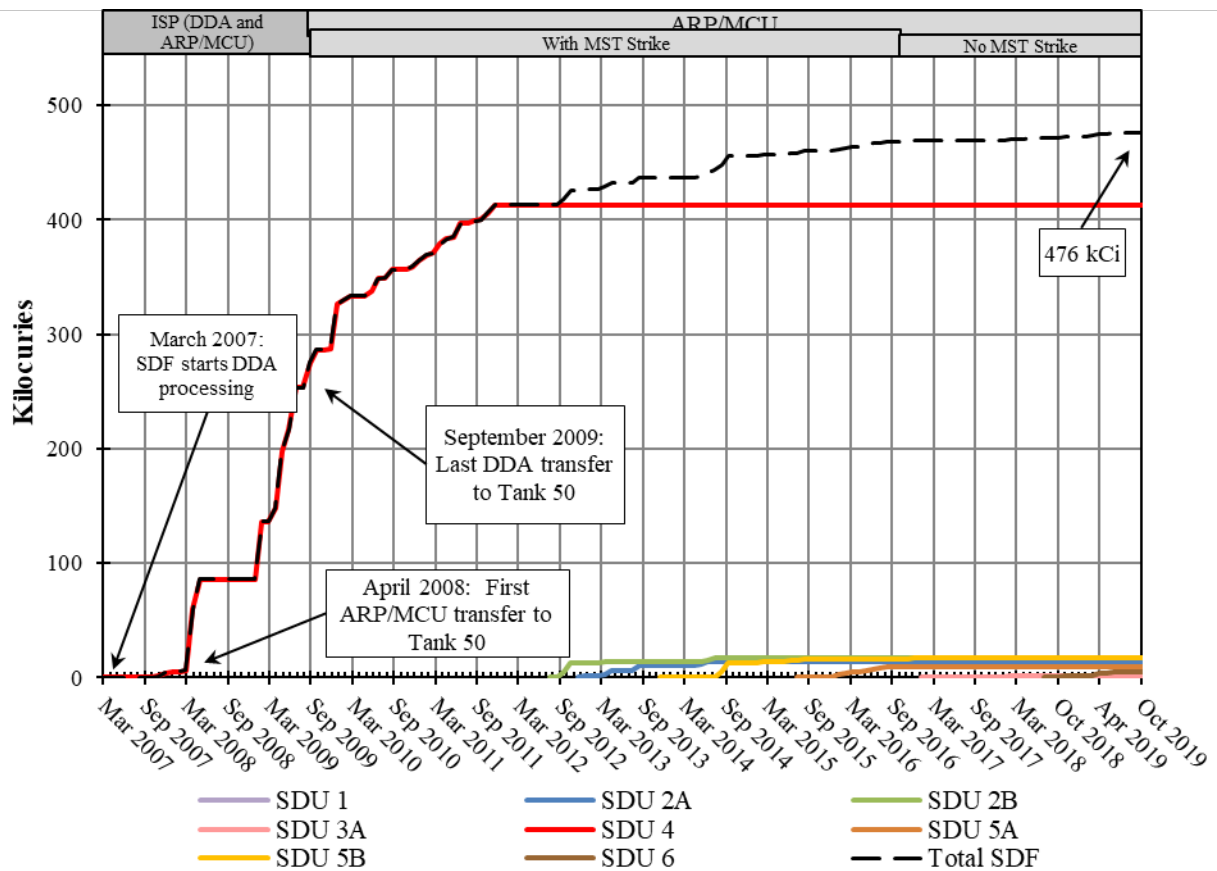


Figure 2-7: Salt Waste Disposed through FY2019 – Beginning with Start of Interim Salt Processing (DDA & ARP/MCU)

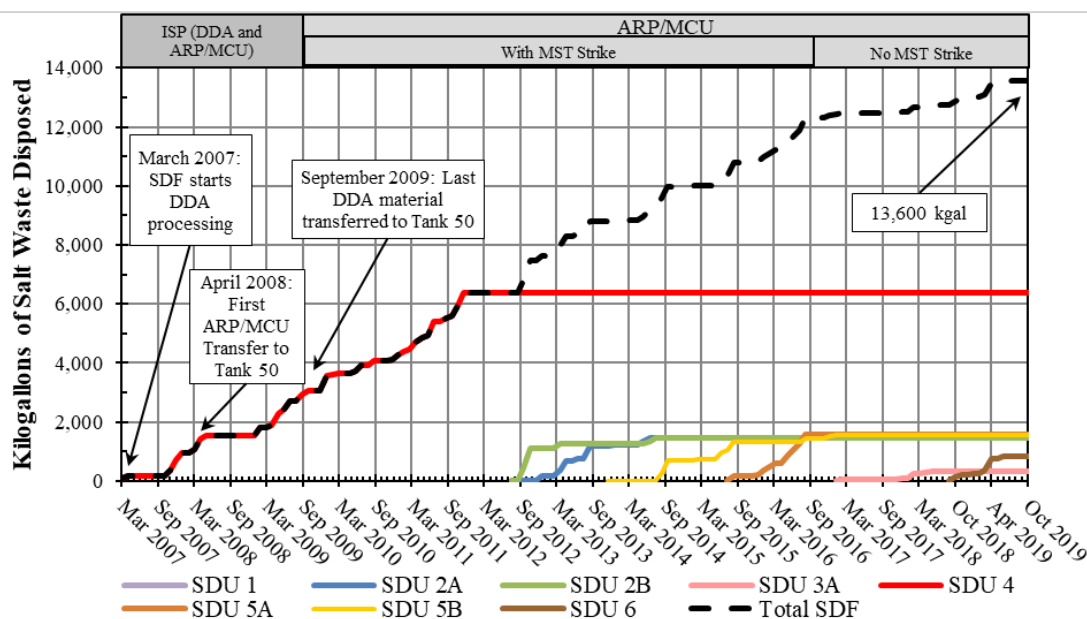

2.4 Comparison of Current and Disposed Inventory

Figures 2-1 and 2-3 present the SDF current inventory and disposed inventory, respectively, from FY1990 through FY2019. The data in Figures 2-1 and 2-3 have been reorganized by SDU to show a comparison between the current inventory and the disposed inventory. Figures 2-8 through 2-13 present both the current inventory and the disposed inventory for SDU 1, SDU 2, SDU 3, SDU 4, SDU 5, and SDU 6 from SDF start up in FY1990 through FY2019.

Figures 2-8 through 2-13 show that the largest delta between the current inventory and disposed inventory is for SDUs 1 and 4 which have stopped receiving any saltstone from SPF and had large quantities of radionuclides with short half-lives. Figure 2-14 presents the current and disposed inventory for each SDU along with the gallons of Tank 50 material (i.e., salt waste) disposed in each SDU. As seen in Figure 2-14, the inventory in SDU 4 makes up the majority of both the disposed and current inventories.

Figure 2-8: SDU 1 Disposed and Current Inventories through FY2019

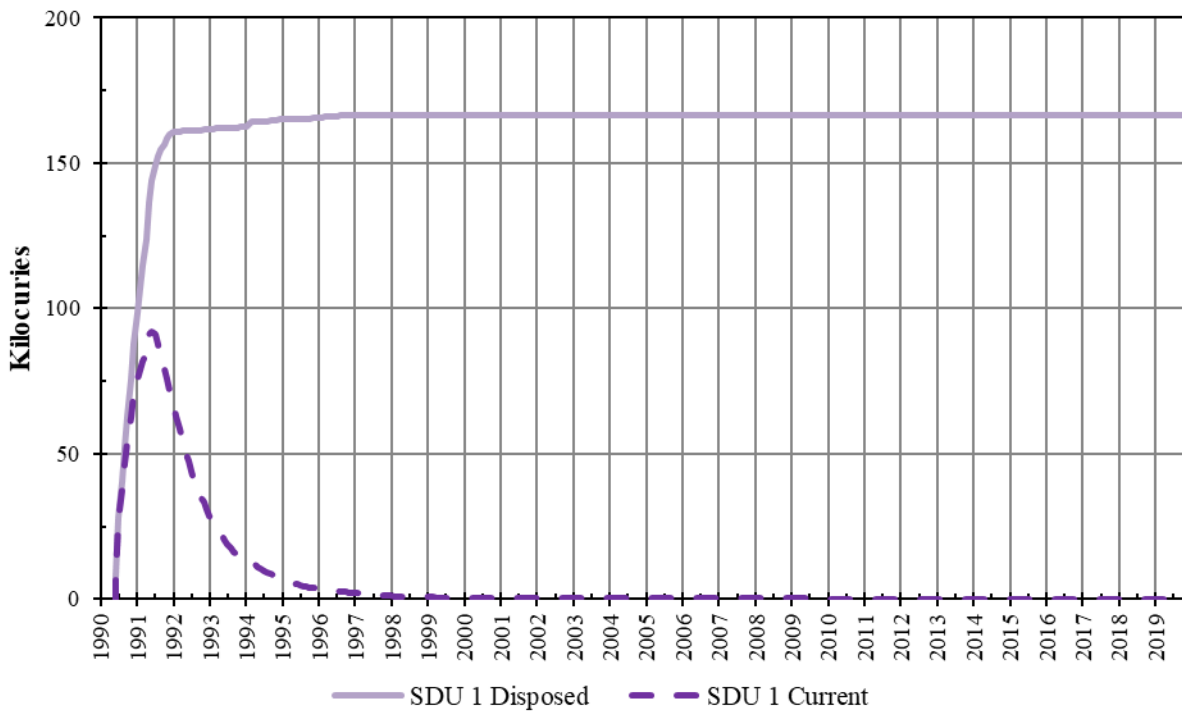


Figure 2-9: SDU 2 Disposed and Current Inventories through FY2019


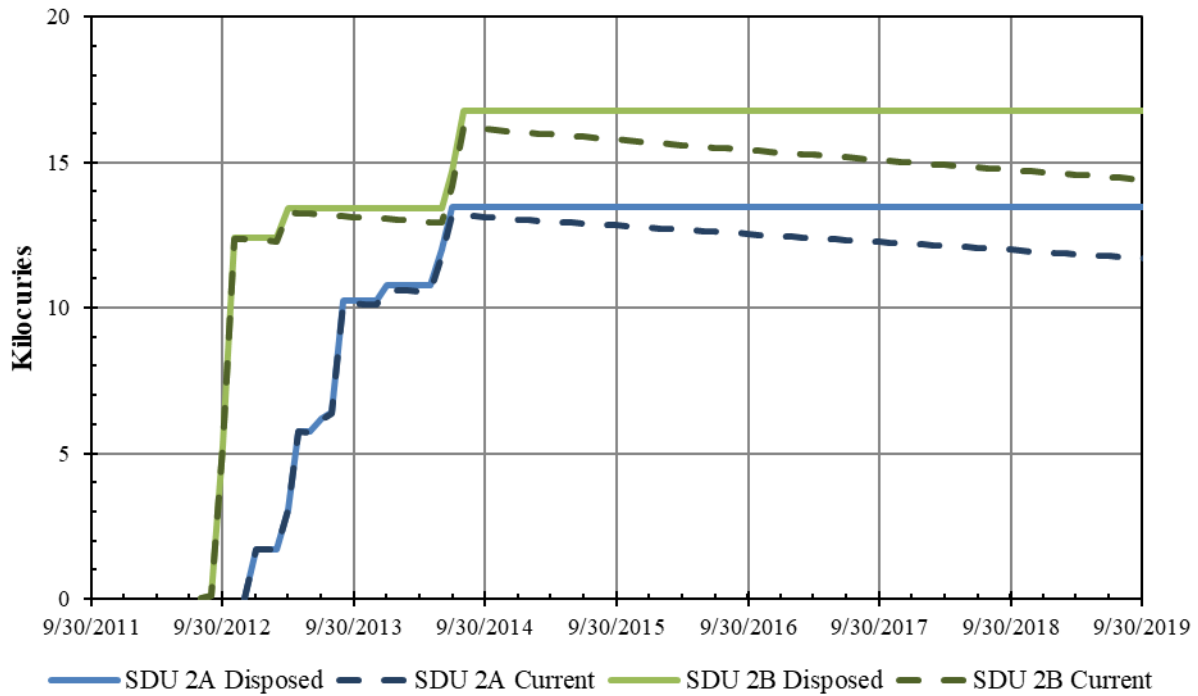


Figure 2-10: SDU 3 Disposed and Current Inventories through FY2019

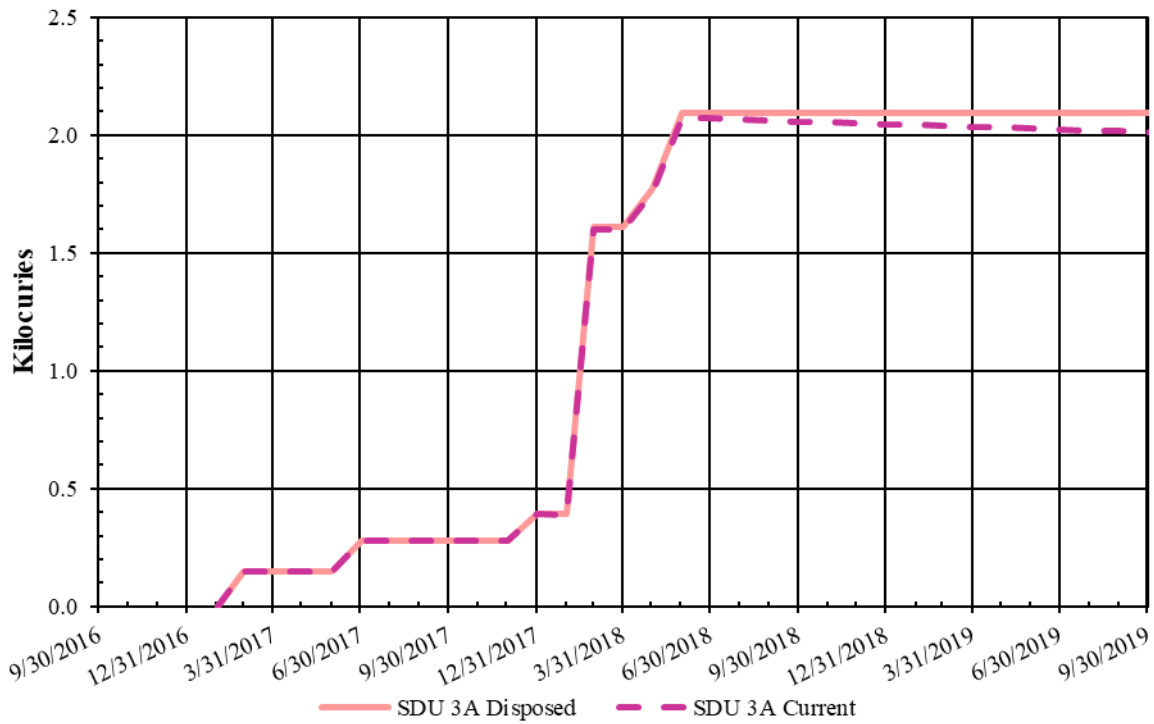

Note: SDU 3B has received no saltstone grout transfers as of 9/30/2019 and is therefore not included

Figure 2-11: SDU 4 Disposed and Current Inventories through FY2019

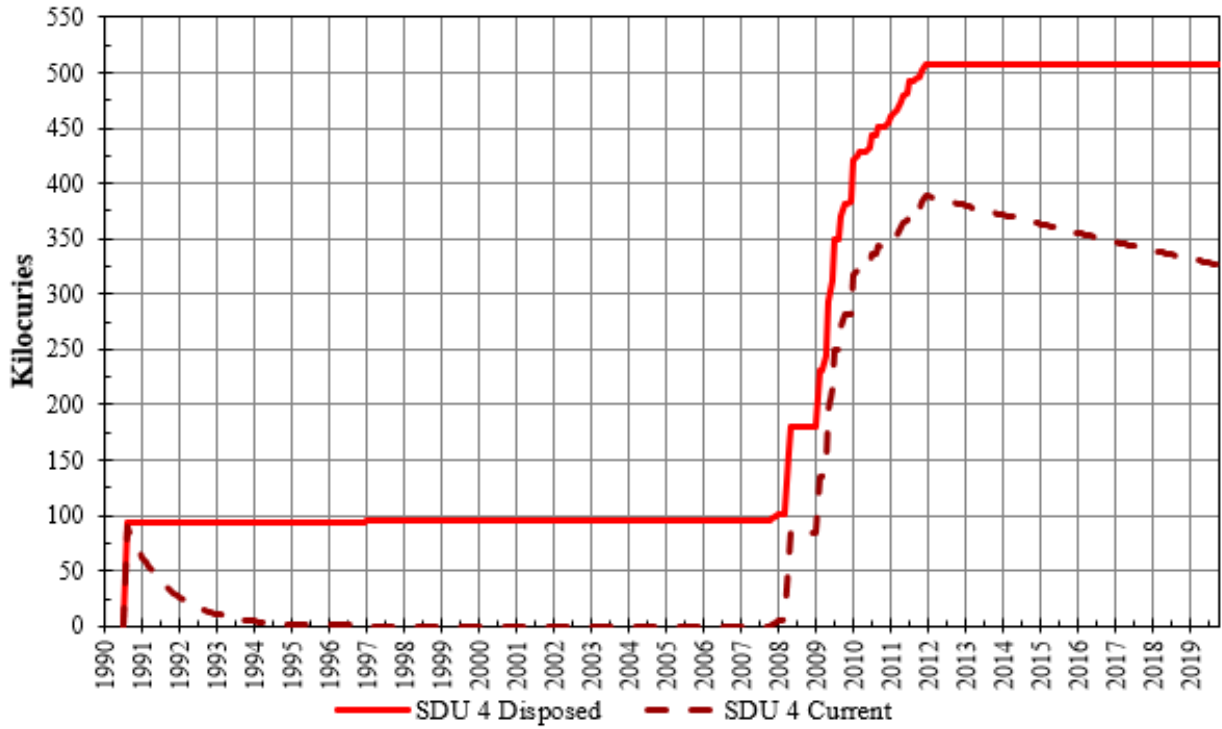


Figure 2-12: SDU 5 Disposed and Current Inventories through FY2019

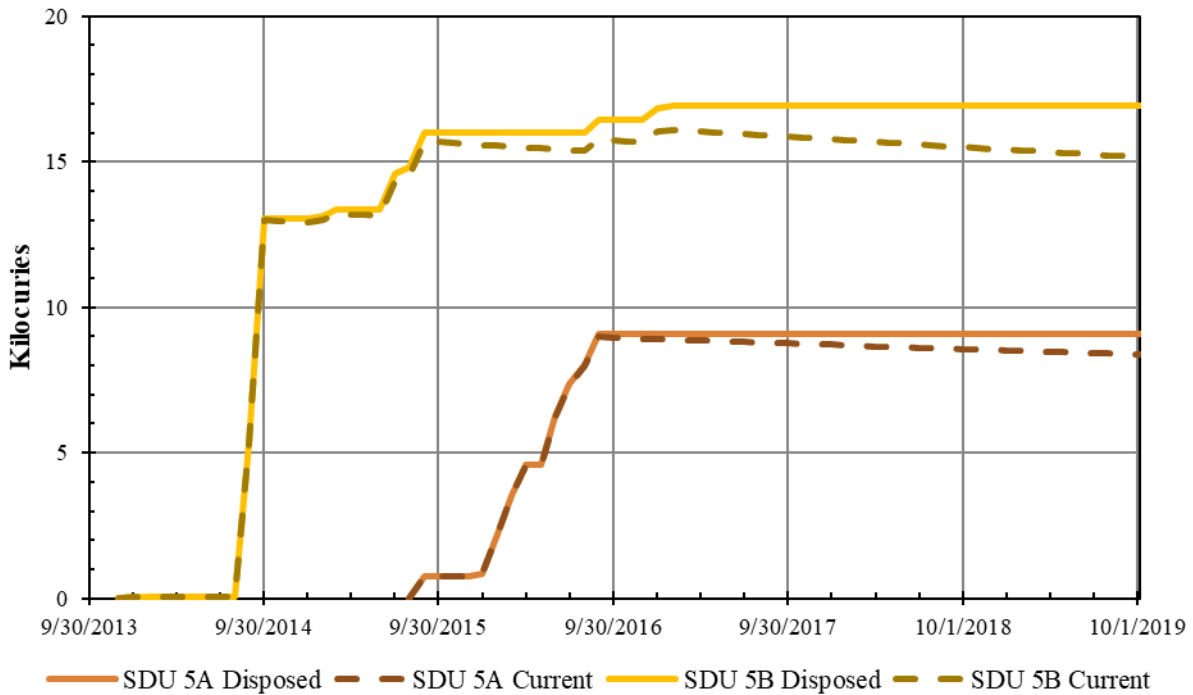


Figure 2-13: SDU 6 Disposed and Current Inventories through FY2019


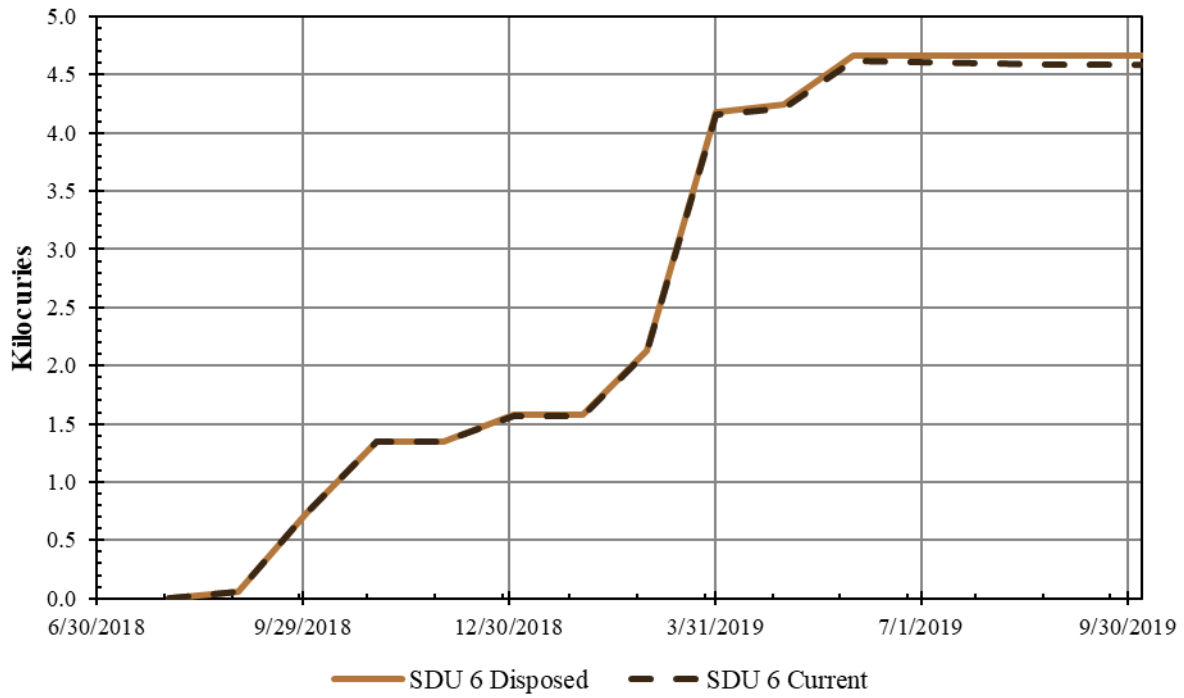


Figure 2-14: SDF Disposed/Current Inventory and Salt Waste Disposed through FY2019

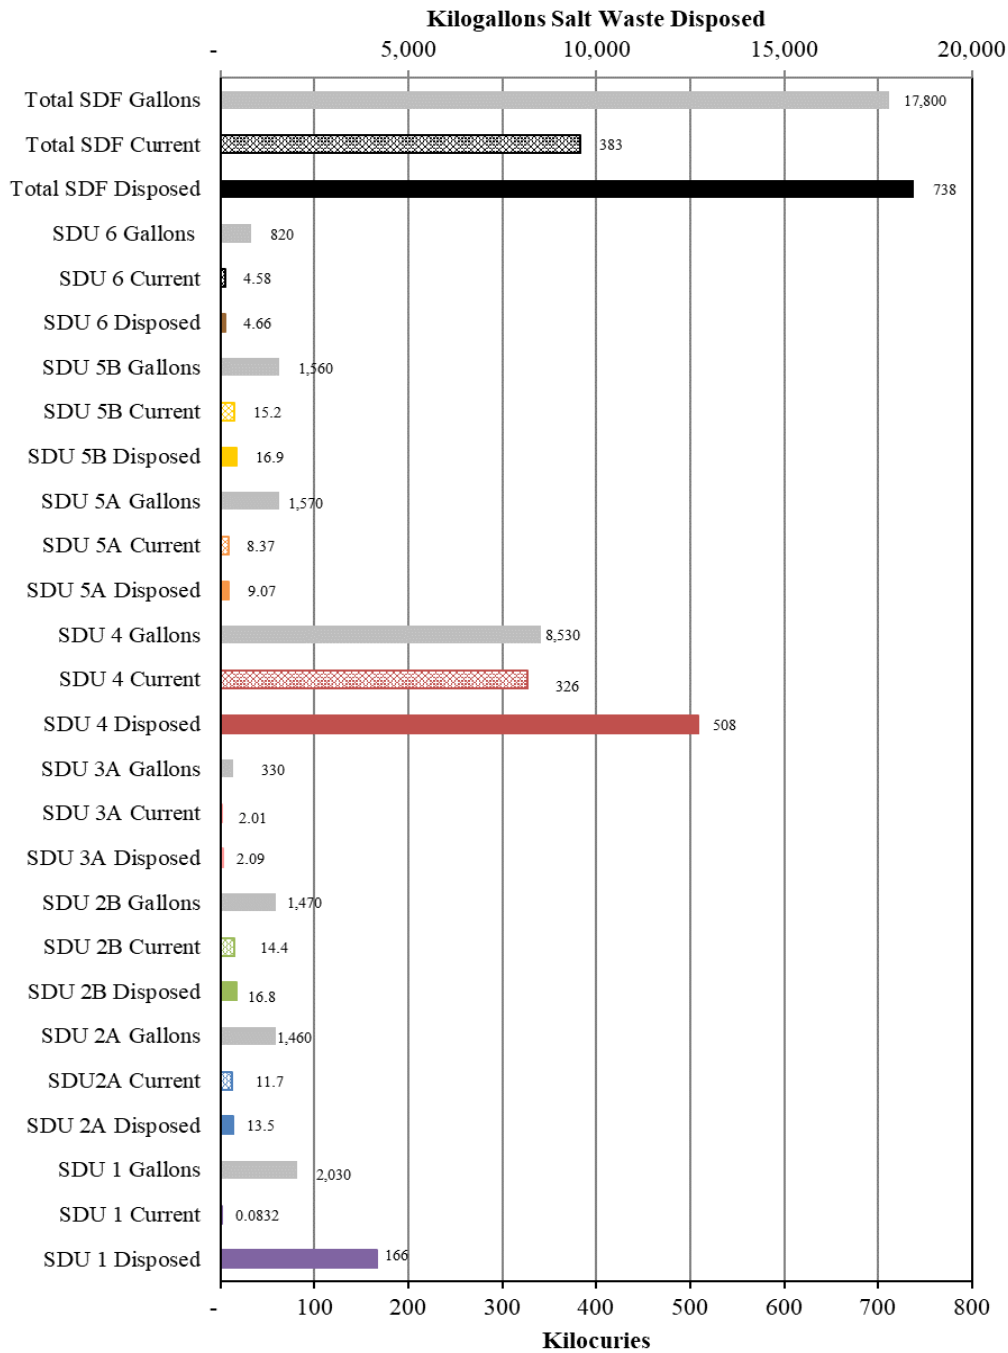

Note: Radionuclides Ca-41, Mo-93, Ag-108m, Sm-147, Gd-152, Lu-174, Bi-210m, Pb-210, Am-242 and Cm-246 which were previously reported are included as part of the SDU 1 and 4 total inventories here as they were input into the SDF-WIDE model, but totals shown in Tables 2-1 and 2-5 no longer include these radionuclides since they are no longer measured or reported after being screened out as SDF Inventory Radionuclides in SRR-CWDA-2009-00017.

Note: The Total SDF Gallons and SDU 4 Gallons of salt waste disposed is only the gallons of Tank 50 salt solution processed to the SDF. This volume does not consider the volume of material in the SDU 4 from the 10,032 United States Naval fuel Material Facility 55-gallon drums emplaced in Cell A. The volume of material from the 55-gallon drums impacts inventory (i.e., curies) in SDU 4, but not the Tank 50 salt solution processed to SDU 4 since the material was not Tank 50 salt solution.

3.0 REFERENCES

G-CLC-H-00138, *Curies Transferred from Tank 11 to Tank 50 During FY2019*, Savannah River Site, Aiken, SC, Rev. 0, January 2020.

DOE-WD-2005-001, *Basis for Section 3116 Determination for Salt Waste Disposal at the Savannah River Site*, Savannah River Site, Aiken, SC, Rev. 0, January 2006.

LWO-PIT-2007-00083, Chew, D.P., *Evaporator Performance, Tank Space Management, and Liquid Waste Transfers: Fiscal Year 2007 Summary*, Savannah River Site, Aiken, SC, Rev. 1, March 2008.

OCC-11-0070, Ltr. from Knowles, L.M. to Anderson, R.K., *Natural Resources Defense Council, et al v. South Carolina Department of Health and Environmental Control, et al., Docket No. 07-ALJ-07-121-CC*, Savannah River Site, Aiken, SC, Rev. 0, May 2011.

OPS-DTZ-90-0027, Fowler, J. R., *Radionuclide Storage and Disposal in Z-Area*, Savannah River Site, Aiken, SC, Rev. 1, June 17, 1991.

SPD-07-153, Ltr. from Allison, J.M. to Pedde, R.A., *Batch 1 Processing at the Saltstone Facility*, Savannah River Site, Aiken, SC, Rev. 0, February 2007.

SRNL-STI-2018-00650, Crawford, C.L., *Results for the Third Quarter Calendar Year 2018 Tank 50 Salt Solution Sample*, Savannah River Site, Aiken, SC, Rev. 0, January 2019.

SRNL-STI-2019-00148, Crawford, C.L., *Results for the Fourth Quarter Calendar Year 2018 Tank 50 Salt Solution Sample*, Savannah River Site, Aiken, SC, Rev. 0, May 2019.

SRNL-STI-2019-00184, Crawford, C.L., *Results for the First Quarter Calendar Year 2019 Tank 50 Salt Solution Sample*, Savannah River Site, Aiken, SC, Rev. 0, June 2019.

SRNL-STI-2019-00381, Crawford, C.L., *Results for the Second Quarter Calendar Year 2019 Tank 50 Salt Solution Sample*, Savannah River Site, Aiken, SC, Rev. 0, October 2019.

SRR-CWDA-2009-00017, *Performance Assessment for the Saltstone Disposal Facility at the Savannah River Site*, Savannah River Site, Aiken, SC, Rev. 0, October 29, 2009.

SRR-CWDA-2015-00003, Hommel, S.P., *Saltstone Disposal Facility Waste Inventory Disposed Estimator Model Report*, Savannah River Site, Aiken, SC, Rev. 0, January 2015.

SRR-CWDA-2015-00033, Interoffice Memorandum, Thomas to Liner, *Description of the Impact of Suspending MST Strikes on Curies Disposed of in the Saltstone Disposal Facility*, Rev. 1, April 20, 2015.

SRR-CWDA-2015-00149, Wooten, L.A., *Determination of the SDF Inventory through 9/30/2015*, Savannah River Site, Aiken, SC, Rev. 1, November 2015.

SRR-CWDA-2016-00111, Wooten, L.A., *Determination of the SDF Inventory through 9/30/2016*, Savannah River Site, Aiken, SC, Rev. 0, November 2016.

SRR-CWDA-2017-00030, Wooten, L.A., *Impact of Suspending Monosodium Titanate Strikes in the Actinide Removal Process on Salt Batch 8B Curies Transferred to Tank 50*, Savannah River Site, Aiken, SC, Rev. 0, July 2017.

SRR-CWDA-2017-00079, Wooten, L.A., *Determination of the SDF Inventory through 9/30/2017*, Savannah River Site, Aiken, SC, Rev. 0, November 2017.

SRR-CWDA-2018-00041, Dixon, K.D., *Determination of Inventory for FY2019 Performance Assessment Modeling*, Savannah River Site, Aiken, SC, Rev. 3, July 11, 2019.

SRR-CWDA-2018-00072, Wooten, L.A., *Determination of the SDF Inventory through 9/30/2018*, Savannah River Site, Aiken, SC, Rev. 0, January 7, 2019.

SRR-ESH-2017-00130, Allen, P.M., *Saltstone Sampling Quarterly Reporting*, Savannah River Site, Aiken, SC, Rev. 0, December 7, 2017.

SRR-LWP-2009-00001, Chew, D.P., *Liquid Waste System Plan*, Savannah River Site, Aiken, SC, Rev. 21, January 2019.

SRR-LWP-2010-00007, Chew, D.P., *Evaporator Performance, Tank Space Management, and Liquid Waste Transfers: Fiscal Year 2009 Summary*, Savannah River Site, Aiken, SC, Rev. 0, March 2010.

SRR-SDU-2017-00003, Brooks, T., *SDU 6 Minimum Grout Containment Capacity*, Savannah River Site, Aiken, SC, Rev. 0, February 6, 2017.

WSRC-RP-2008-00390, *FY 2007 Annual Review - Saltstone Disposal Facility (Z-Area) Performance Assessment (Covering the Performance Period FY 2007)*, Savannah River Site, Aiken, SC, Rev. 0, March 11, 2008.

X-CLC-Z-00070, Utlak, S.A., *3Q14 Saltstone Facility Basis Information for Section III.7 of the Consent Order of Dismissal*, Savannah River Site, Aiken, SC, Rev. 0, November 2014.

X-CLC-Z-00078, Chandler, A.B., *3Q16 Saltstone Facility Basis Information for Section III.7 of the Consent Order of Dismissal*, Savannah River Site, Aiken, SC, Rev. 1, October 2016.

X-CLC-Z-00081, Thompson Jr., T.L., *1Q17 Saltstone Facility Basis Information for Section III.7 of the Consent Order of Dismissal*, Savannah River Site, Aiken, SC, Rev. 0, May 2017.

X-CLC-Z-00084, Harrington, S.J., *1Q18 Saltstone Facility Basis Information for Section III.7 of the Consent Order of Dismissal*, Savannah River Site, Aiken, SC, Rev. 0, June 2018.

X-CLC-Z-00085, Harrington, S.J., *2Q18 Saltstone Facility Basis Information for Section III.7 of the Consent Order of Dismissal*, Savannah River Site, Aiken, SC, Rev. 0, September 2018.

X-CLC-Z-00086, Ball, T.R., *3Q18 Saltstone Facility Basis Information for Section III.7 of the Consent Order of Dismissal*, Savannah River Site, Aiken, SC, Rev. 1, March 2019.

X-CLC-Z-00087, Ball, T.R., *4Q18 Saltstone Facility Basis Information for Section III.7 of the Consent Order of Dismissal*, Savannah River Site, Aiken, SC, Rev. 0, March 2019

X-CLC-Z-00088, Condon, W.A., *1Q19 Saltstone Facility Basis Information for Section III.7 of the Consent Order of Dismissal*, Savannah River Site, Aiken, SC, Rev. 0, September 2019

X-CLC-Z-00089, Condon, W.A., *2Q18 Saltstone Facility Basis Information for Section III.7 of the Consent Order of Dismissal*, Savannah River Site, Aiken, SC, Rev. 0, September 2019