NUREG-2230 EPRI 3002016051

Methodology for Modeling Fire Growth and Suppression Response for Electrical Cabinet Fires in Nuclear Power Plants

U.S. Nuclear Regulatory Commission Office of Nuclear Regulatory Research Washington, D.C. 20555-0001



Electric Power Research Institute 3420 Hillview Avenue Palo Alto, CA 94304-1338



AVAILABILITY OF REFERENCE MATERIALS IN NRC PUBLICATIONS

NRC Reference Material

As of November 1999, you may electronically access NUREG-series publications and other NRC records at the NRC's Library at www.nrc.gov/reading-rm.html. Publicly released records include, to name a few, NUREG-series publications; Federal Register notices; applicant, licensee, and vendor documents and correspondence; NRC correspondence and internal memoranda; bulletins and information notices; inspection and investigative reports; licensee event reports; and Commission papers and their attachments.

NRC publications in the NUREG series, NRC regulations, and Title 10, "Energy," in the *Code of Federal Regulations* may also be purchased from one of these two sources:

1. The Superintendent of Documents

U.S. Government Publishing Office Washington, DC 20402-0001 Internet: www.bookstore.gpo.gov Telephone: (202) 512-1800

Fax: (202) 512-2104

2. The National Technical Information Service

5301 Shawnee Road Alexandria, VA 22312-0002 Internet: www.ntis.gov

1-800-553-6847 or, locally, (703) 605-6000

A single copy of each NRC draft report for comment is available free, to the extent of supply, upon written request as follows:

Address: U.S. Nuclear Regulatory Commission

Office of Administration

Multimedia, Graphics, and Storage &

Distribution Branch

Washington, DC 20555-0001

E-mail: <u>distribution.resource@nrc.gov</u>

Facsimile: (301) 415-2289

Some publications in the NUREG series that are posted at the NRC's Web site address www.nrc.gov/reading-rm/doc-collections/nuregs are updated periodically and may differ from the last printed version. Although references to material found on a Web site bear the date the material was accessed, the material available on the date cited may subsequently be removed from the site.

Non-NRC Reference Material

Documents available from public and special technical libraries include all open literature items, such as books, journal articles, transactions, *Federal Register* notices, Federal and State legislation, and congressional reports. Such documents as theses, dissertations, foreign reports and translations, and non-NRC conference proceedings may be purchased from their sponsoring organization.

Copies of industry codes and standards used in a substantive manner in the NRC regulatory process are maintained at—

The NRC Technical Library

Two White Flint North 11545 Rockville Pike Rockville, MD 20852-2738

These standards are available in the library for reference use by the public. Codes and standards are usually copyrighted and may be purchased from the originating organization or, if they are American National Standards, from—

American National Standards Institute

11 West 42nd Street New York, NY 10036-8002 Internet: <u>www.ansi.org</u> (212) 642-4900

Legally binding regulatory requirements are stated only in laws; NRC regulations; licenses, including technical specifications; or orders, not in NUREG-series publications. The views expressed in contractor prepared publications in this series are not necessarily those of the NRC.

The NUREG series comprises (1) technical and administrative reports and books prepared by the staff (NUREG–XXXX) or agency contractors (NUREG/CR–XXXX), (2) proceedings of conferences (NUREG/CP–XXXX), (3) reports resulting from international agreements (NUREG/IA–XXXX), (4) brochures (NUREG/BR–XXXX), and (5) compilations of legal decisions and orders of the Commission and the Atomic and Safety Licensing Boards and of Directors' decisions under Section 2.206 of the NRC's regulations (NUREG–0750).

DISCLAIMER: This report was prepared as an account of work sponsored by an agency of the U.S. Government. Neither the U.S. Government nor any agency thereof, nor any employee, makes any warranty, expressed or implied, or assumes any legal liability or responsibility for any third party's use, or the results of such use, of any information, apparatus, product, or process disclosed in this publication, or represents that its use by such third party would not infringe privately owned rights.

NUREG-2230 EPRI 3002016051

Methodology for Modeling Fire Growth and Suppression Response for Electrical Cabinet Fires in Nuclear Power Plants

Manuscript Completed: November 2019

Date Published: June 2020

U.S. Nuclear Regulatory Commission Office of Nuclear Regulatory Research (RES) Washington, D.C. 20555-0001

U.S. NRC-RES Project Manager M. H. Salley

Electric Power Research Institute (EPRI) 3420 Hillview Avenue Palo Alto, CA 94304-1338

EPRI Project Manager A. Lindeman

DISCLAIMER OF WARRANTIES AND LIMITATION OF LIABILITIES

THIS DOCUMENT WAS PREPARED BY THE ORGANIZATIONS NAMED BELOW AS AN ACCOUNT OF WORK SPONSORED OR COSPONSORED BY THE ELECTRIC POWER RESEARCH INSTITUTE, INC. (EPRI). NEITHER EPRI, ANY MEMBER OF EPRI, ANY COSPONSOR, THE ORGANIZATION(S) BELOW, NOR ANY PERSON ACTING ON BEHALF OF ANY OF THEM:

- (A) MAKES ANY WARRANTY OR REPRESENTATION WHATSOEVER, EXPRESS OR IMPLIED, (I) WITH RESPECT TO THE USE OF ANY INFORMATION, APPARATUS, METHOD, PROCESS, OR SIMILAR ITEM DISCLOSED IN THIS DOCUMENT, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, OR (II) THAT SUCH USE DOES NOT INFRINGE ON OR INTERFERE WITH PRIVATELY OWNED RIGHTS, INCLUDING ANY PARTY'S INTELLECTUAL PROPERTY, OR (III) THAT THIS DOCUMENT IS SUITABLE TO ANY PARTICULAR USER'S CIRCUMSTANCE; OR
- (B) ASSUMES RESPONSIBILITY FOR ANY DAMAGES OR OTHER LIABILITY WHATSOEVER (INCLUDING ANY CONSEQUENTIAL DAMAGES, EVEN IF EPRI OR ANY EPRI REPRESENTATIVE HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES) RESULTING FROM YOUR SELECTION OR USE OF THIS DOCUMENT OR ANY INFORMATION, APPARATUS, METHOD, PROCESS, OR SIMILAR ITEM DISCLOSED IN THIS DOCUMENT.

REFERENCE HEREIN TO ANY SPECIFIC COMMERCIAL PRODUCT, PROCESS, OR SERVICE BY ITS TRADE NAME, TRADEMARK, MANUFACTURER, OR OTHERWISE, DOES NOT NECESSARILY CONSTITUTE OR IMPLY ITS ENDORSEMENT, RECOMMENDATION, OR FAVORING BY EPRI.

THE FOLLOWING ORGANIZATIONS PREPARED THIS REPORT:

Electric Power Research Institute (EPRI)

Jensen Hughes, Inc.

U.S. Nuclear Regulatory Commission, Office of Nuclear Regulatory Research

THE TECHNICAL CONTENTS OF THIS PRODUCT WERE NOT PREPARED IN ACCORDANCE WITH THE EPRI QUALITY PROGRAM MANUAL THAT FULFILLS THE REQUIREMENTS OF 10 CFR 50, APPENDIX B. THIS PRODUCT IS NOT SUBJECT TO THE REQUIREMENTS OF 10 CFR PART 21.

NOTE

For further information about EPRI, call the EPRI Customer Assistance Center at 800.313.3774 or e-mail askepri@epri.com.

Electric Power Research Institute, EPRI, and TOGETHER...SHAPING THE FUTURE OF ELECTRICITY are registered service marks of the Electric Power Research Institute, Inc.

ABSTRACT

During the past decade, modern fire probabilistic risk assessments (FPRAs) have been developed using NUREG/CR-6850 (EPRI 1011989), *EPRI/NRC-RES Fire PRA Methodology for Nuclear Power Facilities*. The results show that fire can be a significant portion of the overall site risk profile; however, the methodology was never fully piloted before implementation. As a result, further development of the methods has been performed and additional data have been collected and analyzed during the past decade. These improvements have allowed gaps in the methods to be closed and more realistic estimates of risks to be obtained. One aspect of the FPRA methods and data that has not been explicitly reanalyzed is the fire growth timing profile and plant personnel suppression response for electrical cabinet fires. A simplified model of the average time to peak, steady state, and decay is used to model the ignition source's heat release rate profile. For manual suppression credit, a dense collection of electrical ignition sources spanning three decades is used to represent the fire brigade and plant suppression response times.

Recent research efforts have focused on obtaining more detailed information regarding fire incidents at nuclear power plants. This data collection has enabled researchers to obtain more details on the fire attributes, timeline, and plant impact. This report specifically reviewed the available electrical cabinet fire incident data in an effort to update the methodology to better reflect the observed operating experience. Insights from the data review served as the basis for amending portions of the fire modeling and suppression response to more accurately align with operating experience.

The outcome of this work is a revised set of parameters that addresses both the fire growth and the suppression response in the context of fire scenario modeling. The set of electrical cabinet fire events was classified into either a growing or interruptible fire categorization. Interruptible fires are those that have observed ignition but no significant growth for a period of time. Growing fires, on the other hand, experience growth immediately after ignition. Furthermore, the detection-suppression event tree has been updated to better allow for early plant personnel suppression actions. Additional manual non-suppression bins have been added to better reflect the scenario characteristics. The results of this research can be implemented in new and existing FPRAs for a more realistic representation of the scenario progression and suppression end states.

Keywords

Fire events
Fire growth profile
Fire ignition frequency
Fire probabilistic risk assessment (FPRA)
Manual suppression
Non-suppression probability (NSP)

TABLE OF CONTENTS

ABST	RACT.				iii
TABL	E OF C	ONTEN	ITS		v
LIST	OF FIG	URES			ix
LIST	OF TAE	BLES			xi
EXEC	UTIVE	SUMM	ARY		xv
CITA	TIONS				xix
ACK	NOWLE	DGME	NTS		xxi
ACRO	ONYMS				xxiii
1	INTRO	DDUCT	ION		1-1
	1.1	Purpo	se		1-2
	1.2	Scope	e		1-2
2	BACK	GROU	ND		2-1
	2.1	Fire S	everity		2-2
	2.2	Fire D	etection		2-3
	2.3	Fire S	uppression	l	2-4
	2.4	Fire A	ttributes		2-6
3	METH	IODOL	OGY FOR	INTERRUPTIBLE FIRE DETERMINATION	3-1
	3.1	Introd	uction		3-1
	3.2	Assun	nptions		3-1
	3.3	Interru	uptible Fire	Criteria	3-2
		3.3.1	Interruptil	ole Fire Conditions	3-3
			3.3.1.1	Notification	3-4
			3.3.1.2	Passage of Time	3-5
			3.3.1.3	Small Fire	3-6
			3.3.1.4	Minimal Suppression Effort	3-7
			3.3.1.5	Special Case—Arc Flash	3-7
		3.3.2	Summary	of Interruptible Fire Conditions	3-8
	3.4	Interru	uptible Fire	Split Fraction	3-9
	3.5	Interruptible, Growing, MCR, and Electrical Fires Suppression Rate3-9			

		3.5.1	Interruptib	le and Gro	wing Fire Suppression Rate	3-9
		3.5.2	NSP Floor	r for the MC	CR	3-12
			3.5.2.1	Probabilit	ty of Fire in the MCR Within the Mission	3-12
			3.5.2.2		ty of Failing to Manually Suppress a Fire in	3-13
			3.5.2.3	Floor Val	ue	3-14
			3.5.2.4	Sensitivit	y to Input Parameters	3-14
		3.5.3	NSP Num	erical Resu	ılts	3-16
	3.6 U _l	odated I	Bin 15 Fire I	Ignition Fre	quency	3-17
4	INTER	RRUPTI	BLE AND	GROWING	FIRE HRR PROFILES	4-1
	4.1	Bin 15	Fire HRR	Timing Prof	iles	4-1
		4.1.1	Experimer	ntal Data R	eview of Interruptible Fires	4-1
		4.1.2	Experimer	ntal Data R	eview of Growing Fires	4-5
	4.2	Fire M	lodeling of I	nterruptible	and Growing Fires	4-7
		4.2.1	Interruptib	le Timing F	Profile	4-9
		4.2.2	Timing Inp	outs for Fire	Modeling—Interruptible Fires	4-10
		4.2.3	Growing T	iming Profi	le	4-11
		4.2.4	Timing Inp	outs for Fire	Modeling—Growing Fires	4-12
5					SION EVENT TREE FOR CREDITING	5-1
	5.1				t Tree Introduction	
	5.2				nt Tree	
	5.3				ing the NSP	
					t Fraction	
		5.3.2	•	•	files	
		5.3.3		•	on of Electrical Cabinet Fires	
			5.3.3.1	Probabilit	ty of Automatic Smoke Detection of Electrical	
			5.3.3.2	MCR Indi	ication	5-7
			5.3.3.3	MCR Ope	erator Response	5-8
				5.3.3.3.1	Qualitative Analysis	5-8
				5.3.3.3.2	Quantitative Analysis	5-9
				5.3.3.3.3	Standardized Plant Analysis Risk Human Reliability Analysis	5-9
				5.3.3.3.4	Cause-Based Decision Tree Method	5-10

				5.3.3.3.5	THERP Annunciator Response Model	5-16
				5.3.3.3.6	Conclusions	5-17
			5.3.3.4	Detection	by Plant Personnel	5-17
			5.3.3.5	Probability	of Presence of Personnel	5-18
		5.3.4	Time of D	etection for	Electrical Cabinets	5-27
			5.3.4.1	Interruptib	le Fire Time of Detection	5-27
			5.3.4.2	Growing F	Fire Time of Detection	5-28
		5.3.5	Probability	y of Failure–	-Detection	5-28
6	EXAM	PLES .				6-1
	6.1	Exam	ple 1, NUR	EG/CR-6850)	6-1
	6.2	Exam	ple 2, Revis	sed NUREG	/CR-6850, Personnel Detection Sensitivities	6-8
	6.3				/CR-6850, Enclosure Class/Function	6-11
	6.4	Exam	ple 4, Revis	sed NUREG	/CR-6850 (MCR Indication)	6-12
	6.5	Exam	ple 5, Revis	sed NUREG	/CR-6850 (Automatic Suppression)	6-13
	6.6	Exam	ple 6, 1-Mir	ute Time to	Damage	6-13
7	SUMN	IARY				7-1
	7.1	Bin 15	Fire Ignition	n Frequenc	y	7-1
	7.2	Interru	ıptible/Grov	ving Fire Spl	lit Fraction	7-1
	7.3	Interru	ıptible/Grov	ving Fire Tin	ning Profiles	7-1
	7.4	New F	P _{ns} Event Tr	ee Paramet	ers	7-2
	7.5	NSP E	Estimation l	Jpdate		7-3
8	REFE	RENCE	S			8-1
APPE	NDIX A	INS	GIGHTS FR	OM THE EP	RI FEDB	A-1
APPE	NDIX B				ROWING FIRE MONTE CARLO	
		B.1			ation for Characterizing the Time and matic Smoke Detection	B-1
		B.2	Automa	atic Smoke [Detection	B-3
			B.2.1	Ceiling Jet	Temperature	B-3
			B.2.2	eiling Jet G	as Density	B-4
			B.2.3	Normalized	Ceiling Jet Mass Flow Rate	B-4
			B.2.4	Soot Mass	Concentration	B-5
			B.2.5	Optical Den	sity	B-5
		В3	OD Sm	oke Detecti	on Validation	B-6

APPENDIX C	PROBABILITY OF NO DETECTION TABLES	C-1
APPENDIX D	SENSITIVITY AND UNCERTAINTY	D-1

LIST OF FIGURES

Figure 2-1	Fire severity	2-3
Figure 2-2	Fire detection	2-3
Figure 2-3	Fire suppression response	2-5
Figure 2-4	Means of fire suppression	2-6
Figure 2-5	Fire damage	2-7
Figure 3-1	Conceptual interruptible fire timeline, not to scale	3-3
Figure 3-2	Detection method of reported Bin 15 fire events	3-4
Figure 3-3	Non-suppression curve plot showing probability versus time to suppression	3-11
Figure 3-4	Non-suppression curve plot showing probability (logarithmic scale) versus time to suppression for MCR scenarios	3-15
Figure 4-1	NUREG/CR-7197 experimental tests with pre-growth period [11]	4-2
Figure 4-2	NUREG/CR-7197 experimental tests without a pre-growth period of (A) no growth and (B) no pre-growth	4-3
Figure 4-3	Growing fire, A) growth period duration counts, B) suppression time counts	4-8
Figure 4-4	Interruptible HRR timing profile	4-9
Figure 4-5	Interruptible HRR timing profile for fire modeling	4-10
Figure 4-6	HRR profile for a growing fire	4-11
Figure 5-1	Interruptible and growing fire detection and suppression event tree	5-2
Figure 5-2	Pca: availability of information	5-11
Figure 5-3	Pcb: failure of attention	5-12
Figure 5-4	Pcc: misread/miscommunicate data	5-13
Figure 5-5	Pcd: information misleading	5-13
Figure 5-6	Pce: skip a step in procedure	5-14
Figure 5-7	Pcf: misinterpret instructions	5-14
Figure 5-8	Pcg: misinterpret decision logic	5-15
Figure 5-9	Pch: deliberate violation	5-15
Figure 5-10	Annunciator response model of the HRA calculator	5-17

Figure 5-11	Probability of personnel present for detection, with and without crediting adjacent spaces	5-23
Figure 5-12	Probability of detection fault tree for an interruptible fire with MCR indication and automatic smoke detection	5-29
Figure 6-1	Solution for the NUREG/CR-6850 detection-suppression event tree	6-2
Figure 6-2	First detection for the interruptible path, NUREG/CR-6850 Appendix P example	6-3
Figure 6-3	Second detection for the growing path, NUREG/CR-6850 Appendix P	
	example	6-4
Figure 6-4	Solution for the detection-suppression event tree for NUREG/CR-6850 Example 1: interruptible fire path	
Figure 6-5	Solution for the detection-suppression event tree for NUREG/CR-6850 Example 1: growing path	6-7
Figure 6-6	Solution for the detection-suppression event tree for NUREG/CR-6850 Example 1: total P _{ns}	6-8
Figure B-1	Alarm threshold OD gamma distribution fit	B-6
Figure B-2	Results comparing NIST home smoke detector activation times with OD modeled activation times	B-9

LIST OF TABLES

Table 3-1	Conditions for an interruptible fire event determination	3-8
Table 3-2	Interruptible and growing split fractions (2000–2014)	3-9
Table 3-3	Electrical ignition source probability distribution for rate of fires suppressed per unit time (1990–2014 [†])	3-10
Table 3-4	ANOVA of electrical fire suppression data with and without events during the 1980–1989 period	3-12
Table 3-5	Probability of non-suppression floor sensitivity analysis	3-14
Table 3-6	Updated numerical results for electrical cabinet suppression curves	3-16
Table 3-7	FPRA counts per time period	3-17
Table 3-8	Reactor years for fire ignition frequency update	3-17
Table 3-9	Fire ignition frequency distribution for Bin 15	3-18
Table 4-1	HRR timing for interruptible electrical cabinet fires	4-3
Table 4-2	HRR timing for the interruptible fire pre-growth period in electrical cabinet fires	4-5
Table 4-3	HRR timing for growing electrical cabinet fires	4-6
Table 5-1	Revised P _{ns} event tree sequences	5-3
Table 5-2	Automatic smoke detection probability of no detection	5-6
Table 5-3	Sensor and transmitter unreliability data [11]	5-7
Table 5-4	MCR operator response as calculated using CBDTM	5-16
Table 5-5	Description of personnel presence influencing factors	5-20
Table 5-6	Plant personnel presence probabilities	5-25
Table 5-7	Plant personnel presence probabilities considering adjacent compartments	5-26
Table 6-1	Example 2: occupancy and maintenance rating sensitivities	6-8
Table 6-2	Example 2: enclosure class/function group sensitivities	6-11
Table 7-1	Fire ignition frequency distribution for Bin 15	7-1
Table 7-2	Summary of non-suppression event tree parameters	7-3
Table 7-3	Probability distribution for rate of fires suppressed per unit time, λ	7-4
Table A-1	Fire event data from 2000 to 2014	A-2
Table A-2	Fire event data from 1990 to 1999	A-7
Table A-3	Significant attributes derived from fire event review	A-10
Table A-4	Fire events disposition	A-20

Table B-1	Summary of Monte Carlo parameters for modeling automatic smoke detection	B-2
Table B-2	Optical smoke detection validation parameters	B-7
Table C-1	Probability of detection tables	C-2
Table C-2	First detection, interruptible fire, with MCR indication, without crediting personnel in adjacent spaces, no propagation to secondary combustibles (smoke detector probability of no detection included) default fuel loading, unavailability of 0.01, NUREG-2178 Classification Groups 1, 2, and 3 enclosures	C-4
Table C-3	First detection, interruptible fire, with MCR indication, with crediting personnel in adjacent spaces, no propagation to secondary combustibles (smoke detector probability of no detection included) default fuel loading, unavailability of 0.01, NUREG-2178 Classification Groups 1, 2, and 3 enclosures	C-5
Table C-4	First detection, interruptible fire, with MCR indication, without crediting personnel in adjacent spaces, no propagation to secondary combustibles (smoke detector probability of no detection included), default fuel loading, unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures	C-6
Table C-5	First detection, interruptible fire, with MCR indication, with crediting personnel in adjacent spaces, no propagation to secondary combustibles (smoke detector probability of no detection included), default fuel loading, unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures	C-7
Table C-6	First detection, interruptible fire, with MCR indication, without crediting personnel in adjacent spaces, no propagation to secondary combustibles (smoke detector probability of no detection included), low fuel loading, unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures	C-8
Table C-7	First detection, interruptible fire, with MCR indication, with crediting personnel in adjacent spaces, no propagation to secondary combustibles (smoke detector probability of no detection included), low fuel loading, unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures	C-9
Table C-8	First detection, interruptible fire, with MCR indication, without crediting personnel in adjacent spaces, no propagation to secondary combustibles (smoke detector probability of no detection included), very low fuel loading, unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures	C-10
Table C-9	First detection, interruptible fire, with MCR indication, with crediting personnel in adjacent spaces, no propagation to secondary combustibles (smoke detector probability of no detection included), very low fuel loading, unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures	C-11
Table C-10	First detection, interruptible fire, without MCR indication, without crediting personnel in adjacent spaces, no propagation to secondary combustibles (smoke detector probability of no detection included), default fuel loading,	

	unavailability of 0.01, NUREG-2178 Classification Groups 1, 2, and 3 enclosures	C-12
Table C-11	First detection, interruptible fire, without MCR indication, with crediting personnel in adjacent spaces, no propagation to secondary combustibles (smoke detector probability of no detection included), default fuel loading, unavailability of 0.01, NUREG-2178 Classification Groups 1, 2, and 3 enclosures	C-13
Table C-12	First detection, interruptible fire, without MCR indication, without crediting personnel in adjacent spaces, no propagation to secondary combustibles (smoke detector probability of no detection included), default fuel loading, unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures	C-14
Table C-13	First detection, interruptible fire, without MCR indication, with crediting personnel in adjacent spaces, no propagation to secondary combustibles (smoke detector probability of no detection included), default fuel loading, unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures	C-15
Table C-14	First detection, interruptible fire, without MCR indication, without crediting personnel in adjacent spaces, no propagation to secondary combustibles (smoke detector probability of no detection included), low fuel loading, unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures	C-16
Table C-15	First detection, interruptible fire, without MCR indication, with crediting personnel in adjacent spaces, no propagation to secondary combustibles (smoke detector probability of no detection included), low fuel loading, unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures	C-17
Table C-16	First detection, interruptible fire, without MCR indication, without crediting personnel in adjacent spaces, no propagation to secondary combustibles (smoke detector probability of no detection included), very low fuel loading, unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures	C-18
Table C-17	First detection, interruptible fire, without MCR indication, with crediting personnel in adjacent spaces, no propagation to secondary combustibles (smoke detector probability of no detection included), very low fuel loading, unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures	C-19
Table C-18	First detection, growing fire, with MCR indication, without crediting personnel in adjacent spaces, all fuel loadings, NUREG-2178 Classification Groups 1, 2, 3, and 4 enclosures	C-20
Table C-19	First detection, growing fire, with MCR indication, with crediting personnel in adjacent spaces, all fuel loadings, NUREG-2178 Classification Groups 1, 2, 3, and 4 enclosures	C-21
Table C-20	First detection, growing fire, without MCR indication, without crediting personnel in adjacent spaces all fuel loadings, NUREG-2178 Classification Groups 1, 2, 3, and 4 enclosures	C-22

Table C-21	First detection, growing fire, without MCR indication, with crediting personnel in adjacent spaces, all fuel loadings, NUREG-2178 Classification Groups 1, 2, 3, and 4 enclosures	C-23
Table C-22	Second detection, growing fire, no propagation to secondary combustibles (smoke detector probability of no detection included), default fuel loading, unavailability of 0.01, NUREG-2178 Classification Groups 1, 2, and 3 enclosures	C-24
Table C-23	Second detection, growing fire, no propagation to secondary combustibles (smoke detector probability of no detection included), default fuel loading, unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures	C-24
Table C-24	Second detection, growing fire, no propagation to secondary combustibles (smoke detector probability of no detection included), low fuel loading, unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures	C-25
Table C-25	Second detection, growing fire, no propagation to secondary combustibles (smoke detector probability of no detection included), very low fuel loading, unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures	C-25
Table C-26	Second detection, interruptible and growing fire, assumes propagation to secondary combustibles (smoke detector probability of no detection not included), unavailability of 0.01, NUREG-2178 Classification Groups 1, 2, and 3 enclosures	C-26
Table C-27	Second detection, interruptible and growing fire, assumes propagation to secondary combustibles (smoke detector probability of no detection not included), unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures	C-26
Table D-1	Parameter sensitivity cases	D-2
Table D-2	Function sensitivity cases	D-5

EXECUTIVE SUMMARY

PRIMARY AUDIENCE: Fire probabilistic risk assessment (FPRA) engineers and fire protection engineers supporting the development and/or maintenance of FPRAs

SECONDARY AUDIENCE: Engineers, probabilistic risk assessment (PRA) managers, and other stakeholders who review FPRAs and who interface with FPRA methods

KEY RESEARCH QUESTION

Fire event data in the United States have been collected for many decades. These data have been used to calculate fire ignition frequencies and manual non-suppression probabilities (NSPs) in FPRA. In 2013, the Electric Power Research Institute (EPRI) published *The Updated Fire Events Database: Description of Content and Fire Event Classification Guidance* (EPRI 1025284). The updated fire events database captured recent fire operating experience through 2009, expanded and improved data fields, and provided more detailed incident data and better data source reference traceability. After the publication of the 2013 study, EPRI and the Nuclear Regulatory Commission (NRC) jointly published updated fire ignition frequencies and manual NSPs, but no additional research was conducted to better use the fire event data to inform FPRA methods. This report aims to narrow the gap through the review and analysis of the fire event operating experience and revision to the FPRA methods and data to better reflect the operating experience observed.

RESEARCH OVERVIEW

The electrical cabinet (NUREG/CR-6850 [EPRI 1011989], *EPRI/NRC-RES Fire PRA Methodology for Nuclear Power Facilities*, Bin 15) fire event data from 2000 to 2014 were reviewed for insights. These include the operating experience cataloged in the study, *The Updated Fire Events Database: Description of Content and Fire Event Classification Guidance* (EPRI 1025284), from 2000 to 2009, and the study, *Fire Events Database Update for the Period 2010–2014: Revision 1* (EPRI 3002005302) to capture the most recent operating experience. The review of fire event data specifically looked at four fire attributes: detection, fire duration, fire size, and suppression effort. These attributes were used to categorize each fire event as either interruptible or growing. After this categorization, the fire heat release rate (HRR) timing profiles were re-examined using the available experimental data.

After the data review, the structure of the detection-suppression event tree was updated to better reflect insights gained during the event review—for example, (1) numerous reports of operators responding to equipment alarms in the main control room (MCR) and discovering a fire and (2) numerous events describing plant personnel discovering a fire in the early stages followed by suppression with minimal effort. The fire ignition frequency for Bin 15 (electrical cabinets) is now characterized with a split fraction for interruptible and growing fires, and NSP values for interruptible fires, growing fires, and the MCR are calculated.

KEY FINDINGS

- Of the 47 events reviewed, 34 (72.3%) fire events are classified as interruptible, and 13 (27.7%) fire events are classified as growing fires (see Section 3.4).
- The fire ignition frequency for Bin 15 (electrical cabinets) for the time period 2000–2014 is 3.43E-02 (see Section 3.6).
- Based on an analysis of relevant experimental evidence, the HRR timing profile for interruptible fires can be modeled in one of the following two ways (see Section 4.2.2):
 - Using a pre-growth period of 9 minutes with a negligible HRR, 7 minute time to peak, 5 minutes at steady state, and a 13-minute decay period
 - The addition of a pre-growth period to the timing profile prescribed in NUREG/CR-6850:
 - A pre-growth period of 4 minutes with a negligible HRR
 - 12-minute time to peak, 8 minutes at steady state, and a 19-minute decay period
- For growing fires, the HRR timing profile in NUREG/CR-6850 is recommended (12-minute time to peak, 8 minutes at steady state, and 19-minute decay period). See Section 4.2.4.
- Two new suppression curves are developed to better represent the manual suppression response to electrical cabinet fires. The mean suppression rates are interruptible (0.149) and growth (0.100). The existing MCR suppression curve was also updated to 0.385. See Table 3-3.
- The structure of the detection-suppression event trees is revised to better reflect the suppression outcomes observed in operating experience. These include new branches for early plant personnel suppression and response to main control board alarms.

WHY THIS MATTERS

Fire risk can be an important contributor to the overall site risk profile at nuclear power plants. A review of nearly 30 U.S. FPRAs yielded that electrical cabinets dominate the FPRA results. This research that is the subject of this report provides a more detailed and refined methodology to more realistically analyze electrical cabinet fire risk.

HOW TO APPLY RESULTS

The results of this research are intended to be applied to FPRAs to obtain a more realistic estimate of plant risk. The methodology and data presented in this report are intended to be incorporated into new FPRAs but also specifically designed to fit within the framework of existing FPRA analyses. Section 3 summarizes the data updates to ignition frequency, interruptible/growing split fraction, and NSP estimates. Section 4 describes timing parameters for electrical cabinet fires, and Section 5 describes the structural changes and data for the detection-suppression event tree. Section 7 summarizes the findings, including revised ignition frequencies, interruptible/growing split fraction, HRR timing profiles, and updates to the detection-suppression event tree structure and data.

LEARNING AND ENGAGEMENT OPPORTUNITIES

Users of this report might be interested in Fire Analysis, Module III, of FPRA training, which is sponsored jointly by EPRI and the U.S. NRC Office of Nuclear Regulatory Research. The Fire Analysis module is geared toward PRA practitioners responsible for treating those aspects related to fire growth and damage assessment. The Fire Analysis module discusses the basics of plant partitioning, fire frequency analysis, and the development and analysis of fire scenarios from fire ignition to target impact and fire suppression.

EPRI CONTACT: Ashley Lindeman, Senior Technical Leader, 704.595.2538, alindeman@epri.com

NRC CONTACT: Nick Melly, Fire Protection Engineer, 301.415.2392,

nicholas.melly@nrc.gov

PROGRAM: Risk and Safety Management, Program 41.07.01

IMPLEMENTATION CATEGORY: Plant Optimization

CITATIONS

The following organizations prepared this report:

Electric Power Research Institute (EPRI) 3420 Hillview Avenue Palo Alto, CA 94304

Principal Investigator

A. Lindeman

Jensen Hughes, Inc. 111 Rockville Pike, Suite 550 Rockville, MD 20850

Principal Investigators

M. Chi-Miranda

E. Collins

J. Floyd

O. Gonzalez

F. Joglar

S. Montanez

V. Ontiveros

J. Williamson

U.S. Nuclear Regulatory Commission Office of Nuclear Regulatory Research Washington, DC 20555

Principal Investigators

S. Cooper N. Melly

D. Stroup

This report describes research sponsored jointly by the U.S. Nuclear Regulatory Commission's (NRC's) Office of Nuclear Regulatory Research (RES) and the Electric Power Research Institute (EPRI) performed under a formal Memorandum of Understanding (MOU).

This publication is a corporate document that should be cited in the literature in the following manner:

Methodology for Modeling Fire Growth and Suppression Response for Electrical Cabinet Fires in Nuclear Power Plants. EPRI, Palo Alto, CA, and the U.S. Nuclear Regulatory Commission, Office of Nuclear Regulatory Research (RES), Washington, D.C.: 2020. 3002016051/NUREG-2230. (While the NRC and EPRI reports have different publication dates, they are essentially the same report.)

The report should be cited internally in NRC documents in this way:

U.S. Nuclear Regulatory Commission, "Methodology for Modeling Fire Growth and Suppression Response for Electrical Cabinet Fires in Nuclear Power Plants," NUREG-2230 (Electric Power Research Institute (EPRI) 3002016051), May 2020.

ACKNOWLEDGMENTS

A draft of this report was Noticed in the *Federal Register* for public comment on July 1, 2019 (84 FR 31354). The authors thank those members of the public and organizations who provided comments during the public comment period, specifically Victoria Anderson, Nuclear Energy Institute; Robert Cavedo, Exelon Corporation; Électricité de France; Ernie Kee; and the Center for Nuclear Waste Regulatory Analysis (CNWRA); all of whom provided insightful comments on the draft of the document. The authors' resolution of comments on the draft report is available in the Agencywide Documents Access and Management System (ADAMS) under accession number ML19291A339. The comments received from CNWRA and their responses to the authors' resolution of those comments are available in ADAMS under accession numbers ML19276D383 and ML19276D384, respectively.

ACRONYMS

ANOVA analysis of variance

ARP alarm response procedure

CBD Chesapeake Bay Detachment

CBDTM cause-based decision tree method

CD cold shutdown

CH challenging

CO₂ carbon dioxide

ERP emergency response procedure

EPRI Electric Power Research Institute

FACP fire alarm control panel

FB fire brigade

FDS Fire Dynamics Simulator

FDTs Fire Dynamics Tools

FEDB Fire Events Database

FPRA fire probabilistic risk assessment

HCR/ORE human cognitive reliability/operator reliability experiment

HEAF high-energy arcing fault
HEP human error probability

HEP human error probability

HRA human reliability analysis

HRR heat release rate

HS hot shutdown

ICES INPO Consolidated Event System

INPO Institute of Nuclear Power Operations

MCC motor control center
MCR main control room

NIST National Institute of Standards and Technology

NPP nuclear power plant

NRC Nuclear Regulatory Commission

NSP non-suppression probability

OD optical density

OPEX operating experience

PC potentially challenging

PO power operation

PRA probabilistic risk assessment
PSF performance shaping factor

QTP qualified thermoplastic

RF refueling SD shutdown

SFPE Society of Fire Protection Engineers

SIS Synthetic Insulated Switchboard Wire or XLPE-Insulated Conductor

SPAR-H standardized plant analysis risk human reliability analysis

SNL Sandia National Laboratories

THERP technique for human error rate prediction

T/M testing and maintenance

TP thermoplastic

TS thermoset

VEWFDS very early warning fire detection system

VTT Valtion Teknillinen Tutkimuskeskus

1 INTRODUCTION

During the past decade, there has been significant experience applying the fire probabilistic risk assessment (FPRA) methodology published in NUREG/CR-6850 (Electric Power Research Institute [EPRI] 1011989), *EPRI/NRC-RES Fire PRA Methodology for Nuclear Power Facilities* [1]. Through this experience, certain aspects of the methodology were identified as candidates for additional research and development. One aspect of the FPRA methodology that has not undergone revision is the fire scenario progression and interaction between the fire ignition, growth, and suppression models.

NUREG/CR-6850 provided a simplified framework for calculating fire ignition frequency, the fire hazard, and the suppression effectiveness. This model captures actual U.S. nuclear power plant (NPP) experience to develop the fire ignition frequencies and manual non-suppression rates. The fire hazard, on the other hand, is derived from experimental fire tests to predict a distribution of heat release rates (HRRs). In addition to the HRR, fire testing informs the timing of the fire, specifically the rate at which the fire grows to its peak HRR, steady-state burning, and decay phases. When applied, the combination of operating experience (OPEX) and experimental testing has resulted in a high percentage of electrical cabinet fire scenarios damaging external targets. This does not align with the insights in the EPRI Fire Events Database (FEDB), which suggest that most fires are contained and limited to the ignition source [2].

Around 2010, the EPRI FEDB underwent an extensive upgrade to improve the data quality (including timing, event descriptions, and so on) and source document traceability and added more recent U.S. NPP OPEX. This update marked a significant improvement over previous versions that provided minimal details. This version of the FEDB allowed for the revision of ignition frequencies and non-suppression probabilities (NSPs) through 2009 [3]. Although NUREG-2169 (EPRI 3002002936), *Nuclear Power Plant Fire Ignition Frequency and Non-Suppression Probability Estimation Using the Updated Fire Events Database*, updated the data [3], it was recognized that further research would be needed to more realistically model the fire progressions observed in actual experience.

This report provides an updated framework for treatment of the fire scenario progression starting from ignition through suppression. The detection-suppression event tree described in Appendix P of NUREG/CR-6850 (EPRI 1011989) is revised to include additional fire sequences commonly observed in NPP fire events.

Introduction

1.1 Purpose

The purpose of this report is to provide an approach that more closely models the types of fire progressions and response activities (for example, detection and suppression) observed in OPEX. Specifically, the methodology described in this report provides the following:

- An updated Bin 15 fire frequency that makes use of the most recent fire event data classified in the study, Fire Events Database Update for the Period 2010–2014: Revision 1 (EPRI 3002005302) [4].
- Split fractions for interruptible and growing fires for use in the revised detection-suppression event tree.
- A conceptual fire event tree progression model developed through an event review of insights from the FEDB. (Subsequent to the review, a procedure and rule set were developed to allow for consistent classification of fire events into two different growth profiles, interruptible and growing.)
- A revised electrical cabinet HRR timing profile developed for use in the detailed fire
 modeling of interruptible fires. (This revised profile includes a pre-growth period of 9 minutes
 of negligible HRR. The treatment for the HRR profile for growing fires was not updated in
 this research.)
- Revisions to the detection-suppression event tree to include paths for crediting early
 intervention by plant personnel, as well as developing new parameters to facilitate these
 revisions. (These new parameters include an opportunity to credit detection by general plant
 personnel.)
- An opportunity for main control room (MCR) indications as a means for fire detection when applicable in the detection-suppression event tree.
- The fires observed in electrical cabinets do not always produce conditions significant
 enough to actuate fixed detection systems, thereby introducing the probability of automatic
 smoke detection effectiveness parameter to characterize the ability of spot-type smoke
 detection devices to operate in a range of geometric conditions and HRRs.
- New suppression curves for electrical cabinets (Bin 15) applicable to interruptible and growing electrical cabinet fire scenarios.
- New suppression curve for MCR fires.
- A new electrical fires suppression curve also generated for use with other non-cabinet electrical ignition sources (for example, motors, pumps, and transformers).

1.2 Scope

The scope of the methodology described in this report is limited to electrical cabinet sources (Bin 15, electrical cabinets) with detailed fire modeling. It is noted, however, that due to the legacy treatment of manual suppression curves, the research described in this report also produced new manual suppression curves for the MCR and electrical equipment other than electrical cabinets (that is, motors, dry transformers, and so forth).

2 BACKGROUND

The fire ignition frequencies and manual non-suppression rates used in FPRAs are developed using evidence from actual U.S. NPP experience. This experience is consolidated in the EPRI FEDB [2]. During the development period of NUREG/CR-6850, the challenges of inconsistent recordkeeping and reporting practices associated with gathering fire event evidence were known and documented. Inconsistencies related to the quality of the data—in terms of content, the amount and accuracy of the information in the records provided by the data sources, and fires that were potentially unreported and therefore not included in the database—resulted in acknowledgment of incomplete or possibly inaccurate data to develop the fire ignition frequency and the manual non-suppression rates.

The concept of the potentially challenging fire, a fire that either did or had the potential to challenge nuclear safety, was also introduced in NUREG/CR-6850. The combination of limitations in event descriptions and limited data to develop the fire hazard associated with ignition resulted in a relatively higher frequency of fire scenarios damaging targets external to the ignition source.

Since the publication of NUREG/CR-6850, the fire ignition frequencies, the fire hazard, and the manual suppression data were reviewed and updated in an attempt to bring the modeling of the risks associated with fires in NPPs into better agreement with actual NPP experience. In 2010, an extensive update of the FEDB was performed, which significantly improved the quality (event timing, descriptions, source document traceability, and so on) of the events recorded. A review of fixed ignition sources in the FEDB concluded that "[t]he majority of fires were confined to the ignition source at the time they were extinguished" [2]. The updated FEDB was used to revise the fire ignition frequency and the manual suppression effectiveness estimations as documented in NUREG-2169. Similarly, in 2015, NUREG/CR-7197 documented an experimental study of 112 full-scale electrical cabinet fires. A review of these fires resulted in updated HRR profile distributions and peak values as documented in NUREG-2178 (EPRI 3002005578), Refining and Characterizing Heat Release Rates from Electrical Enclosures During Fire (RACHELLE-FIRE), Volume 1: Peak Heat Release Rates and Effect of Obstructed Plume [5].

Despite these revisions, it was recognized that further research was necessary to achieve more realistic modeling of fire risk from electrical cabinets at NPPs. Since the publication of NUREG/CR-6850, FPRA results have been compared against OPEX. This comparison suggested a number of differences in terms of fire severity, fire detection, and fire suppression.

The insights presented in this section are extracted from a review of the fire event data from the 15-year period from 2000 to 2014. This includes the latest time period of data in NUREG-2169 (2000–2009), supplemented by additional data reviewed and coded by both EPRI and the U.S. Nuclear Regulatory Commission (NRC) in *Fire Events Database Update for the Period 2010–2014: Revision 1* (EPRI 3002005302). During this time period (2000–2014), 47 electrical cabinet events were classified as potentially challenging or greater in the EPRI FEDB.

Background

2.1 Fire Severity

- Only 1 of 47 events was classified as undetermined fire severity (half-count event). This is a
 marked improvement from both NUREG/CR-6850 (which has 24 undetermined events in the
 1990–2000 period) and NUREG-2169 (which had 21 undetermined events in the 1990s and
 3 in the 2000s). The definitive severity classification is the result of a higher pedigree of data
 along with better source reference traceability. Additionally, as part of this project, additional
 event details were requested, as needed, to clarify event details. In two fire events, this
 helped classify the fire severity.
- Seven of the 47 events were of a challenging (CH) fire classification. The challenging classification is used to denote fires "that had an observable and substantive effect on the environment outside the initiating source, regardless of where in the plant the fire occurred, what was potentially under threat, or what was actually damaged by the fire" [2]. The challenging classification is intended to capture fires that damage adjacent objects (cables, components, or secondary combustibles) and capture significant suppression actions (such as use of hose stream or automatic/manual activation of fixed suppression). Three of the challenging fires actuated fixed automatic fire suppression systems (events 588, 50912, and 51304). The four other events were classified as challenging due to heavy smoke, delays in suppression, and extensive damage within the cabinet. In all four events, damage was limited to the ignition source. For event 175, grounding devices were left in three balance-of-plant incoming breaker cubicles. When the main transformer was energized, the grounding devices provided a direct short to ground, which induced fires in three cubicles. The damage was limited to the breaker cubicles with grounding devices.
- The remaining 39 events were classified as potentially challenging. The potentially challenging classification is used to denote fire events "that were not judged to be CH events, but that could, under foreseeable alternate circumstances, have reached a CH state" [2].

The fire severity classifications are summarized in Figure 2-1. The predominant insight is that most fire events are potentially challenging, indicating the presence of small fires and intervention prior to the fire reaching a challenging state. Additionally, there are several instances where manual fire suppression occurred around the 15-minute mark or later and the fire was described as small and limited to the ignition source. This suggests that not all fires grow and develop as postulated in Table G-2 of NUREG/CR-6850.




Figure 2-1 Fire severity

2.2 Fire Detection

The event review looked at the different ways the fires of interest were detected (see Figure 2-2). There are several instances where multiple forms of fire detection alarmed in close proximity, but for simplicity the first indication is noted in this summary.

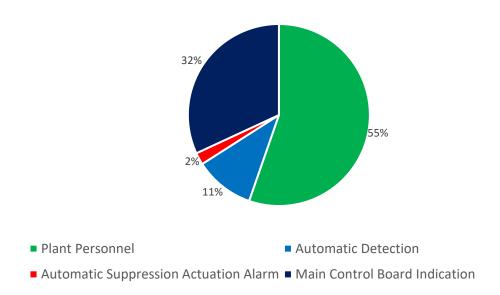


Figure 2-2 Fire detection

Background

The suppression model in NUREG/CR-6850 Appendix P is entered as soon as automatic detection occurs. Therefore, to credit the manual response and any automatic suppression system, a calculation is performed for detector actuation. When detected, the fire suppression system or plant personnel can respond (for example, the manual suppression curve is applicable). For rooms without automatic detection, manual detection is presumed to occur within 15 minutes. Using the fire growth profiles in NUREG/CR-6850, this detection would occur during the peak HRR. In limited instances, prompt detection may be credited. Prompt detection is implicitly credited in the MCR (which is continuously occupied) and for hot work (where a fire watch is procedurally required). In these cases, there is no additional time for detection.

Automatic detection was observed as only the first indication in 13% of events (either automatic suppression actuation alarm [2%] or fixed automatic detection [11%]). This suggests that some of the fire events are detected in the early stages of the fire development and/or may smolder for some period of time prior to having any potential of catching other nearby combustibles on fire. There is also a chance that the fire may self-extinguish or fail to spread to nearby secondary combustibles, thereby limiting fire growth.

The most common method of detection is plant personnel at 55%. The second most common method of detection is an alarm or indication in the main control board (that is, a signal that initiates the process of discovering the presence of fire and/or suppression activities when appropriate). In this instance, an operator may send plant personnel to investigate an abnormal condition.

Given the insights described previously, the detection-suppression event tree was modified to account for detection by either plant personnel, main control board indication, or automatic detection. The concept of a pre-growth time was also investigated.

2.3 Fire Suppression

The fire event review also focused on characterizing the suppression response. As outlined in Figure 2-3, plant personnel play a strong role in the suppression of electrical cabinet fire events. Approximately 33% of these fires are suppressed by the full fire brigade (FB), whereas 57% are suppressed by personnel discovering the fire, staff conducting testing and maintenance (T/M) on equipment, or other general plant personnel. (Note: If the first responding personnel are members of the FB, they are still counted as plant personnel and not as the full FB in Figure 2-3.) This is not captured in the guidance described in Appendix P of NUREG/CR-6850, which only credits plant personnel for prompt suppression in hot work and MCR fire scenarios. The event review determined that 3% of the electrical cabinet fires were suppressed by automatic systems.

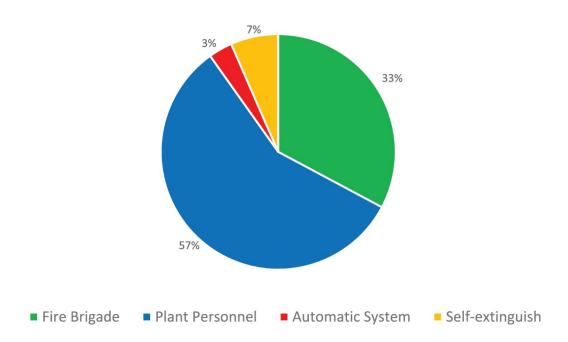


Figure 2-3 Fire suppression response

As covered in Section 3.3.1.4, a criterion important to the review of fire timing profiles was analyzing the suppression response, specifically characterizing whether the suppression response was simple. Examples of simple responses include de-energizing or removing power (30%) to the ignition source and the use of a single portable extinguisher (30%) or a combination of the two (11%). Figure 2-4 shows that 71% of the fire events were suppressed using simple suppression actions.

Background

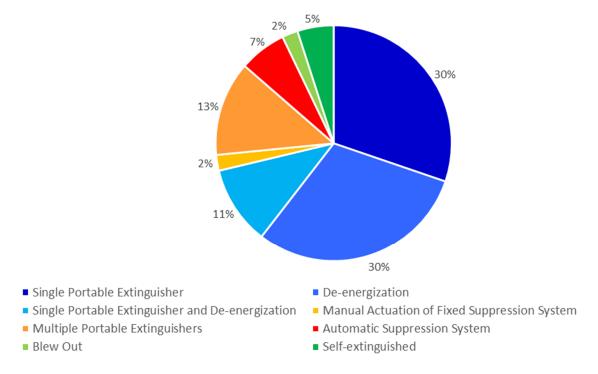


Figure 2-4 Means of fire suppression

2.4 Fire Attributes

There is limited information in the EPRI FEDB associated with fire size (HRR) and rate of fire growth. The variability in fire event reporting can range from no description, simple descriptions of fire size (for example, small or limited to ignition source), reports of flame size in inches, to pictures of the damage. A review of the fire events in the EPRI FEDB associated with electrical cabinets shows that a significant fraction, 86%, was limited to the ignition source; no fire damage was found to have occurred to anything other than the ignition source (see Figure 2-5). In this context, the ignition source was defined as the electrical cabinet of origin. Additionally, there was no evidence that electrical cabinets were found to cause ignition of secondary targets, including adjacent cabinets, or cable trays.

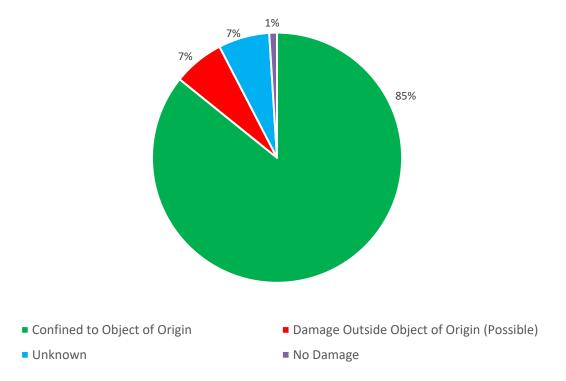


Figure 2-5 Fire damage

The fire events reviewed suggest a rate of fire growth and intensity that allows for detection, suppression, and control that limits damage to the ignition source in the majority of the events. Therefore, there is an additional time period that allows plant personnel to respond prior to external target damage.

The guidance outlined in this report provides an approach that more closely models these types of fire progressions observed in OPEX.

3 METHODOLOGY FOR INTERRUPTIBLE FIRE DETERMINATION

3.1 Introduction

The event review performed in Section 2 indicates that a majority of electrical cabinet fires are extinguished by plant personnel, with minimal suppression efforts, prior to developing into a challenging state. Figure 2-1 shows that 83% of electrical cabinet fires are classified as potentially challenging. In other words, these are fires that were not fully involved, did not impact surrounding equipment, or did not damage cable trays or conduit nearby.

Following the approach described in NUREG/CR-6850 [1], all fires, regardless of fire severity classification (potentially challenging, challenging, and undetermined), are modeled with an assumed growth time of 12 minutes. The insights from a review of the FEDB data suggest that a significant fraction of fires grow in a manner that allows for plant personnel to respond. To capture this experience, events are classified into two growth profile groups: (1) interruptible fire: events in which plant personnel could detect and perform early suppression activities; these are fires that progress at a rate so that plant personnel may discover and suppress prior to experiencing external target damage; and (2) growing fire: events in which the fire may grow in a manner such that plant personnel may not be able to provide suppression prior to fire growth.

Each classification, interruptible fire and growing fire, has an associated fire growth timing profile for use in conjunction with the HRRs found in NUREG/CR-6850 (EPRI 1011989), EPRI/NRC-RES Fire PRA Methodology for Nuclear Power Facilities, or NUREG-2178 (EPRI 3002005578), Refining and Characterizing Heat Release Rates from Electrical Enclosures During Fire (RACHELLE-FIRE), Volume 1: Peak Heat Release Rates and Effect of Obstructed Plume. In addition, each classification has a unique non-suppression rate corresponding to the OPEX for each respective classification. The fractions of fires characterized as interruptible fire and growing fire serve as inputs to the detection-suppression event tree.

3.2 Assumptions

The following assumptions apply to the event review and determination of interruptible versus growing fires.

The documentation provided by the NPP utility, describing each fire event in the FEDB, is an
accurate representation of the fire event and contained sufficient information to support the
event review and fire data classification. The pedigree of the source data contained in the
current FEDB has significantly improved in recent years. This improvement has allowed for
advancements in methodologies that agree with OPEX.

Methodology For Interruptible Fire Determination

- A fire found by an operator while on a roving fire watch, routine walkdown, and so on has ignited prior to the discovery of the fire (that is, some time has passed prior to the discovery of the fire, and it has had enough time to grow). Similarly, it is assumed that a fire discovered by an operator or other plant personnel, working in the same fire compartment in which the ignition source is located, had an opportunity to grow in the time it takes for the operator to discern the location of the fire/ignition source.
- A fire may be controlled even if it has not been fully extinguished by the initial suppression attempt (manual), unless otherwise stated in the fire event described in the FEDB.
- Detection and suppression systems, if in place, were installed and maintained following Code requirements and evaluated to be adequate for the fire hazard and assumed to have the capability to perform effectively.
- Equipment trouble alarms in the MCR, due to fire, occur in the early stages of the fire development.

3.3 Interruptible Fire Criteria

An interruptible fire is a fire that grew at a rate that is slow enough to allow for plant personnel to be notified of the event, locate the source, and suppress the fire with minimal effort. Such fires are limited to the ignition source and typically suppressed using portable fire extinguishers or by de-energizing the ignition source. To determine whether an event is an interruptible fire, there are two criteria that need to be met. These criteria are (1) the event describes or provides evidence that some time has passed (from the beginning of the fire to detection and start of suppression actions against the fire) and the fire has not grown beyond the criteria for a small fire (see Section 3.3.1.3), and (2) the event indicates that the fire was extinguished with minimal suppression effort(s).

The intent of the first criteria is to ensure that the fire had the opportunity to grow (time has passed) but has not grown to a point that prevents responding personnel from attempting a suppression response prior to damage of other targets or damage outside of the ignition source.

The intent of the second criteria is to ensure that the fire event could be suppressed by plant personnel with minimal effort. Only events describing fires that were suppressed with minimal effort are counted as interruptible. A full explanation of the interruptible fire conditions supporting these criteria is provided in Section 3.3.1.

3.3.1 Interruptible Fire Conditions

In the review of electrical cabinets fires (that is, Bin 15 fire events), a number of conditions have been consistently observed for fires that did not show appreciable fire growth and may be used to determine whether the criteria for interruptible fire have been met. These conditions can be generally classified based on the detection, personnel response to a cue, fire size, and burning characteristics. Specifically evaluated conditions include the following:

- 1. Notification of an event
- 2. Indication of the passage of time, often recorded or logged as the following:
 - Time for personnel traveling to the ignition source
 - Time for confirmation of fire detection
 - Time for notification to MCR (for fire and non-fire related initial notifications)
 - Time for the dispatch and arrival of the appropriate suppression capabilities
- 3. Fire size (that is, small fire observed)
- 4. Suppression of the fire with minimal effort

Figure 3-1 depicts a conceptual timeline of interruptible fire conditions.

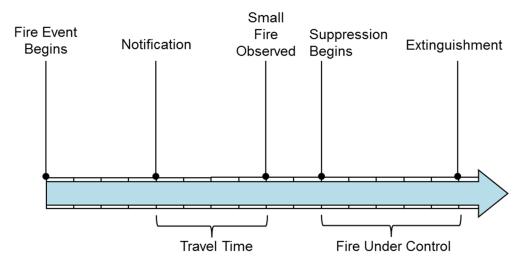


Figure 3-1 Conceptual interruptible fire timeline, not to scale

Although these conditions may be used to help clarify whether the fire described meets the two interruptible fire criteria described previously, observing these conditions should be used to justify the interruptible fire **criteria** and not to directly classify an event as an interruptible fire.

3.3.1.1 Notification

For interruptible fire events, notification signals an indication or alarm of a possible fire. Notification could come from a wide range of detection methods, including the following:

- Automatic notification to the MCR. This notification occurs in the form of an alarm or signal of the loss or malfunctioning of equipment, such as a pump, switchgear, motor control center (MCC), and so on, at the main control board. Given an indication that a component/equipment is no longer functioning as intended, personnel are often dispatched to locate the source and/or cause for this notification signal.
- Automatic notification to the fire alarm control panel (FACP). This notification or alarm
 in the MCR would represent the actuation of an automatic fire detection system. Unlike the
 MCR notification described previously, which does not alway signals a fire event, this type of
 alarm indicates that a potential fire event is taking place.
- **Notification by plant personnel**. Many of the events recorded in the FEDB describe that the first indication of a fire comes from a call or report to the MCR by plant personnel. These are events where a fire watch, a roving fire watch, staff conducting T/M, or other plant personnel who happened to be in the vicinity of the ignition source, see smoke, smell smoke, or hear a loud noise and notify the MCR of the situation.

Due to the way the events in the FEDB are recorded, some indication of notification will occur and this condition will be met. After all, the plant staff can only respond to events that are known. Even if the fire is discovered by an operator on a roving fire watch and immediately suppressed, the event will be recorded that the fire was detected by plant personnel. The observed detection methods for Bin 15 events recorded in the FEDB are presented in Figure 3-2. As shown in Figure 3-2, there are many ways that plant staff can be notified of fires beyond traditional fixed fire detection systems. The event review concluded that most Bin 15 fire events are discovered by plant personnel.

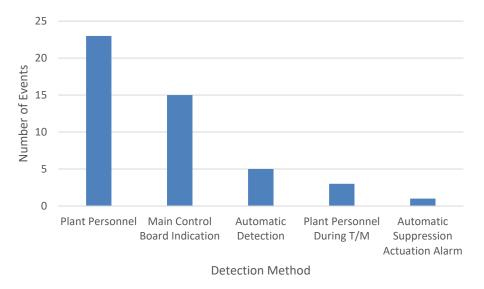


Figure 3-2
Detection method of reported Bin 15 fire events

Although the notification condition will occur, it is tied to the overall aspect of the criteria to help judge that some time has taken place to allow the fire to grow, but that this growth did not happen at a rate that precludes the ability for plant personnel to respond and suppress the fire with minimal effort.

In order to classify an event as an interruptible fire and meet the notification condition, one of the following mechanisms should be present in the event description:

- MCR staff receiving a notification of a potential fire by control/instrumentation failures or indications (for example, a failed equipment alarm such as a tripped pump)
- Fire watch
- General plant personnel (in vicinity, or a passerby)
- Security personnel (in vicinity, or a passerby)
- Fixed automatic detection system (smoke)

Potential notification mechanisms that should not be used as evidence of an interruptible fire type are the following:

- Automatic suppression system actuation alarms (sprinkler or water flow alarms, halon or CO₂ discharge alarms)
- Plant personnel conducting T/M on the equipment of fire origin (fires caught and
 extinguished during T/M conditions would violate the passage of time criteria. These fires
 may have developed into growing fires if personnel were not present at the onset of the
 fire—that is, had the fire occurred at the next demand during normal operation.)
- Fixed automatic detection system (thermal)

After the fire has been detected, the second condition evaluates whether time passed from detection. The passage of time condition, if observed, provides confidence that the fire had an opportunity to grow.

3.3.1.2 Passage of Time

The passage of time condition captures the intent of the interruptible fire criteria that some time has passed allowing the fire an opportunity to grow. By noting that the first responding personnel had to travel to the fire location provides evidence that the fire described in the event had an opportunity to grow. This condition may be identified in the description by one or more of the following:

- Time for plant personnel to travel to the location of the fire
- Time for confirmation of fire after detection
- Time for notification to the MCR
- Time to dispatch operators or plant personnel in response to the detection signal

In most cases, travel (passage of) time will be included in an event description as an indication that an operator was dispatched to a location following a notification or alarm at or to the MCR.

In addition, if a fire is discovered while on roving fire watch or routine walkdown, it is assumed that the fire started prior to the discovery and had an opportunity to grow. In this case, the notification and passage of time conditions would be considered met simultaneously.

Methodology For Interruptible Fire Determination

An event where plant personnel discover a fire while working in the same vicinity as the ignition source should not be immediately excluded. Although there may not be clear indication of travel, the passage of time may still take place because, in these cases, personnel would likely have to search for this fire. These fire events are most likely to occur within the MCR, activities requiring a continuous fire watch, or in areas where T/M is in progress. Examples of the passage of time would include an indication of an odor of smoke or a noise (notification) and words and phrases in the event description such as *investigated*, *determined*, *discovered*, or *looking for indication of a fire*. Again, this ensures that the fire had an opportunity to grow but was not found to have done so.

The passage of time condition evaluates the time that has passed between detection and suppression. This criterion would not be met for fires that occur where personnel are directly adjacent to the source or directly involved with the equipment when the fire begins (for example, personnel performing T/M) and are therefore able to suppress the fire immediately, with no clear indication of the fire growth rate. For example, if the fire is discovered in equipment during T/M, the notification condition is met when the fire is discovered; however, the passage of time condition is not met, given that personnel are already located at the fire source.

Next, the small fire condition is used to confirm the second half of the criteria—that the fire has not grown quickly.

3.3.1.3 Small Fire

The small fire condition of an interruptible fire event means the fire has not grown larger than could be suppressed by the initial responding plant personnel. In many cases, an event report will include descriptions of small flame lengths, small flame heights, or even simply as a small fire. This qualitative description does not mean that this condition has been met. Although the qualifier *small* is often observed for events that should be classified as an interruptible fire, it must be judged against the context of the entire event description—that is, a propagating or fully involved fire discovered late in the progression does not constitute a small fire.

Because sometimes the only indication provided in an event is that the fire is small, one indication of a small fire is that it was suppressed with minimal effort (such as the use of a single portable fire extinguisher).

In order to meet the small fire condition, one of the following indications should be present in the event description:

- Plant personnel or an operator describes the fire as *small*.
- The fire is limited to a subcomponent within the ignition source when discovered.
- The fire is suppressed with minimal effort.

Potential indications that should not be used as evidence of a small fire include: (1) a fully involved fire and (2) a fire not limited to the ignition source, damaging targets other than the ignition source.

Observing these conditions, notification, passage of time, and a small fire allows for confidence that the first criteria for classifying an event as an interruptible fire have been met. Recall that these conditions are presented as a means of determining whether the criteria are met, not as substitutions for the criteria. These conditions have been consistently observed for events classified as interruptible fires but should be used to support the interruptible criteria only—a fire that had the opportunity to, but has not grown quickly, and suppressed with minimal effort.

3.3.1.4 Minimal Suppression Effort

The minimal suppression effort condition includes the method(s): de-energization of the ignition source and/or discharge of a single portable extinguisher (or parts of multiple extinguishers, as long as there is an indication that the fire was successfully controlled by the initial attempt). This condition also requires the suppression actions to be performed by the first responding personnel (may be either plant personnel or FB).

In the case of multiple, back-to-back, attempts to suppress the fire or if an automatic suppression system was activated, more than a minimal effort was required and the event should not be counted as an interruptible fire. Examples of multiple attempts include the use of more than one full fire extinguisher (for example, multiple extinguishers in quick succession) was required for suppression or observing that the fire was not under control after each suppression attempt.

Recall that the intent of the previous conditions is to discern whether the fire event progressed at a rate that allows for plant personnel to respond prior to appreciable fire growth. However, the lack of a clear indication of notification, the passage of time, and the fact that a small fire that can be suppressed with minimal effort does not necessarily mean the fire described was not a fire that grew at a rate to which plant personnel had an opportunity to respond.

Potential indication of suppression efforts that should not be used as evidence of an interruptible fire type are the following:

- A fire suppressed by a fixed automatic suppression system
- Use of multiple extinguishers in quick succession
- Suppression by hose stream
- Suppression by off-site assistance

There are a number of instances where the previous conditions overlap. For example, the small fire condition may be met if it was suppressed with minimal effort or the notification and passage of time conditions may be met simultaneously when the fire is discovered by a roving fire watch. These conditions—notification, passage of time, and small fire observed—are provided because they have been consistently observed in the event descriptions for fires that did not grow at a rate exceeding the ability of plant personnel to respond and successfully extinguish the fire with minimal effort.

3.3.1.5 Special Case—Arc Flash

The term *arc flash* has been used in fire event records to characterize the observed fire phenomena. These events are often associated with power distribution equipment, including MCCs and switchgear. These events have been classified as electrical cabinet (that is, Bin 15) events because they differ from the high-energy arcing fault (HEAF) events, which are included in Bin 16 [1]. Due to the relatively small intensity of the arc flash event, these events may be counted and used in the determination of the fire ignition frequency and NSPs even if they did not damage anything other than the ignition source.

There are two subpopulations of this type of event that may be classified as interruptible fire events: (1) events for which any flaming fire, sparks, and smoldering are limited to the cubicle of origin, and (2) events that trip an upstream breaker and self-extinguish prior to developing into a fire that requires more than a minimal effort to suppress.

Methodology For Interruptible Fire Determination

Although these events may have immediately reached their peak intensity, they do not continue to grow prior to the arrival of plant personnel and are suppressed with minimal efforts including de-energizing the cabinet and/or the use a single portable fire extinguisher.

3.3.2 Summary of Interruptible Fire Conditions

Table 3-1 summarizes the conditions described in a fire event that provide evidence of an interruptible fire. Conditions from each of the four interruptible fire attributes in Table 3-1 should be used to support the criteria identified in Section 3.3.1 for a fire to be classified as an interruptible fire.

Table 3-1 Conditions for an interruptible fire event determination

Interruptible Fire Attribute	Condition Met	Condition Not Met	
	Plant staff communicating an observation to the MCR		
	Equipment alarm in MCR or malfunctioning/trouble signal	Fixed suppression system actuation alarm in FACP	
Notification	Fixed automatic detection reported on FACP		
Notification	Discovery by plant personnel: general plant personnel		
	Discovery by plant personnel: fire watch (roving or stationary)	Fire starting in equipment while performing T/M when paired with immediate suppression	
	Discovery by plant security personnel		
	Plant personnel dispatched to an event		
Passage of	Plant personnel on roving fire watch or walkdown who notice the fire	Fire starting in equipment while performing T/M	
Time	Words and phrases such as investigated, determined, discovered, or looking for indication of a fire		
	Plant personnel describing a small fire, small flame lengths	Plant personnel describing a room full of smoke (challenging conditions requiring use of a self-contained breathing apparatus)	
Small Fire	Fire limited to the ignition source only or subcomponent within the ignition source	Fire not limited to ignition source—fire propagating to cable trays above or other equipment	
	Fire suppressed with minimal effort	Fire not suppressed with minimal effort	
	Use of one or more portable extinguishers at the same time	Fixed (automatic or manual fixed) suppression system activated	
Minimal Suppression	Initial attack successful	Use of multiple extinguishers in quick succession	
Éffort	Fire extinguished by de-energizing equipment	Suppression by hose stream	
	Self-extinguished	Suppression requiring off-site assistance	

3.4 Interruptible Fire Split Fraction

Table 3-2 summarizes the classification of Bin 15 events against the criteria described in Section 3.3. Specific details of the event review and fire growth classifications are documented in Appendix A.

Table 3-2 Interruptible and growing split fractions (2000–2014)

Growth Profile	Count	Split Fraction
Interruptible	34	0.723
Growing	13	0.277

This split fraction is used in the detection-suppression event tree described in Section 5. These split fractions are generic values.

3.5 Interruptible, Growing, MCR, and Electrical Fires Suppression Rate

3.5.1 Interruptible and Growing Fire Suppression Rate

In addition to the split fraction of interruptible and growing fires, the suppression rate for each growth profile was investigated. Suppression rates for the MCR and electrical fires already exist [3]. The MCR suppression rate includes the manual suppression rates associated with ignition events within the MCR; likewise, the electrical suppression rate includes fire events in electrical ignition sources (excluding HEAFs and oil fires). Following the review of events, the interruptible and growing fires were separated from the electrical fires suppression curve and developed into two new suppression curves (interruptible and growing). Therefore, a total of three suppression rates are applicable for fires in electrical cabinets: interruptible, growing, and MCR. The suppression rates use the applicable FEDB events from 1990 to 2014.

Just as in NUREG/CR-6850 Supplement 1 and NUREG-2169, the suppression time is defined as the time the fire was extinguished or the time the fire was reported to have been brought under control by responding plant personnel, personnel discovering the fire, or the FB. As part of the event review, careful attention and additional details were sought out to best determine the appropriate time of detection and suppression actions. The details of the suppression binning are provided in Appendix Appendix A. A summary of the number of events, durations, and suppression rates is provided in Table 3-3 and shown graphically in Figure 3-3.

Methodology For Interruptible Fire Determination

Table 3-3 Electrical ignition source probability distribution for rate of fires suppressed per unit time (1990–2014[†])

Suppression	Number of	Total		Rate of Fire Suppressed (λ)		
Curve	Events	Duration	Mean	5th Percent	50th Percent	95th Percent
Interruptible	43	288	0.149	0.114	0.148	0.189
Growing	18	179.5	0.100	0.065	0.098	0.142
Electrical fires*	74	653	0.113	0.093	0.113	0.136
MCR [†]	10	26	0.385	0.209	0.372	0.604

^{*}Electrical fires include non-cabinet electrical sources, such as electrical motors, indoor dry transformers, and junction boxes among other electrical equipment.

Similar to NUREG-2169, the 5th, 50th, and 95th percentiles for the suppression rate, λ , presented in Table 3-3 are calculated using the chi-square distribution in Equation 3-1:

$$P(x,v)/t_D/2 \tag{3-1}$$

where P(x,v) is the lower cumulative distribution function of the chi-square distribution, x is the desired percentile, v is the number of degrees of freedom (equal to the number of events used in the suppression curve), and t_D is the total duration suppression time for the suppression curve.

[†]Due to the limited number of events in the MCR, the development of the suppression rate includes data from the 1980s. For detailed information on the control room suppression rate, see NUREG-2178, Volume 2, EPRI 3002016052 [39].

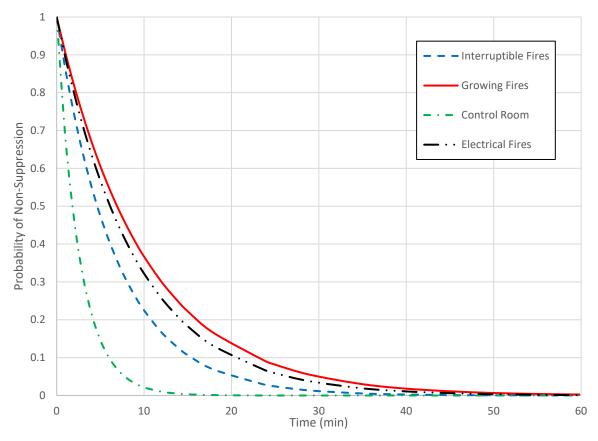


Figure 3-3
Non-suppression curve plot showing probability versus time to suppression

Note that the total number of events for interruptible, growing, electrical fires, and MCR, in Table 3-3, does not add up to the total number of events listed in NUREG-2169 for electrical fires. The suppression rate associated with electrical cabinets (electrical fires in NUREG-2169) includes electrical cabinets, electric motors, indoor dry transformers, and junction boxes, among other electrical equipment. The interruptible and growing fire suppression rates are limited to electrical cabinets counted under Bin 15, as defined in NUREG/CR-6850, based on events that occurred between 1990 and 2014. Eight of 39 Bin 15 electrical cabinet events that occurred between 1990 and 1999 did not contain enough information to categorize them as interruptible or growing fires. To capture these events, half of the count and suppression time was split evenly between the two classifications. Eighteen of the events occurring in the 1990s could be classified as interruptible and growing and were considered in their respective suppression rate calculations. For the remaining events, no suppression time could be determined from the event reports. Due to the limited cabinet fire event information, the data from the 1980s period were excluded from the suppression rate analysis. Similarly, for the electrical fires suppression rate category, the 1980s suppression data were excluded. This was done primarily to keep the data period between the interruptible, growing, and electrical fires categories the same. Assuming that any error in the data is normally distributed, an analysis of variance (ANOVA)—a method used to analyze and determine whether the differences between the sample means for groups of information are statistically significant—was performed on electrical fires (without Bin 15 electrical cabinets) suppression data with and without the 1980s data. The results presented in Table 3-4 found no significant difference for the two data sets (P-value>0.05, F-Ratio less than the critical F-statistic).

Methodology For Interruptible Fire Determination

Table 3-4
ANOVA of electrical fire suppression data with and without events during the 1980–1989 period

Source of Variation	Sum of Squares	Degrees of Freedom	Mean Squares	F Ratio	P-Value-V	Fcritical
Between groups	153.5	1	153.5	1.13	0.29	3.89
Within groups	24012.6	177	135.7			
Total	24166.06	178				

3.5.2 NSP Floor for the MCR

Appendix P of NUREG/CR-6850 set a floor value of 1E-03 for the manual NSP estimates. The objective of the floor value was to limit the use of the manual suppression probability model (that is, EXP[-\lambdat]) to values close to the range of fire durations available in OPEX—that is, the floor value was intended to bound the probability of manual suppression for potential fires larger than those included in the operational experience. In practice, this floor value has affected achieving realistic results for the faster manual suppression rates, such as the MCR manual suppression curve because the value of 1.0E-3 is reached in a relatively short period of time.

In practice, the floor value is interpreted as the best possible manual NSP that can be credited in the analysis. Therefore, floor value would set a lower limit based on the ability to suppress a fire before target damage and the probability of observing a fire within a period of time.

To estimate the floor value, a Monte Carlo sampling process was performed to approximate the best possible manual NSP for a fire in the MCR.

3.5.2.1 Probability of Fire in the MCR Within the Mission Time

In the MCR, typical ignition sources include the main control board (Bin 4), electrical cabinets (Bin 15), transient fires (Bin 7), and transient fires due to welding and cutting (Bin 6). The likelihood of fires associated with these sources is quantitatively characterized by their corresponding generic frequencies. For the purposes of establishing a floor value, the generic frequencies are treated (that is, apportioned to the MCR) as follows:

- The main control board frequency is fully apportioned to the MCR because there is only one main control board per unit. The generic frequency value is 2.05E-3/year (NUREG-2178, Volume 2, [39]). The full frequency is included because the entire main control board is located within the MCR.
- The electrical cabinet frequency is based on the number of cabinets counted in the MCR in the FPRA. This count can vary widely from NPP to NPP. The generic frequency value is 3.43E-2/year (see Table 3-9), which applies to a single NPP. Component counts for boiling water reactors and pressurized water reactors were reviewed and the average Bin 15 component count is around 800 per unit. The lowest observed count was over 300. To generalize the analysis, the ignition source weighting factor credited in the calculation (that is, multiplied the generic frequency) is a random variable sampled following a uniform

distribution with a range between 1/300 and 1/1300. The practical implication of this assumption is that there are, on average, 800 cabinets counted as ignition sources in a single-unit NPP based upon experience gained performing FPRAs. Because the Bin 15 fire frequency is divided among the ignition sources, the lower the component count, the higher the ignition frequency per component. Using a lower bound of 300 provides reasonable assurance that the ignition frequency is overestimated.

• Some portion of the transient frequency is apportioned to the MCR because the generic value covers the control building, auxiliary building (pressurized water reactors), and reactor building (boiling water reactors) portions of the NPP. The generic frequency values [3] are 3.33E-3/year for general transient fires and 4.44E-3 for transient fires due to welding and cutting (if hot work is not prohibited in the MCR during power operation, using the very low hot work factor [22]). To generalize the analysis, it is assumed that the apportioning factor is a random variable sampled following a uniform distribution with a range between 10% and 30%. The practical implication of this assumption is that, on average, 20% of the transient frequency is apportioned in the MCR. This conservatively assumes that the MCR, often a single room, represents 20% of the combined control, auxiliary, and reactor building floor area.

The average of the Monte Carlo sampling results in a total ignition frequency of 3.7E-3/year. This is interpreted as an approximation of the total ignition frequency for a fire in the MCR. It should be noted that this value does not take credit for fire severity (severity level of the fire needed to cause damage) and assumes that any fire is significant enough to cause damage outside of the ignition source. For this analysis, the selected period of time is 24 hours. This time represents the mission time in probabilistic risk assessment (PRA) (see NUREG-2122 [38]). Assuming a constant frequency, the exponential distribution can be used for determining the probability of observing a fire in the MCR for a mission time of 24 hours as follows:

$$Pr(t \le 24 h) = (3.7E - 03)/365 \approx 1.0E - 5$$
 (3-2)

This is the average probability (following the Monte Carlo runs) of a fire occurring in the MCR per day including the weights covered in the preceding bullets (cabinet counts and transient floor area).

3.5.2.2 Probability of Failing to Manually Suppress a Fire in the MCR

The manual NSP for the MCR can be calculated using the manual suppression curve assuming a characteristic fire scenario duration treated as a random variable. For the MCR, it is practical to define the duration as the time available before abandoning due to fire. This provides a time frame for operators or the FB to control the fire before having to evacuate the MCR. In this formulation, this period is treated as a uniform distribution ranging between 5 minutes (less than halfway to peak HRR for a growing fire) and 20 minutes (reaches the NUREG/CR-6850, Appendix P floor value, which is used as an indication that the limiting probability of non-suppression would have been reached). This range of times for evacuating the MCR for environmental conditions is conservative because it assigns equal probabilities to relatively short abandonment times and ignores fire scenarios where abandonment may not be necessary. The suppression rate constant for the MCR is 0.385. On average, these values calculate an NSP of 2.5E-2.

3.5.2.3 Floor Value

The recommended floor value is then the probability of a fire occurring during the FPRA mission time of one day (24 hours) multiplied by the average probability of non-suppression and an assumed average capacity factor of 95%, calculated as $1.0\text{E-}05 \times 2.5\text{E-}2 \times 0.95 \approx 2.4\text{E-}7$. This value is specific to the MCR because it was developed using location-specific ignition frequencies and the MCR manual suppression curve. As mentioned previously, this floor represents the lowest probability of an unsuppressed fire that can be credited in a fire scenario. The NSP floor value for a dual unit MCR is 4.8E-07.

The use of this recommended floor value does not impact the calculation of NSPs credited for specific fire scenarios because it only sets a new lower limit for credited NSP values.

3.5.2.4 Sensitivity to Input Parameters

The parameters used in this analysis are selected to provide a conservative analysis. The sensitivity of the proposed floor value to the input parameters chosen is reviewed in Table 3-5.

Table 3-5
Probability of non-suppression floor sensitivity analysis

Sensitivity Case	NSP Floor	Discussion
Base case, single unit	2.4E-07	N/A
Two-unit NPP: double the generic frequencies associated with the MCB, electrical cabinets, and transients	4.8E-07	This sensitivity captures a shared (two-unit) control room configuration. The result is a 99% increase to the floor value.
All fires suppression rate: 0.067/year (NUREG-2169)	4.3E-06	This sensitivity captures the effect of assuming a more challenging fire (such as those experienced in other areas of the plant) in the MCR. The result is an order of magnitude reduction in the approximated floor value.
Time to abandonment distribution reduced to 1–5 minutes	3.3E-06	This sensitivity highlights the effect of assuming times that are more representative of those associated with target damage. The result is an order of magnitude reduction in the floor value.
Number of cabinets: uniform distribution from 100 to 300	2.5E-07	This sensitivity highlights that the analysis is driven by the main control board frequency. The NSP floor is not sensitive to a reduction in the number of Bin 15 cabinets counted as ignition sources.
Reduced MCR apportioned transient frequency to a uniform distribution with a range between 1% and 10%.	2.1E-07	This sensitivity highlights that the analysis is driven by the main control board frequency. The NSP floor is not sensitive to the apportioned transient frequency.
All cases: all fires suppression rate, 1- to 5-minute abandonment times	8.5E-06	In this sensitivity, all of the previously sensitivity cases are all applied. The result is an order of magnitude reduction in the floor value.

Even with this estimated floor, the MCR still presents a unique case. The MCR suppression rate is developed using 10 fire events with a total suppression duration of 26 minutes (see Table 3-3), the longest fire being 9 minutes. Therefore, the fires capable of reaching the revised P_{ns} floor of 2.4E-07 would need to last for 39 minutes without being suppressed. By 39 minutes, it is reasonable to expect that MCR personnel would have exhausted any readily available extinguishers and that further suppression efforts would require resources from outside of the MCR. To capture the possibility of such events, a two-step calculation process is suggested for fires in the MCR.

The first step uses the MCR suppression rate in Table 3-3 for calculations of the P_{ns} with a floor value of 1E-03. This results in fires that are suppressed prior to approximately 18 minutes using a suppression rate of 0.385. The second step captures all remaining MCR fire durations up to the floor of 2.4E-07 through the use of an ignition source bin specific suppression rate (interruptible, growing, transient, and so forth). For example, a cabinet fire in the MCR will use the control room suppression rate up to a value of 1E-03, after which the interruptible and growing suppression rates in Table 3-3 or NUREG-2169 will be used for fire durations in excess of 18 minutes. This is expressed graphically in Figure 3-4. In essence, this treats longer duration fires in the MCR as if they were fires elsewhere in the plant where personnel and equipment for suppression may not be immediately available.

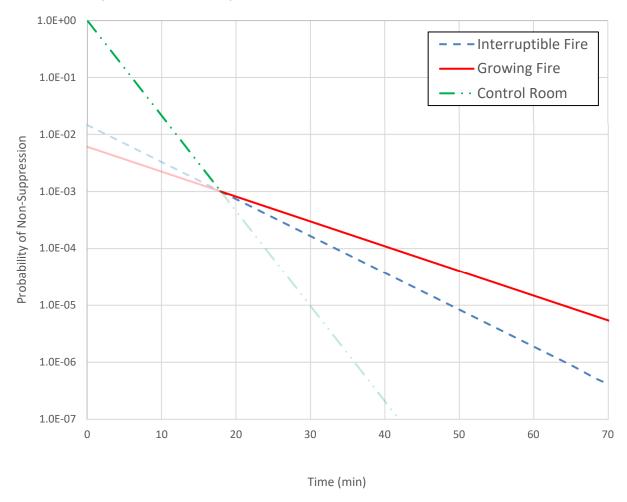


Figure 3-4 Non-suppression curve plot showing probability (logarithmic scale) versus time to suppression for MCR scenarios

Methodology For Interruptible Fire Determination

3.5.3 NSP Numerical Results

The numerical results for interruptible, growing, the MCR, and the revised electrical fires suppression curves are presented in Table 3-6.

Table 3-6 Updated numerical results for electrical cabinet suppression curves

Time (min)	Interruptible	Growing	MCR	Electrical Fires
0	1.00E+00	1.00E+00	1.00E+00	1.00E+00
5	4.74E-01	6.06E-01	1.46E-01	5.67E-01
10	2.25E-01	3.67E-01	2.14E-02	3.22E-01
15	1.07E-01	2.22E-01	3.12E-03	1.83E-01
20	5.05E-02	1.35E-01	7.37E-04/8.15E-04 [†]	1.04E-01
25	2.39E-02	8.15E-02	3.50E-04/4.94E-04 [†]	5.88E-02
30	1.13E-02	4.94E-02	1.66E-04/2.99E-04 [†]	3.34E-02
35	5.38E-03	2.99E-02	7.85E-05/1.81E-04 [†]	1.89E-02
40	2.55E-03	1.81E-02	3.72E-05/1.10E-04 [†]	1.07E-02
45	1.21E-03	1.10E-02	1.76E-05/6.64E-05 [†]	6.10E-03
50	*	6.64E-03	8.36E-06/4.02E-05 [†]	3.46E-03
55	*	4.02E-03	3.96E-06/2.44E-05 [†]	1.96E-03
60	*	2.44E-03	1.88E-06/1.48E-05 [†]	1.11E-03
65	*	1.48E-03	8.91E-07/8.94E-06 [†]	*
70	*	*	4.22E-07/5.42E-06 [†]	*
75	*	*	§/3.28E-06 [†]	*
80	*	*	§/1.99E-06 [†]	*
85	*	*	§/1.20E-06 [†]	*
90	*	*	§/7.29E-07 [†]	*
95	*	*	§/4.41E-07 [†]	*
100	*	*	§	*

^{*}A value 1.0E-3 should be used.

[§]A value 2.4.0E-7 should be used.

[†]Designates split for interruptible/growing fires in electrical cabinets in the MCR. A similar split would be required for other HRR bins, such as transients. Note that the growing fire split is bounding for electrical cabinets and transients in the MCR.

The numerical results presented in Table 3-6 for fires lasting longer than 18 minutes are estimated numerically by transitioning to the NSP value for the subsequent suppression curve to 1E-03 at a time of approximately 18 minutes. The following equations may be used to estimate times post 18 minutes:

- Interruptible fires (electrical cabinets only): $1E 03e^{-0.149(t-t_1)}$
- Growing fires (electrical cabinets only): $1E 03e^{-0.100(t-t_1)}$
- Transient fires: $1E 03e^{-0.111(t-t_1)}$

where, t, is the scenario time, post 18 minutes, and, t_1 , is the time at which the control room suppression rate reaches 1.0E-03 and estimated as $\frac{-\ln{(1E-03)}}{0.385}$.

3.6 Updated Bin 15 Fire Ignition Frequency

After the publication of NUREG-2169, EPRI cataloged and classified the fire event data available in the Institute of Nuclear Power Operations (INPO) Consolidated Event System (ICES) database. The fire severity review is documented in EPRI study, *Fire Events Database Update for the Period 2010–2014: Revision 1* (3002005302) [4]. This research makes use of the latest fire event data that were classified for fire severity. The counts for Bin 15 are shown in Table 3-7.

Table 3-7 FPRA counts per time period

			Dower		FPRA (Counts	
Bin	Location	Ignition Source	Power Modes	1968– 1989	1990– 1999	2000– 2009	2010– 2014
15	Plantwide components	Electrical cabinets (non- HEAF)	AA	64.5	29.5	23.5	23

The time period 2000–2009 includes the 84 NPPs that completed the full data collection protocol and plant review for the EPRI FEDB update. This is consistent with fire frequency calculations performed in NUREG-2169. Fire event data for events occurring in 2010 or later are collected and managed through INPO. This process is industrywide, and, as a result, all operating plants were included in the 2010–2014 time period. The reactor years for both atpower and shutdown are presented in Table 3-8.

Table 3-8
Reactor years for fire ignition frequency update

	1968–1989	1990–1999	2000–2009	2010–2014
At-power reactor years	899	848	771	467.7
Shutdown reactor years	383	233	78.8	45.7

Methodology For Interruptible Fire Determination

The updated fire ignition frequency distribution for Bin 15 is presented in Table 3-9.

Table 3-9 Fire ignition frequency distribution for Bin 15

Bin	Location	Ignition Source	Power Modes	Time Period	Mean	Median	5th Percent	95th Percent
15	Plantwide componen ts	Electrical cabinets (non- HEAF)	AA	2000– 2014	3.43E-02	3.19E-02	1.13E-02	6.60E-02

Note: If a plant-specific Bayesian update of the fire ignition frequency is warranted, a revision of the interruptible and growing fires split fraction is not necessary.

4

INTERRUPTIBLE AND GROWING FIRE HRR PROFILES

4.1 Bin 15 Fire HRR Timing Profiles

As covered in Section 3, the interruptible and growing fire event classifications resulted in an application of different manual suppression rates. However, when applied to the detection-suppression event tree analysis, what is not captured in the revision of these suppression rates is the lack of growth observed and reported in the fire events prior to plant personnel having a chance to respond. As described in Section 3, interruptible fires are fires that do not damage items outside of the ignition source prior to there being an opportunity for plant personnel to respond. When modeled in the detection-suppression event tree, with the traditionally developed 12-minute growth-to-peak period, targets located near the ignition source would see little to no change in the time to damage with just a revised suppression rate. Therefore, in addition to a revised suppression rate, the HRR timing profile is investigated for the interruptible and growing fire classifications.

The NUREG/CR-6850 HRR timing profile associated with electrical cabinets is as follows [1]:

- The fire grows to its peak HRR in approximately 12 minutes.
- The fire burns at its peak HRR for approximately 8 additional minutes.
- The average time to decay is approximately 19 minutes.

To determine the appropriate HRR profiles for use in this methodology, additional experimental data were reviewed. The data reviewed included the test series considered in NUREG/CR-6850 and presented in NUREG/CR-4527 [6], as well as other test series focused on electrical cabinets, such as those performed by Valtion Teknillinen Tutkimuskeskus (VTT) [7–10] of Finland and the National Institute of Standards and Technology (NIST)/NRC presented in NUREG/CR-7197 [11].

The analysis averaging the experimental results is shown for interruptible and growing fires in Sections 4.1.1 and 4.1.2. These results are analyzed and guidance for fire modeling is provided in Section 4.2.

4.1.1 Experimental Data Review of Interruptible Fires

A key parameter of an interruptible fire is the time that separates ignition and the possibility of growth by the fire. A review of the experimental data shows that a number of experiments include a period where, following ignition, no discernible increase in the HRR is observed for a period of time—a pre-growth period (see Figure 4-1).

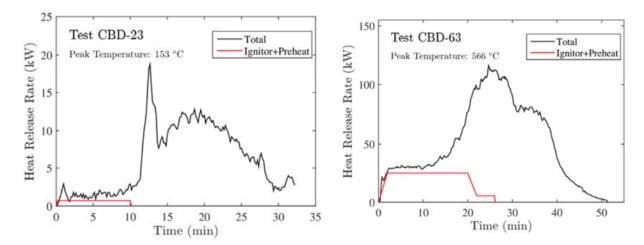



Figure 4-1 NUREG/CR-7197 experimental tests with pre-growth period [11]

This observation is similar to the delayed growth reported in many fire events [2] and observed in experiments performed by Sandia National Laboratories (SNL), VTT, and NIST/NRC in a manner to represent a challenging electrical cabinet fire. These tests included various cable loadings and a range of ignition sources, such as propane burners and liquid fuel pan fires [11]. As a result, some of the times associated with the growing periods may be biased higher (shorter duration) than would be expected for fire events occurring in electrical cabinets at NPPs.

Similar to the development of the HRR profile in NUREG/CR-6850, experimental data were used to determine the HRR profile for an interruptible fire. This profile includes four stages: pregrowth, growth, steady, and a decay period. A number of experiments were excluded from the analysis: if the experimental fire never grew (for example, Figure 4-2 A) or did not include a pregrowth period (for example, Figure 4-2 B), it was not included in the estimation of the interruptible HRR profile. Additionally, specific to the experiments performed as part of NUREG/CR-7197, portions of the tests with personnel intervening (for example, opening a cabinet door or jostling cables) during the experiment are excluded from the analysis.






Figure 4-2 NUREG/CR-7197 experimental tests without a pre-growth period of (A) no growth and (B) no pre-growth

The experiments with observed pre-growth along with the observed values for pre-growth, time to peak, steady burning, and decay are presented in Table 4-1. The tests considered include the experiments conducted as part of NUREG/CR-4527 (SNL) [6], NUREG/CR-7197 Chesapeake Bay Detachment (CBD) [11], and VTT [7–10].

Table 4-1 HRR timing for interruptible electrical cabinet fires

Toot	Units in Minutes					
Test	Pre-Growth Period	Time to Peak	Steady Burning	Time to Decay		
SNL-ST7	6	10	11	34		
SNL-PCT5	20	12	0	22		
SNL-Test24	20	7	0	6		
SNL-Test25	17	5	3	25		
VTT186-Exp2	10	4	2	29		
CBD-23	8	4	11	9		
CBD-25	9	12	11	4		
CBD-31	2	10	6	11		
CBD-42	4	13	0	14		
CBD-43	2	4	15	2		
CBD-44	2	16	0	13		
CBD-45	12	2	12	5		
CBD-51	2	3	0	15		
CBD-54	5	11	2	12		
CBD-56	4	2	28	2		
CBD-59_A	10	7	4	N/A		
CBD-60	19	5	5	19		

Interruptible and Growing Fire HRR Profiles

Table 4-1
HRR timing for interruptible electrical cabinet fires (continued)

Toot	Units in Minutes					
Test	Pre-Growth Period	Time to Peak	Steady Burning	Time to Decay		
CBD-62	21	6	0	13		
CBD-63	10	14	5	23		
CBD-68	2	5	5	11		
CBD-71	2	12	2	11		
CBD-79_A	5	2	2	3		
CBD-83	9	4	0	16		
CBD-84	6	13	3	10		
CBD-87	7	5	0	13		
CBD-88	4	2	0	13		
CBD-89	10	6	0	12		
CBD-97_A	7	3	6	N/A		
CBD-107	3	9	2	8		
CBD-108	1	6	0	13		
CBD-109	4	7	3	18		
CBD-111_A	5	6	9	N/A		
Average	8	7	5	13		
Median	6	6	3	13		

As noted previously, the tests reviewed in Table 4-1 include an observed pre-growth period. However, a number of experiments include ignition sources with non-negligible HRRs—examples include ethanol, acetone liquid pan fires (~20 kW), or a plastic bucket containing Kimwipes and acetone (~24 kW)—that may not necessarily be representative of what would be expected for the pre-growth period duration of an Interruptible fire. Therefore, the data presented in Table 4-1 were reassessed using an additional set of criteria. These criteria are as follows:

- Combination of ignition source and pre-heat (CBD tests only) less than 5.5 kW
- For ignition sources equal to 5.5 kW, indication that the total combined HRR (ignition source and cable loading) did not immediately start growing following the end of the ignition source growing phase ramp-up

Tests that met both of these criteria are the most relevant for estimating the pre-growth period and are presented in Table 4-2. Tests listed in Table 4-1 that did not meet the criteria listed previously were not used to estimate the pre-growth period of an interruptible fire. Note: All tests listed in Table 4-1 were used to estimate the subsequent growth, steady, and decay periods of an interruptible fire.

Table 4-2 HRR timing for the interruptible fire pre-growth period in electrical cabinet fires

Test	Duration (min)	Ignition Source HRR (kW)	Discussion
SNL-Test24	20	0.17	Electrical igniter, smoke for igniter observed at 10.5 minutes
SNL-Test25	17	0.17	Electrical igniter, smoke for igniter observed at 9.5 minutes
SNL_PCT5	20	0.17	Electrical igniter, ignition observed within 16 minutes
VTT186-Exp2	10	0.5 – 1.5	Propane burner off at 5 minutes
CBD-23	8	0.7	Low ignition HRR
CBD-25	9	0.7	Low ignition HRR
CBD-54	5	2.2	Low ignition HRR
CBD-59_A	10	0.8	Low ignition HRR
CBD-68	2	0.8	Low ignition HRR
CBD-79_A	5	5.5	Early period total HRR less than ignition source
CBD-83	9	0.8	Low ignition HRR
CBD-84	6	0.8	Low ignition HRR
CBD-88	4	0.8	Low ignition HRR
CBD-89	10	0.8	Low ignition HRR
CBD-97_A	7	5.5	Early period equal to ignition HRR
CBD-108	1	5.5	Early period total HRR less than ignition source
Average	9		
Median	9		

4.1.2 Experimental Data Review of Growing Fires

Valid experiments not counted in the development of the interruptible fire profile are used to inform a profile for growing fires, as shown in Table 4-3. This profile was obtained by averaging the growth, steady burning, and decay durations of the experiments conducted as part of NUREG/CR-4527 (SNL) [6], NUREG/CR-7197 (CBD) [11], and VTT [7–10].

Interruptible and Growing Fire HRR Profiles

Table 4-3 HRR timing for growing electrical cabinet fires

	Units in Minutes				
Test	Time to Peak	Steady Burning	Time to Decay		
SNL-ST3	10	0	22		
SNL-ST4	4	14	11		
SNL-ST5	9	0	22		
SNL-ST6	8	18	34		
SNL-ST8	11	20	28		
SNL-ST9	10	14	16		
SNL-ST10	11	20	30		
SNL-ST11	19	0	41		
SNL-PCT1	8	27	25		
SNL-PCT2	11	3	28		
SNL-PCT3	9	16	26		
SNL-PCT6	15	0	41		
VTT186-Exp1	41	0	64		
VTT186-Exp3-2	14	26	90		
VTT269-Exp1	40	20	46		
VTT269-Exp2C	33	6	71		
VTT269-Exp3	13	0	122		
VTT521-Exp7	3	20	22		
VTT521-Exp8	5	26	14		
VTT521-Exp9	9	9	17		
VTT521-Exp10	6	24	16		
CBD-7	8	10	7		
CBD-20	39	21	N/A		
CBD-52	3	13	9		
CBD-53_A	5	0	25		
CBD-58	5	2	24		
CBD-66_A	17	0	6		
CBD-67_A	9	0	4		
CBD-69	10	11	6		
CBD-75	8	30	0		
CBD-77_A	10	7	N/A		
CBD-78_A	11	0	N/A		
CBD-90	20	1	19		

Table 4-3
HRR timing for growing electrical cabinet fires (continued)

Took		Units in Minutes				
Test	Time to Peak	Steady Burning	Time to Decay			
CBD-92	6	0	29			
CBD-93	9	1	13			
CBD-94	12	2	12			
CBD-95	13	4	19			
CBD-96	9	0	18			
CBD-100	26	4	17			
CBD-102	5	10	10			
CBD-103	10	12	19			
CBD-105	7	0	6			
CBD-106_A	8	2	N/A			
CBD-112	9	2	8			
Average	12	9	26			
Median	10	5	19			

4.2 Fire Modeling of Interruptible and Growing Fires

Reviewing the data presented in Table 4-1 and Table 4-3 shows that the distributions of times for a number of the periods are skewed. The data for the growth period of the growing fire classified experiments are plotted in Figure 4-3A. The suppression time data for fire events classified as growing fires in Section 3 are presented in Figure 4-3B.

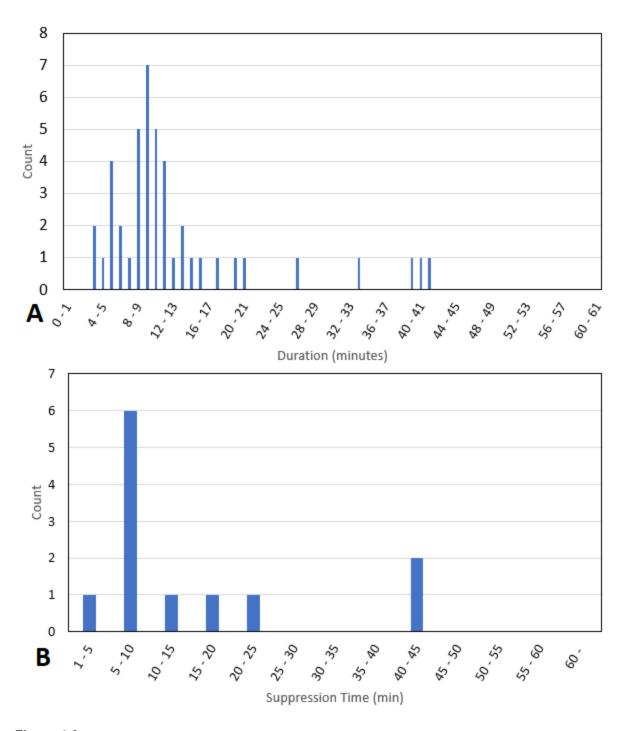


Figure 4-3 Growing fire, A) growth period duration counts, B) suppression time counts

In NUREG/CR-6850 [1] the duration of each period in the HRR profile was determined by an average of the available data. The period durations estimated in this report are also developed using the average (mean) of the available data. For skewed data both the mean and median are commonly used to characterize the distribution of results. Whereas the median is less affected by data located in the tails of the distribution, the mean may better represent the range of the data observed in both the experiments and the OPEX.

4.2.1 Interruptible Timing Profile

The averaged data from Table 4-1 (and Table 4-2 for pre-growth) are presented in Figure 4-4. Based on the data from experiments, the average data for interruptible fires are as follows:

- For a period of 9 minutes, there is no measurable HRR.
- The fire grows to its peak HRR in approximately 7 minutes.
- The fire burns at its peak HRR for approximately 5 additional minutes.
- The fire decays linearly over a period of approximately 13 minutes.

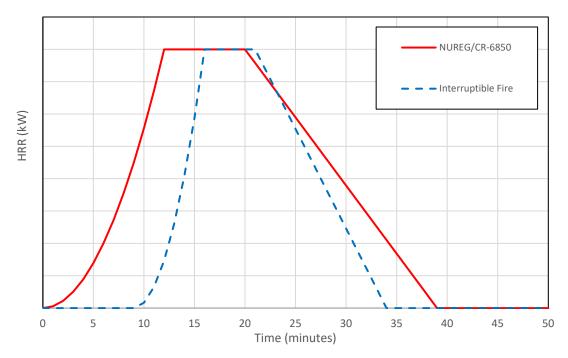


Figure 4-4 Interruptible HRR timing profile

This profile results in a fire with a shorter duration than the profile presented in NUREG/CR-6850. The fire reaches its peak approximately 16 minutes from the time of ignition, begins its decay period at 21 minutes, and is out after 34 minutes. The NUREG/CR-6850 HRR profile reaches its peak at 12 minutes, starts its decay at 20 minutes, and is out after 39 minutes.

4.2.2 Timing Inputs for Fire Modeling—Interruptible Fires

To model interruptible fires in the FPRA, the analyst has two options (see Figure 4-5). They are as follows:

- Option 1: Interruptible Fire Timing Profile
 - A period of 9 minutes with no measurable HRR may be included prior to the period of fire growth. If included, this pre-growth phase must be reflected in any calculations of the time to damage, time to detection, and time to suppression.
 - The fire grows to its peak HRR in 7 minutes. A t² function should be used for representing the growth phase of the fire.
 - The fire burns at its peak HRR for 5 additional minutes.
 - The fire decays linearly over a period of 13 minutes.
- Option 2: Adjusted NUREG/CR-6850 Timing Profile
 - A period of up to 4 minutes with no measurable HRR may be included prior to the period of fire growth. If included, this pre-growth phase must be reflected in any calculations of the time to damage, time to detection, and time to suppression.
 - The inclusion of 4 minutes of pre-growth time results in a time to peak equal to that of the experimentally derived *interruptible* fires when using the NUREG/CR-6850 profile and ensures that any detailed fire modeling previously performed allows for consideration of the pre-growth period while maintaining conservative modeling.
 - With the timing described in the NUREG/CR-6850 profile (12 minutes to peak, 8 minutes steady state, and 19 minute decay).

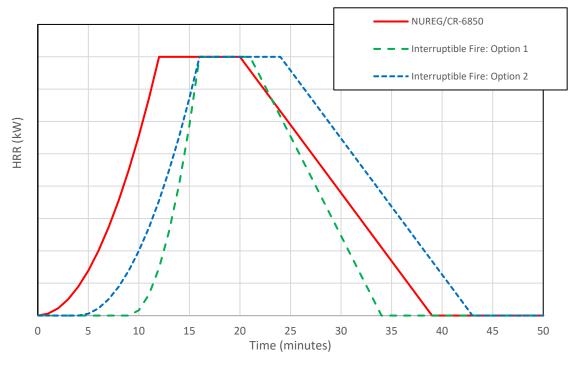


Figure 4-5
Interruptible HRR timing profile for fire modeling

4.2.3 Growing Timing Profile

The averaged data from Table 4-3 are presented in Figure 4-6. Based on the data from experiments, the average of the growing fires is as follows:

- The fire grows to its peak HRR in approximately 12 minutes.
- The fire burns at its peak HRR for approximately 9 additional minutes.
- The fire decays linearly over a period of approximately 26 minutes.

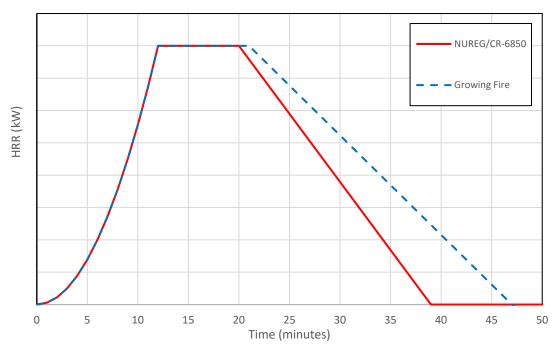


Figure 4-6 HRR profile for a growing fire

This profile results in a fire with a longer duration than the profile presented in NUREG/CR-6850. The fire reaches its peak approximately 12 minutes from the time of ignition, begins its decay period at 21 minutes, and is out after 47 minutes. The NUREG/CR-6850 HRR profile reaches its peak at 12 minutes, starts its decay at 20 minutes, and is out after 39 minutes.

As presented in Section 4.1.2, the HRR profiles are developed using the average times generated from the experimental evidence. For the growing fires, the fire grows to a peak value in an average of 12 minutes, which matches the recommended duration of the growth phase in Appendix G of NUREG/CR-6850. However, the steady burning and decay phases have longer durations than the ones recommended in Appendix G of NUREG/CR-6850.

Interruptible and Growing Fire HRR Profiles

The increase in the decay stage is primarily due to the durations of five tests performed by VTT [7–10]. The decay stages for experiments VTT186-Exp1, VTT186-Exp3-2, VTT269-Exp1, VTT269-Exp2C, and VTT269-Exp3 all have durations that are longer than 89% of other durations included in the development of the average. Together, these five tests increase the average decay period by approximately 8 minutes. Although appropriate for estimating peak HRRs, these long duration fires with relatively low intensity in the later stages of the experiments do not necessarily represent the observed experience as described in Section 2. Therefore, the growth profile described in NUREG/CR-6850 is recommended for modeling growing fires.

4.2.4 Timing Inputs for Fire Modeling—Growing Fires

The NUREG/CR-6850 HRR timing profile, recommended for modeling growing fires, is as follows:

- The fire grows to its peak HRR in 12 minutes. A t² function should be used for representing the growth phase of the fire.
- The fire burns at its peak HRR for 8 additional minutes.
- The average time to decay is 19 minutes.

5 REVISED DETECTION—SUPPRESSION EVENT TREE FOR CREDITING PERSONNEL SUPPRESSION

5.1 Detection-Suppression Event Tree Introduction

This section describes the detection-suppression event tree model for characterizing fire detection and suppression activities in response to a fire event. The event tree is a modification of the model described in Appendix P of NUREG/CR-6850 [1] and Chapter 14 of Supplement 1 of NUREG/CR-6850 [12]. This modification is intended to capture the potential for plant personnel suppression during the early stages of a fire.

Numerous fire event records maintained in the EPRI FEDB [2, 4] describe early suppression attempts by plant personnel, such as (1) suppression by operators responding to an equipment trouble alarm in the MCR and discovering a fire in the alarming equipment, and (2) plant personnel discovering a fire in its early stages prior to the activation of any automatic detection or suppression systems and suppression using portable fire extinguishers.

This capability is not explicitly included in the detection-suppression event tree models described in NUREG/CR-6850 or Supplement 1 to NUREG/CR-6850. These models only credit prompt suppression for fires in the MCR or for fire scenarios associated with hot work activities. In order to expand plant personnel capability for early detection and suppression, a number of new parameters are developed to incorporate this capability (that is, plant personnel capability for suppression actions prior to the arrival of the plant FB) in the detection-suppression event tree described in NUREG/CR-6850 [1].

5.2 Detection-Suppression Event Tree

To capture early intervention and suppression by plant personnel, the event tree in NUREG/CR-6850 [1] (for scenarios without incipient detection) is revised and split into two identical branch groups: one for capturing the non-suppression probability (NSP) for interruptible fire and one for growing fire. The revised event tree format is presented in Figure 5-1. The outcomes of each possible sequence in the revised event tree are listed in Table 5-1.

Revised Detection-Suppression Event Tree For Crediting Personnel Suppression

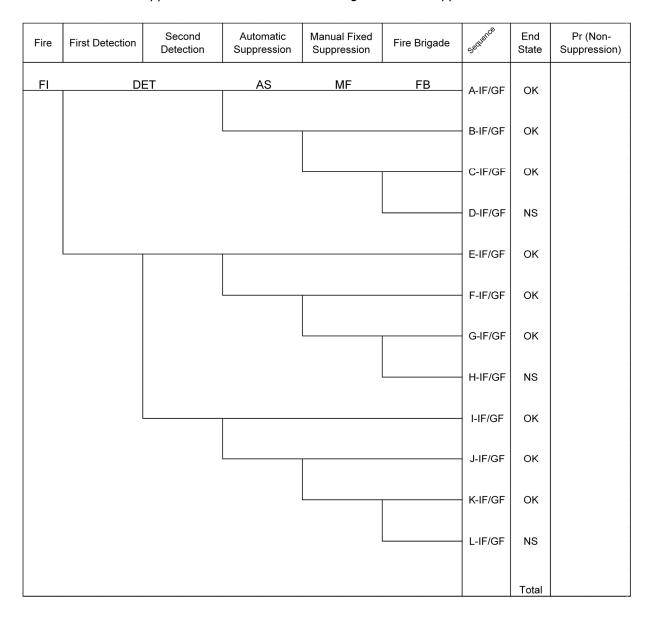


Figure 5-1 Interruptible and growing fire detection and suppression event tree

Table 5-1
Revised P_{ns} event tree sequences

Sequence	Detection	Suppression		
A-IF/GF		Fire suppression by an automatically actuated fixed system		
B-IF/GF	First detection (zero time of detection)	Fire suppression by a manually actuated fixed system		
C-IF/GF		/GF (zero time of detection) Fire suppression by the FB		
D-IF/GF		Fire damage to target items		
E-IF/GF	Second detection (modeled time to detection)	Fire suppression by an automatically actuated fixed system		
F-IF/GF		Second detection Fire suppression by a manually actuated fixed system		
G-IF/GF		(modeled time to detection) Fire suppression by the FB		
H-IF/GF		Fire damage to target items		
I-IF/GF		Fire suppression by an automatically actuated fixed system		
J-IF/GF	Manual/delayed detection	Fire suppression by a manually actuated fixed system		
K-IF/GF		Fire suppression by the FB		
L-IF/GF		Fire damage to target items		

Sequences A to L in Table 5-1 conclude with the identifiers *-IF* and *-GF*. These represent the two growth profiles: interruptible fire and growing fire. These two profiles are described in detail in Section 4. In this methodology, each profile is calculated using the same event tree sequences with the exception, as follows:

For the interruptible portion of the scenario, the event tree dictates that the fire has not grown quickly prior to being discovered. Therefore, for sequences A to H, the time of detection will be set to t=0 for interruptible fire. Different suppression rates are used to calculate the probability of non-suppression for the interruptible fire and growing fire profiles (see Section 3.5). The total scenario-specific NSP is determined as the weighted sum based on the split fractions of the P_{ns} for each profile.

The revised interruptible and growing sequences (A-L, see Table 5-1) are conceptually similar to sequences A-N in NUREG/CR-6850 [1]. With respect to calculating the NSP for a scenario, required changes are as follows:

- The probability of detection is no longer split between branches representing the failure of prompt and automatic. Detection is now split between the first detection opportunity (zero time of detection) and the second detection opportunity (modeled time of detection). Prompt detection, associated with a continuously occupied space or continuous fire watch, would be captured through the use of the guidance in Section 5.3.3.5 on plant personnel presence probabilities. For scenarios with incipient detection, see the guidance provided in NUREG-2180 [13].
- A unique sequence singling out prompt suppression is no longer included. The development
 of the interruptible and growing suppression rates makes use of zero detection and short
 suppression times.

Revised Detection-Suppression Event Tree For Crediting Personnel Suppression

- The sequence of events associated with delayed detection is retained in this methodology. In NUREG/CR-6850, these sequences were associated with detection by non-automatic means, such as a roving fire watch. NUREG/CR-6850 also associates what would be described as an example of MCR indication with delayed detection. Given a review of OPEX, this means that detection is no longer associated with a delay. See Sections 5.3.3.2 and 5.3.4 for a detailed discussion.
- It is assumed that a fire will always be detected; therefore, what was formerly sequence N in the detection-suppression event tree in NUREG/CR-6850 no longer exists individually in the revised detection-suppression event tree and would be captured in the results of sequence L. The probability of failing to detect the fire in time is determined, as described in Section 5.3.5, for the entire scenario.
- The time to detection is assumed to be zero for the following:
 - Detection by a non-fire trouble alarm in the MCR, plant personnel, and automatic smoke detection for an interruptible fire
 - Detection by a non-fire trouble alarm in the MCR and plant personnel for a growing fire
 For more discussion, see Section 5.3.4.
- The time to automatic detection for a growing fire may be modeled using the NUREG/CR-6850 growth profile. As described in Section 4.2.4, the NUREG/CR-6850 profile grows to a peak HRR in 12 minutes following a t-squared profile.
- Special consideration of successful automatic suppression should be taken when included in the interruptible fire path. The interruptible fire introduces the concept of a fire that is not expected to grow to a point that would be capable of activating an automatic suppression system. However, the FPRA must account for the possibility that the fire could grow and be capable of not only damaging targets, but also activating an automatic suppression system. Similar to a growing fire, the interruptible fire HRR profile, as described in Section 4.2.2, should be used when estimating the activation time of an automatic heat detection or thermally activated automatic suppression system for an interruptible fire.

When the NSP for both interruptible and growing fire paths is calculated, the split fraction is applied (see Section 3.4) and the two probabilities are summed to determine the scenario P_{ns} .

5.3 New Parameters for Estimating the NSP

Early detection and suppression by plant personnel is included in the detection-suppression event tree model using the following parameters, which are described in detail in the following sections:

- Interruptible fire/growing fire split fraction
- Electrical cabinet HRR timing profiles
- Automatic (smoke) detection ineffectiveness
- MCR indication
- MCR operator response
- Plant personnel response
- Plant personnel presence

The sensitivity of these parameters is analyzed in examples (see Section 6). Uncertainty in the development of the parameters is reviewed in Appendix Appendix D.

5.3.1 Interruptible Fire Split Fraction

Section 3.4 classified electrical cabinet fire events into two growth profile groups: (1) interruptible fire: events in which plant personnel could detect and perform early suppression activities. These are fires that progress in a manner that is at a rate so that plant personnel may discover and suppress prior to experiencing external target damage; and (2) growing fire: events where the fire may grow in a manner where plant personnel may not be able to provide suppression in the early stages of the fire development. The split fraction is presented in Table 3-2.

5.3.2 Fire HRR Timing Profiles

Revised HRR timing profiles for both interruptible and growing fires are described in Section 4. The profiles used for detailed fire modeling—for the times to damage, automatic detection, and activation of automatic suppression systems—are described in Section 4.2.2 (interruptible) and Section 4.2.4 (growing).

5.3.3 Probability of Detection of Electrical Cabinet Fires

In the NUREG/CR-6850 detection-suppression event tree, detection (excluding prompt detection) is split into two events: automatic and manual (delayed). The automatic detection branch traditionally captures both the unreliability and unavailability of an automatic detection system included in the analysis (for more, see Section 5.3.5). As reviewed in Section 2, a significant fraction of Bin 15 electrical cabinet fires are detected by other means: plant personnel and non-fire trouble alarms in the MCR. Given the prevalence of these means of detection over the occurrence of automatic detection systems, the likelihood of successful detection by these means is included in the general detection step of the detection-suppression event tree described in this report.

5.3.3.1 Probability of Automatic Smoke Detection of Electrical Cabinet Fires

In the NSP calculations associated with NUREG/CR-6850, the probability of failure associated with automatic detection is characterized with the unreliability and unavailability of the detection system. Following that approach, it is assumed that any fire that occurs is capable of producing a detection signal at some point in time based on a system effectiveness review consistent with Section P.1.2 in NUREG/CR-6850. Given the revised treatment for detection described in this report, an ineffectiveness parameter is added to explicitly capture fires that are too small to activate an automatic smoke detection system. To capture the potential for smoke detectors failing to activate due to fire size, a Monte Carlo sampling process was performed to calculate the average probability of detection for both interruptible and growing fires. The *ineffectiveness* term refers to the probability that a fire will not be detected.

Using a randomized sample size of 20,000 occurrences for each electrical enclosure classification and fuel type, the probability of detection was averaged. The parameters, the distribution of the parameters, and the other defining statistical properties used in the variation are provided in Table C-1. The results of the Monte Carlo analysis are provided for each electrical enclosure classification, fuel load, and cable type included in NUREG-2178, and the results are summarized in Table 5-2.

Revised Detection-Suppression Event Tree For Crediting Personnel Suppression

Table 5-2
Automatic smoke detection probability of no detection

Enclosure Class/ Function Group	Enclosure Ventilation	Fuel Type	Default Fuel Loading Probability of No Detection	Low Fuel Loading Probability of No Detection	Very Low Fuel Loading Probability of No Detection
1 – Switchgears and load centers	Closed	TS/QTP/SIS	0.58	N/A	N/A
1 – Switchgears and load centers	Closed	TP	0.20	N/A	N/A
2 – MCCs and battery chargers	Closed	TS/QTP/SIS	0.41	N/A	N/A
2 – MCCs and battery chargers	Closed	TP	0.07	N/A	N/A
3 – Power inverters	Closed	TS/QTP/SIS	0.63	N/A	N/A
3 – Power inverters	Closed	TP	0.33	N/A	N/A
4a – Large enclosures	Closed	TS/QTP/SIS	0.52	0.48	0.67
4a – Large enclosures	Closed	TP	0.22	0.45	0.33
4a – Large enclosures	Open	TS/QTP/SIS	0.42	0.54	0.76
4a – Large enclosures	Open	TP	0.27	0.31	0.36
4b – Medium enclosures	Closed	TS/QTP/SIS	0.72	0.52	0.54
4b – Medium enclosures	Closed	TP	0.45	0.79	0.54
4b – Medium enclosures	Open	TS/QTP/SIS	0.58	0.67	0.60
4b – Medium enclosures	Open	TP	0.27	0.37	0.43
4c – Small enclosures	N/A	All	0.44	N/A	N/A

TS = thermoset

QTP = qualified thermoplastic

SIS = Synthetic Insulated Switchboard Wire or XLPE-Insulated Conductor

TP = thermoplastic

These values include variations in ceiling heights, horizontal separation distances, and HRR percentiles. For more details, see Appendix B.

The probabilities presented in Table 5-2 should be used for scenarios of fires limited to single electrical cabinets where relatively small fires may not activate automatic systems. The results of the Monte Carlo analysis highlight that a significant fraction of the HRRs not detected are of 50 kW or less. An HRR in excess of 50 kW results in approximately 95% of the simulated cases covering all enclosure class/function groups being detected. Of the simulated fire sizes that are

not detected, an increase of 120 kW would result in the detection of approximately 98% of all the simulated fires sampled. In the FPRA, some of the most challenging and risk-significant scenarios come from the involvement of secondary combustibles. When the contribution of the HRR associated with propagation to secondary combustibles is characterized by 150 kW/m² or 250 kW/m² [28] for TS and TP cables, respectively, it is reasonable to assume that the fire is large enough to be detected. Therefore, the resulting probability of failure would be determined only by the unreliability and unavailability of the automatic smoke detection system only.

5.3.3.2 MCR Indication

Fifteen (32%) of the Bin 15 events recorded in the FEDB describe notification of an event by trouble alarms or indications in the MCR, such as a loss of power or reduced output alarms. This suggests that indication of a fire event does not always come from an automatic fire detection alarm or a phone call to the MCR.

To capture this in the revised detection-suppression event tree model, a new branch is included in the MCR Indication Response group. This event is a True/False option. The branch should be set to True when the ignition source involves equipment or components that are specifically monitored in the MCR (that is, there is both a trouble alarm and annunciation associated with the equipment that will provide indication or alarm in the event of a loss or degradation of function). The value of this event when it is set to True is developed from a review of industry average component failure data.

NUREG/CR-6928 [14] presents industry average component performance results, including those for sensor and transmitter components. Table 5-3 presents the sensor/transmitter unreliability data for various parameters (level, pressure, and temperature).

Table 5-3
Sensor and transmitter unreliability data [11]

Component	Failure Mode	Failures	Demands
Sensor/transmitter: level	Failure to operate	5	6750
Sensor/transmitter: pressure	Failure to operate	2.3	23960
Sensor/transmitter: temperature	Failure to operate	17.1	40759

Summing the unreliability data for each component results in a value of approximately 5/6750 + 2.3/23960 + 17.1/40759 = 1.26E-03 failures per demand. Although not directly representing the unreliability of trouble alarms, the general function of these sensors/transmitters is to convey an out-of-spec condition for key parameters associated with plant equipment that will then be annunciated in the MCR through a trouble alarm. Depending on the equipment, an operator may be sent to locally verify the equipment status. For this reason, the sensor/transmitter unreliability data are used to suggest an appropriate value for use with this methodology. Therefore, when set to True, the probability of the branch representing the success of a trouble alarm in the MCR is set to 0.99 to represent a bounding probability of alarm success. This value represents a 1-0.99 = 0.01 failure probability, which bounds the value of 1.26E-03 to account for other failure modes or indication systems not included in the unreliability data.

This function of MCR indication should only be used for ignition sources that are **specifically monitored**, and any trouble with the equipment must be annunciated in the MCR. If the ignition source is not monitored in the MCR (upon a failure or degradation, there is no equipment or component-specific indication in the MCR), the probability of failure for this event must be set to 1. In some cases, monitoring may be limited to a component, or components, located within a piece of equipment—a relay located within a cabinet, for example. In these cases, the MCR indication should only be credited when modeling is performed at the component level and should not be applied at the level of the cabinet.

5.3.3.3 MCR Operator Response

When an alarm (for example, automatic fire detection or equipment trouble) occurs, operators must react and appropriately perform different actions to ensure a timely response to a potential fire. The parameters covered in this section capture the human error probability (HEP) of an operator responding to a non-automatic fire alarm or equipment trouble indication in the MCR.

The human reliability analysis (HRA) presented here is a screening-type of generic analysis. If plant-specific details do not match the qualitative elements given here, credit for this analysis may not be possible. On the other hand, if plant-specific elements are somehow better than described in the following list, increased credit may be possible, if supported by a plant-specific detailed HRA.

5.3.3.3.1 Qualitative Analysis

Key features of the MCR operator response include the following:

- The scope of analysis includes only electrical cabinets and relates to fire NSPs.
- The alarm occurs before (and without) a reactor trip (or other problems that could immediately lead to a reactor trip).
- Alarms are located on front panels in the MCR (which means that alarm panels and associated annunciators are designed in accordance with NUREG-0700 [15] and other human factors requirements).
- Alarm response is trained on and is part of normal operations.
- Alarm response is guided by the alarm response procedures (ARPs), which are part of the
 emergency response procedures (ERPs). As such, ARPs are written following the human
 factors guidance required for ERPs (for example, there is a required procedure format,
 attention paid to logic, such as limited use of and and not).
- Formal, three-way communications are used within the MCR and with plant personnel (by phone or radio) according to conduct of operations, training, and so on.
- Peer checking within the MCR is performed according to conduct of operations, training, and so on.
- There is adequate staff in the MCR according to NRC requirements.
- There is no specific time urgency for alarm response, except for operational good practice (perhaps stated in the plant-specific conduct of operations).

- The key MCR operator tasks include the following:
 - Detect alarm
 - Select the appropriate ARP
 - Follow ARP guidance¹
 - Call and dispatch field operator (including communications regarding specific alarm and associated equipment, location of equipment, and so on)

These qualitative elements are very similar to those stated in NUREG-2180 [13]. The key differences include the following:

- Alarms for incipient fire detectors are few and unique (for example, they may have only a handful of incipient fire alarms, may have separate panels, or may have unique markings).
- MCR operators are expected to have specialized training for response to alarms for incipient fire detectors.
- As part of MCR operator training on incipient fire detectors, operators are trained on the need for immediate and urgent response (for example, "drop everything"), making response to these alarms very similar to alarm response following a reactor trip.
- MCR operators are trained on the need for quick response to incipient fire detectors.

5.3.3.3.2 Quantitative Analysis

A comparative quantification using various methods available in the EPRI HRA Calculator was performed to evaluate an HEP for this action. The methods used were the following:

- Standardized plant analysis risk human reliability analysis (SPAR-H) [16, 17]
- Cause-based decision tree method (CBDTM) from the EPRI HRA approach [18]
- Technique for human error rate prediction (THERP) [19] Annunciator Response Model²

5.3.3.3 Standardized Plant Analysis Risk Human Reliability Analysis

As discussed in NUREG/CR-6883 [16], The SPAR-H method produces a simple best estimate HEP for use in plant risk models. Based on review of first- and second-generation HRA methods, the SPAR-H method assigns human activity to one of two general task categories: action or diagnosis. Eight categories of performance shaping factors (PSFs) capable of influencing human performance are accounted for in the SPAR-H quantification process by addressing not only the negative effects, but also the potential beneficial influence of these factors. The application of PSF multipliers in the SPAR-H method follows a "threshold approach," wherein discrete multipliers are used that are associated with various PSF levels.

HRA for a context similar to that modeled in this report was performed in NUREG-2180 [13] for response to incipient fire detectors. In NUREG-2180, only the diagnosis contribution of the SPAR-H quantification guidance was used and was considered to include the potential failure to properly communicate the equipment location to the field operator. Because of the parallels between the context addressed by the HRA in NUREG-2180 and the context addressed in this

In the rare cases where the ARP guidance does **not** include a verification step, this approach cannot be used because it presumes that there is a documented, compelling reason to allow credit for field operator verification.

² This method was used for comparison purposes, but it should be noted that NUREG-2180 did **not** recommend its use for a similar MCR operator alarm diagnosis action based on incipient detection of a fire condition.

report, the same approach is used here (that is, the HEP assignment is based on diagnosis for cognition only).

Taking into account the similarities and differences between this case of general alarms versus incipient fire detector alarms, SPAR-H PSF assessments and the associated multipliers are summarized in the following:

- Available time is nominal (multiplier = 1).
- Stress is nominal (multiplier = 1).
- Complexity is nominal (that is, there is little ambiguity) (multiplier = 1).
- Experience/training is nominal (multiplier = 1).
- Procedures are diagnostic/symptom-oriented (multiplier = 0.5).
- Ergonomics is nominal (multiplier = 1).
- Fitness for duty is nominal (multiplier = 1).
- Work processes are nominal (multiplier = 1).

In the SPAR-H PSF assessments for this scenario versus those used in NUREG-2180 for incipient fire detectors, analysts should note the following differences:

- Obvious diagnosis is used for the incipient fire detector case.
- Ergonomics for the incipient fire detector case are judged to be good (that is, better than nominal) because such installations also typically involve an additional computer station for the incipient detectors.
- Work processes for the incipient fire detector case are judged to be good (that is, better than nominal) because of the importance that NPP organizations place on such installations.

Using the multipliers noted along with the SPAR-H base HEP for diagnosis of 1E-2, the resultant HEP is 5.0E-3. An argument that the complexity assessment be an obvious diagnosis (that is, multiplier of 0.1) instead of nominal could be made, changing the resultant HEP to 5.0E-4.

5.3.3.4 Cause-Based Decision Tree Method

The EPRI HRA approach [17] includes two quantification methods that address cognitive failures. These methods have been applied to internal events and fire HRA, the latter of which is discussed in Appendix B of NUREG-1921 [20].

The EPRI human cognitive reliability/operator reliability experiment (HCR/ORE) method is a time reliability correlation and typically used when available time is relatively short. However, the HCR/ORE method is not appropriate for operator actions that are extremely well-practiced or skill-based, such as manual reactor trip after trip signals and alarms are received. For this reason, and because the HCR/ORE method provides little insight on the potential causes of operator failure, EPRI's CBDTM is considered more appropriate for assessing the cognitive contribution to operator failure for skill- or rule-based operator response actions that do not involve a time constraint.

EPRI's CBDTM consists of eight decision trees (see Figure 5-2 through Figure 5-9), four of which address failures in the plant information-operator interface and another four that address failures in operator-procedure interface. Both sets of these decision trees match well with the MCR operator action modeled in this analysis.

Using the qualitative analysis inputs discussed at the beginning of this section, the CBDTM decision tree selections for the cognitive MCR operator action to notice the alarm and communicate with the field operator were assessed as follows:

- Pca: Availability of Information (see Figure 5-2)
 Notes/assumptions include the following:
 - Nominal initial conditions in plant
 - Indication available and accurate in MCR
 - Training in classroom and simulator on use of ARPs to respond to MCR equipment trouble alarms




Figure 5-2 Pca: availability of information

- Pcb: Failure of Attention (see Figure 5-3)
 Notes/assumptions include the following:
 - Workload presumed to be low for a nominal condition in the plant
 - Operator checking the alarm (not presumed to be monitoring a condition or status when the anomalous condition occurs)
 - Equipment trouble alarm located on MCR overhead or front panel

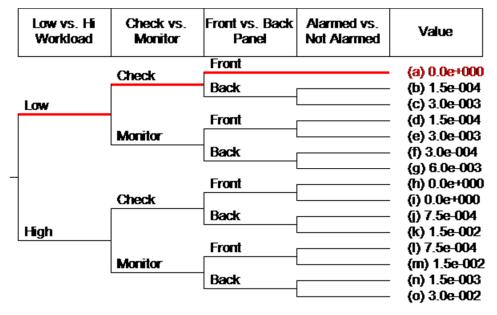


Figure 5-3 Pcb: failure of attention

- Pcc: Misread/Miscommunicate Data (see Figure 5-4)
 Notes/assumptions include the following:
 - Equipment trouble alarm easy to see on front panel or overhead panels in MCR
 - Human-machine interface of annunciator considered to be optimal or familiar to the operator so that it is considered good
 - Formal communication protocol used in transmitting information to field operator regarding equipment trouble and location




Figure 5-4
Pcc: misread/miscommunicate data

- Pcd: Information Misleading (see Figure 5-5)
 Notes/assumptions include the following:
 - Plant nominal initial condition; therefore, all cues are as stated (in other words, no potential for spurious or erroneous alarms due to fire impacts)




Figure 5-5 Pcd: information misleading

- Pce: Skip a Step in Procedure (see Figure 5-6)
 Notes/assumptions include the following:
 - ARP steps are written to be brief, clear, and direct
 - Single ARP is used for response to annunciator
 - ARP steps are distinct
 - Presume that placekeeping aids are included in ARP




Figure 5-6 Pce: skip a step in procedure

- Pcf: Misinterpret Instructions (see Figure 5-7)
 Notes/assumptions include the following:
 - ARPs are written using standard procedural language.
 - All information is included to direct operator to verify condition and dispatch a field operator to investigate.




Figure 5-7
Pcf: misinterpret instructions

- Pcg: Misinterpret Decision Logic (see Figure 5-8)
 Notes/assumptions include the following:
 - ARP language is clear and direct and does not include not, and, or statements requiring significant diagnosis.
 - Response to an equipment trouble annunciator is well-practiced in simulator and classroom training.




Figure 5-8
Pcg: misinterpret decision logic

- Pch: Deliberate Violation (see Figure 5-9)
 Notes/assumptions include the following:
 - Operators believe the appropriateness and efficacy of the ARPs.




Figure 5-9 Pch: deliberate violation

EPRI's CBDTM assigns as negligible the contribution from all of the data decision trees and all but one of the procedure decision trees. The results also show that the contribution from procedures for this human failure event is the lowest possible HEP (that is, ~1E-3 in decision tree *pce*).

CBDTM gives analysts the opportunity to model peer checking through the Cognitive Recovered module, which was addressed by crediting extra crew, as shown in Table 5-4.

Table 5-4
MCR operator response as calculated using CBDTM

	Cognitive Recovery									
	Initial HEP	Self-Review	Extra Crew	STA Review	Shift Change	ERF Review	Multiply HEP by	Final Value		
Pca	N/A	-	-	-	-	-	1.0E+00	0.0		
Pcb	N/A	-	-	-	1	-	1.0E+00	0.0		
Pcc	N/A	ı	-	ı	-	-	1.0E+00	0.0		
Pcd	N/A	1	-	ı	ı	-	1.0E+00	0.0		
Pce	9.9E-04	ı	5.0E-01	ı	ı	-	1.0E+00	5.0E-04		
Pcf	N/A	1	-	ı	1	-	1.0E+00	0.0		
Pcg	N/A	-	-	-	-	-	1.0E+00	0.0		
Pch	N/A	-	-	-	-	-	1.0E+00	0.0		
	Final Pc (with recovery credited)									

STA = shift technical advisor

The total estimated CBDTM HEP including peer checking is, therefore, 5.0E-04.

5.3.3.5 THERP Annunciator Response Model

As discussed in NUREG-2180 [13], THERP was developed before the Three Mile Island 2 accident [21] and the ensuing upgrades to NPP control room designs, operating procedures, operator licensing, and training programs. In addition, the THERP Annunciator Response Model does not explicitly address cognition or diagnosis, as most modern HRA methods do, and does not appropriately take into account the pattern matching of annunciator tiles that modern NPP operators do when responding to an event. HEPs for the Annunciator Response Model (shown in Table 20-23 of NUREG/CR-1278 [19]) range from 1E-4 to 2.5E-1.

A comparative quantification using the Annunciator Response Model is included here because industry has still found the model useful for specific instances, such as response to a single annunciator in the MCR.

The MCR operator response HEP is considered to be the sum of (1) the failure of the operator to notice the occurrence of the trouble alarm (annunciator) and (2) the failure to correctly interpret the trouble alarm on the MCR panel or above-panel display and dispatch the operators to the right location.

The Annunciator Response Model of the HRA Calculator is applied to the failure of the operator to notice the annunciator occurrence. For one annunciator, the mean failure probability is 2.7E-04 (see Figure 5-10).




Figure 5-10 Annunciator response model of the HRA calculator

For the interpretation portion of the human failure event, standard THERP Table 20-10, Item 6 [19], provides a value for an error of commission in reading and recording quantitative information using values from indicator lamps that are used as quantitative displays. This reflects the operator reading the information from the indicator and relaying it to the field operator. This results in an HEP of 1.3E-03. Crediting peer checking for this action with a conditional HEP of 5.0E-01 reduces the HEP to 6.5E-04.

Summing these two values: 2.7E-04+6.5E-04 results in an HEP of 9.2E-04 for the MCR operator response.

5.3.3.3.6 Conclusions

Based on the assumptions and task analysis in the qualitative analysis and the comparison of methods in the quantitative analysis, it is recommended that the analyst use a screening HEP of 1E-3 for the MCR operator response.

It should be noted that in NUREG-2180 [13], two HEPs are developed: MCR operator response and a field operator response. This methodology does not include the development or use of a field operator response HEP because the time required for and probability of success is already included in the development of the suppression rate. For more on the development of the suppression rate, see Section 3.5. An HEP for general plant personnel discovering a fire and responding appropriately is developed in Section 5.3.3.4.

5.3.3.4 Detection by Plant Personnel

As covered in Section 2, 55% of electrical cabinet fires are detected by plant personnel. Examples of detection by plant personnel for interruptible and growing fires are listed as follows:

- Event 131 describes that technicians were working in the area, heard a loud bang, and, upon investigating the source of the noise, observed smoke and sparks coming from an electrical panel.
- Event 411 describes an event where personnel heard a loud noise while working and detected a fire.
- Event 10394 describes personnel investigating an odor of something burning and discovered a small fire.

The basic event of detection by plant personnel in the event tree must be defined to be consistent with the OPEX underlying the NSPs covered in Section 3.5. Because these underlying data represent only those fires that are detected and suppressed by plant personnel, there are only two things that must be represented through detection by plant personnel: (1) plant personnel must be at or near where the fire is located (see Section 5.3.3.5 that addresses the presence of personnel) and (2) plant personnel must be trained to respond to sensing a fire (for example, smelling smoke) in the same way that plant personnel behaved in the operational experience (for example, personnel both reported the fire to the MCR and suppressed the fire).

Consequently, the detection by plant personnel event is essentially a go/no-go feasibility test, allowing only those NPP utilities that provide the appropriate training to take credit for this approach. Note that, given what the data underlying the NSPs represent, this approach assumes that appropriately trained plant personnel will detect the fire.³

In turn, the definition of *appropriate training* includes a key requirement related to fire detection and suppression—all plant personnel who encounter any indications of fire should identify the fire location and then report the fire to the MCR. Personnel should be trained to perform these actions, and these actions should be a part of plant policy and expected conduct.

This requirement must be met for all plant personnel who are expected to occupy the area being assessed (that is, each space must be evaluated separately, based on the personnel expected to occupy that space).

This training requirement may be satisfied by general plant training that is required for all badged plant personnel who are permitted to move around the NPP unescorted. Such training may include specific requirements that all suspected occurrences of fire (such as smell or sight of smoke and/or sight of flames) be reported to the MCR (including the location of the fire, extent of the fire, and type of material involved). Such training may be reinforced by plant policies and/or conduct of operations.

Fire suppression training would be satisfied by FB training. However, because FB training is not typically provided to all plant personnel, other plant-specific training on fire suppression, including who is trained, when they are authorized to suppress a fire, and so on, must be documented.

5.3.3.5 Probability of Presence of Personnel

Twenty-two events in the FEDB identify occasions where a fire was discovered by plant personnel prior to, concurrent with, or independent of an automatic detection, suppression, or a trouble alarm. The FPRA ranks personnel presence in the vicinity using the transient influence factors. These factors, specifically those associated with occupancy and maintenance, are used to develop a determination of the probability of plant personnel being present in a fire compartment. The events listed in Section 5.3.3.4 describe the detection of fires by personnel occupying or performing maintenance in a compartment.

Note that the fire being detected should not include an incipient fire. For detection of incipient fires, see NUREG-2180 [3].

NUREG/CR-6850 describes occupancy and maintenance influencing factors as the following:

- Occupancy: occupancy level, which includes traffic, of a compartment
- Maintenance: frequency and nature of maintenance activities (preventive and/or corrective) in a compartment
 - FAQ 12-0064 [22] adds a hot work influencing factor. The rating levels associated with hot work weighted similarly to those of maintenance. For this analysis, the maximum of the ratings associated with maintenance and hot work should be selected to represent the contribution of personnel performing work for the detection of a fire.

The rating levels in FAQ 12-0064 [22] are assigned to each transient influencing factor, as follows:

- No: 0—for compartments where transients are precluded by design or entrance is not possible during plant operation
- **Very low: 0.3**—compartment is subject to controls and procedures that result in a factor less than a low rating level
- Low: 1—reflects minimal level of the factor
- Medium: 3—reflects average level of the factor
- **High: 10**—reflects the higher-than-average level of the factor
- Very high: 50—specific to maintenance, reflects a significantly higher-than-average level of the factor

These rating levels are used to make an estimation of the probability that personnel would be present in a compartment and therefore capable of detecting a fire. Note that the changes described later apply only to estimating the numerical probability that personnel are expected to be in a compartment. The influencing factors assigned for the purposes of apportioning the transient ignition frequency should be maintained for estimating the probability of personnel detection. No changes may be made to the use of the influencing factor values as applied to the transient ranking scheme, as described in NUREG/CR-6850 and FAQ 12-0064.

Following some modifications, personnel presence rating levels for both the occupancy and maintenance influencing factors are presented in Table 5-5. These modifications are the only exceptions that may be made and are done so for the purposes of estimating personnel detection.

Revised Detection-Suppression Event Tree For Crediting Personnel Suppression

Table 5-5
Description of personnel presence influencing factors

Very High (50)	V/N		(50/2)/50 = 0.5	Area experiences significantly more work orders compared with the average number of work orders for a typical compartment.
High (10)	10/10 = 1.0	Continuously occupied compartment.	(10/2)/50 = 0.1	A large number of work orders for a typical compartment.
Medium (5)	5/10 = 0.5	Compartments not continuously occupied, but with regular foot traffic.	(5/2)/50 = 0.05	Average number of work orders for a typical compartment.
Low (1)	1/10 = 0.1	Compartment with low foot traffic or out of the general traffic path (for example, a roving fire watch or security rounds).	(1/2)/50 =0.01	Small number of work orders compared with the average number of work orders for a typical compartment.
Very Low (0.3)	0.3/10 = 0.03	Compartment is bounded on all sides by controlled physical barriers and is normally uncoccupied during plant operations. The compartment is not used as an access pathway for any other plant location. Entrance to the compartment is strictly controlled. Compartment is not accessible to general plant personnel. Access requires prior approval and requires notification to on-shift operators in the MCR.	(0.3/2)/50 = 0.003	Access to the location is strictly controlled, contains only cables, fire detectors, and junction boxes. Hot working during operation is prohibited, and plant records confirm no violations of these procedures over some reasonable time.
(0) ON	0/10 = 0	Entrance to the compartment is not possible during plant operation.	0 = 09/0	Maintenance activities during power operation are precluded by design.
Influencing Factor	$Pr(n_0) = 0$ Cocupancy rating $\overline{Maximum\ occupancy\ rating}$	Occupancy	$Pr(n_M) = Maintenance rating/2$ $Maximum maintenance rating$	Maintenance*

*Note: As shown, understanding that maintenance activities are not as strong an indication of personnel presence as the occupancy factor, all maintenance rating levels were reduced by 50%.

For occupancy, the rating level associated with *medium* was revised from 3 to 5. This change was made to better correlate the rating values with the rating description as being representative of the average level of the factor. With a maximum value of 10 (high), a value of 5 also better correlates with the OPEX experience showing that 55% (see Figure 2-2) of the fire events have been detected by plant personnel.

For maintenance, two modifications were made. The same modification to rating associated with the medium factor was applied. In addition, understanding that maintenance activities are not as strong an indication of personnel presence as the occupancy factor, all maintenance rating levels were reduced by 50%.

Because the occupancy and maintenance ratings may not necessarily be mutually exclusive, the probability that personnel may be present is determined by estimating the amount of personnel expected to be in (occupancy) a compartment or an adjacent compartment, calculated as Equation 5-1:

$$Pr(n_0 \text{ or } n_M) = Pr(n_0 \cup n_M) = Pr(n_0) + Pr(n_M) - Pr(n_0) \times Pr(n_M)$$
 (5-1)

where, n_0 is the occupancy personnel influence factor rating for the compartment with the ignition source and n_M is the maintenance personnel influence factor.

Note that this method describes the development of probabilities for use in determining whether personnel are present in a compartment and do not require any normalizing factors of conservation of frequency.

In Section 3.3.1.2, it is noted that just because personnel discovering a fire are in the same vicinity or room as the fire, it should not immediately be discounted as lacking the passage of time condition used to support an interruptible fire classification. Although this note was included to call out the possibility of time passing as personnel locate a fire even if they are in the same compartment during ignition, many events simply state that personnel performed some investigation, determination, discovery, or search for indication of a fire and may not necessarily be in the same compartment as the fire when they begin any notification and passage of time (or lack thereof). Given this experience, the occupancy and maintenance ratings for adjacent rooms can also be considered when estimating the probability that personnel would be present to detect a fire. Therefore, credit for personnel can be taken when an adjacent room has an occupancy and maintenance rating factor equal to or higher than the source compartment. Recognizing that personnel in an adjacent compartment would not immediately experience the same conditions as personnel in the source compartment, a reduction of 50% will be applied to credit for an adjacent compartment, calculated as Equation 5-2:

$$Pr\left(\left(n_O + \frac{n_O}{2}\right) \text{ or } \left(n_M + \frac{n_M}{2}\right)\right) = Pr\left(\left(n_O + \frac{n_O}{2}\right) \cup \left(n_M + \frac{n_M}{2}\right)\right)$$

$$= Pr\left(n_O + \frac{n_O}{2}\right) + Pr\left(n_M + \frac{n_M}{2}\right) - Pr\left(n_O + \frac{n_O}{2}\right) \times Pr\left(n_M + \frac{n_M}{2}\right)$$
(5-2)

The identifiers n_O and n_M are not changed to specify the rating of the adjacent room because credit can be taken only for ratings equal to those of the source compartment. As an example, the probability personnel *are* present to detect a fire in a compartment with the following:

- A medium occupancy and maintenance rating in the ignition source compartment
- A medium occupancy in an adjacent compartment
- A high maintenance in an adjacent compartment, determined as Equation 5-3:

$$Pr\left(n_{O} + \frac{n_{O}}{2}\right) + Pr\left(n_{M} + \frac{n_{M}}{2}\right) - Pr\left(n_{O} + \frac{n_{O}}{2}\right) \times Pr\left(n_{M} + \frac{n_{M}}{2}\right) =$$

$$\left(\frac{5 + 5/2}{10}\right) + \left(\frac{5/2 + (5/2)/2}{50}\right) - \left(\frac{5 + 5/2}{10}\right) \times \left(\frac{5/2 + (5/2)/2}{50}\right) = 0.769$$
(5-3)

The denominator in Equation 5-3 comes from the maximum rating level value for the respective influencing factor.

Recalling Figure 2-2, 55% of the fires that have occurred in electrical cabinets have been detected by plant personnel. In Figure 5-11 the probabilities of having personnel present to detect a fire for the different possible occupancy and maintenance rating factors are presented graphically. The results for scenarios with and without taking credit for adjacent spaces are presented in Figure 5-11. One interesting point to note is that when credit is taken for personnel in an adjacent space, the average probability of having personnel present across all cases is approximately 46%, very similar to the 47% observed in OPEX, as noted in Section 5.3.3.5. When only the ratings of the source compartment are considered, the average probability drops to 38%.

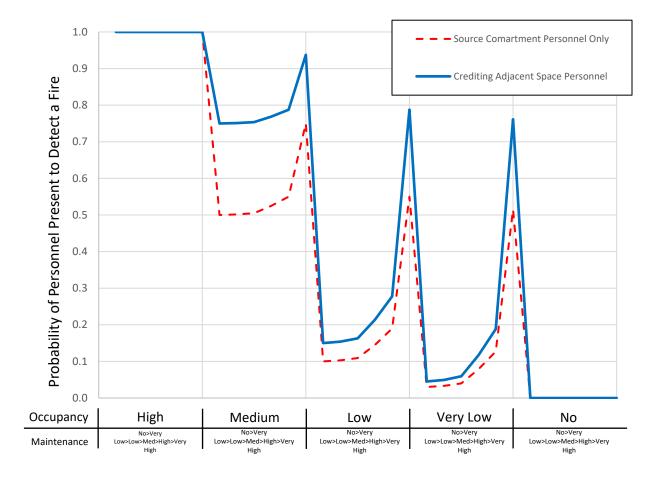


Figure 5-11
Probability of personnel present for detection, with and without crediting adjacent spaces

The rules applied independently of the personnel probability calculation are as follows:

- A high occupancy in the source compartment results in a 100% chance of personnel being present, regardless of maintenance and adjacent compartment ratings.
- A no-occupancy in the source compartment results in a 0% chance of personnel being present, regardless of maintenance and adjacent compartment ratings.
- Credit for maintenance is reduced by 50% to recognize that maintenance activities are not as strong an indication of personnel presence as the occupancy factor.
- Credit for adjacent spaces may only be taken for adjacent spaces, as follows:
 - With an influencing factor rating equal to or greater than that of the source compartment
 - Within the same building
 - Located on the same floor/elevation as the compartment containing the ignition source

- Allowance may be taken for adjacent compartments with documented open barriers to allow the smoke and other products of combustion to be shared between compartments.
 Examples include the following:
 - Open stairways between floors
 - Unsealed barrier penetrations
 - Doors or dampers
- Credit for adjacent spaces may only be taken for a maximum of half of the rating of the source compartment.
- Rooms with controlled ventilation and designated airflow directionality should be considered when determining adjacent space influencing factors.

Example: A control room with a high occupancy may not necessarily be credited as the adjacent room with a higher influencing factor rating, given that the differences in pressure will limit the ability for occupants to detect a fire outside of the control room. The probability that plant personnel would not be present in a compartment—calculated as $1 - Pr(n_0 \text{ or } n_M)$ —without considering adjacent spaces is presented in Table 5-6. When adjacent spaces may be credited, the probability that plant personnel would not be present is shown in Table 5-7.

Table 5-6 Plant personnel presence probabilities

Case	Contribu	Occupancy Contributing Probability		ince ting lity	Probability of No Personnel Present		
1	High		All		0		
2	High		Very low		0		
3	High		Low		0		
4	High		Medium		0		
5	High		High		0		
6	High		Very high		0		
7	Medium:	0.5	No:	0	$1 - (0.5 + 0 - 0.5 \times 0) =$	0.5	
8	Medium:	0.5	Very low:	0.003	$1 - (0.5 + 0.003 - 0.5 \times 0.003) =$	0.499	
9	Medium:	0.5	Low:	0.01	$1 - (0.5 + 0.01 - 0.5 \times 0.01) =$	0.495	
10	Medium:	0.5	Medium:	0.05	$1 - (0.5 + 0.05 - 0.5 \times 0.05) =$	0.475	
11	Medium:	0.5	High:	0.1	$1 - (0.5 + 0.1 - 0.5 \times 0.1) =$	0.45	
12	Medium:	0.5	Very high:	0.5	$1 - (0.5 + 0.5 - 0.5 \times 0.5) =$	0.25	
13	Low:	0.1	No	0	$1 - (0.1 + 0 - 0.1 \times 0) =$	0.9	
14	Low:	0.1	Very low	0.003	$1 - (0.1 + 0.003 - 0.1 \times 0.003) =$	0.897	
15	Low:	0.1	Low	0.01	$1 - (0.1 + 0.01 - 0.1 \times 0.01) =$	0.891	
16	Low:	0.1	Medium	0.05	$1 - (0.1 + 0.05 - 0.1 \times 0.05) =$	0.855	
17	Low:	0.1	High	0.1	$1 - (0.1 + 0.1 - 0.1 \times 0.1) =$	0.81	
18	Low:	0.1	Very high	0.5	$1 - (0.1 + 0.5 - 0.1 \times 0.5) =$	0.45	
19	Very low:	0.03	No	0	$1 - (0.03 + 0 - 0.03 \times 0) =$	0.97	
20	Very low:	0.03	Very low	0.003	$1 - (0.03 + 0.003 - 0.05 \times 0.003)$	0.967	
21	Very low:	0.03	Low	0.01	$1 - (0.03 + 0.01 - 0.03 \times 0.01) =$	0.96	
22	Very low:	0.03	Medium	0.05	$1 - (0.03 + 0.05 - 0.03 \times 0.05) =$	0.922	
23	Very low:	0.03	High	0.1	$1 - (0.03 + 0.1 - 0.03 \times 0.1) =$	0.873	
24	Very low:	0.03	Very high 0.5		$1 - (0.03 + 0.5 - 0.03 \times 0.5) =$	0.485	
25	No		No		1.0	•	
26	No Ve		Very low		1.0		
27	No		Low		1.0		
28	No		Medium		1.0		
29	No		High		1.0		
30	No		Very high		1.0		

Table 5-7
Plant personnel presence probabilities considering adjacent compartments

Case	Occupancy Contributing Probability Including Adjacent Spaces		Maintenance Contributing Probability Including Adjacent Spaces		Probability of No Personnel Present Including Adjacent Spaces	
1	High		No		0	
2	High		Very low		0	
3	High		Low		0	
4	High		Medium		0	
5	High		High		0	
6	High		Very high		0	_
7	Medium:	0.750	No:	0.000	$1 - (0.75 + 0 - 0.75 \times 0.0) =$	0.250
8	Medium:	0.750	Very low:	0.005	$1 - (0.75 + 0.005 - 0.75 \times 0.005) =$	0.249
9	Medium:	0.750	Low:	0.015	$1 - (0.75 + 0.015 - 0.75 \times 0.015) =$	0.246
10	Medium:	0.750	Medium:	0.075	$1 - (0.75 + 0.075 - 0.75 \times 0.075) =$	0.231
11	Medium:	0.750	High:	0.150	$1 - (0.75 + 0.15 - 0.75 \times 0.15) =$	0.213
12	Medium:	0.750	Very high:	0.750	$1 - (0.75 + 0.75 - 0.75 \times 0.75) =$	0.063
13	Low:	0.150	No	0.000	$1 - (0.15 + 0.0 - 0.75 \times 0.0) =$	0.850
14	Low:	0.150	Very low	0.005	$1 - (0.15 + 0.005 - 0.15 \times 0.005) =$	0.846
15	Low:	0.150	Low	0.015	$1 - (0.15 + 0.015 - 0.15 \times 0.015) =$	0.837
16	Low:	0.150	Medium	0.075	$1 - (0.15 + 0.075 - 0.15 \times 0.075) =$	0.786
17	Low:	0.150	High	0.150	$1 - (0.15 + 0.15 - 0.15 \times 0.15) =$	0.723
18	Low:	0.150	Very high	0.750	$1 - (0.15 + 0.75 - 0.15 \times 0.75) =$	0.213
19	Very low:	0.045	No	0.000	$1 - (0.045 + 0 - 0.045 \times 0.0) =$	0.955
20	Very low:	0.045	Very low	0.005	$1 - (0.045 + 0.005 - 0.045 \times 0.005) =$	0.951
21	Very low:	0.045	Low	0.015	$1 - (0.045 + 0.015 - 0.045 \times 0.015) =$	0.941
22	Very low:	0.045	Medium	0.075	$1 - (0.045 + 0.075 - 0.045 \times 0.075) =$	0.883
23	Very low:	0.045	High	0.150	$1 - (0.045 + 0.15 - 0.045 \times 0.15) =$	0.812
24	Very low:	0.045	Very high 0.750		$1 - (0.045 + 0.75 - 0.045 \times 0.75) =$	0.239
25	No		No		1.0	
26	No Very low			1.0		
27	No		Low		1.0	
28	No		Medium		1.0	
29	No		High		1.0	
30	No		Very high		1.0	

5.3.4 Time of Detection for Electrical Cabinets

This section describes the approach for determining the time to detection in interruptible and growing fire scenarios.

5.3.4.1 Interruptible Fire Time of Detection

The time of detection is included in the calculation of the manual NSP as a reduction in the time available to suppress a fire prior to reaching the damage state of the scenario. As stated in NUREG/CR-6850 and then revised in NUREG-2169, the time available for manual suppression is shown in Equation 5-4:

$$t_{ms} = t_{dam} - t_{det} ag{5-4}$$

where, t_{ms} is the time available for manual suppression, t_{dam} is the time to target damage, and t_{det} is the time to detection.

Given the changes in the electrical cabinet growth profiles described in Section 4.2, specifically the period of negligible HRR associated with an interruptible fire, any fire modeling calculation used to determine the time of detection would be similarly delayed. A delay in detection, equal to that of any calculated damage, would negate the operational experience that interruptible fires are fires that are not only detected, but also suppressed, prior to growing and damaging targets.

The development of the suppression rates (see Section 3.5) uses the times recorded in fire events in the FEDB. Therefore, the earliest time that can be recorded in an event is the time that the fire was detected. Because interruptible fires are by definition fires that have not grown significantly, it is assumed for modeling purposes that the timeline for the fire scenario starts at detection. Therefore, for the interruptible path, time-dependent calculations of the NSP are calculated using only the time to damage of the scenario. Stated differently, t_{det} , for the purposes of determining the time to automatic smoke detection, detection by a non-fire trouble alarm in the MCR, or detection by plant personnel is set to zero for the interruptible fires to represent the start of activities following detection.

For interruptible fires, the delayed growth profile must be used when estimating the time of detection (or suppression) with heat detectors (or wet-pipe and pre-action sprinklers for suppression) just as it is used for the estimation of other temperature-related criteria, such as the time to damage.

For a scenario where the time to target damage is calculated to occur following the inclusion of a secondary combustible cable tray, the interruptible fires event tree may take credit for automatic smoke detection using the detailed fire modeling calculated time to automatic smoke detection in the second detection step. A second assessment of the probability of failing to detect a fire using the same automatic smoke detection system is appropriate because with the inclusion of the secondary combustible cable tray, the fire being modeled (with a non-zero time of detection) is essentially a different fire. Recall from Section 5.3.3.1 that results presented in Table 5-2 account for fires limited to the ignition source that may not create an atmosphere sufficient to activate an automatic smoke detection system. Results from the Monte Carlo analysis showed that the contribution of the HRR associated with propagation to secondary combustibles is sufficient to assume that the fire is large enough to be detected by an available and reliable automatic system.

5.3.4.2 Growing Fire Time of Detection

For growing fire scenarios that include MCR indication, the time to MCR indication should be prior to damaging targets in the zone of influence, which is consistent with operational experience. For modeling purposes, this would result in a time of detection of zero minutes.

Similarly, for growing fire scenarios, the time of detection for plant personnel should be modeled as zero. The detection time of t = 0 is representative of prompt detection associated with personnel being present in the location of a fire.

For growing fires, the time to detection for automatic detection systems should be determined using detailed fire modeling in conjunction with the traditional electrical cabinet HRR profile as described in NUREG/CR-6850.

5.3.5 Probability of Failure—Detection

NUREG/CR-6850 provides a value of 0.05 for the probability of random failure of smoke detection systems using the estimated unreliability values presented in NSAC-179L [23]. The FPRA should also consider plant-specific unavailability of detection (and suppression) systems to account for maintenance activities or impairments. Often, in the FPRA, these two values are simply added together. This addition comes from the simplification of a type of fault tree analysis where the probability of failure in the detection system comes from the failure of the detection (or suppression) system due to the system being unreliable or unavailable.

Mathematically, assuming the reliability and availability of the detection (or suppression) systems are mutually exclusive, the probability of failure of the automatic detection system is represented in Equation 5-5:

$$Pr(F \text{ or } U) = Pr(F \cup U) = Pr(F) + Pr(U)$$
(5-5)

where *F* represents the unreliability of the system and *U* represents the unavailability of the system.

The screening probability of detection by plant personnel and average probability of smoke detection, like the unavailability, may lead to the failure of the automatic smoke detection system. Therefore, just as with the plant-specific unavailability and reliability, these should be considered in estimating the probability of detecting a fire. Figure 5-12 represents an example determination of the probability of failure for detection for an interruptible fire. In this example, an MCC, monitored in the MCR, is located in a fire compartment that has been determined to have an occupancy rating level of *low* and a maintenance rating level of *medium* and no contribution of adjacent spaces.

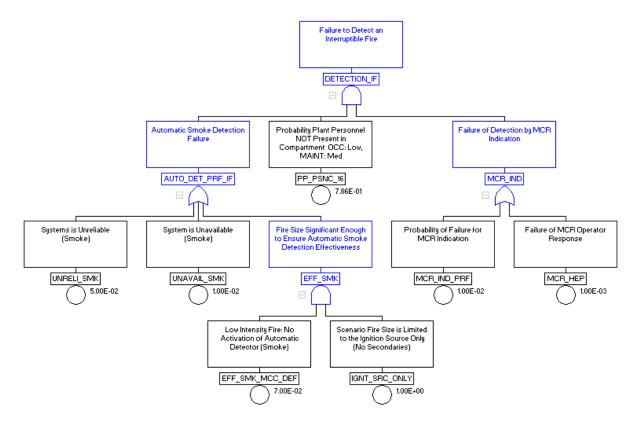


Figure 5-12
Probability of detection fault tree for an interruptible fire with MCR indication and automatic smoke detection

In Figure 5-12, the top event representing the probability for failure of detection for a fire, DETECTION IF, is estimated using the following basic events:

- MCR_IND_PRF. The probability of failure associated with non-fire trouble alarms in the MCR (Section 5.3.3.2).
- **MCR-HEP**. The failure of an MCR operator to appropriately respond to a trouble indication (Section 5.3.3.3).
- PP_PSNC_16. The failure of plant personnel to be present in a compartment for low occupancy and medium maintenance ratings and no credit for adjacent spaces (see Section 5.3.3.5).
- **EFF_SMK_MCC_DEF**. The MCC does not reach a detectable smoke optical density (OD) and is not detected (see Section 5.3.3.1).
- **IGNT_SRC_ONLY**. A flag set to True (1) or False (0) used to include or exclude the detection ineffectiveness term when secondary combustibles are involved or not.
- UNRELI_SMK. The unreliability of a smoke detection system (NUREG/CR-6850, Appendix P).
- UNAVAIL_SMK. The plant-specific unavailability of a smoke detection system (assumed for this example).

Assuming that the events are mutually exclusive, the cut-sets for estimating this probability of detection would be the following (Equations 5-6 through 5-11):

$$MCR_IND_PRF \times EFF_SMK_MCC_DEF \times PP_PSNC_16 \rightarrow 0.01 \times 0.07 \times 0.786$$
 (5-6)

$$MCR_HEP \times EFF_SMK_MCC_DEF \times PP_PSNC_16 \rightarrow 0.001 \times 0.07 \times 0.786$$
 (5-7)

$$MCR_IND_PRF \times UNRELI_SMK \times PP_PSNC_16 \rightarrow 0.01 \times 0.05 \times 0.786$$
 (5-8)

$$MCR_IND_PRF \times UNAVAIL_SMK \times PP_PSNC_16 \rightarrow 0.01 \times 0.01 \times 0.786$$
 (5-9)

$$MCR_HEP \times UNRELI_SMK \times PP_PSNC_16 \rightarrow 0.001 \times 0.05 \times 0.786$$
 (5-10)

$$MCR_HEP \times UNAVAIL_SMK \times PP_PSNC_16 \rightarrow 0.001 \times 0.01 \times 0.786$$
 (5-11)

Adding these cut-sets, the detection probability of failure is approximately 1.12E-03.

Appendix C contains tables that pre-calculate the probability of no detection given common scenario attributes. Table C-1 summarizes the scenario characteristics of interest (detection step, growth profile, MCR indication, credit for personnel in adjacent spaces, propagation to secondary combustibles, detector unavailability, and NUREG-2178 enclosure class/function groups, and loading) and serves as a road map to Tables C-2 through C-27, which calculate the probabilities of no detection.

6 EXAMPLES

Six examples are presented to show the application of the methodology to different scenarios.

6.1 Example 1, NUREG/CR-6850

The example presented in Appendix P of NUREG/CR-6850 [1] is assessed using the methodology presented in this report. Information provided in the NUREG/CR-6850 example includes the following:

- Room is equipped with a smoke detection system. There is no very early warning fire
 detection system (VEWFDS), sometimes referred to as an *incipient detection system*. The
 time to automatic smoke detection is 1 minute.
- Room is not equipped with an automatic fixed suppression system.
- Room is equipped with a manually activated fixed gaseous suppression system.
- The ignition source is an MCC. It is assumed that the ignition source is limited to a single vertical section of the MCC.
- The target is a cable tray located away from the ignition source with a time to damage of approximately 15 minutes.
- The brigade response time is 7 minutes. As described in NUREG-2169 [3], the brigade response time is already included in the estimated suppression rate; so, this time is no longer necessary.

Additional information is required to apply the revised methodology, as follows:

- The MCC is not monitored in the MCR, and there would be no special indication of a fault in the MCC prior to or concurrent with the automatic fire detection.
- The ineffectiveness of the automatic smoke detection system is 0.07, as described in Section 5.3.3.1.
- A pre-growth period of 4 minutes is included in the detailed fire modeling of the interruptible fraction of fires (Option 2). For details, see Section 4.2.2.
- The MCC is located in a room that has been determined to have medium occupancy and medium maintenance rating levels. An adjacent space has also been classified with medium occupancy and maintenance ratings. This results in a probability that personnel are not present to detect the fire of 0.231. For details, see Section 5.3.3.5.
- The interruptible fire and growing fire suppression rates are 0.149 and 0.100, respectively, as described in Section 3.5.
- The split between interruptible and growing fire profiles is 0.723/0.277, respectively, as described in Section 3.4.

Figure 6-1 illustrates the solution of the P_{ns} event tree following the NUREG/CR-6850 [1] approach.

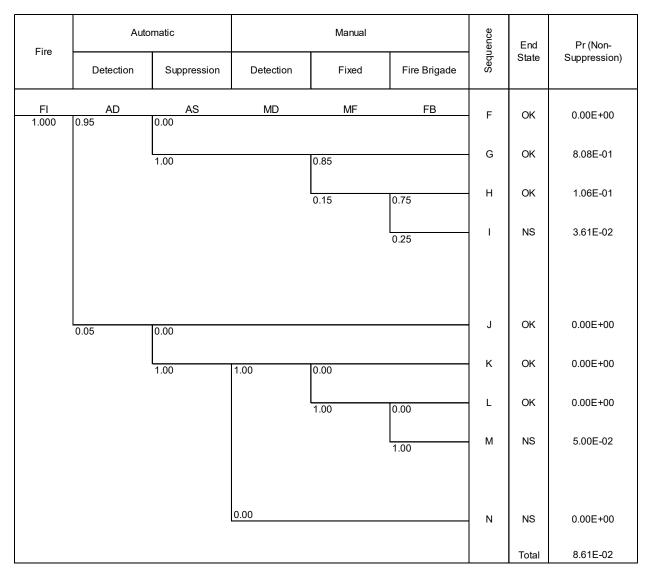


Figure 6-1 Solution for the NUREG/CR-6850 detection-suppression event tree

The first credited system for sequences F to I is automatic detection, which has a failure probability of 0.05 as identified in NUREG/CR-6850. The probability of failure to activate the gaseous suppression system in time is the summation of the human error activating the system (assumed to be 0.1 in NUREG/CR-6850 for this example) and the unreliability of the system (0.05 in NUREG/CR-6850 for this example). The probability of failure for the FB is calculated using the electrical suppression curve provided in NUREG-2169 [3] (lambda of 0.098). The resulting timing is 15-1 = 14 minutes and the P_{ns} becomes as shown in Equation 6-1.

$$e^{-\lambda t} \to e^{-0.098 \cdot 14} = 0.25$$
 (6-1)

If the automatic detection fails, delayed detection is credited. Sequences J to N refer to this situation. Assuming a delayed detection time of 15 minutes [1], the FB has no time to suppress the fire before target damage and the probability of non-suppression becomes 1.0.

The sum of sequences I, M, and N provides the total scenario P_{ns} , which is 3.61E-02 + 5.0E-02 + 0.0 = 0.0861.

Because the MCC is not monitored in the MCR (there would be no indication of trouble with the equipment), the detection branches would be calculated, as shown in Figure 6-2 and Figure 6-3.

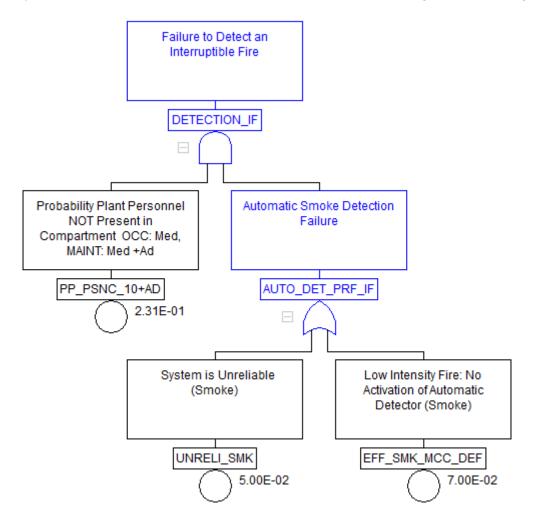


Figure 6-2 First detection for the interruptible path, NUREG/CR-6850 Appendix P example

Because there is no thermally activated detection system in this example, there is no second detection option for the interruptible fire path. The first detection step for the growing path would simply be the probability of no personnel present in the compartment, or 0.231 from Table 5-7.

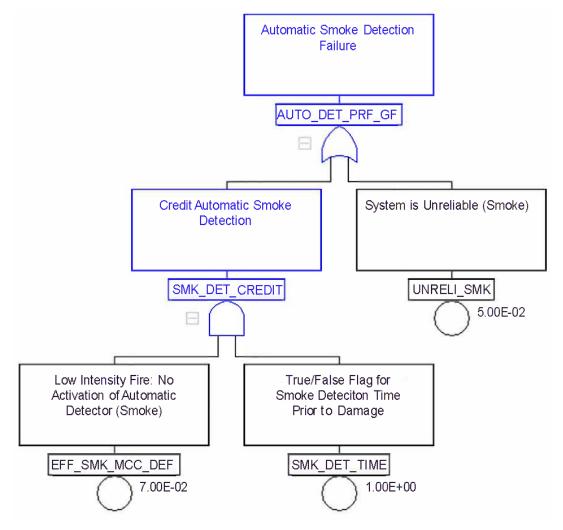


Figure 6-3 Second detection for the growing path, NUREG/CR-6850 Appendix P example

The resulting detection failure probabilities are the following:

• First interruptible: 2.60E-02

Second interruptible: 1.0

First growing: 2.31E-01

Second growing: 1.12E-01

For the interruptible path, credit can be taken for the manual fixed system (no credit is taken for an automatic suppression system because there is not one present in the space). The NSP for the FB branch (D-IF) is calculated and shown in Equation 6-2.

$$e^{-\lambda t} \to e^{-0.149 \cdot (15+4)} = 0.06$$
 (6-2)

Note that 4 minutes is added to the time to damage to represent the pre-growth time associated with an interruptible fire. For more details, see Section 4.2.2.

Following a failure in the first detection branch, because there is no second detection (and therefore no probability of reaching sequences E to H), the next calculations are associated with the delayed detection Equation 6-3:

$$e^{-\lambda t} \to e^{-0.149 \cdot (15+4-15)} = 0.55$$
 (6-3)

The growing path is similar to the interruptible path with a few small differences. The NSP for the FB branch (D-GF) following the first detection path is calculated and shown in Equation 6-4.

$$e^{-\lambda t} \to e^{-0.100 \cdot (15-0)} = 0.22$$
 (6-4)

For the growing fire, there is a second detection success opportunity (represented by the automatic smoke detection system). The NSP for the FB branch (H-GF) is calculated and shown in Equation 6-5.

$$e^{-\lambda t} \to e^{-0.100 \cdot (15-1)} = 0.25$$
 (6-5)

For the growing fire, there is not enough time to credit delayed detection because the time to damage equals the 15 minutes of time associated with detection.

The scenario NSP is calculated as (1) 8.61E-03 + 0.00 + 2.14E-03 = 1.08E-02 for an interruptible fire and (2) 2.57E-02 + 7.59E-03 + 2.60E-02 = 5.93E-02 for a growing fire. Considering the split fraction for interruptible and growing fire profiles, the total NSP becomes 0.024. The result is a reduction in the NSP of 0.062.

Figure 6-4 through Figure 6-6 illustrate the solution of the NSP event tree following the updated approach described previously.

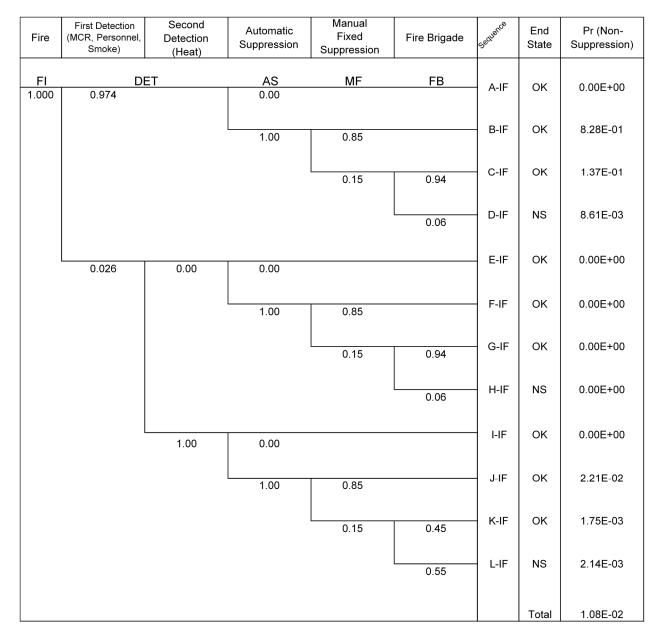


Figure 6-4 Solution for the detection-suppression event tree for NUREG/CR-6850 Example 1: interruptible fire path

Fire	First Detection (MCR & Personnel)	Second Detection (Automatic)	Automatic Suppression	Manual Fixed Suppression	Fire Brigade	Sequence	End State	Pr (Non- Suppression)
FI 1.000	0.769	ET	AS 0.00	MF	FB	- A-GF	ОК	0.00E+00
			1.00	0.85		B-GF	ок	6.53E-01
				0.15	0.78	C-GF	ок	8.96E-02
					0.22	D-GF	NS	2.57E-02
	2.31E-01	0.89	0.00			E-GF	ок	0.00E+00
			1.00	0.85		F-GF	ок	1.75E-01
				0.15	0.75	G-GF	ок	2.32E-02
				0.10	0.25	H-GF	NS	7.59E-03
					0.20	I-GF	ок	0.00E+00
		0.11	0.00			- J-GF	ок	0.00E+00
			1.00	0.00		K-GF	ОК	0.00E+00
				1.00	0.00	L-GF	NS	2.60E-02
					1.00			
							Total	5.93E-02

Figure 6-5 Solution for the detection-suppression event tree for NUREG/CR-6850 Example 1: growing path

Fire	Interruptible Fire	Event Tree	Pr (Non-Suppression)
FI	Yes 0.723	Interruptible 0.011	7.78E-03
	No 0.277	Growing 0.059	1.64E-02
		Total	0.02420

Figure 6-6 Solution for the detection-suppression event tree for NUREG/CR-6850 Example 1: total $P_{\rm ns}$

6.2 Example 2, Revised NUREG/CR-6850, Personnel Detection Sensitivities

The scenario described in Example 1 is repeated; however, occupancy and maintenance ratings of the compartment where the MCC is located are varied. The results of these changes are presented in Table 6-1.

Table 6-1 Example 2: occupancy and maintenance rating sensitivities

nd P _{ns}
5-7
eduction of the
ompared to the ented in Appendix
CR-6850.
=======================================

Table 6 1
Example 2: occupancy and maintenance rating sensitivities (continued)

Sensitivity Case	Rating Levels	Personnel Presence Probability and P _{ns}
No credit for adjacent spaces	Source compartment: Occupancy: medium Maintenance: medium Adjacent compartment: Occupancy: N/A Maintenance: N/A	 0.475, Table 5-6 P_{ns} = 0.033 Results in: A reduction of 0.053 in the P_{ns} compared to the method in NUREG/CR-6850 An increase of 0.009 in the P_{ns} compared to the results following the method presented in this report for Example 1
Lower occupancy and maintenance ratings in adjacent spaces No credit may be taken for an adjacent space with lower ratings	Source compartment: Occupancy: medium Maintenance: medium Adjacent compartment: Occupancy: low Maintenance: low	 0.475, Table 5-6 P_{ns} = 0.033 Results in: A reduction of 0.053 in the P_{ns} compared to the method in NUREG/CR-6850 An increase of 0.009 in the P_{ns} compared to the results following the method presented in this report for Example 1

Table 6-1 Example 2: occupancy and maintenance rating sensitivities (continued)

Sensitivity Case	Rating Levels	Personnel Presence Probability and P _{ns}
Lower occupancy and higher maintenance ratings in adjacent spaces (Note: Credit for the adjacent space may only be taken for values up to that of the source compartment. Therefore, only a value of 5—equal to the medium rating of source compartment—is credited. A value of 10—associated with the high rating—is not allowed. Additionally, no credit may be taken for an adjacent occupancy with a lower rating.)	Source compartment: Occupancy: medium Maintenance: medium Adjacent compartment: Occupancy: low Maintenance: high	(5+0/2)/10+(5+ 5 / 2)/50- ((5+0/2)/10 x (5+5/2)/50)= 0.575 1 - 0.575 = 0.425 P _{ns} = 0.031 Results in: • A reduction of 0.055 in the P _{ns} compared to the method in NUREG/CR-6850 • An increase of 0.007 in the P _{ns} compared to the results following the method presented in this report for Example 1
Higher occupancy and maintenance ratings in adjacent spaces	Source compartment: Occupancy: medium Maintenance: medium Adjacent compartment: Occupancy: high Maintenance: high	0.231, Table 5-7 P _{ns} = 0.024 Results in a reduction of the P _{ns} of 0.062 compared to the method in Appendix P of NUREG/CR-6850.
Low occupancy and maintenance ratings	Source compartment: Occupancy: low Maintenance: low Adjacent compartment: Occupancy: low Maintenance: low	 0.837, Table 5-6 P_{ns} = 0.047 Results in: A reduction of 0.04 in the P_{ns} compared to the method in NUREG/CR-6850 An increase of 0.022 in the P_{ns} compared to the results following the method presented in this report for Example 1

6.3 Example 3, Revised NUREG/CR-6850, Enclosure Class/Function Group Sensitivities

The scenario described in Example 1 is repeated; however, the electrical cabinet source enclosure class/function group is varied. The results of these changes are presented in Table 6-2.

Table 6-2 Example 2: enclosure class/function group sensitivities

Sensitivity Case	Enclosure Group/Function Class	Automatic Smoke Detection Failure Probability and Pns
	Enclosure class/function group: 0.07, Table 5-2	0.1122 P _{ns} = 0.024
Example 1	Unreliability: 0.05	
	Unavailability: N/A	Results in a reduction of the Pns of 0.062 compared to the method in Appendix P of NUREG/CR-6850.
		0.3053
Open, large enclosure, TP	Enclosure class/function group: 0.27, Table 5-2 Unreliability: 0.05 Unavailability: N/A	P _{ns} = 0.038 Results in: • A reduction of 0.048 in the P _{ns} compared to the method in NUREG/CR-6850 • An increase of 0.014 in the P _{ns} compared to the results following the method presented in this report for Example 1

Table 6-2 Example 2: enclosure class/function group sensitivities (continued)

Sensitivity Case	Enclosure Group/Function Class	Automatic Smoke Detection Failure Probability and Pns
Small enclosure	Enclosure class/function group: 0.44, Table 5-2 Unreliability: 0.05 Unavailability: N/A	 0.4672 P_{ns} = 0.05 Results in: A reduction of 0.036 in the P_{ns} compared to the method in NUREG/CR-6850 An increase of 0.026 in the P_{ns} compared to the results following the method presented in this report for Example 1
Include unavailability of smoke detection	Enclosure class/function group: 0.07, Table 5-2 Unreliability: 0.05 Unavailability: 0.01	 0.1211 P_{ns} = 0.025 Results in: A reduction of 0.061 in the P_{ns} compared to the method in NUREG/CR-6850 An increase of 0.001 in the P_{ns} compared to the results following the method presented in this report for Example 1

6.4 Example 4, Revised NUREG/CR-6850 (MCR Indication)

The scenario described in Example 1 is repeated; however, now the MCC **is** monitored in the MCR, and there would be an indication of a fault in the MCC prior to or concurrent with the automatic detection.

Because the ignition source is now monitored by the MCR, the probability of detection includes the main control board indication (see Section 5.3.3.2) and the MCR operator response (see Section 5.3.3.3). These two changes result in a new P_{ns} of 0.0158, a decrease of 0.07 from the

result when following the method in Appendix P of NUREG/CR-6850 and a decrease of 0.0084 compared to the results following the method presented in this report for Example 1.

6.5 Example 5, Revised NUREG/CR-6850 (Automatic Suppression)

The scenario described in Example 1 is repeated; however, now the room is equipped with a wet pipe automatic suppression system. For this example, the initial fire modeling results show that the automatic suppression system activates 10 minutes into the scenario. Including the 4-minute pre-growth period for the interruptible fraction of fires results in an automatic suppression activation time of 14 minutes.

Because the activation of the automatic suppression system occurs prior to damage in both the interruptible and growing paths, the unreliability (0.02, NUREG/CR-6850) and unavailability (0.01, assumed for this example) is included in the calculation of the $P_{\rm ns}$. These changes result in a new $P_{\rm ns}$ of 0.008, a reduction of 0.078 from the result when following the method in Appendix P of NUREG/CR-6850 and a decrease of 0.016 compared to the results following the method presented in this report for Example 1.

6.6 Example 6, 1-Minute Time to Damage

In many instances, the first target damaged by an ignition source is located very close to the ignition source, and the time to damage may be only 1 minute. This example compares the change in the P_{ns} between the methodology in this report and the value calculated using the NUREG/CR-6850 approach.

This scenario is provided with the following information:

- The target is a cable tray located close to the ignition source with a time to damage of 1 minute.
- The ignition source is an MCC. It is assumed that the ignition source is limited to a single vertical section of the MCC.
- The room is equipped with a smoke detection system. There is no VEWFDS (sometimes referred to as an *incipient detection system*). The time to automatic smoke detection is 1 minute. The ineffectiveness of the automatic smoke detection system is 0.07, as described in Section 5.3.3.1.
- The smoke detection system has an unavailability of 0.01.
- The room is not equipped with a fixed automatic or manually activated suppression system.
- The ignition source is monitored in the MCR, and there would be an indication of a fault prior to or concurrent with the automatic detection.
- The interruptible fire and growing fire suppression rates are 0.149 and 0.100, respectively, as described in Section 3.5.
- The split between interruptible and growing fire profiles is 0.723/0.277, respectively, as described in Section 3.4.
- Option 2, the adjusted NUREG/CR-6850 profile, is used to model the interruptible fraction of fires. For details, see Section 4.2.2.
- MCR indication unreliability is 0.01, as described in Section 5.3.3.2.

Examples

- The MCR operator HEP is 1.0E-03, as described in Section 5.3.3.3.
- The MCC is located in a room that has been determined to have medium occupancy and medium maintenance rating levels. An adjacent space has also been classified with medium occupancy and maintenance ratings. This results in a probability that personnel are not present to detect the fire of 0.231. For details, see Section 5.3.3.5.

The P_{ns} following the approach in NUREG/CR-6850 is equal to 1.0. The P_{ns} following the methodology presented in this report is equal to 0.60, a reduction of 0.40 from the method in Appendix P of NUREG/CR-6850.

A sensitivity is preformed using the experimentally developed interruptible fire HRR timing profile (option 1). This results in a 9 minute pre-growth period with no measurable HRR for the interruptible fraction of fires. The P_{ns} following the methodology presented in this report is equal to 0.42, a reduction of 0.58 from the result when following the method in Appendix P of NUREG/CR-6850.

7 SUMMARY

This report provides an updated framework for treatment of the fire scenario progression starting from ignition, through fire growth, and suppression. The framework described in Appendix P of NUREG/CR-6850 is expanded to allow for additional fire progressions commonly observed in plant fire events.

7.1 Bin 15 Fire Ignition Frequency

The addition of events from the period of 2010–2014 [4] requires the fire ignition frequency to be updated. Following the methods outlined in NUREG-2169, the updated fire ignition frequency distribution for Bin 15 is presented in Table 7-1.

Table 7-1
Fire ignition frequency distribution for Bin 15

Bin	Location	Ignition Source	Power Modes	Period	Mean	Median	5th Percent	95th Percent
15	Plantwide components	Electrical cabinets (non-HEAF)	AA	2000– 2014	3.43E-02	3.19E-02	1.13E-02	6.60E-02

7.2 Interruptible/Growing Fire Split Fraction

Section 3 covers the event review process to determine the fraction of fires that exhibit interruptible fire behavior. Forty-seven fire events were reviewed and the split fractions are as follows:

Interruptible: 0.723 (34 out of 47 events)

• Growing: 0.277 (13 out of 47 events)

A summary of the classification and event review is found in Appendix A, Table A-1.

7.3 Interruptible/Growing Fire Timing Profiles

Growing fires should be modeled using the existing timing profile in NUREG/CR-6850 (12 minutes to peak, 8 minutes at steady state, and 19-minute decay).

For interruptible fires, the analyst has two options:

- Option 1: Interruptible Fire Timing Profile
 - A period of 9 minutes with no measurable HRR may be included prior to the period of fire growth. If included, this pre-growth phase must be reflected in any calculations of the time to damage, time to detection, and time to suppression.
 - The fire grows to its peak HRR in 7 minutes. A t² function should be used for representing the growth phase of the fire.

Summary

- The fire burns at its peak HRR for 5 additional minutes.
- The fire decays linearly over a period of 13 minutes.
- Option 2: Adjusted NUREG/CR-6850 Timing Profile
 - A period of 4 minutes with no measurable HRR may be included prior to the period of fire growth. If included, this pre-growth phase must be reflected in any calculations of the time to damage, time to detection, and time to suppression.
 - With the timing described in the NUREG/CR-6850 profile (12 minutes to peak, 8 minutes steady state, and 19 minute decay).

7.4 New P_{ns} Event Tree Parameters

To support the revised event tree structure, additional parameters in the event tree are developed, including the following:

- Interruptible and growing fire split fractions: 0.723/0.277 (see Section 3.4)
- Probability of no automatic smoke detection (see Table 5-2 in Section 5.3.3)
- Success of MCR indication: 0.99 (see Section 5.3.3.2)
- MCR operator response HEP: 1.0E-03 (see Section 5.3.3.3)
- Probability of plant personnel present (see Table 5-6 and Table 5-7 in Section 5.3.3.5)
- Time of detection is as follows:
 - The following detection types have a zero time to detection (t = 0) as covered in Section 5.3.4.1 (interruptible) and 5.3.4.2 (growing):
 - Detection by a non-fire trouble alarm in the MCR
 - Plant personnel
 - Automatic smoke detection (interruptible fires only)
 - Interruptible fires crediting heat detection should calculate the time to detection using the interruptible HRR timing profile
 - Growing fires crediting any automatic detection system should calculate the time to detection using the growing (NUREG/CR-6850) HRR timing profile

The new event tree parameters are summarized in Table 7-2.

Table 7-2
Summary of non-suppression event tree parameters

Parameter	Interruptible Fire	Growing Fire			
Split fraction	0.723	0.277			
Automatic smoke detection ineffectiveness	-	n NUREG-2178 case able 5-2)			
Time to automatic smoke detection	t = 0 for effective No credit for (1-effective)	t = calculated time for effective No credit for (1-effective)			
MCR indication	0.99 (see So MCR ope	n) indication reliability: ection 5.3.3.2) erator HEP: Section 5.3.3.3)			
Time to MCR indication	<u> </u>	es monitored in the MCR ction 5.3.4)			
Personnel detection credit	-	sence estimation 6 and Table 5-7)			
Time to personnel detection	t = 0 for personnel present (see Section 5.3.4)				
HRR profile	Interruptible fire profile (see Section 4.2.2 Option 1) OR 4 minutes pre-growth + NUREG/CR-6850 profile (see Section 4.2.2, Option 2)	NUREG/CR-6850 profile (see Section 4.2.4)			

7.5 NSP Estimation Update

As a result of this research, two new suppression curves were generated. For interruptible, the data set contains electrical cabinet events that were classified as interruptible. Likewise, for growing, this data set contains electrical cabinet events that were classified as growing. Similar to the earlier electrical curve, both suppression curves exclude HEAFs and fires that occur in the MCR.

For fires that occur in the MCR, the suppression curve was updated with additional data and the floor value has been lowered. The MCR suppression curve was updated in Table 3-3 (in conjunction with the research on the main control board model in NUREG-2178 Volume 2) [39]. The MCR suppression curve is used for fires occurring within the MCR, regardless of ignition source (electrical cabinets, main control board, transients, and so on). Section 3.5.2 covers the NSP floor and provides a basis for lowering the floor to 2.4E-07 for fire scenarios in single unit MCRs. A revised floor value for dual-unit MCRs of 4.8E-07 is also recommended based on a sensitivity analysis for multi-unit control rooms.

Lastly, the existing electrical fires suppression curve was updated. Events include non-cabinet electrical sources, such as electric motors, indoor dry transformers, and junction boxes, among other electrical equipment.

The numerical values of the P_{ns} curve probabilities are provided in Table 7-3.

Table 7-3 Probability distribution for rate of fires suppressed per unit time, $\boldsymbol{\lambda}$

Calculation		Number of	Total		Rate of Fire	Rate of Fire Suppressed (λ)	
Source Document	Suppression Curve	Events in Curve	Duration (minutes)	Mean	5th Percent	50th Percent	95th Percent
NUREG-2169	Turbine-generator fires	30	1167	0.026	0.019	0.025	0.034
NUREG-2178, Vol. II	Control room	10	26	0.385	0.209	0.372	0.604
NUREG-2169	Pressurized water reactor containment (at power)	8	40	0.075	0.020	0.067	0.157
NUREG-2169	Containment (low power-shutdown)	31	599	0.104	0.075	0.103	0.136
NUREG-2169	Outdoor transformers	54	928	0.026	0.018	0.026	0.035
NUREG-2169	Flammable gas	8	234	0.034	0.017	0.033	0.056
NUREG-2169	Oil fires	09	562	0.089	690'0	0.088	0.111
NUREG-2169	Cable fires	4	29	0.138	0.047	0.127	0.267
NUREG-2230	Electrical fires*	74	653	0.113	0.093	0.113	0.136
NUREG-2230	Interruptible fires (Bin 15)	43	288	0.149	0.114	0.148	0.189
NUREG-2230	Growing fires (Bin 15)	18	179.5	0.100	90.0	0.098	0.142
NUREG-2169	Welding fires	52	484	0.107	0.084	0.107	0.133
NUREG-2169	Transient fires	43	386	0.111	0.085	0.111	0.141
FAQ 17-003	HEAFs	11	385	0.029	0.016	0.028^	0.044
NUREG-2169, NUREG-2230	All fires	398	5878	0.068	0.062	0.068	0.073

*Electrical fires include non-cabinet electrical sources, such as electrical motors, indoor transformers, and junction boxes, among other electrical

equipment. ^FAQ 17-0013 reported the 50th percentile as 0.029. When calculated using the chi-squared distribution, the calculated 50th percentile is 0.028.

8 REFERENCES

- EPRI/NRC-RES Fire PRA Methodology for Nuclear Power Facilities: Volume 2: Detailed Methodology. U.S. Nuclear Regulatory Commission, Washington, DC, and the Electric Power Research Institute (EPRI), Palo Alto, CA: 2005. NUREG/CR-6850 and EPRI 1011989.
- 2. The Updated Fire Events Database: Description of Content and Fire Event Classification Guidance. EPRI, Palo Alto, CA: 2013. 1025284.
- 3. Nuclear Power Plant Fire Ignition Frequency and Non-Suppression Probability Estimation Using the Updated Fire Events Database. U.S. Nuclear Regulatory Commission, Washington, DC, and EPRI, Palo Alto, CA: 2015. NUREG-2169 and EPRI 3002002936.
- 4. Fire Events Database Update for the Period 2010–2014: Revision 1. EPRI, Palo Alto, CA: 2016. 3002005302.
- Refining and Characterizing Heat Release Rates From Electrical Enclosures During Fire (RACHELLE-FIRE), Volume 1: Peak Heat Release Rates and Effect of Obstructed Plume. U.S. Nuclear Regulatory Commission, Washington, DC, and EPRI, Palo Alto, CA:, 2016. NUREG-2178 and EPRI 3002005578.
- 6. An Experimental Investigation of Internally Ignited Fires in Nuclear Power Plant Control Cabinets Part I: Cabinet Effects Testing. U.S. Nuclear Regulatory Commission, Washington, DC, and Sandia National Laboratories, Albuquerque, NM, April 1987. NUREG/CR-4527 and SAND86–0336.
- 7. J. Mangs and O. Keski-Rahkonen, "Full Scale Fire Experiments on Electronic Enclosures," VTT Publications 186, VTT Technical Research Centre of Finland, Espoo, Finland, 1994.
- 8. J. Mangs and O. Keski-Rahkonen, "Full Scale Fire Experiments on Electronic Enclosures II," VTT Publications 269, VTT Technical Research Centre of Finland, Espoo, Finland, 1996.
- 9. J. Mangs, J. Paananen, and O. Keski-Rahkonen, "Calorimetric Fire Experiments on Electronic Enclosures," *Fire Safety Journal*, 38:165–186, 2003.
- 10. J. Mangs, "On the Fire Dynamics of Vehicles and Electrical Equipment," VTT Publications 521, VTT Technical Research Centre of Finland, Espoo, Finland, 2004.
- 11. U.S. Nuclear Regulatory Commission. Heat Release Rates of Electrical Enclosure Fires. NUREG/CR-7197, April 2016.
- 12. Fire Probabilistic Risk Assessment Methods Enhancements. EPRI, Palo Alto, CA, and the U.S. Nuclear Regulatory Commission, Washington, DC, 2010. EPRI 1019259 and NUREG/CR-6850 Supplement 1.
- 13. U.S. Nuclear Regulatory Commission. Determining the Effectiveness, Limitations, and Operator Response for Very Early Warning Fire Detection Systems in Nuclear Facilities (DELORES-FIRE). NUREG-2180, 2016.
- 14. U.S. Nuclear Regulatory Commission. Industry-Average Performance for Components and Initiating Events at U.S. Commercial Nuclear Power Plants. NUREG/CR-6928, 2007.

References

- 15. U.S. Nuclear Regulatory Commission. Human-System Interface Design Review Guidelines, Revision 2. NUREG-0700, May 2002.
- 16. U.S. Nuclear Regulatory Commission. The SPAR-H Reliability Analysis Method. NUREG/CR-6883, August 2005.
- 17. Idaho National Laboratory. *SPAR-H Step-by-Step Guidance*, INL/EXT-10-18533, Revision 2, May 2011.
- 18. An Approach to the Analysis of Operator Actions in Probabilistic Risk Assessment. EPRI, Palo Alto, CA: 1992. TR-100259.
- 19. U.S. Nuclear Regulatory Commission. Handbook of Human Reliability Analysis with Emphasis on Nuclear Power Plant Applications. NUREG/CR-1278, August 1983.
- 20. EPRI/NRC-RES Fire Human Reliability Analysis Guidelines., U.S. Nuclear Regulatory Commission, Washington, DC, and EPRI, Palo Alto, CA: 2012. NUREG-1921 and EPRI 1023001.
- 21. U.S. Nuclear Regulatory Commission. The Status of Recommendations of the President's Commission on the Accident at Three Mile Island, A Ten Year Review. NUREG-1355, March 1989.
- 22. U.S. Nuclear Regulatory Commission. Hot Work/Transient Fire Frequency: Influence Factors, ADAMS Accession Number ML121780013. FAQ 12-0064.
- 23. Automatic and Manual Suppression Reliability Data for Nuclear Power Plant Fire Risk Analyses. EPRI, Palo Alto, CA: 1994. NSAC-179L.
- 24. U.S. Nuclear Regulatory Commission. Fire Dynamic Tools (FDTs), Quantitative Fire Hazard Analysis Methods for the U.S. Nuclear Regulatory Commission Fire Protection Inspection Program. NUREG-1805, 2013.
- 25. R. L. Alpert, "Calculation of Response Time of Ceiling-Mounted Fire Detectors," *Fire Technology*, 8:181, 1972.
- 26. E. Claperyon, "Memoire sur la pusissance motrice de la chaleur," *Journal de l'Ecole Polytechnique*, XIV:153–190, 1834.
- 27. G. Van Wylen and R. Sonntag, *Fundamentals of Classical Thermodynamics*, 3rd ed., John Wiley & Sons, New York, NY, 1986.
- 28. U.S. Nuclear Regulatory Commission. Cable Heat Release, Ignition, and Spread in Tray Installation During Fire (CHRISTIFIRE), Volume 1: Horizontal Tray. NUREG/CR-7010, 2010.
- 29. M. J. Hurley, *The SFPE Handbook of Fire Protection Engineering*, 5th ed. Society of Fire Protection Engineers, New York, NY, 2016.
- 30. G. W. Muholland and C. Croarkin, "Specific Extinction Coefficient of Flame Generated Smoke," *Fire and Materials*, 24(5):39–55, 2000.
- 31. J. A. Milke, F. W. Mowrer, and P. Gandhi, *Validation of a Smoke Detection Performance Prediction Methodology*, Fire Protection Research Foundation, Quincy, MA, 2008.
- 32. R. Bukowsk et al., *Performance of Home Smoke Alarms*, National Institute of Standards and Technology, Gaithersburg, MD, 2008. NIST Tech. Note 1455-1,
- 33. Verification and Validation of Selected Fire Models for Nuclear Power Plant Applications, U.S. Nuclear Regulatory Commission, Washington, DC, and EPRI, Palo Alto, CA: 2016. NUREG-1824 Supplement 1, and EPRI 3002002182.

References

- 34. K. Overholt, *Verification and Validation of Commonly Used Empirical Correlations for Fire Scenarios*, National Institute of Standards and Technology, Gaithersburg, MD, March 2014. NIST Special Publication 1169.
- 35. K. B. McGrattan et al., *Fire Dynamics Simulator, Technical Reference Guide, Volume 3: Validation*, 6th ed. National Institute of Standards and Technology and VTT Technical Research Centre of Finland, Gaithersburg, MD, February 2019.
- 36. United States Committee on Extension to the Standard Atmosphere, et al. U.S. Standard Atmosphere. National Aeronautics and Space Administration, U.S. Air Force, and United States Weather Bureau, 1962.
- 37. K. McGrattan and S. Miles. Modeling Enclosure Fires Using Computational Fluid Dynamics (CFD), Section 3-8, *The SFPE Handbook of Fire Protection Engineering*, 4th ed.. Society of Fire Protection Engineers, New York, NY, 2008.
- 38. U.S. Nuclear Regulatory Commission. Glossary of Risk-Related Terms in Support of Risk-Informed Decisionmaking. NUREG-2122, 2013.
- 39. Refining and Characterizing Heat Release Rates From Electrical Enclosures During Fire (RACHELLE-FIRE), Volume 2: Fire Modeling Guidance for Electrical Cabinets, Electric Motors, Indoor Dry Transformers, and the Main Control Board, Draft for Public Comment. U.S. Nuclear Regulatory Commission, Washington, DC, and EPRI, Palo Alto, CA: 2019. NUREG-2178, Volume 2, and EPRI 3002016052.

APPENDIX A INSIGHTS FROM THE EPRI FEDB

Appendix A contains data extracted from the EPRI FEDB. The supporting information contained in the FEDB serves as the basis for revision of several fire modeling parameters. A description of the tables in Appendix A includes the following:

- **Table A-1**. This table documents the overall results from the review of the Bin 15 fire events from 2000 to 2014. The data fields updated as part of this project include the fire growth classification, P_{ns} category, and suppression time.
- **Table A-2**. This table documents the review of the 1990–1999 electrical cabinet fire events that were used to supplement the manual NSP curves.
- Table A-3. This table documents the important attributes of the fire event review that led to
 the classification of growth profiles in Table A-1. During the review of fire events, the
 attributes most important to fire growth were documented, including notification, passage of
 time, fire size, and suppression effort.
- Table A-4. This table includes fire events that were originally classified as potentially challenging or greater in either NUREG-2169 (EPRI 3002002936) [3] or EPRI 3002005302 [4]. Upon further review and/or additional supporting information, these events are no longer applicable. This table contains a description and disposition for the seven events that were dispositioned as part of this project.

Table A-1 Fire event data from 2000 to 2014

Incident Number	Event Date	Ignition Source	Power Condition	Fire Severity	Bin Designation	Fire Growth Classification	P _{ns} Category	Suppression Time	Suppression Notes
131	1/14/2005	Electrical	РО	PC	15	Interruptible	Interruptible	6	The FB report stated that the fire was out after 9 minutes. FB called to respond.
144	10/30/2006	Electrical cabinets	ОА	ЭЫ	15	Interruptible	Interruptible	10	12:38 MCR alarms; 12:48 MCR informed fire was out.
146	2/27/2007	Electrical cabinets	ОА	ЭЫ	15	Interruptible	Excluded	N/A	Supervised burnout.
152	10/23/2007	Electrical cabinets	О	ЭЫ	15	Growing	Excluded	N/A	Self-extinguish (load center breaker tripped).
161	4/22/2009	Electrical cabinets	ОА	ЭЫ	15	Interruptible	Interruptible	2	
175	11/22/2009	Electrical cabinets	СБ	НЭ	15	Growing	Growing	40	
303	3/1/2000	Electrical cabinets	СD	ЬС	15	Growing	Growing	2	
320	10/24/2000	Electrical cabinets	ОА	ЭЫ	15	Interruptible	Interruptible	2	
381	3/6/2005	Electrical cabinets	ЬО	ЬС	15	Interruptible	Interruptible	13	
411	3/8/2001	Electrical cabinets	ЬО	ЬС	15	Interruptible	Excluded	N/A	Self-extinguish (no plant intervention).
517	3/23/2006	Electrical cabinets	ЬО	ЬС	15	Interruptible	Interruptible	12	$XX:46-XX:34 = 12$, time CO_2 put on fire.

Table A-1 Fire event data from 2000 to 2014 (continued)

Incident Number	Event Date	Ignition Source	Power Condition	Fire Severity	Bin Designation	Fire Growth Classification	P _{ns} Category	Suppression Time	Suppression Notes
520	6/6/2006	Electrical	PO	PC	15	Interruptible	Interruptible	8	First smoke alarm at 1:19 (first indication at 1:16). Fire Extinguished at 1:27, 27-19 = 8. FB opened breaker and extinguished flames.
588	11/30/2006	Electrical cabinets	ОА	НЭ	15	Growing	Excluded	N/A	Extinguished by automatic suppression only.
10338	9/13/2001	Electrical cabinets	ЬО	PC	15	Growing	Growing	2	
10394	2/22/2005	Electrical cabinets	ЬО	PC	15	Interruptible	Excluded	N/A	Self-extinguished (no plant intervention).
30276	7/24/2006	Electrical cabinets	ОА	ЪС	15	Interruptible	Control room	2	
30338	3/30/2006	Electrical cabinets	O	PC	15	Interruptible	Interruptible	ဇ	
30478	9/9/2005	Electrical	РО	PC	15	Growing	Growing	5	Incident commander (FB) was not the one to discover the fire, but the first to challenge it.
30513	5/27/2008	Electrical cabinets	Ю	Э	15	Growing	Control	2	Halon—manual.
30522	9/12/2000	Electrical cabinets	ОА	ЪС	15	Interruptible	Excluded	N/A	Suppression time indeterminate.
50473	6/26/2000	Electrical cabinets	РО	PC	15	Interruptible	Interruptible	3	
50784	11/20/2005	Electrical cabinets	ЬО	n	15	Growing	Growing	0	From T/M.
50811	1/9/2001	Electrical cabinets	ЬО	PC	15	Interruptible	Interruptible	7.5	Time estimated from information in CAP.

Table A-1 Fire event data from 2000 to 2014 (continued)

Incident Number	Event Date	Ignition Source	Power Condition	Fire Severity	Bin Designation	Fire Growth Classification	P _{ns} Category	Suppression Time	Suppression Notes
50874	7/12/2002	Electrical cabinets	CD	PC	15	Interruptible	Interruptible	2	
50912	5/5/2010	Electrical cabinets	CD	нэ	15	Growing	Excluded	N/A	Auto-suppression actuation.
50914	6/8/2010	Electrical cabinets	HS	Э	15	Interruptible	Control	3	
50916	7/13/2010	Electrical cabinets	РО	PC	15	Growing	Control	0.5	Reported as 0 time to suppress.
50921	10/11/2010	Electrical cabinets	РО	PC	15	Interruptible	Interruptible	7	Under control at 8:31 and detected at 8:24:7 minutes, FB (team) extinguished the fire.
50923	12/19/2010	Electrical cabinets	РО	PC	15	Interruptible	Interruptible	16	FB opened the breakers
50925	2/8/2011	Electrical cabinets	РО	ЪС	15	Interruptible	Interruptible	8	FB appears to have removed cards/applied CO ₂ .
50936	6/25/2011	Electrical cabinets	РО	НЭ	15	Growing	Growing	37	FB team extinguished the fire.
50939	10/4/2011	Electrical cabinets	СD	ЪС	15	Interruptible	Interruptible	6	
50944	11/16/2011	Electrical cabinets	CD	PC	15	Interruptible	Interruptible	3	E-mail with notes on arc flash only; 3 minutes to open breaker, no suppression actions taken.
50946	1/23/2012	Electrical cabinets	RF	PC	15	Interruptible	Interruptible	10	
50956	10/22/2012	Electrical cabinets	ЬО	CH	15	Interruptible	Interruptible	9	First report at 18:48 and de- energized at 18:54:6 minutes.

Table A-1 Fire event data from 2000 to 2014 (continued)

4		2 (4)		Ë	:				
Number	Event Date	Source	Condition	Severity	Designation	Classification	F _{ns} Category	Suppression	Suppression Notes
51007	1/6/2013	Electrical cabinets	РО	PC	15	Interruptible	Interruptible	8	FB dispatched at 9:00. Manual suppression at 9:08.
51090	2/15/2013	Electrical cabinets	РО	PC	15	Interruptible	Interruptible	1	Time of detection is 8:59, and time fire was under control was 9:00.
51118	4/12/2011	Electrical cabinets	RF	PC	15	Interruptible	Interruptible	4	Maintenance person controlled the fire with extinguisher—out when FB de-energized.
51146	4/3/2013	Electrical cabinets	РО	PC	15	Interruptible	Interruptible	17	XX:49 Inverter loads realigned (assume that this is the point of fire under control) and 1st trouble alarm at XX:32. 49-32 = 17.
51172	3/21/2013	Electrical cabinets	СD	PC	15	Interruptible	Interruptible	5	
51180	5/16/2010	Electrical cabinets	РО	PC	15	Interruptible	Interruptible	2	
51190	4/2/2012	Electrical cabinets	РО	PC	15	Interruptible	Interruptible	11	First alert at 6:18, and fire suppressed at 6:29 = 11.
51216	1/3/2010	Electrical cabinets	РО	PC	15	Interruptible	Interruptible	5	
51304	1/18/2014	Electrical cabinets	РО	СН	15	Growing	Excluded	N/A	Auto-suppression actuation.
51324	5/23/2014	Electrical cabinets	РО	PC	15	Interruptible	Interruptible	15	19:46-19:31 = 15 first indication of trouble to suppression.
51332	10/6/2014	Electrical cabinets	ЬО	СН	15	Growing	Growing	2	

Table A-1 Fire event data from 2000 to 2014 (continued)

Incident Number	ncident lumber Event Date Source	Ignition Source	Power Condition	Fire Severity	Fire Bin Severity Designation (Fire Growth Classification	P _{ns} Category	Suppression Time	Suppression Notes
51377	51377 12/12/2013	Electrical cabinets	СО	PC	15	Interruptible	Interruptible	2	

HS = hot shutdown
PO = power operation
RF = refueling
PC = potentially challenging
CH = challenging
CD = cold shutdown

Table A-2 Fire event data from 1990 to 1999

Incident Number	Event Date	Power Condition	Fire Severity	Bin Designation	Fire Growth Classification	P _{ns} Category	Suppression Time	Suppression Notes
29	2/23/1991	SH.	PC	15	Interruptible	Interruptible	7	Fire was extinguished before the FB reached the scene.
38	3/21/1992	СО	НЭ	15	Interruptible	Interruptible	8	
41	6/17/1992	О	PC	15	Interruptible	Interruptible	ω	Within 8 minutes from discovery of the fire, the FB reported that the pump breaker had been racked out and the fire had been completely extinguished.
45	7/29/1992	Ю	PC	15	Growing	Growing	16	4:31 (FB extinguished fire with CO ₂) - 4:15 (fire starts) = 16.
69	8/29/1994	ЬО	n	15	Undetermined	Undetermined	10	Most likely description of degradation/self-extinguished fire.
89	10/15/1996	ЬО	ЪС	15	Interruptible	Interruptible	10	13:25 (fire declared out) - 13:15 (fire reported) = 10.
86	10/8/1998	RF	ЭЬ	15	Interruptible	Interruptible	W/N	Self-extinguished.
187	8/16/19 99	ЬО	DG	15	Interruptible	Interruptible	8	Use 8 minutes (suppression time as designated by plant).
188	8/24/1999	ЬО	DC	15	Growing	Growing	13	
203	4/6/1990	RF	СН	15	Growing	Growing	24	EPRI screenshot has boxes checked for damage outside ignition source/ignition of combustible materials outside ignition source.

Table A-2 Fire event data from 1990 to 1999 (continued)

Incident Number	Event Date	Power Condition	Fire Severity	Bin Designation	Fire Growth Classification	P _{ns} Category	Suppression Time	Suppression Notes
206	6/11/1990	СО	D .	15	Interruptible	Interruptible	2	Discovered while on rounds, power supply removed. Appears limited to ignition source.
209	8/22/1990	Ю	PC	15	Interruptible	Interruptible	2	
211	11/2/1990	RF	PC	15	Undetermined	Undetermined	2	Description: transformer failure, fire extinguished by de-energizing transformer.
219	9/27/1991	РО	PC	15	Interruptible	Interruptible	5	Description: insulation failure of transformer. Fire extinguished by deenergizing breaker. Discovered by roving fire watch.
224	3/8/1992	RF	n	15	Growing	Growing	9	Caused by electrician, damage confined to object of origin. Power removed.
253	2/6/1995	ОЫ	ЭЫ	15	Interruptible	Interruptible	10	
254	9/25/1995	RF(1), PO(2)	ЪС	15	Interruptible	Interruptible	4	The condition was reported at 14:06 and out at 14:10 = 4.
20264	1/19/1990	DS/Od	n	15	Undetermined	Undetermined	6	Light amount of smoke coming from an MCC. Hold in coil overheated, suppressed with extinguisher, unclear how discovered.
20267	3/12/1990	CD	n	15	Undetermined	Undetermined	N/A	Discovered by plant personnel. Suppression time indeterminate.
20268	4/19/1990	ОО	n	15	Undetermined	Undetermined	N/A	Discovered by plant personnel Suppression time indeterminate.
20269	4/30/1990	ЬО	N	15	Undetermined	Undetermined	N/A	Suppression time indeterminate.
20270	6/7/1990	RF)	15	Undetermined	Undetermined	2	Discovered by fire watch, unclear if time passed.

Table A-2 Fire event data from 1990 to 1999 (continued)

otes	rity guard.	led trip coil. terminate.	urned up. terminate.	ions, self- terminate.	sonnel who MCC. terminate.	fire watch.	ersonnel.	ation, not same plant	on system, able fire terminate.				or operator
Suppression Notes	Discovered by a security guard.	Heavy smoke due to failed trip coil. Suppression time indeterminate.	Control transformer burned up. Suppression time indeterminate	Discovered by Operations, self- extinguished. Suppression time indeterminate.	Discovered by plant personnel who saw smoke from MCC. Suppression time indeterminate.	Discovered by roving fire watch.	Discovered by plant personnel.	Fire occurred in lift station, not considered in fire PRA (same plant as Fire ID 52157 in Table A-4).	Discovered by detection system, extinguished by portable fire extinguisher. Suppression time indeterminate.				Growing (senior reactor operator present).
Suppression Time	5	N/A	A/N	N/A	N/A	5	2	N/A	N/A	10	6	7	2
P _{ns} Category	Undetermined	Undetermined	Undetermined	Excluded	Undetermined	Undetermined	Undetermined	Excluded	Undetermined	Growing	Growing		Growing
Fire Growth Classification	Undetermined	Undetermined	Undetermined	Undetermined	Undetermined	Undetermined	Undetermined	Undetermined	Undetermined	Growing	Growing		Growing
Bin Designation	15	15	15	15	15	15	15	15	15	15	15		15
Fire Severity)	PC	D .	n	n	n	n	Ω	n	n	n		n
Power Condition	PO(1), SD(2)	РО	PO(1), SD(2)	RF	РО	RF(1), PO(2)	РО	ЬО	ЬО	ЬО	РО		РО
Event Date	9/10/1990	9/18/1990	10/11/1990	10/12/1990	9/17/1991	2/29/1992	33889	34175	34542	35811	36286		36404
Incident Number	20272	20273	20275	20276	20282	20287	20295	20302	20312	20325	20328		20329

Table A-2 Fire event data from 1990 to 1999 (continued)

Incident Number	Event Date	Power Condition	Fire Severity	Bin Designation	Incident Event Date Power Fire Bin Fire Growth Number Condition Severity Designation Classification	P _{ns} Category	Suppression Time	Suppression Notes
20346	34423	RF	n	15	Undetermined	Undetermined Undetermined	N/A	Discovered by maintenance, self- extinguished. Suppression time indeterminate.
20356	34749	ОЬ	PC	15	Interruptible	Interruptible	5	Discovered by plant personnel, de- energized.
20357	34843	ЬО	PC	15	Growing (personnel right there)	Growing	N/A	Discovered by plant personnel. Self-extinguished.
20362	35491	О	PC	15	Undetermined	Undetermined Undetermined	2	Discovered by equipment alarm, de- energized.
, , , , , , , , , , , , , , , , , , , ,								

U = undetermined SD = shutdown

Table A-3 Significant attributes derived from fire event review

Event Date Classification Notification		Notificati	o	Passage of Time	Fire Size	Suppression Effort	Review Notes
Discovered by plant personnel	Discovered by plant personnel		dis	Personnel dispatched to event	Sparks and smoke	Water mist extinguishers	Time: While attempting to investigate the source of the noise, sparks and smoke were observed coming from a power distribution panel. Suppression: Water mist fire extinguishers were used to cool off the electrical panel.
MCR indication/ equipment trouble alarm (first) Automatic detection/FACP (secondary)	MCR indication/ equipment trouble alarm (first) Automatic detection/FACP (secondary)			Personnel dispatched to event	Small fire; limited to ignition source	De-energized the ignition source; suppression by first responding personnel	No extinguishing agent used. Fire terminated when power source was removed.

Table A-3 Significant attributes derived from fire event review (continued)

Incident Number	Event Date	Fire Growth Classification	Notification	Passage of Time	Fire Size	Suppression Effort	Review Notes
146	2/27/2007	Interruptible	MCR indication/ equipment trouble alarm Discovered by plant personnel	Personnel dispatched to event	Limited to ignition source	De-energized + CO ₂ extinguishers	Incident commander arrived on the scene within 3 minutes of the initial dispatch. Confirmed presence of smoke. Instructed FB to search for source. Smoke worsened, FB members chose to don self-contained breathing apparatus. Fire appears to have had ample time to grow.
152	10/23/2007	Growing	MCR indication/ equipment trouble alarm (first) Automatic detection/FACP (secondary)	Personnel investigated, determined, discovered, looking for indication of a fire, and so on	Small fire limited to ignition source	Minimal suppression effort	Received several alarms simultaneously while starting charging pump for test. Then fire alarm went off. Fire appears self-extinguished when feeder breaker tripped.
161	4/22/2009	Interruptible	Discovered by plant personnel	Personnel investigated, determined, discovered, looking for indication of a fire, and so on	Small fire	Minimal suppression effort Single portable extinguisher	Strong odor observed, operators investigated and found 6-in. (152.4- mm) fire.
175	11/22/2009	Growing	Fire caused by plant personnel during T/M automatic detection/FACP (simultaneous)	Personnel dispatched to event	Fire in three cubicles	Multiple fire extinguishers; offsite assistance requested	Event occurred while the plant was in Mode 5.Grounding devices were left in three balance-of-plant incoming breaker cubicles. When the main transformer was energized, the grounding devices provided a direct short to ground, which induced fires.

Table A-3 Significant attributes derived from fire event review (continued)

Incident Number	Event Date	Fire Growth Classification	Notification	Passage of Time	Fire Size	Suppression Effort	Review Notes
303	3/1/2000	Growing	Discovered by plant personnel	Personnel dispatched to event	Small fire limited to ignition source	Multiple portable extinguishers	Operators investigated smell of burning insulation. Upon arriving at the ignition source, the cabinet doors were found open with flames coming out of the cabinet and paint burning off the top.
320	10/24/2000	10/24/2000 Interruptible	Discovered by plant personnel	Personnel investigated, determined, discovered, looking for indication of a fire, and so on	Small fire	Minimal suppression effort; single portable extinguisher	
381	3/6/2005	Interruptible	MCR indication/ equipment trouble alarm	Personnel dispatched to event	Small fire	De-energized the ignition source	Personnel dispatched reported a flame on the fan motor. The fire was extinguished as soon as the power was cut to the fan assembly. No other damage to the cubicle or surrounding wiring.
411	3/8/2001	Interruptible	Discovered by plant personnel	Personnel investigated, determined, discovered, looking for indication of a fire, and so on	Limited to the ignition source	De-energized the ignition source	Meets arc flash criteria. Heard loud noise and lights dimmed. Time passed as the crew was asked to evacuate the tunnel. Fire damage limited to one breaker cabinet (no flames observed when fire blew door open). Cables appear to be in good condition.

Table A-3 Significant attributes derived from fire event review (continued)

Incident Number	Event Date	Fire Growth Classification	Notification	Passage of Time	Fire Size	Suppression Effort	Review Notes
517	3/23/2006	Interruptible	MCR indication/ equipment trouble alarm (first) Automatic detection/FACP (secondary)	Personnel dispatched to event	Small fire	Multiple portable extinguishers	Annunciator and alarm in MCR. Smoke alarm actuates around 5 minutes after annunciator. Reactor operator sent to investigate (time lapsed as he exited the radiologically controlled area and reported to location). Ten minutes elapsed by the time the RO arrived and found a 6-in. (0.15-m) flame in the bottom of the cabinet. Two personnel applied to extinguishers in parallel.
520	6/6/2006	Interruptible	MCR indication/ equipment trouble alarm (first) Automatic detection/FACP (secondary)	Personnel dispatched to event	Small fire limited to ignition source	De-energized the ignition source	
588	11/30/2006	Growing	MCR indication/ equipment trouble alarm (first) Automatic detection/FACP (secondary)	Personnel dispatched to event		Automatic suppression system activated	Switchgear trouble alarm, followed 30 seconds later by fire alarm. Sprinkler system had dumped.
10338	9/13/2001	Growing	Fire caused by plant personnel during T/M	None	Small fire limited to ignition source	Single portable extinguisher	Classified as growing due to limited/no passage of time and fire attributes. Report of flash by technicians at breaker monitoring relays. Although the fire was small, the breaker failure was more severe than plant personnel could recall.

Table A-3 Significant attributes derived from fire event review (continued)

Incident Number	Event Date	Fire Growth Classification	Notification	Passage of Time	Fire Size	Suppression Effort	Review Notes
10394	2/22/2005	Interruptible	Discovered by plant personnel	Personnel investigated, determined, discovered, looking for indication of a fire, and so on	Small fire limited to ignition source	Self- extinguished	Plant personnel investigating aroma of something burning. Flames last only a few seconds and then self-extinguished. Three circuit cards were replaced.
30276	7/24/2006	Interruptible	Discovered by plant personnel	Personnel investigated, determined, discovered, looking for indication of a fire, and so on	Small fire limited to ignition source	De-energized the ignition source	Upon a smell of smoke in the MCR, operators investigated and found flames in the area of a transformer inside the housing. No extinguisher was used, power supply breaker opened to de-energize component.
30338	3/30/2006	Interruptible	Discovered by plant personnel	Personnel investigated, determined, discovered, looking for indication of a fire, and so on	Limited to the ignition source	Single portable extinguisher De-energized the ignition source	Fire discovered during routine observation.
30478	9/9/2005	Growing	Discovered by plant personnel	Personnel dispatched to event		Multiple portable extinguishers	Upon investigation, opened panel and saw heavy smoke and small flames. Physical fire damage limited to three relays, adjacent wiring, and plastic duct sleeve. Wiring in the cable chase directly above the relays sustained significant damage. One CO ₂ extinguisher and parts of another were used.

Table A-3 Significant attributes derived from fire event review (continued)

Incident Number	Event Date	Fire Growth Classification	Notification	Passage of Time	Fire Size	Suppression Effort	Review Notes
30513	5/27/2008	Growing	Automatic detection/FACP	Personnel dispatched to event	Limited to the ignition source	Manual activation of fixed suppression system	Classified as growing due to manual activation of Halon system and fire reflash.
30522	9/12/2000	Interruptible	Automatic detection/FACP	Personnel dispatched to event	Limited to the ignition source	Single portable extinguisher de-energizing the ignition source	Fire damage internal to the component (noticeable charring and smoke damage). External box had some heat and smoke damage, but fire kept to the electrical unit.
50473	6/26/2000	Interruptible	MCR indication/ equipment trouble alarm	Personnel dispatched to event	Small fire	Self- extinguished	Investigated burning odor noted while responding to trouble alarm. Small flame observed from a relay along with visible smoke. Fire self-extinguished.
50784	11/20/2005	Growing	Fire caused by plant personnel during T/M	None	Small fire limited to ignition source		
50811	1/9/2001	Interruptible	MCR indication/ equipment trouble alarm	Personnel dispatched to event	Small fire limited to ignition source	Single portable extinguisher	
50874	7/12/2002	Interruptible	Discovered by plant personnel	Personnel investigated, determined, discovered, looking for indication of a fire, and so on	Small fire	De-energized the ignition source	Small electrical fire in the breaker trip coll.

Table A-3 Significant attributes derived from fire event review (continued)

Incident Number	Event Date	Fire Growth Classification	Notification	Passage of Time	Fire Size	Suppression Effort	Review Notes
50912	5/5/2010	Growing	Automatic suppression actuation alarm			Automatic suppression system activated	
50914	6/8/2010	Interruptible	Discovered by plant personnel	Personnel investigated, determined, discovered, looking for indication of a fire, and so on	Small fire	Single portable extinguisher	Resistor-capacitor suppressor caught fire and spread directly above (3 in. [76.2 mm]).
50916	7/13/2010	Growing	Fire caused by plant personnel during T/M	None	Limited to the ignition source	Single portable extinguisher De-energized the ignition source	Classified as growing due to maintenance and no evidence of time passing.
50921	10/11/2010	Interruptible	Discovered by plant personnel	Personnel dispatched to event	Arcing and smoke	Single portable extinguisher	Fire caused damage to the feeder cable and control panel.
50923	12/19/2010	Interruptible	MCR indication/ equipment trouble alarm (first) Automatic detection/FACP (secondary)	Personnel dispatched to event	Limited to the ignition source	De-energized the ignition source	Intermittent trouble alarms followed by two alarms on fire alarm computer. Fire was contained to the heater control panel, and breakers were opened to isolate power.
50925	2/8/2011	Interruptible	MCR indication/ equipment trouble alarm	Personnel dispatched to event	Small fire	Single portable extinguisher De-energized the ignition source	Numerous alarms led operators to investigate. Fire damaged two adjacent circuit cards.

Table A-3 Significant attributes derived from fire event review (continued)

Incident Number	Event Date	Fire Growth Classification	Notification	Passage of Time	Fire Size	Suppression Effort	Review Notes
50936	6/25/2011	Growing	Automatic detection/FACP	Personnel dispatched to event		Multiple portable extinguishers	Classified as growing due to fire attributes (heavy smoke and delays in suppression) and notes of multiple portable extinguishers used.
50939	10/4/2011	Interruptible	Automatic detection/FACP	Personnel dispatched to event	Limited to the ignition source	De-energized the ignition source	Third harmonic choke on inverter on fire with some damage to a circuit card and transformer. Lesser damage on a cable in cabinet.
50944	11/16/2011	Interruptible	Discovered by plant personnel	Personnel investigated, determined, discovered, looking for indication of a fire, and so on	Small fire	De-energized the ignition source	Meets arc flash criteria. As electricians and shift engineer were walking down hallway, an arc flash around a breaker handle occurred and smoke was observed coming out of MCC doors. No flames observed, just arc flash. Three minutes passed until the breaker was opened. Personnel were standing by but did not feel the need to apply fire suppression. Fire limited to breaker cubicle.
50946	1/23/2012	Interruptible	Discovered by plant personnel	Personnel dispatched to event	Small fire	De-energized the ignition source	Electrical transient with smoke damage and burned wiring. Fire was in control and effectively out when power was removed.
50956	10/22/2012	Interruptible	Discovered by security	Personnel dispatched to event	Small fire limited to ignition source	De-energized the ignition source	Security observed bright light and loud sound. FB leader called and confirmed smoke. The control power transformer overheated, and fire was limited to breaker cubicle and did not affect surrounding equipment or plant operators. Fire extinguished after breaker tripped.

Table A-3 Significant attributes derived from fire event review (continued)

Incident Number	Event Date	Fire Growth Classification	Notification	Passage of Time	Fire Size	Suppression Effort	Review Notes
51007	1/6/2013	Interruptible	Discovered by plant personnel Automatic suppression actuation alarm	Personnel dispatched to event	Limited to the ignition source	Single portable extinguisher	Confined to source (electrical box associated with gantry crane). Detection by plant personnel (notification), suppression by FB using extinguisher (travel, small fire).
51090	2/15/2013	Interruptible	Discovered by plant personnel	Operators contact MCR and receive permission to open breaker	No visible flames	De-energizing the ignition source	Operators reported dense smoke to MCR (along with MCR indications/trouble alarms and automatic detection). A CPT was melting and fire extinguished when power removed. The MCC bucket was repaired and returned to service.
51118	4/12/2011	Interruptible	Discovered by plant personnel	Personnel investigated, determined, discovered, looking for indication of a fire, and so on	Small fire	Single portable extinguisher	Fire limited to single card with some damage to adjacent cards.
51146	4/3/2013	Interruptible	MCR indication/ equipment trouble alarm (first) Automatic detection/FACP (secondary)	Personnel dispatched to event	Small fire limited to ignition source	De-energizing the ignition source	Inverter trouble and fire alarm concurrent. Dispatched operator reports small fire contained to internal transformer with no damage to surrounding components. Fire ceased when de-energized.
51172	3/21/2013	Interruptible	Discovered by plant personnel	Personnel dispatched to event	Limited to the ignition source	Single portable extinguisher	No damage outside breaker.

Table A-3 Significant attributes derived from fire event review (continued)

Incident Number	Event Date	Fire Growth Classification	Notification	Passage of Time	Fire Size	Suppression Effort	Review Notes
51180	5/16/2010	Interruptible	MCR indication/ equipment trouble alarm	Personnel investigated, determined, discovered, looking for indication of a fire, and so on	Small fire limited to ignition source	Minimal suppression effort	
51190	4/2/2012	Interruptible	Automatic detection/FACP	Personnel dispatched to event	Small fire	Single portable extinguisher	Damage limited to 25-kVA inverter within cabinet.
51216	1/3/2010	Interruptible	Discovered by plant personnel	Personnel dispatched to event	Small fire	Single portable extinguisher	Small fire on relays in panel. Used CO ₂ to extinguish.
51304	1/18/2014	Growing	MCR indication/ equipment trouble alarm (first) Automatic detection/FACP (secondary)	Personnel dispatched to event		Automatic suppression system activated	Inverter trouble alarm first, followed by additional alarms and fire alarm. Automatic Halon release.
51324	5/23/2014	Interruptible	MCR indication/ equipment trouble alarm	Personnel dispatched to event	Small fire limited to ignition source	Single portable extinguisher	6-in. (152.4-mm) wound transformer on fire.
51332	10/6/2014	Growing	Discovered by plant personnel	None		Single portable extinguisher	No time lapsed and substantial fire damage within cabinet.
51377	12/12/2013	Interruptible	Discovered by plant personnel	Personnel investigated, determined, discovered, looking for indication of a fire, and so on	Limited to the ignition source	Single portable extinguisher	Plant personnel heard loud buzzing noise 3 seconds after energizing equipment. Damage limited to MCC loose connection area.

Table A-4 Fire events disposition

Fire ID	Fire Event Description	Fire Event Disposition
20382	There is no description of this event. This event first appeared in the EPRI 1003111 (published November 2001).	No information was received on this event in the FEDB update (EPRI 1025284). EPRI reached out to the plant during this project. The PRA and fire protection groups investigated and found no such fire event at the plant.
30281	Relay 2AF in panel XXXXXX failed resulting in smoke emanating from this and adjoining panels in the CB-XXX. At approximately from this and adjoining panels in the CB-XXX. At approximately from this and adjoining panels in the CB-XXX. At approximately from this and adjoining panels in the CB-XXX. At approximately from this and adjoining panels in the CB-XXX. At approximately from this and adjoining panels in the CB-XXX. At approximately from this and adjoining panels in the CB-XXX. At approximately from this and adjoining the prevailing of or left family conductors. Relay 2AF showed evidence of failed insulation. This was the control room watch standers denied self-contained breathing he control room watch standers donned self-contained breathing he control room watch standers denergized that Relay 2AF was de-energized. As a precaution, testing was ongoing and led to the condition in the MCR. Testing was ongoing and led to the condition in the MCR. Testing was ongoing and led to the condition in the MCR. Testing the synch switches for the main generator all energized simultaneously. This allowed 230-V potential to be sync protective relay.	Meets smoke event criteria in 1025284 (Page 58, 5-6) -Events may be screened out if smoke is light/no evidence of flaming combustion -Human intervention to stop light smoke events prior to becoming actual fires is acceptable when screening these events from the FEDB, if personnel were continuously present during the evolution leading to the smoking condition, such as a surveillance test, maintenance work, or other activity. From control room: It appears they were in a shutdown condition, and notes "the procedure used for testing the synch switches," which led to the conclusion that testing was ongoing and led to the condition in the MCR.

Table A-4 Fire events disposition (continued)

Fire ID	Fire Event Description	Fire Event Disposition
30578	The control room initiated a FB response to a reported fire in an electrical box (the power supply for the cask handling crane). The fire reported by the work control supervisor in the area. The work control supervisor called back to say the fire was out at 10:58, and the health and safety coordinator (former FB leader) verified that the fire was out at 11:03 (9 minutes from initiation). The FB responded to the scene and found no fire or smoke in the area and stood by until 11:40. At this time, damage appears to be limited to a piece of heat shrink tubing on a connector.	This location is within the protected area (waste processing building); however, it contains no FPRA-related equipment or cables. This event is re-classified as non-challenging because this is an event that is not of interest to the FPRA and is not in a location relevant to plant operations or safety.
50467	Breaker was found to have smoke coming out of the breaker cube. After the breaker was removed, it was found that breaker closing coil was (frozen) burnt in the close position, thereby keeping the closing springs in the charged position. This condition happened when operations surveillance tried to close the breaker and breaker started to smoke.	Meets smoke event criteria in 1025284 (Page 58, 5-6) -Events may be screened out if smoke is light/no evidence of flaming combustion -Human intervention to stop light smoke events prior to becoming actual fires is acceptable when screening these events from the FEDB, if personnel were continuously present during the evolution leading to the smoking condition, such as a surveillance test, maintenance work, or other activity.
51088	While performing work, three day shift electrical technicians were beginning to perform a step to verify the integrity of the inverter after new components had been installed. The steps were to perform a load test of the inverter. The new components were installed, and the cables for the test were terminated on the prior nightshift. The output voltage was not within range, and the lead electrical tech realized they needed another meter. He went to the shop to get another meter. The other two electricians remained at the energized inverter. After 20 minutes, the lead paged one of the techs to read voltage. The tech reported voltage and also presence of some smoke coming out of inverter. The lead electrician told them to shut down the inverter and they responded by turning off the ac and dc breakers. Soon after the inverter was turned off, the Halon alarm sounded and all personnel exited the room.	The smoking condition was terminated (power de-energized) prior to the Halon release. Therefore, this event should screen under 1025284 under the following: -Equipment failures during monitored T/M activities: Return to service (Page 91) -Smoke events (Page 58) -Would need to have noticeable temperature increase (Page 86) and meet additional criterion (Page 88) to be PC or greater.

Table A-4 Fire events disposition (continued)

Fire ID	Fire Event Description	Fire Event Disposition
51257	During a planned transfer of the cooling water lift station 4-kV bus to its alternate source, the transfer solenoid caught fire due to failure of the solenoid. The fire was put out with a carbon dioxide fire extinguisher.	This is not a countable fire as the lift station is located over a mile away from the plant. This building is not modeling in the PRA and has no PRA interlocks.
51309	Electrical fire inside protected area in non-vital power panel outside power block.	Not a PRA countable fire. This is a 480-V disconnect switch outside the power block that feeds support buildings.

APPENDIX B

INTERRUPTIBLE AND GROWING FIRE MONTE CARLO SAMPLING

B.1 Monte Carlo Simulation for Characterizing the Time and Probability of Automatic Smoke Detection

The Monte Carlo sampling technique to approximate the probability of automatic smoke detection is calculated given the possible range of determining factors.

The Monte Carlo simulation consists of four parts, as follows:

- 1. Generate a fire HRR profile over time (randomized peak HRR). See Section 4.2.
- 2. Calculate the time-dependent smoke concentration at a randomized radial distance and ceiling height above the fuel source. See Section B.2.
- 3. Calculate whether the simulated smoke detector will activate given randomized activation OD values. See Section B.2.
- 4. Average all smoke detection results over 20,000 occurrences. See Section 5.3.3.1.

The specifics of this process are described in further detail in the following sections with an overall summary of the input parameters provided in Table B-1.

Interruptible and Growing Fire Monte Carlo Sampling

Table B-1 Summary of Monte Carlo parameters for modeling automatic smoke detection

Parameter	Distribution Type	Values	Notes
Peak HRR	Gamma	Varies	See NUREG-2178, Tables 4-1 and 4-2
Duration of the pre-growth and growth phases of the HRR profile	Constant	12	Total of pre- and growth phase (see Section 4.2.2 and Section 4.2.4)
Duration of the steady state HRR profile stage	Constant	8	Steady burning duration (see Section 4.2.4)
Duration of the decay state HRR profile stage	Constant	19	Decay burning duration (see Section 4.2.4)
Ceiling height above fuel source	Uniform	1.5–6.1 m (5–20 ft)	Random value independently sampled assuming a uniform distribution. The range of values is assumed to capture likely ceiling heights in NPPs.
Radial distance to detector	Uniform	0–6.5 m (0–21.2 ft)	Random value independently sampled assuming a uniform distribution. The range of values is assumed to be within acceptable Code compliance distances.
Activation OD	Gamma	α: 2.34, β: 0.13	Average OD thresholds (see Section B.2)
Soot yield	Variable	Varies	Reference value randomly selected for specific cable type (see Section B.2)
HRR radiative fraction	Variable	Varies	Reference value randomly selected for specific cable type (see Section B.2)
Heat of combustion	Variable	Varies	Reference value randomly selected for specific cable type (see Section B.2)
Ambient temperature	Constant	25 °C	Typical ambient temperature in a NPP
Ambient pressure	Constant	101325 Pa	Typical ambient pressure in a NPP
Obstructed plume bias	Constant	0.62	Plume calculated conservatively assuming an obstructed plume (see NUREG-2178)

B.2 Automatic Smoke Detection

Various models—ranging from the relatively simply hand calculation to the complex computational fluid dynamic calculation—are available to estimate automatic smoke detection. The calculation methods validated in the supplement to NUREG-1824 [33] use temperature as a surrogate for smoke concentration to estimate if and when automatic smoke detection will occur. The method used in this guidance is developed around an estimation of the optical density and validated in Appendix B.3.

To determine the detection system activation, several parameters must be calculated assuming that the smoke detector is located within the ceiling jet produced by the fire. These include the following:

- Ceiling jet temperature
- Ceiling jet density
- Average ceiling jet velocity
- Normalized ceiling jet mass flow rate
- Soot mass concentration
- Optical density

B.2.1 Ceiling Jet Temperature

As presented in NUREG-1805, Chapter 11, Section 5.1 [24], the Alpert ceiling jet temperature correlations [25] of a fire plume can be calculated using Equations B-1 and B-2.

$$T_{jet} = T_{amb} + B \cdot 16.9 \left(\frac{Q^{\frac{2}{3}}}{(H_{pau})^{\frac{5}{3}}} \right) \text{ for } r_{det}/H \le 0.18,$$
 (B-1)

$$T_{jet} = T_{amb} + B \cdot 5.38 \left(\frac{\frac{Q_3^2}{H_{pau}^{\frac{5}{3}}}}{\left(\frac{r}{H_{pau}}\right)^{\frac{2}{3}}} \right)$$
 for $r_{det}/H > 0.18$ (B-2)

where T_{jet} is the ceiling jet temperature in °C, T_{amb} is the ambient temperature in °C, Q is the total HRR in kW, H_{pau} is the height of the ceiling above the fuel source in meters, r_{det} is the radial distance from the plume center line to the detector in meters, and B = 0.62 is the obstructed plume bias from NUREG-2178, Volume 1. In this formulation, the reduction in the ceiling jet temperature rise over ambient is assumed to be proportional to the obstructed plume correction when applied.

Due to the direct association with the thermal plume, the obstructed plume bias is conservatively included in the estimation of the ceiling jet temperature. The inclusion of this bias results in an increased HRR required to reach a detectable OD.

Interruptible and Growing Fire Monte Carlo Sampling

B.2.2 Ceiling Jet Gas Density

The ceiling jet density is the density of the ceiling jet at the radial distance of the smoke detector. The flow rate of the products of combustion in the ceiling jet is very small compared to the flow rate of excess and entrained air. Consequently, the ceiling jet density can be computed using the Alpert ceiling jet temperature equations presented previously (Equations B-1 and B-2) and the ideal gas law for air [26], as shown in Equation B-3.

$$\rho_{jet} = \frac{mw_{air} P_{atm}}{(T_{jet} + 273.15)R_{gas}}$$
(B-3)

where ρ_{jet} is the density of the ceiling jet in kg/m³, mw_{air} is the molar mass of air equal to 0.0288 kg/mol, P_{atm} is atmospheric pressure equal to 101325 Pa, and R_{gas} is the universal gas constant equal to 8.314 J/mol·K.

B.2.3 Normalized Ceiling Jet Mass Flow Rate

The conservation of energy and the first law of thermodynamics [27] can be applied to determine how much entrainment has occurred into the fire plume and ceiling jet in order to achieve the final gas temperature at the detector. A unit mass of fuel can be considered to have an enthalpy equal to its heat of combustion. Post-combustion, the convective fraction of that enthalpy results in a hot fire plume and ceiling jet. Ignoring convective heat loss to the ceiling, at any radial distance in the ceiling jet, the total energy flux at that distance is equal to the convective heat release of the fire. Because $T_{jet} - T_{amb}$ is relatively small where smoke detection is expected to occur, the specific heat of air can be considered a constant, $c_p = 1$ kJ/(kg·K) [24] in Equation B-4:

$$\Delta H_c (1 - X_r) = m_{jet} c_p (T_{jet} - T_{amb})$$
(B-4)

where ΔH_c is the heat of combustion in kJ/kg, 1- X_r is the convective fraction, and m_{jet} is the mass flow rate of the ceiling jet normalized to 1 kg/s of fuel; this includes both the mass of fuel and the air that has diluted the fuel.

The normalized mass flow rate in the ceiling jet can therefore be computed as shown in Equation B-5.

$$m_{jet} = \Delta H_c \frac{(1 - X_r)}{T_{jet} - T_{amb} + 0.001}$$
 (B-5)

The 0.001 is included in the numerical computation to avoid dividing by zero for cases where the fire size is near zero and the ceiling jet temperature is approximately the same as the ambient temperature.

B.2.4 Soot Mass Concentration

For each kg of fuel consumed, y_s kg of soot is produced. Therefore, the overall soot mass concentration at the detector, ρ_{soot} , in kg/m³ can be computed as shown in Equation B-6.

$$\rho_{soot} = \frac{y_s}{m_{iet}DF}\rho_{jet} \tag{B-6}$$

where y_s is the soot yield of the fuel in kg/kg and all other parameters have been identified. The soot yield values used in the Monte Carlo sampling process are taken from the values for electric cables in the Society of Fire Protection Engineers (SFPE) handbook [29; Table A.39]. The value used for the soot yield—and subsequently heat of combustion and radiative fraction—for each sample is selected randomly from the values for electric cables listed in the SFPE handbook [29; Table A.39].

B.2.5 Optical Density

The OD measurement quantifies the exponential decay of light passing through a path length of smoke [24]. For smoke detection activation, when the calculated OD exceeds the activation OD, the detector will activate. Equation B-7 is used to calculate OD of the smoke in the ceiling jet at the detector.

$$OD = \frac{(\rho_{soot})(K_m)}{\ln{(10)}}$$
(B-7)

where $K_{\underline{m}}$ is the specific light extinction coefficient in m²/kg. A value for flaming fires of 8700 m²/kg is suggested by Mulholland and Croarkin [30]. This value is then compared against a detector threshold to determine whether a given scenario will activate the detector.

The activation OD values used in the Monte Carlo sampling process were developed from the average OD alarm thresholds for ionization and photoelectric smoke detectors [31]. The values, presented graphically in Figure B-1, are used to fit a gamma distribution. The alpha and beta parameters from this best fit gamma distribution are used in the Monte Carlo sampling process to provide a randomized activation OD for the smoke detection calculation.

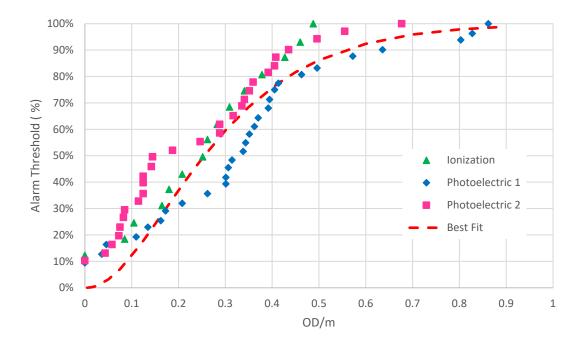


Figure B-1
Alarm threshold OD gamma distribution fit

B.3 OD Smoke Detection Validation

Validation of the OD smoke detection method described in Appendix B.2 was performed using results from home smoke alarm performance test results summarized in NIST Technical Note 1455-1 [32]. NIST Technical Note 1455-1 contains data from a series of smoke alarm tests that were used to estimate the performance of smoke detectors in residences. Tests were performed in a manufactured home using various ignition sources (upholstered chair and mattress) and detector locations. For this validation, only the results from detectors located within the same room were used as the ignition source. The results of the Fire Dynamics Tools (FDTs) (temperature rise) smoke detector activation times were a bias of +7% (slower time to detection) and a standard deviation of 58%.

The activation times for three detectors (ionization and photoelectric) over eight of the NIST home smoke alarm test series [32] were used in this validation study. These test series were also used in the validation of smoke detector activation times that are summarized in Supplement 1 to NUREG-1824 [33]. The inputs used to perform the OD smoke detector validation results are presented in Table B-3.

Table B-2 Optical smoke detection validation parameters

Parameter	Value(s)	Notes
HRR profile (FDT ^s validation)	$\dot{Q} = \alpha t^2$ α range: 0.00309 to 0.010480	As noted in NIST Special Publication 1169 [34], the fire growth was specified by the t- squared growth rate up to a cutoff time of 300 seconds.
HRR profile (Fire Dynamics Simulator [FDS] validation)	$\dot{Q}=\dot{Q}_0\left(\frac{t}{\tau}\right)^2$ \dot{Q}_0 : range from 100 to 350 kW $ au$: 180 seconds Time offset: range from 10 to 40 seconds	As noted in the FDS Validation Guide [35], the HRR was determined by approximating the fire growth using a t-squared ramp calibrated using the temperature measured in the highest thermocouple in the tree during the experiment.
Vertical separation	2.0–2.1 m	Heights specified for applicable tests as presented in Special Publication 1169 [34].
Horizontal separation	1.3–1.8 m	Distances specified for applicable tests as presented in Special Publication 1169 [34].
Activation OD	0.42 OD/m	Average OD for an approximate 80% cumulative activation for ionization and photoelectric smoke detectors [31].
Soot yield	0.0975 g/g	Average, unweighted, soot yield for polyurethane (flexible foams), polyester, and wood [29].
Ambient temperature	21°C–26°C	Ambient temperatures specified for applicable tests as presented in Special Publication 1169 [34].
Heat of combustion	30,000 kJ/g	Approximate, unweighted, soot yield for polyurethane (flexible foams) and polyester [29].

Interruptible and Growing Fire Monte Carlo Sampling

Table B-2
Optical smoke detection validation parameters (continued)

Parameter	Value(s)	Notes
Ambient pressure	101325 Pa	Constant [36]
Gravity	9.81 m/s ²	Constant [36]
Radiative fraction	0.3	The radiant fraction for the fire was set to 0.3, which is at the lower end of the suggested range of 0.3–0.4 [37].
Molecular weight of air	0.029	Constant [36]
Molar gas constant, R	8.31 J/mol⋅K	NIST reference on constant, units, and uncertainty, physics.nist.gov

Results are shown in Figure B-2. The bias in the OD smoke detector activation model are +12% assuming the FDTs validation HRR profile and +24% assuming the FDS validation HRR profiles. The standard deviation is slightly reduced, 50% and 46% for the FDTs and FDS validation HRRs, respectively. These validation results demonstrate that the OD smoke detection method results in an average over-prediction for modeling the activation times for smoke detectors.

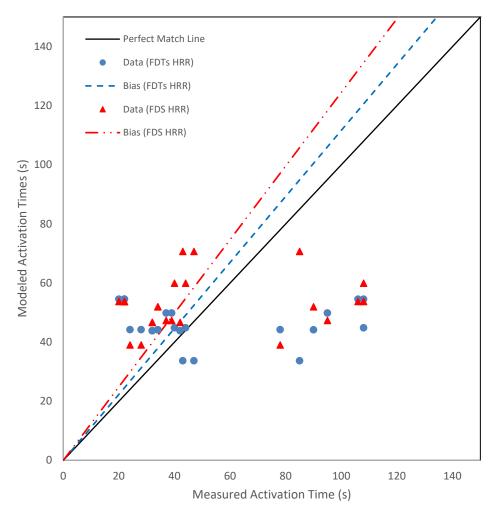


Figure B-2 Results comparing NIST home smoke detector activation times with OD modeled activation times

APPENDIX C PROBABILITY OF NO DETECTION TABLES

This appendix contains tables that pre-calculate the probability of no detection given common scenario attributes. Table C-1 summarizes the scenario characteristics of interest (detection step, growth profile, MCR indication, credit for personnel in adjacent spaces, propagation to secondary combustibles, detector unavailability, NUREG-2178 enclosure class/function groups, and loading) and serves as a road map to Tables C-2 through C-27, which calculate the probabilities of no detection. An automatic smoke detection system unavailability of 0.01 is assumed.

The general calculation form for each table is presented immediately following the tables. Table C-1 Probability of detection tables

Table	Detection Step	Growth Profile	MCR Indication	Credit Personnel in an Adjacent Space	Propagation to Secondary Combustibles	Loading	Unavailability	NUREG-2178 Enclosure Class/Function Group
Table C-2	First detection	Interruptible	Yes	o _N	No	All	0.01	1, 2, and 3
Table C-3	First detection	Interruptible	Yes	Yes	No	IIV	0.01	1, 2, and 3
Table C-4	First detection	Interruptible	Yes	o _N	No	Default	0.01	4a, 4b, and 4c
Table C-5	First detection	Interruptible	Yes	Yes	No	Default	0.01	4a, 4b, and 4c
Table C-6	First detection	Interruptible	Yes	o _N	No	Low	0.01	4a and 4b
Table C-7	First detection	Interruptible	Yes	Yes	No	Low	0.01	4a and 4b
Table C-8	First detection	Interruptible	Yes	o _N	No	Very Low	0.01	4a and 4b
Table C-9	First detection	Interruptible	Yes	Yes	No	Very Low	0.01	4a and 4b
Table C-10	First detection	Interruptible	No	No	No	IIV	0.01	1, 2, and 3
Table C-11	First detection	Interruptible	No	Yes	No	IIV	0.01	1, 2, and 3
Table C-12	First detection	Interruptible	No	No	No	Default	0.01	4a, 4b, and 4c
Table C-13	First detection	Interruptible	No	Yes	No	Default	0.01	4a, 4b, and 4c
Table C-14	First detection	Interruptible	No	o _N	No	Low	0.01	4a, 4b, and 4c
Table C-15	First detection	Interruptible	No	Yes	No	row	0.01	4a, 4b, and 4c
Table C-16	First detection	Interruptible	No	No	No	Very Low	0.01	4a and 4b
Table C-17	First detection	Interruptible	No	Yes	No	Very Low	0.01	4a and 4b
Table C-18	First detection	Growing	Yes	No	N/A	IIW	N/A	All
Table C-19	First detection	Growing	Yes	Yes	N/A	All	N/A	All
Table C-20	First detection	Growing	No	No	N/A	IIA	N/A	All

Table C-1 Probability of detection tables (continued)

Table	Detection Step	Growth Profile	MCR Indication	Credit Personnel in an Adjacent Space	Propagation to Secondary Combustibles	Loading	Unavailability	NUREG-2178 Enclosure Class/Function Group
Table C-21	First detection	Growing	o N	Yes	A/N	ΙΙ	N/A	IIA
Table C-22	Second detection	Growing	N/A	N/A	oN O	All	0.01	1, 2, and 3
Table C-23	Second detection	Growing	N/A	A/N	No	Default	0.01	4a, 4b, and 4c
Table C-24	Second detection	Growing	N/A	A/N	ON	Том	0.01	4a and 4b
Table C-25	Second detection	Growing	N/A	A/N	ON	Very Low	0.01	4a and 4b
Table C-26	Second detection	Interruptible and Growing	N/A	N/A	Yes	All	0.01	1, 2, and 3
Table C-27	Second detection	Interruptible and Growing	A/N	N/A	Yes	All	0.01	4a, 4b, and 4c

Table C-2
First detection, interruptible fire, with MCR indication,

no propagation to secondary combustibles (smoke detector probability of no detection included) default fuel loading, unavailability of 0.01,

NUREG-2178 Classification Groups 1, 2, and 3 enclosures

3 – Power Inverters, TP	0.00E+00	2.16E-03	2.16E-03	2.14E-03	2.06E-03	4 OFF 02	- CO-1CO-1	1.93E-03 1.08E-03	1.93E-03 1.08E-03 3.89E-03	1.92E-03 1.08E-03 3.89E-03 3.88E-03	1.95E-03 1.08E-03 3.89E-03 3.88E-03	1.95E-03 1.08E-03 3.89E-03 3.88E-03 3.70E-03	1.92E-03 1.08E-03 3.89E-03 3.88E-03 3.70E-03 3.50E-03	1.93E-03 1.08E-03 3.89E-03 3.86E-03 3.70E-03 1.95E-03	1.93E-03 1.08E-03 3.89E-03 3.86E-03 3.70E-03 1.95E-03 4.20E-03	1.93E-03 1.08E-03 3.89E-03 3.86E-03 3.70E-03 3.50E-03 4.20E-03 4.18E-03	1.93E-03 1.08E-03 3.89E-03 3.86E-03 3.70E-03 1.95E-03 4.20E-03 4.18E-03	1.93E-03 1.08E-03 3.89E-03 3.86E-03 3.70E-03 1.95E-03 4.20E-03 4.18E-03 4.18E-03 3.99E-03	1.93E-03 1.08E-03 3.89E-03 3.86E-03 3.70E-03 1.95E-03 4.20E-03 4.18E-03 4.15E-03 3.99E-03 3.78E-03	1.93E-03 3.89E-03 3.88E-03 3.86E-03 3.70E-03 4.20E-03 4.18E-03 4.15E-03 3.99E-03 3.78E-03 2.10E-03
3 – Power Inverters, TS/QTP/SIS	0.00E+00	3.80E-03	3.79E-03	3.76E-03	3.61E-03	3.42E-03	_	1.90E-03	1.90E-03 6.84E-03	1.90E-03 6.84E-03 6.81E-03	1.90E-03 6.84E-03 6.81E-03 6.77E-03	1.90E-03 6.84E-03 6.81E-03 6.77E-03 6.49E-03	1.90E-03 6.84E-03 6.81E-03 6.77E-03 6.49E-03	1.90E-03 6.84E-03 6.81E-03 6.77E-03 6.49E-03 3.42E-03	1.90E-03 6.84E-03 6.81E-03 6.77E-03 6.49E-03 6.15E-03 7.37E-03	1.90E-03 6.84E-03 6.81E-03 6.77E-03 6.49E-03 3.42E-03 7.37E-03	1.90E-03 6.84E-03 6.81E-03 6.77E-03 6.49E-03 6.15E-03 7.37E-03 7.34E-03	1.90E-03 6.84E-03 6.81E-03 6.77E-03 6.49E-03 3.42E-03 7.37E-03 7.34E-03 7.34E-03	1.90E-03 6.84E-03 6.81E-03 6.77E-03 6.49E-03 6.15E-03 7.37E-03 7.37E-03 7.34E-03 7.34E-03 7.34E-03 6.63E-03	1.90E-03 6.84E-03 6.81E-03 6.77E-03 6.49E-03 6.15E-03 7.37E-03 7.37E-03 7.29E-03 7.00E-03 3.68E-03
2 – MCCs and Battery Chargers, TP	0.00E+00	6.90E-04	6.88E-04	6.83E-04	6.55E-04	6.21E-04		3.45E-04	3.45E-04 1.24E-03	3.45E-04 1.24E-03 1.24E-03	3.45E-04 1.24E-03 1.24E-03 1.23E-03	3.45E-04 1.24E-03 1.24E-03 1.23E-03	3.45E-04 1.24E-03 1.24E-03 1.18E-03 1.12E-03	3.45E-04 1.24E-03 1.23E-03 1.18E-03 1.12E-03 6.21E-04	3.45E-04 1.24E-03 1.24E-03 1.23E-03 1.12E-03 6.21E-04	3.45E-04 1.24E-03 1.24E-03 1.18E-03 1.12E-03 6.21E-04 1.34E-03	3.45E-04 1.24E-03 1.24E-03 1.23E-03 1.18E-03 6.21E-04 1.34E-03 1.32E-03	3.45E-04 1.24E-03 1.23E-03 1.18E-03 6.21E-04 1.34E-03 1.33E-03 1.35E-03	3.45E-04 1.24E-03 1.23E-03 1.18E-03 6.21E-04 1.34E-03 1.33E-03 1.32E-03 1.20E-03	3.45E-04 1.24E-03 1.24E-03 1.23E-03 1.18E-03 6.21E-04 6.21E-04 1.34E-03 1.32E-03 1.32E-03 1.27E-03
2 – MCCs and Battery Chargers, and/QTP/SIS	0.00E+00	2.59E-03	2.58E-03	2.56E-03	2.46E-03	2.33E-03		1.29E-03	1.29E-03 4.65E-03	1.29E-03 4.65E-03 4.64E-03	1.29E-03 4.65E-03 4.64E-03 4.61E-03	1.29E-03 4.65E-03 4.64E-03 4.61E-03	4.65E-03 4.64E-03 4.61E-03 4.42E-03 4.19E-03	4.65E-03 4.64E-03 4.61E-03 4.42E-03 4.19E-03 2.33E-03	1.29E-03 4.65E-03 4.64E-03 4.61E-03 4.19E-03 2.33E-03 5.02E-03	1.29E-03 4.65E-03 4.64E-03 4.61E-03 4.42E-03 2.33E-03 5.02E-03 5.00E-03	1.29E-03 4.65E-03 4.64E-03 4.42E-03 4.19E-03 2.33E-03 5.02E-03 5.00E-03	1.29E-03 4.65E-03 4.64E-03 4.61E-03 4.19E-03 2.33E-03 5.02E-03 5.00E-03 4.77E-03	1.29E-03 4.65E-03 4.64E-03 4.61E-03 4.19E-03 2.33E-03 5.02E-03 5.00E-03 4.97E-03 4.77E-03	1.29E-03 4.65E-03 4.64E-03 4.61E-03 4.42E-03 4.19E-03 5.02E-03 5.02E-03 5.00E-03 4.97E-03 4.77E-03 2.51E-03
- Switchgears and Load Centers, TP	0.00E+00	1.43E-03	1.43E-03	1.42E-03	1.36E-03	1.29E-03		7.17E-04	7.17E-04 2.58E-03	7.17E-04 2.58E-03 2.57E-03	7.17E-04 2.58E-03 2.57E-03 2.56E-03	7.17E-04 2.58E-03 2.57E-03 2.56E-03 2.45E-03	7.17E-04 2.58E-03 2.57E-03 2.56E-03 2.45E-03 2.32E-03	7.17E-04 2.58E-03 2.57E-03 2.56E-03 2.45E-03 2.32E-03 1.29E-03	7.17E-04 2.58E-03 2.57E-03 2.56E-03 2.45E-03 2.32E-03 1.29E-03	7.17E-04 2.58E-03 2.57E-03 2.56E-03 2.45E-03 2.32E-03 1.29E-03 2.77E-03	7.17E-04 2.58E-03 2.56E-03 2.45E-03 2.32E-03 1.29E-03 2.78E-03 2.77E-03	7.17E-04 2.58E-03 2.56E-03 2.45E-03 2.32E-03 1.29E-03 2.77E-03 2.77E-03 2.64E-03	7.17E-04 2.58E-03 2.57E-03 2.35E-03 2.32E-03 1.29E-03 2.77E-03 2.77E-03 2.75E-03 2.64E-03	7.17E-04 2.58E-03 2.57E-03 2.56E-03 2.32E-03 1.29E-03 2.77E-03 2.77E-03 2.75E-03 2.75E-03 2.75E-03 1.39E-03
1 – Switchgears and Load Centers, TS/QTP/SIS	0.00E+00	3.52E-03	3.52E-03	3.49E-03	3.35E-03	3.17E-03		1.76E-03	1.76E-03 6.34E-03	1.76E-03 6.34E-03 6.32E-03	1.76E-03 6.34E-03 6.32E-03 6.28E-03	1.76E-03 6.34E-03 6.32E-03 6.28E-03 6.02E-03	1.76E-03 6.34E-03 6.32E-03 6.28E-03 6.02E-03 5.71E-03	1.76E-03 6.34E-03 6.32E-03 6.28E-03 6.02E-03 5.71E-03 3.17E-03	1.76E-03 6.34E-03 6.32E-03 6.28E-03 6.02E-03 5.71E-03 3.17E-03	1.76E-03 6.34E-03 6.32E-03 6.28E-03 6.02E-03 5.71E-03 3.17E-03 6.83E-03	1.76E-03 6.34E-03 6.32E-03 6.02E-03 5.71E-03 3.17E-03 6.83E-03 6.81E-03	1.76E-03 6.34E-03 6.32E-03 6.28E-03 6.02E-03 5.71E-03 3.17E-03 6.83E-03 6.81E-03 6.76E-03	1.76E-03 6.34E-03 6.32E-03 6.28E-03 6.02E-03 5.71E-03 3.17E-03 6.83E-03 6.81E-03 6.76E-03 6.50E-03	1.76E-03 6.34E-03 6.32E-03 6.28E-03 6.02E-03 5.71E-03 3.17E-03 6.83E-03 6.81E-03 6.76E-03 6.50E-03 3.42E-03
Occupancy Maintenance	₩	2	Very low	Low	Medium	High		Very high	Very high No	Very high No Very low	Very high No Very low Low	Very high No Very low Low Medium	Very high No Very low Low Medium High	Very high No Very low Low Medium High Very high	Very high No Very low Low Medium High Very high No	Very high No Very low Low Medium High Very high No No	Very high No Very low Low Medium High Very high No No Very low Low	Very high No Very low Low Medium High Very high No Very low Low Medium	Very high No Very low Low Medium High Very high No Very low Low Low High	Very high No Very low Low Medium High Very high No Very low Low Low Medium High Very high
Occupancy	High	Medium	Medium	Medium	Medium	Medium	N A = 11:	Medium	Low	Low	Low	Low Low Low	Low Low Low	Low Low Low Low Low	Low Low Low Low Low Low Low Low Low	Low Low Low Low Low Low Low Low Very Low	Low Low Low Low Low Low Low Low Very Low Very Low	Low Low Low Low Low Low Very Low Very Low Very Low	Low Low Low Low Low Low Very Low Very Low Very Low Very Low	Low Low Low Low Low Low Low Very Low Very Low Very Low Very Low Very Low

Probability of No Personnel Present [Table 5-6]) × ((MCR Indication Unreliability [Section 5.3.3.2] + MCR Operator HEP [Section 5.3.3.3]) – (MCR Indication Unreliability [Section 5.3.3.2] × MCR Operator HEP [Section 5.3.3.3])) × (Smoke Detection Ineffectiveness [Table 5-2] + Smoke Detection Unreliability [NUREG/CR-6850] + Smoke Detection Unavailability [0.01, assumed])

Table C-3 First detection, interruptible fire, with MCR indication,

no propagation to secondary combustibles (smoke detector probability of no detection included) default fuel loading, unavailability of 0.01,

NUREG-2178 Classification Groups 1, 2, and 3 enclosures

Occupancy	Occupancy Maintenance	1 – Switchgears and Load Centers, TS/QTP/SIS	1 – Switchgears and Load Centers, TP	2 – MCCs and Battery Chargers, TS/QTP/SIS	2 – MCCs and Battery Chargers, TP	3 – Power Inverters, TS/QTP/SIS	3 – Power Inverters, TP
High	W	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Medium	9	1.76E-03	7.17E-04	1.29E-03	3.45E-04	1.90E-03	1.08E-03
Medium	Very low	1.75E-03	7.14E-04	1.29E-03	3.43E-04	1.89E-03	1.08E-03
Medium	Low	1.73E-03	7.06E-04	1.27E-03	3.39E-04	1.87E-03	1.06E-03
Medium	Medium	1.63E-03	6.63E-04	1.19E-03	3.19E-04	1.75E-03	9.99E-04
Medium	High	1.50E-03	6.11E-04	1.10E-03	2.94E-04	1.62E-03	9.22E-04
Medium	Very high	4.44E-04	1.81E-04	3.26E-04	8.69E-05	4.78E-04	2.73E-04
Low	No	5.99E-03	2.44E-03	4.40E-03	1.17E-03	6.46E-03	3.68E-03
Low	Very low	2.96E-03	2.43E-03	4.38E-03	1.17E-03	6.43E-03	3.66E-03
Low	Low	5.90E-03	2.40E-03	4.33E-03	1.15E-03	6.36E-03	3.62E-03
Low	Medium	5.54E-03	2.25E-03	4.07E-03	1.08E-03	5.97E-03	3.40E-03
Low	High	5.09E-03	2.07E-03	3.74E-03	9.97E-04	5.49E-03	3.13E-03
Low	Very high	1.50E-03	6.11E-04	1.10E-03	2.94E-04	1.62E-03	9.22E-04
Very Low	No	6.73E-03	2.74E-03	4.94E-03	1.32E-03	7.25E-03	4.13E-03
Very Low	Very low	6.70E-03	2.73E-03	4.92E-03	1.31E-03	7.22E-03	4.11E-03
Very Low	Low	6.63E-03	2.70E-03	4.87E-03	1.30E-03	7.15E-03	4.07E-03
Very Low	Medium	6.22E-03	2.53E-03	4.57E-03	1.22E-03	6.71E-03	3.82E-03
Very Low	High	5.72E-03	2.33E-03	4.20E-03	1.12E-03	6.17E-03	3.51E-03
Very Low	Very high	1.68E-03	6.86E-04	1.24E-03	3.30E-04	1.82E-03	1.03E-03
No	All	7.04E-03	2.87E-03	5.17E-03	1.38E-03	7.60E-03	4.33E-03
/D". h. l. i. i.	10.25.25.11t. , 2f.N.2. D.2.25.21	(L2 2 L2 L2 L2 L2 L2 L2 L2	1) > //A/OB Indication Inscliction Section 3 2 3 1 MOB Occasion E 2 2 3 3			(it 0 0 0 0 1 1 1 2 4 0 2 0	

Probability of No Personnel Present [Table 5-7]) × ((MCR Indication Unreliability [Section 5.3.3.2] + MCR Operator HEP [Section 5.3.3.3]) – (MCR Indication Unreliability [Section 5.3.3.2] × MCR Operator HEP [Section 5.3.3.3])) × (Smoke Detection Ineffectiveness [Table 5-2] + Smoke Detection Unreliability [NUREG/CR-6850] + Smoke Detection Unavailability [0.01, assumed])

Table C-4
First detection, interruptible fire, with MCR indication,

no propagation to secondary combustibles (smoke detector probability of no detection included), without crediting personnel in adjacent spaces,

default fuel loading, unavailability of 0.01,

NUREG-2178 Classification Group 4 (all other) electrical enclosures

-																				
4c – Small Enclosures N/A, All	0.00E+00	2.74E-03	2.74E-03	2.72E-03	2.61E-03	2.47E-03	1.37E-03	4.94E-03	4.92E-03	4.89E-03	4.69E-03	4.44E-03	2.47E-03	5.32E-03	5.31E-03	5.27E-03	5.06E-03	4.79E-03	2.66E-03	5.49E-03
4b – Medium Enclosures Open, TP	0.00E+00	1.80E-03	1.80E-03	1.78E-03	1.71E-03	1.62E-03	9.00E-04	3.24E-03	3.23E-03	3.21E-03	3.08E-03	2.92E-03	1.62E-03	3.49E-03	3.48E-03	3.46E-03	3.32E-03	3.14E-03	1.75E-03	3.60E-03
4b – Medium Enclosures Open, TS/QTP/SIS	0.00E+00	3.52E-03	3.52E-03	3.49E-03	3.35E-03	3.17E-03	1.76E-03	6.34E-03	6.32E-03	6.28E-03	6.03E-03	5.71E-03	3.17E-03	6.84E-03	6.82E-03	6.77E-03	6.50E-03	6.15E-03	3.42E-03	7.05E-03
4b – Medium Enclosures Closed, TP	0.00E+00	2.79E-03	2.78E-03	2.76E-03	2.65E-03	2.51E-03	1.39E-03	5.02E-03	5.00E-03	4.97E-03	4.77E-03	4.52E-03	2.51E-03	5.41E-03	5.39E-03	5.35E-03	5.14E-03	4.87E-03	2.70E-03	5.57E-03
4b – Medium Enclosures Closed, TS/QTP/SIS	0.00E+00	4.29E-03	4.28E-03	4.25E-03	4.08E-03	3.86E-03	2.15E-03	7.73E-03	7.70E-03	7.65E-03	7.34E-03	6.95E-03	3.86E-03	8.33E-03	8.30E-03	8.24E-03	7.91E-03	7.49E-03	4.16E-03	8.58E-03
4a – Large Enclosures Open, TP	0.00E+00	1.81E-03	1.80E-03	1.79E-03	1.72E-03	1.63E-03	9.03E-04	3.25E-03	3.24E-03	3.22E-03	3.09E-03	2.93E-03	1.63E-03	3.50E-03	3.49E-03	3.47E-03	3.33E-03	3.15E-03	1.75E-03	3.61E-03
4a – Large Enclosures Open, TS/QTP/SIS	0.00E+00	2.66E-03	2.65E-03	2.63E-03	2.52E-03	2.39E-03	1.33E-03	4.78E-03	4.77E-03	4.73E-03	4.54E-03	4.30E-03	2.39E-03	5.15E-03	5.14E-03	5.10E-03	4.90E-03	4.64E-03	2.58E-03	5.31E-03
4a – Large Enclosures Closed, TP	0.00E+00	1.56E-03	1.55E-03	1.54E-03	1.48E-03	1.40E-03	7.79E-04	2.80E-03	2.79E-03	2.78E-03	2.66E-03	2.52E-03	1.40E-03	3.02E-03	3.01E-03	2.99E-03	2.87E-03	2.72E-03	1.51E-03	3.12E-03
4a – Large Enclosures Closed, TS/QTP/SIS	0.00E+00	3.19E-03	3.18E-03	3.15E-03	3.03E-03	2.87E-03	1.59E-03	5.73E-03	5.72E-03	5.68E-03	5.45E-03	5.16E-03	2.87E-03	6.18E-03	6.16E-03	6.12E-03	5.87E-03	5.56E-03	3.09E-03	6.37E-03
Occupancy Maintenance	IIV	oN	Very low	row	Medium	High	Very high	oN	Very low	row	Medium	High	Very high	No	Very low	Low	Medium	High	Very high	IIA
Occupancy	High	Medium	Medium	Medium	Medium	Medium	Medium	Low	Low	Low	Low	Low	Low	Very Low	Very Low	Very Low	Very Low	Very Low	Very Low	No

Probability of No Personnel Present [Table 5-6]) × ((MCR Indication Unreliability [Section 5.3.3.2] + MCR Operator HEP [Section 5.3.3.3]) – (MCR Îndication Únreliability [Section 5.3.3.2] × MCR Óperator HEP [Section 5.3.3.3])) × (Smoke Detection Ineffectiveness [Table 5-2] + Smoke Detection Unreliability [NUREG/CR-6850] + Smoke Detection Unavailability [0.01, assumed])

Table C-5 First detection, interruptible fire, with MCR indication,

no propagation to secondary combustibles (smoke detector probability of no detection included), default fuel loading, unavailability of 0.01, with crediting personnel in adjacent spaces,

NUREG-2178 Classification Group 4 (all other) electrical enclosures

Occupancy	Occupancy Maintenance	4a – Large Enclosures Closed, TS/QTP/SIS	4a – Large Enclosures Closed, TP	4a – Large Enclosures Open, TS/QTP/SIS	4a – Large Enclosures Open, TP	4b – Medium Enclosures Closed, TS/QTP/SIS	4b – Medium Enclosures Closed, TP	4b – Medium Enclosures Open, TS/QTP/SIS	4b – Medium Enclosures Open, TP	4c – Small Enclosures N/A, All
High	ΙΨ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Medium	No	1.59E-03	7.79E-04	1.33E-03	9.03E-04	2.15E-03	1.39E-03	1.76E-03	9.00E-04	1.37E-03
Medium	Very low	1.59E-03	7.76E-04	1.32E-03	8.99E-04	2.14E-03	1.39E-03	1.75E-03	8.96E-04	1.37E-03
Medium	row	1.57E-03	7.66E-04	1.31E-03	8.89E-04	2.11E-03	1.37E-03	1.73E-03	8.86E-04	1.35E-03
Medium	Medium	1.47E-03	7.20E-04	1.23E-03	8.34E-04	1.98E-03	1.29E-03	1.63E-03	8.32E-04	1.27E-03
Medium	High	1.36E-03	6.64E-04	1.13E-03	7.69E-04	1.83E-03	1.19E-03	1.50E-03	7.67E-04	1.17E-03
Medium	Very high	4.01E-04	1.96E-04	3.35E-04	2.28E-04	5.41E-04	3.51E-04	4.44E-04	2.27E-04	3.46E-04
Low	No	5.42E-03	2.65E-03	4.52E-03	3.07E-03	7.30E-03	4.74E-03	5.99E-03	3.06E-03	4.66E-03
Low	Very low	5.39E-03	2.64E-03	4.50E-03	3.06E-03	7.26E-03	4.72E-03	5.96E-03	3.05E-03	4.64E-03
Low	Low	5.33E-03	2.61E-03	4.45E-03	3.02E-03	7.19E-03	4.67E-03	5.90E-03	3.01E-03	4.59E-03
Low	Medium	5.01E-03	2.45E-03	4.18E-03	2.84E-03	6.75E-03	4.38E-03	5.54E-03	2.83E-03	4.31E-03
Low	High	4.61E-03	2.25E-03	3.84E-03	2.61E-03	6.21E-03	4.03E-03	5.10E-03	2.60E-03	3.97E-03
Low	Very high	1.36E-03	6.64E-04	1.13E-03	7.69E-04	1.83E-03	1.19E-03	1.50E-03	7.67E-04	1.17E-03
Very Low	No	6.09E-03	2.98E-03	5.07E-03	3.45E-03	8.20E-03	5.32E-03	6.73E-03	3.44E-03	5.24E-03
Very Low	Very low	6.06E-03	2.96E-03	5.05E-03	3.44E-03	8.16E-03	5.30E-03	6.70E-03	3.42E-03	5.22E-03
Very Low	Low	6.00E-03	2.93E-03	5.00E-03	3.40E-03	8.08E-03	5.25E-03	6.63E-03	3.39E-03	5.16E-03
Very Low	Medium	5.63E-03	2.75E-03	4.69E-03	3.19E-03	7.58E-03	4.92E-03	6.22E-03	3.18E-03	4.84E-03
Very Low	High	5.17E-03	2.53E-03	4.31E-03	2.93E-03	6.97E-03	4.53E-03	5.72E-03	2.92E-03	4.45E-03
Very Low	Very high	1.52E-03	7.45E-04	1.27E-03	8.63E-04	2.05E-03	1.33E-03	1.68E-03	8.60E-04	1.31E-03
No	IIV	6.37E-03	3.12E-03	5.31E-03	3.61E-03	8.58E-03	5.57E-03	7.05E-03	3.60E-03	5.49E-03

(Probability of No Personnel Present [Table 5-7]) × ((MCR Indication Unreliability [Section 5.3.3.2] + MCR Operator HEP [Section 5.3.3.3]) – (MCR Indication Unreliability [Section 5.3.3.2] × MCR Operator HEP [Section 5.3.3.3]) × (Smoke Detection Ineffectiveness [Table 5-2] + Smoke Detection Unreliability [NUREG/CR-6850] + Smoke Detection Unavailability [0.01, assumed])

Table C-6 First detection, interruptible fire, with MCR indication,

no propagation to secondary combustibles (smoke detector probability of no detection included), low fuel loading, unavailability of 0.01,

NUREG-2178 Classification Group 4 (all other) electrical enclosures

Ñσ																				
4b – Medium Enclosures , Open, TP	0.00E+00	2.37E-03	2.37E-03	2.35E-03	2.25E-03	2.13E-03	1.19E-03	4.27E-03	4.25E-03	4.23E-03	4.05E-03	3.84E-03	2.13E-03	4.60E-03	4.59E-03	4.55E-03	4.37E-03	4.14E-03	2.30E-03	4 74F-03
4b – Medium Enclosures, Open, TS/QTP/SIS	0.00E+00	4.00E-03	3.99E-03	3.96E-03	3.80E-03	3.60E-03	2.00E-03	7.19E-03	7.17E-03	7.12E-03	6.83E-03	6.48E-03	3.60E-03	7.75E-03	7.73E-03	7.67E-03	7.37E-03	6.98E-03	3.88E-03	7 99F-03
4b – Medium Enclosures, Closed, TP	0.00E+00	4.70E-03	4.69E-03	4.65E-03	4.46E-03	4.23E-03	2.35E-03	8.46E-03	8.43E-03	8.37E-03	8.03E-03	7.61E-03	4.23E-03	9.11E-03	9.09E-03	9.02E-03	8.66E-03	8.20E-03	4.56E-03	9 40F-03
4b – Medium Enclosures, Closed, TS/QTP/SIS	0.00E+00	3.20E-03	3.20E-03	3.17E-03	3.04E-03	2.88E-03	1.60E-03	5.77E-03	5.75E-03	5.71E-03	5.48E-03	5.19E-03	2.88E-03	6.22E-03	6.20E-03	6.15E-03	5.91E-03	2.60E-03	3.11E-03	6 41F-03
4a – Large Enclosures, Open, TP	0.00E+00	2.02E-03	2.02E-03	2.00E-03	1.92E-03	1.82E-03	1.01E-03	3.64E-03	3.62E-03	3.60E-03	3.46E-03	3.27E-03	1.82E-03	3.92E-03	3.91E-03	3.88E-03	3.73E-03	3.53E-03	1.96E-03	4 04F-03
4a – Large Enclosures, Open, TS/QTP/SIS	0.00E+00	3.28E-03	3.27E-03	3.25E-03	3.12E-03	2.95E-03	1.64E-03	5.90E-03	5.89E-03	5.85E-03	5.61E-03	5.31E-03	2.95E-03	6.36E-03	6.34E-03	6.30E-03	6.05E-03	5.73E-03	3.18E-03	6.56F-03
4a – Large Enclosures, Closed, TP	0.00E+00	2.82E-03	2.81E-03	2.79E-03	2.68E-03	2.54E-03	1.41E-03	5.07E-03	5.05E-03	5.02E-03	4.82E-03	4.56E-03	2.54E-03	5.46E-03	5.45E-03	5.41E-03	5.19E-03	4.92E-03	2.73E-03	5 63F-03
4a – Large Enclosures, Closed, TS/QTP/SIS	0.00E+00	2.99E-03	2.98E-03	2.96E-03	2.84E-03	2.69E-03	1.50E-03	5.38E-03	5.36E-03	5.33E-03	5.11E-03	4.84E-03	2.69E-03	5.80E-03	5.78E-03	5.74E-03	5.51E-03	5.22E-03	2.90E-03	5 98F-03
Occupancy Maintenance	All	oN	Very low	Low	Medium	High	Very high	٥N	Very low	MOT	Medium	High	Very high	٥N	Very low	MOT	Medium	High	Very high	All
Occupancy	High	Medium	Medium	Medium	Medium	Medium	Medium	Low	Low	Low	Low	Low	Low	Very Low	Very Low	Very Low	Very Low	Very Low	Very Low	S

Probability of No Personnel Present [Table 5-6]) × ((MCR Indication Unreliability [Section 5.3.3.2] + MCR Operator HEP [Section 5.3.3.3]) – (MCR Îndication Únreliability [Section 5.3.3.2] × MCR Óperator HEP [Section 5.3.3.3])) × (Smoke Detection Ineffectiveness [Table 5-2] + Smoke Detection Unreliability [NUREG/CR-6850] + Smoke Detection Unavailability [0.01, assumed])

Table C-7
First detection, interruptible fire, with MCR indication,

no propagation to secondary combustibles (smoke detector probability of no detection included), low fuel loading, unavailability of 0.01,

NUREG-2178 Classification Group 4 (all other) electrical enclosures

0.00E+00 0.00E+00 0.00E+00 0.00E+00 1.41E-03 1.64E-03 1.01E-03 1.60E-03 1.40E-03 1.63E-03 1.01E-03 1.60E-03 1.39E-03 1.61E-03 9.94E-04 1.58E-03 1.30E-03 1.61E-03 9.34E-04 1.58E-03 1.30E-03 1.40E-03 8.61E-04 1.37E-03 3.55E-04 4.13E-04 2.55E-04 4.04E-04 4.79E-03 5.58E-03 3.43E-03 5.45E-03 4.77E-03 5.58E-03 3.43E-03 5.45E-03 4.77E-03 5.56E-03 3.48E-03 5.04E-03 4.70E-03 5.16E-03 3.18E-03 5.04E-03 4.07E-03 1.40E-03 3.86E-03 6.12E-03 5.38E-03 6.27E-03 3.86E-03 6.10E-03 5.38E-03 6.24E-03 3.80E-03 6.10E-03 5.30E-03 6.77E-03 3.57E-03 5.66E-03
1.64E-03 1.01E-03 1.63E-03 1.01E-03 1.61E-03 9.94E-04 1.52E-03 9.33E-04 1.40E-03 8.61E-04 5.58E-03 3.43E-03 5.55E-03 3.42E-03 5.49E-03 3.38E-03 6.27E-03 3.86E-03 6.27E-03 3.86E-03 6.27E-03 3.80E-03 6.77E-03 3.80E-03 6.77E-03 3.80E-03 6.77E-03 3.80E-03
1.63E-03 1.01E-03 1.61E-03 9.94E-04 1.52E-03 9.33E-04 1.40E-03 8.61E-04 4.13E-04 2.55E-04 5.58E-03 3.43E-03 5.55E-03 3.42E-03 5.49E-03 3.38E-03 4.74E-03 3.86E-03 6.27E-03 3.86E-03 6.27E-03 3.80E-03 6.77E-03 3.80E-03 5.79E-03 3.80E-03
1.61E-03 9.94E-04 1.52E-03 9.33E-04 1.40E-03 8.61E-04 4.13E-04 2.55E-04 5.58E-03 3.43E-03 5.55E-03 3.42E-03 5.49E-03 3.48E-03 4.74E-03 3.86E-03 6.27E-03 3.86E-03 6.27E-03 3.86E-03 6.27E-03 3.80E-03 6.77E-03 3.80E-03 5.79E-03 3.57E-03
1.52E-03 9.33E-04 1.40E-03 8.61E-04 4.13E-04 2.55E-04 5.58E-03 3.43E-03 5.55E-03 3.42E-03 5.49E-03 3.38E-03 5.16E-03 3.18E-03 4.74E-03 2.92E-03 1.40E-03 8.61E-04 6.27E-03 3.86E-03 6.24E-03 3.80E-03 6.17E-03 3.57E-03
1.40E-03 8.61E-04 4.13E-04 2.55E-04 5.58E-03 3.43E-03 5.55E-03 3.42E-03 5.49E-03 3.38E-03 6.16E-03 3.18E-03 4.74E-03 2.92E-03 1.40E-03 8.61E-04 6.27E-03 3.86E-03 6.24E-03 3.80E-03 6.77E-03 3.57E-03
4.13E-04 2.55E-04 5.58E-03 3.43E-03 5.55E-03 3.42E-03 5.49E-03 3.38E-03 5.16E-03 3.18E-03 4.74E-03 2.92E-03 1.40E-03 8.61E-04 6.27E-03 3.86E-03 6.24E-03 3.80E-03 6.17E-03 3.57E-03
5.58E-03 3.43E-03 5.55E-03 3.42E-03 5.49E-03 3.38E-03 5.16E-03 3.18E-03 4.74E-03 2.92E-03 1.40E-03 8.61E-04 6.27E-03 3.86E-03 6.24E-03 3.80E-03 6.17E-03 3.57E-03
5.55E-03 3.42E-03 5.49E-03 3.38E-03 5.16E-03 3.18E-03 4.74E-03 2.92E-03 1.40E-03 8.61E-04 6.27E-03 3.86E-03 6.24E-03 3.84E-03 6.17E-03 3.57E-03
5.49E-03 3.38E-03 5.16E-03 3.18E-03 4.74E-03 2.92E-03 1.40E-03 8.61E-04 6.27E-03 3.86E-03 6.24E-03 3.84E-03 6.17E-03 3.57E-03
5.16E-03 3.18E-03 4.74E-03 2.92E-03 1.40E-03 8.61E-04 6.27E-03 3.86E-03 6.24E-03 3.84E-03 6.17E-03 3.80E-03 5.79E-03 3.57E-03
4.74E-03 2.92E-03 1.40E-03 8.61E-04 6.27E-03 3.86E-03 6.24E-03 3.84E-03 6.17E-03 3.80E-03 5.79E-03 3.57E-03
1.40E-03 8.61E-04 6.27E-03 3.86E-03 6.24E-03 3.84E-03 6.17E-03 3.80E-03 5.79E-03 3.57E-03
6.27E-03 3.86E-03 6.24E-03 3.84E-03 6.17E-03 3.80E-03 5.79E-03 3.57E-03
6.24E-03 3.84E-03 6.17E-03 3.80E-03 5.79E-03 3.57E-03
6.17E-03 3.80E-03 5.79E-03
5.79E-03 3.57E-03
4.57E-03 5.33E-03 3.28E-03 5.20E-03
1.35E-03 1.57E-03 9.66E-04 1.53E-03
5.63E-03 6.56E-03 4.04E-03 6.41E-03

Probability of No Personnel Present [Table 5-7]) × ((MCR Indication Unreliability [Section 5.3.3.2] + MCR Operator HEP [Section 5.3.3.3]) – (MCR Îndication Únreliability [Section 5.3.3.2] × MCR Óperator HEP [Section 5.3.3.3])) × (Smoke Detection Ineffectiveness [Table 5-2] + Smoke Detection Unreliability [NUREG/CR-6850] + Smoke Detection Unavailability [0.01, assumed])

Table C-8 First detection, interruptible fire, with MCR indication,

no propagation to secondary combustibles (smoke detector probability of no detection included), without crediting personnel in adjacent spaces,

very low fuel loading, unavailability of 0.01,

NUREG-2178 Classification Group 4 (all other) electrical enclosures

4b – Medium Enclosures, Open, TS/QTP/SIS	0.00E+00 0.00E+00	3.63E-03 2.68E-03	3.62E-03 2.68E-03	3.60E-03 2.65E-03	3.45E-03 2.55E-03	3.27E-03 2.41E-03	1.82E-03 1.34E-03	6.54E-03 4.82E-03	6.52E-03 4.81E-03	6.47E-03 4.78E-03	6.21E-03 4.58E-03	5.88E-03 4.34E-03	3.27E-03 2.41E-03	7 05F-03 5 20F-03						
4b – Medium Enclosures, Closed, TP TS/G	0.00E+00 0.0	3.31E-03 3.6	3.31E-03 3.6	3.28E-03 3.6	3.15E-03 3.4	2.98E-03 3.2	1.66E-03 1.8	5.97E-03 6.5	5.95E-03 6.5	5.91E-03 6.4	5.67E-03 6.2	5.37E-03 5.8	2.98E-03 3.2	6.43E-03 7.0		6.41E-03 7.0				
4b – Medium 4b Enclosures, El Closed, C	0.00E+00	3.31E-03	3.30E-03	3.28E-03	3.14E-03	2.98E-03	1.65E-03	5.96E-03	5.94E-03	5.90E-03	5.66E-03	5.36E-03	2.98E-03	6.42E-03		6.40E-03				
4a – Large Enclosures, Open, TP	0.00E+00	2.32E-03	2.32E-03	2.30E-03	2.21E-03	2.09E-03	1.16E-03	4.18E-03	4.17E-03	4.14E-03	3.97E-03	3.76E-03	2.09E-03	4.50E-03	Lor	4.49E-03	4.49E-03 4.46E-03	4.49E-03 4.46E-03 4.28E-03	4.49E-03 4.46E-03 4.28E-03 4.05E-03	4.49E-03 4.46E-03 4.28E-03 4.05E-03 2.25E-03
4a - Large Enclosures, Open, TS/QTP/SIS	0.00E+00	4.53E-03	4.52E-03	4.48E-03	4.30E-03	4.07E-03	2.26E-03	8.15E-03	8.12E-03	8.07E-03	7.74E-03	7.33E-03	4.07E-03	8.78E-03	0 755 0	0.735-03	8.69E-03	8.35E-03	8.69E-03 8.35E-03 7.90E-03	8.69E-03 8.35E-03 7.90E-03 4.39E-03
4a – Large Enclosures, Closed, TP	0.00E+00	2.16E-03	2.16E-03	2.14E-03	2.05E-03	1.94E-03	1.08E-03	3.89E-03	3.87E-03	3.85E-03	3.69E-03	3.50E-03	1.94E-03	4.19E-03	4 18F-03	201.	4.15E-03	4.15E-03 3.98E-03	4.15E-03 3.98E-03 3.77E-03	4.15E-03 3.98E-03 3.77E-03 2.09E-03
4a - Large Enclosures, Closed, TS/QTP/SIS	0.00E+00	4.01E-03	4.00E-03	3.97E-03	3.81E-03	3.61E-03	2.00E-03	7.21E-03	7.19E-03	7.14E-03	6.85E-03	6.49E-03	3.61E-03	7.78E-03	7.75E-03		7.70E-03	7.70E-03 7.39E-03	7.70E-03 7.39E-03 7.00E-03	7.70E-03 7.39E-03 7.00E-03 3.89E-03
Maintenance	oN N	N _o	Very low	Low	Medium	High	Very high	No	Very low	MoJ	Medium	High	Very high	No	Very low		Low	Low Medium	Low Medium High	Low Medium High Very high
Occupancy	High	Medium	Medium	Medium	Medium	Medium	Medium	Low	Low	Low	Low	Low	Low	Very Low	Verv Low		Very Low	Very Low Very Low	Very Low Very Low Very Low	Very Low Very Low Very Low

(Probability of No Personnel Present [Table 5-6]) × ((MCR Indication Unreliability [Section 5.3.3.2] + MCR Operator HEP [Section 5.3.3.3]) – (MCR Indication Unreliability [Section 5.3.3.2] × MCR Operator HEP [Section 5.3.3.3])) × (Smoke Detection Ineffectiveness [Table 5-2] + Smoke Detection Unreliability [NUREG/CR-6850] + Smoke Detection Unavailability [0.01, assumed])

C-10

First detection, interruptible fire, with MCR indication, Table C-9

no propagation to secondary combustibles (smoke detector probability of no detection included), very low fuel loading, unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures

Occupancy	Maintenance	4a – Large Enclosures, Closed, TS/QTP/SIS	4a – Large Enclosures, Closed, TP	4a - Large Enclosures, Open, TS/QTP/SIS	4a – Large Enclosures, Open, TP	4b - Medium Enclosures, Closed, TS/QTP/SIS	4b – Medium Enclosures, Closed, TP	4b - Medium Enclosures, Open, TS/QTP/SIS	4b – Medium Enclosures, Open, TP
High	ΙΑ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Medium	No	2.00E-03	1.08E-03	2.26E-03	1.16E-03	1.65E-03	1.66E-03	1.82E-03	1.34E-03
Medium	Very low	2.00E-03	1.08E-03	2.25E-03	1.16E-03	1.65E-03	1.65E-03	1.81E-03	1.33E-03
Medium	Low	1.97E-03	1.06E-03	2.23E-03	1.14E-03	1.63E-03	1.63E-03	1.79E-03	1.32E-03
Medium	Medium	1.85E-03	9.98E-04	2.09E-03	1.07E-03	1.53E-03	1.53E-03	1.68E-03	1.24E-03
Medium	High	1.71E-03	9.20E-04	1.93E-03	9.89E-04	1.41E-03	1.41E-03	1.55E-03	1.14E-03
Medium	Very high	5.05E-04	2.72E-04	5.70E-04	2.93E-04	4.17E-04	4.18E-04	4.58E-04	3.38E-04
Low	No	6.81E-03	3.67E-03	7.69E-03	3.95E-03	5.63E-03	5.63E-03	6.17E-03	4.56E-03
MOT	Very low	6.78E-03	3.65E-03	7.66E-03	3.93E-03	5.60E-03	5.61E-03	6.15E-03	4.54E-03
MOT	Low	6.71E-03	3.62E-03	7.58E-03	3.89E-03	5.54E-03	5.55E-03	6.08E-03	4.49E-03
γοη	Medium	6.30E-03	3.39E-03	7.12E-03	3.65E-03	5.20E-03	5.21E-03	5.71E-03	4.21E-03
γοη	High	5.80E-03	3.12E-03	6.54E-03	3.36E-03	4.79E-03	4.79E-03	5.25E-03	3.88E-03
MOT	Very high	1.71E-03	9.20E-04	1.93E-03	9.89E-04	1.41E-03	1.41E-03	1.55E-03	1.14E-03
Very Low	No	7.66E-03	4.12E-03	8.65E-03	4.43E-03	6.32E-03	6.33E-03	6.94E-03	5.12E-03
Very Low	Very low	7.62E-03	4.11E-03	8.61E-03	4.42E-03	6.29E-03	6.30E-03	6.91E-03	5.10E-03
Very Low	Low	7.54E-03	4.06E-03	8.52E-03	4.37E-03	6.23E-03	6.24E-03	6.84E-03	5.04E-03
Very Low	Medium	7.08E-03	3.81E-03	7.99E-03	4.10E-03	5.84E-03	5.85E-03	6.41E-03	4.73E-03
Very Low	High	6.51E-03	3.51E-03	7.35E-03	3.77E-03	5.37E-03	5.38E-03	5.90E-03	4.35E-03
Very Low	Very high	1.92E-03	1.03E-03	2.16E-03	1.11E-03	1.58E-03	1.58E-03	1.74E-03	1.28E-03
٥N	All	8.02E-03	4.32E-03	9.05E-03	4.64E-03	6.62E-03	6.63E-03	7.26E-03	5.36E-03

Probability of No Personnel Present [Table 5-7]) × ((MCR Indication Unreliability [Section 5.3.3.2] + MCR Operator HEP [Section 5.3.3.3]) – (MCR Indication Unreliability [Section 5.3.3.2] × MCR Operator HEP [Section 5.3.3.3])) × (Smoke Detection Ineffectiveness [Table 5-2] + Smoke Detection Unreliability [NUREG/CR-6850] + Smoke Detection Unavailability [0.01, assumed])

C-11

First detection, interruptible fire, without MCR indication, Table C-10

no propagation to secondary combustibles (smoke detector probability of no detection included), default fuel loading, unavailability of 0.01, NUREG-2178 Classification Groups 1, 2, and 3 enclosures

3 – Power Inverters, TP	0.00E+00	1.97E-01	1.96E-01	1.95E-01	1.87E-01	1.77E-01	9.84E-02	3.54E-01	3.53E-01	3.51E-01	3.37E-01	3.19E-01	1.77E-01	3.82E-01	3.81E-01	3.78E-01	3.63E-01	77 177 0	3.44E-01
3 – Power Inverters, TS/QTP/SIS	0.00E+00	3.46E-01	3.45E-01	3.42E-01	3.28E-01	3.11E-01	1.73E-01	6.22E-01	6.20E-01	6.16E-01	5.91E-01	5.60E-01	3.11E-01	6.70E-01	10-389 ⁻ 9	6.63E-01	6.37E-01	10-3E0 9	0.00.0
2 – MCCs and Battery Chargers, TP	0.00E+00	6.28E-02	6.26E-02	6.21E-02	5.96E-02	5.65E-02	3.14E-02	1.13E-01	1.13E-01	1.12E-01	1.07E-01	1.02E-01	5.65E-02	1.22E-01	1.21E-01	1.20E-01	1.16E-01	1 10F-01	
2 – MCCs and Battery Chargers, TS/QTP/SIS	0.00E+00	2.35E-01	2.35E-01	2.33E-01	2.24E-01	2.12E-01	1.18E-01	4.24E-01	4.22E-01	4.19E-01	4.02E-01	3.81E-01	2.12E-01	4.56E-01	4.55E-01	4.52E-01	4.34E-01	4,11F-01	.)
Switchgears and Load Centers, TP	0.00E+00	1.31E-01	1.30E-01	1.29E-01	1.24E-01	1.17E-01	6.53E-02	2.35E-01	2.34E-01	2.33E-01	2.23E-01	2.11E-01	1.17E-01	2.53E-01	2.52E-01	2.51E-01	2.41E-01	2.28F-01	
1 – Switchgears and Load Centers, TS/QTP/SIS	0.00E+00	3.21E-01	3.20E-01	3.17E-01	3.04E-01	2.88E-01	1.60E-01	5.77E-01	5.75E-01	5.71E-01	5.48E-01	5.19E-01	2.88E-01	6.22E-01	6.20E-01	6.15E-01	5.91E-01	5.60F-01	
Occupancy Maintenance	_S	2	Very low	Low	Medium	High	Very high	2	Very low	Low	Medium	High	Very high	No	Very low	Low	Medium	High	
Occupancy	High	Medium	Medium	Medium	Medium	Medium	Medium	Low	Low	Low	Low	Low	Low	Very Low	Very Low	Very Low	Very Low	Very Low	

(Probability of No Personnel Present [Table 5-6) × (Smoke Detection Ineffectiveness [Table 5-2] + Smoke Detection Unreliability [NUREG/CR-6850] + Smoke Detection Unavailability [0.01, assumed])

First detection, interruptible fire, Table C-11

with crediting personnel in adjacent spaces, without MCR indication,

no propagation to secondary combustibles (smoke detector probability of no detection included), default fuel loading, unavailability of 0.01, NUREG-2178 Classification Groups 1, 2, and 3 enclosures

Occupancy Maintenance	1 – Switchgears and Load Centers, TS/QTP/SIS	1 – Switchgears and Load Centers, TP	2 – MCCs and Battery Chargers, TS/QTP/SIS	2 – MCCs and Battery Chargers, TP	3 – Power Inverters, TS/QTP/SIS	3 – Power Inverters, TP
W	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
% 9	1.60E-01	6.53E-02	1.18E-01	3.14E-02	1.73E-01	9.84E-02
Very low	1.60E-01	6.50E-02	1.17E-01	3.12E-02	1.72E-01	9.80E-02
Low	1.58E-01	6.42E-02	1.16E-01	3.09E-02	1.70E-01	9.69E-02
Medium	1.48E-01	6.03E-02	1.09E-01	2.90E-02	1.60E-01	9.09E-02
High	1.37E-01	5.56E-02	1.00E-01	2.67E-02	1.47E-01	8.39E-02
Very high	4.04E-02	1.64E-02	2.96E-02	7.91E-03	4.35E-02	2.48E-02
No	5.45E-01	2.22E-01	4.00E-01	1.07E-01	5.87E-01	3.35E-01
Very low	5.42E-01	2.21E-01	3.98E-01	1.06E-01	5.85E-01	3.33E-01
Low	5.37E-01	2.18E-01	3.94E-01	1.05E-01	5.78E-01	3.30E-01
Medium	5.04E-01	2.05E-01	3.70E-01	9.86E-02	5.43E-01	3.09E-01
High	4.63E-01	1.89E-01	3.40E-01	9.07E-02	5.00E-01	2.85E-01
Very high	1.37E-01	5.56E-02	1.00E-01	2.67E-02	1.47E-01	8.39E-02
No	6.12E-01	2.49E-01	4.49E-01	1.20E-01	6.60E-01	3.76E-01
Very low	6.10E-01	2.48E-01	4.48E-01	1.19E-01	6.57E-01	3.74E-01
Low	6.03E-01	2.46E-01	4.43E-01	1.18E-01	6.50E-01	3.70E-01
Medium	5.66E-01	2.30E-01	4.16E-01	1.11E-01	6.10E-01	3.48E-01
High	5.20E-01	2.12E-01	3.82E-01	1.02E-01	5.61E-01	3.20E-01
Very high	1.53E-01	6.24E-02	1.12E-01	3.00E-02	1.65E-01	9.41E-02
All	6.41E-01	2.61E-01	4.71E-01	1.26E-01	6.91E-01	3.94E-01

(Probability of No Personnel Present [Table 5-7]) × (Smoke Detection Ineffectiveness [Table 5-2] + Smoke Detection Unreliability [NUREG/CR-6850] + Smoke Detection Unavailability [0.01, assumed])

Table C-12 First detection, interruptible fire,

without MCR indication, without crediting personnel in adjacent spaces,

no propagation to secondary combustibles (smoke detector probability of no detection included), default fuel loading, unavailability of 0.01,

NUREG-2178 Classification Group 4 (all other) electrical enclosures

4a - Large Enclosures Closed, TP TS/QTP/SIS Closed, TP TS/QTP/SIS 4a - Large Medium Enclosures Enclosures Closed, TP TS/QTP/SIS
0.00E+00 0.00E+00 0.00E+00
1.42E-01 2.42E-01 1.64E-01
1.41E-01 2.41E-01 1.64E-01
1.40E-01 2.39E-01 1.63E-01
1.35E-01 2.30E-01 1.56E-01
1.28E-01 2.18E-01 1.48E-01
7.09E-02 1.21E-01 8.22E-02
2.55E-01 4.35E-01 2.96E-01
2.54E-01 4.34E-01 2.95E-01
2.53E-01 4.31E-01 2.93E-01
2.42E-01 4.13E-01 2.81E-01
2.30E-01 3.92E-01 2.66E-01
1.28E-01 2.18E-01 1.48E-01
2.75E-01 4.69E-01 3.19E-01
2.74E-01 4.68E-01 3.18E-01
2.72E-01 4.64E-01 3.16E-01
2.61E-01 4.46E-01 3.03E-01
2.47E-01 4.22E-01 2.87E-01
1.37E-01 2.34E-01 1.59E-01
2.84E-01 4.84E-01 3.29E-01

(Probability of No Personnel Present [Table 5-6]) x (Smoke Detection Ineffectiveness [Table 5-2] + Smoke Detection Unreliability [NUREG/CR-6850] + Smoke Detection Unavailability [0.01, assumed])

Table C-13 First detection, interruptible fire, without MCR indication,

no propagation to secondary combustibles (smoke detector probability of no detection included), default fuel loading, unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures

Occupancy	Occupancy Maintenance	4a – Large Enclosures Closed, TS/QTP/SIS	4a – Large Enclosures Closed, TP	4a – Large Enclosures Open, TS/QTP/SIS	4a – Large Enclosures Open, TP	4b – Medium Enclosures Closed, TS/QTP/SIS	4b – Medium Enclosures Closed, TP	4b – Medium Enclosures Open, TS/QTP/SIS	4b – Medium Enclosures Open, TP	4c – Small Enclosures N/A, All
High	ΙΨ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Medium	No	1.45E-01	7.09E-02	1.21E-01	8.22E-02	1.95E-01	1.27E-01	1.60E-01	8.19E-02	1.25E-01
Medium	Very low	1.44E-01	7.06E-02	1.20E-01	8.18E-02	1.94E-01	1.26E-01	1.60E-01	8.16E-02	1.24E-01
Medium	Low	1.43E-01	6.97E-02	1.19E-01	8.09E-02	1.92E-01	1.25E-01	1.58E-01	8.06E-02	1.23E-01
Medium	Medium	1.34E-01	6.55E-02	1.12E-01	7.59E-02	1.80E-01	1.17E-01	1.48E-01	7.57E-02	1.15E-01
Medium	High	1.23E-01	6.04E-02	1.03E-01	7.00E-02	1.66E-01	1.08E-01	1.37E-01	6.98E-02	1.06E-01
Medium	Very high	3.65E-02	1.79E-02	3.05E-02	2.07E-02	4.92E-02	3.20E-02	4.04E-02	2.06E-02	3.14E-02
Low	No	4.93E-01	2.41E-01	4.11E-01	2.79E-01	6.64E-01	4.31E-01	5.45E-01	2.78E-01	4.24E-01
Low	Very low	4.91E-01	2.40E-01	4.09E-01	2.78E-01	6.61E-01	4.29E-01	5.43E-01	2.77E-01	4.22E-01
Low	Low	4.85E-01	2.37E-01	4.05E-01	2.75E-01	6.54E-01	4.25E-01	5.37E-01	2.74E-01	4.18E-01
Low	Medium	4.56E-01	2.23E-01	3.80E-01	2.58E-01	6.14E-01	3.99E-01	5.04E-01	2.57E-01	3.92E-01
Low	High	4.19E-01	2.05E-01	3.50E-01	2.38E-01	5.65E-01	3.67E-01	4.64E-01	2.37E-01	3.61E-01
Low	Very high	1.23E-01	6.04E-02	1.03E-01	7.00E-02	1.66E-01	1.08E-01	1.37E-01	6.98E-02	1.06E-01
Very Low	No	5.54E-01	2.71E-01	4.62E-01	3.14E-01	7.46E-01	4.84E-01	6.12E-01	3.13E-01	4.77E-01
Very Low	Very low	5.51E-01	2.70E-01	4.60E-01	3.13E-01	7.43E-01	4.82E-01	6.10E-01	3.12E-01	4.75E-01
Very Low	Low	5.46E-01	2.67E-01	4.55E-01	3.09E-01	7.35E-01	4.77E-01	6.03E-01	3.08E-01	4.70E-01
Very Low	Medium	5.12E-01	2.50E-01	4.27E-01	2.90E-01	6.90E-01	4.48E-01	5.66E-01	2.89E-01	4.41E-01
Very Low	High	4.71E-01	2.30E-01	3.93E-01	2.67E-01	6.34E-01	4.12E-01	5.21E-01	2.66E-01	4.05E-01
Very Low	Very high	1.39E-01	6.78E-02	1.16E-01	7.86E-02	1.87E-01	1.21E-01	1.53E-01	7.83E-02	1.19E-01
No	IIA	5.80E-01	2.84E-01	4.84E-01	3.29E-01	7.81E-01	5.07E-01	6.41E-01	3.28E-01	4.99E-01
			íi							10.0

(Probability of No Personnel Present [Table 5-7]) × (Smoke Detection Ineffectiveness [Table 5-2] + Smoke Detection Unreliability [NUREG/CR-6850] + Smoke Detection Unavailability [0.01, assumed])

Table C-14
First detection, interruptible fire, without MCR indication,

no propagation to secondary combustibles (smoke detector probability of no detection included), low fuel loading, unavailability of 0.01,

NUREG-2178 Classification Group 4 (all other) electrical enclosures

<u> </u>																				
4b – Medium Enclosures, Open, TP	0.00E+00	2.16E-01	2.15E-01	2.14E-01	2.05E-01	1.94E-01	1.08E-01	3.88E-01	3.87E-01	3.84E-01	3.69E-01	3.50E-01	1.94E-01	4.19E-01	4.17E-01	4.14E-01	3.98E-01	3.77E-01	2.09E-01	
4b – Medium Enclosures, Open, TS/QTP/SIS	0.00E+00	3.64E-01	3.63E-01	3.60E-01	3.46E-01	3.27E-01	1.82E-01	6.55E-01	6.52E-01	6.48E-01	6.22E-01	5.89E-01	3.27E-01	7.06E-01	7.03E-01	6.98E-01	6.71E-01	6.35E-01	3.53E-01	
4b – Medium Enclosures, Closed, TP	0.00E+00	4.27E-01	4.27E-01	4.23E-01	4.06E-01	3.85E-01	2.14E-01	7.69E-01	7.67E-01	7.62E-01	7.31E-01	6.92E-01	3.85E-01	8.29E-01	8.27E-01	8.21E-01	7.88E-01	7.46E-01	4.15E-01	
4b – Medium Enclosures, Closed, TS/QTP/SIS	0.00E+00	2.92E-01	2.91E-01	2.89E-01	2.77E-01	2.62E-01	1.46E-01	5.25E-01	5.23E-01	5.20E-01	4.99E-01	4.72E-01	2.62E-01	5.66E-01	5.64E-01	5.60E-01	5.38E-01	5.09E-01	2.83E-01	100 1
4a – Large Enclosures, Open, TP	0.00E+00	1.84E-01	1.83E-01	1.82E-01	1.75E-01	1.65E-01	9.19E-02	3.31E-01	3.30E-01	3.28E-01	3.14E-01	2.98E-01	1.65E-01	3.57E-01	3.56E-01	3.53E-01	3.39E-01	3.21E-01	1.78E-01	1000
4a – Large Enclosures, Open, TS/QTP/SIS	0.00E+00	2.99E-01	2.98E-01	2.96E-01	2.84E-01	2.69E-01	1.49E-01	5.37E-01	5.36E-01	5.32E-01	5.10E-01	4.84E-01	2.69E-01	5.79E-01	5.77E-01	5.73E-01	5.50E-01	5.21E-01	2.90E-01	100
4a – Large Enclosures, Closed, TP	0.00E+00	2.56E-01	2.56E-01	2.54E-01	2.43E-01	2.31E-01	1.28E-01	4.61E-01	4.60E-01	4.57E-01	4.38E-01	4.15E-01	2.31E-01	4.97E-01	4.96E-01	4.92E-01	4.73E-01	4.47E-01	2.49E-01	
4a – Large Enclosures , Closed, TS/QTP/SIS	0.00E+00	2.72E-01	2.72E-01	2.69E-01	2.58E-01	2.45E-01	1.36E-01	4.90E-01	4.88E-01	4.85E-01	4.65E-01	4.41E-01	2.45E-01	5.28E-01	5.26E-01	5.22E-01	5.02E-01	4.75E-01	2.64E-01	, 0 1, , ,
Maintenance	All	No	Very low	Low	Medium	High	Very high	No	Very low	Low	Medium	High	Very high	No	Very low	Low	Medium	High	Very high	114
Occupancy	High	Medium	Medium	Medium	Medium	Medium	Medium	Low	Low	Low	Low	Low	Low	Very Low	Very Low	Very Low	Very Low	Very Low	Very Low	

(Probability of No Personnel Present [Table 5-6]) × (Smoke Detection Ineffectiveness [Table 5-2] + Smoke Detection Unreliability [NUREG/CR-6850] + Smoke Detection Unavailability [0.01, assumed])

First detection, interruptible fire, without MCR indication, Table C-15

no propagation to secondary combustibles (smoke detector probability of no detection included), low fuel loading, unavailability of 0.01,

NUREG-2178 Classification Group 4 (all other) electrical enclosures

(Probability of No Personnel Present [Table 5-7]) × (Smoke Detection Ineffectiveness [Table 5-2] + Smoke Detection Unreliability [NUREG/CR-6850] + Smoke Detection Unavailability [0.01, assumed])

First detection, interruptible fire, without MCR indication, Table C-16

no propagation to secondary combustibles (smoke detector probability of no detection included), very low fuel loading, unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures

4b – Medium Enclosures, Open, TP	0.00E+00	2.44E-01		2.43E-01	2.43E-01 2.41E-01	2.43E-01 2.41E-01 2.32E-01	2.41E-01 2.32E-01 2.20E-01	2.43E-01 2.41E-01 2.32E-01 2.20E-01 1.22E-01	2.43E-01 2.41E-01 2.32E-01 2.20E-01 1.22E-01 4.39E-01	2.43E-01 2.32E-01 2.32E-01 2.20E-01 1.22E-01 4.39E-01	2.43E-01 2.32E-01 2.32E-01 1.22E-01 4.39E-01 4.35E-01	2.43E-01 2.32E-01 2.32E-01 2.20E-01 1.22E-01 4.39E-01 4.35E-01 4.35E-01	2.43E-01 2.32E-01 2.20E-01 1.22E-01 4.39E-01 4.35E-01 4.17E-01 3.95E-01	2.43E-01 2.32E-01 2.32E-01 1.22E-01 4.39E-01 4.35E-01 4.17E-01 3.95E-01 2.20E-01	2.43E-01 2.32E-01 2.32E-01 1.22E-01 4.39E-01 4.35E-01 4.17E-01 3.95E-01 4.73E-01	2.43E-01 2.32E-01 2.32E-01 1.22E-01 4.39E-01 4.35E-01 4.17E-01 3.95E-01 4.73E-01 4.72E-01	2.43E-01 2.32E-01 2.20E-01 1.22E-01 4.39E-01 4.35E-01 4.17E-01 3.95E-01 4.72E-01 4.72E-01 4.72E-01 4.72E-01	2.43E-01 2.32E-01 2.20E-01 1.22E-01 4.39E-01 4.35E-01 4.17E-01 3.95E-01 2.20E-01 4.72E-01 4.72E-01 4.72E-01 4.72E-01	2.43E-01 2.32E-01 2.20E-01 1.22E-01 4.39E-01 4.17E-01 3.95E-01 4.72E-01 4.72E-01 4.72E-01 4.72E-01 4.72E-01 4.72E-01 4.72E-01 4.72E-01	2.43E-01 2.41E-01 2.32E-01 1.22E-01 4.39E-01 4.35E-01 4.17E-01 3.95E-01 4.73E-01 4.73E-01 4.72E-01 4.72E-01 4.72E-01 4.72E-01 4.72E-01 4.73E-01 2.20E-01 4.73E-01 2.37E-01
Hedium Enclosures, Open, TS/OTE/SIS	0.00E+00	3.31E-01	70 0	3.30E-01	3.27E-01	3.30E-01 3.27E-01 3.14E-01	3.27E-01 3.27E-01 3.14E-01 2.97E-01	3.27E-01 3.27E-01 3.14E-01 2.97E-01	3.27E-01 3.27E-01 3.14E-01 2.97E-01 1.65E-01 5.95E-01	3.27E-01 3.27E-01 3.14E-01 2.97E-01 1.65E-01 5.95E-01	3.27E-01 3.27E-01 3.14E-01 2.97E-01 1.65E-01 5.95E-01 5.93E-01	3.30E-01 3.27E-01 3.14E-01 2.97E-01 1.65E-01 5.95E-01 5.93E-01 5.89E-01	3.30E-01 3.27E-01 3.14E-01 1.65E-01 5.95E-01 5.89E-01 5.89E-01 5.85E-01	3.30E-01 3.27E-01 3.14E-01 2.97E-01 1.65E-01 5.95E-01 5.89E-01 5.89E-01 5.65E-01 2.97E-01	3.30E-01 3.27E-01 3.14E-01 2.97E-01 1.65E-01 5.95E-01 5.89E-01 5.89E-01 5.85E-01 5.35E-01 6.41E-01	3.30E-01 3.27E-01 3.14E-01 1.65E-01 5.95E-01 5.89E-01 5.89E-01 5.85E-01 5.85E-01 6.41E-01 6.39E-01	3.30E-01 3.27E-01 3.14E-01 1.65E-01 5.95E-01 5.89E-01 5.89E-01 5.85E-01 5.35E-01 6.35E-01 6.35E-01	3.30E-01 3.27E-01 3.14E-01 1.65E-01 5.95E-01 5.89E-01 5.89E-01 5.85E-01 5.35E-01 6.39E-01 6.39E-01 6.39E-01	3.30E-01 3.27E-01 3.14E-01 1.65E-01 5.95E-01 5.89E-01 5.89E-01 5.85E-01 5.35E-01 6.39E-01 6.39E-01 6.39E-01 6.39E-01	3.30E-01 3.27E-01 3.14E-01 1.65E-01 5.95E-01 5.89E-01 5.89E-01 5.35E-01 6.41E-01 6.39E-01 6.39E-01 6.39E-01 3.21E-01
4b – Medium Enclosures, Closed, TP	0.00E+00	3.02E-01	3.01E-01	2.0.0	2.99E-01	2.99E-01 2.87E-01	2.99E-01 2.87E-01 2.71E-01	2.99E-01 2.87E-01 2.71E-01 1.51E-01	2.99E-01 2.87E-01 2.71E-01 1.51E-01 5.43E-01	2.99E-01 2.87E-01 2.71E-01 1.51E-01 5.43E-01 5.41E-01	2.99E-01 2.87E-01 2.71E-01 1.51E-01 5.43E-01 5.37E-01	2.99E-01 2.87E-01 2.71E-01 1.51E-01 5.43E-01 5.37E-01 5.37E-01	2.87E-01 2.87E-01 2.71E-01 1.51E-01 5.43E-01 5.41E-01 5.37E-01 5.16E-01 4.89E-01	2.99E-01 2.87E-01 1.51E-01 5.43E-01 5.41E-01 5.37E-01 5.16E-01 4.89E-01 2.71E-01	2.99E-01 2.87E-01 1.51E-01 5.43E-01 5.41E-01 5.37E-01 4.89E-01 2.71E-01 5.85E-01	2.99E-01 2.71E-01 1.51E-01 5.43E-01 5.41E-01 5.37E-01 5.37E-01 5.37E-01 5.16E-01 4.89E-01 2.71E-01 5.85E-01 5.85E-01	2.99E-01 2.71E-01 1.51E-01 5.43E-01 5.41E-01 5.37E-01 5.16E-01 4.89E-01 2.71E-01 5.85E-01 5.85E-01 5.85E-01	2.99E-01 2.87E-01 2.71E-01 1.51E-01 5.43E-01 5.37E-01 5.37E-01 5.37E-01 5.37E-01 5.37E-01 5.37E-01 5.37E-01 5.37E-01 5.35E-01 5.85E-01 5.85E-01 5.85E-01	2.99E-01 2.87E-01 2.71E-01 1.51E-01 5.43E-01 5.47E-01 5.45E-01 5.16E-01 4.89E-01 5.85E-01 5.85E-01 5.85E-01 5.85E-01 5.85E-01 5.85E-01 5.85E-01	2.99E-01 2.87E-01 1.51E-01 1.51E-01 5.43E-01 5.47E-01 5.37E-01 5.37E-01 5.85E-01 5.85E-01 5.85E-01 5.85E-01 5.83E-01 5.98E-01 5.98E-01
4b - Medium Enclosures, Closed, TS/OTP/SIS	0.00E+00	3.01E-01	3.01E-01		2.98E-01	2.98E-01 2.86E-01	2.98E-01 2.86E-01 2.71E-01	2.98E-01 2.86E-01 2.71E-01 1.51E-01	2.98E-01 2.86E-01 2.71E-01 1.51E-01 5.42E-01	2.98E-01 2.86E-01 2.71E-01 1.51E-01 5.42E-01 5.40E-01	2.98E-01 2.86E-01 2.71E-01 1.51E-01 5.42E-01 5.40E-01 5.37E-01	2.98E-01 2.86E-01 2.71E-01 1.51E-01 5.42E-01 5.40E-01 5.37E-01	2.98E-01 2.86E-01 2.71E-01 1.51E-01 5.42E-01 5.37E-01 5.37E-01 4.88E-01	2.98E-01 2.86E-01 2.71E-01 1.51E-01 5.40E-01 5.37E-01 5.37E-01 4.88E-01 2.71E-01	2.98E-01 2.86E-01 2.71E-01 1.51E-01 5.42E-01 5.40E-01 5.37E-01 5.15E-01 4.88E-01 2.71E-01 5.84E-01	2.98E-01 2.86E-01 2.71E-01 1.51E-01 5.42E-01 5.37E-01 5.37E-01 5.37E-01 5.37E-01 5.37E-01 5.37E-01 5.37E-01 5.37E-01 5.37E-01 5.37E-01	2.98E-01 2.86E-01 2.71E-01 1.51E-01 5.40E-01 5.37E-01 5.37E-01 5.37E-01 2.71E-01 2.71E-01 5.84E-01 5.84E-01 5.82E-01	2.98E-01 2.86E-01 2.71E-01 1.51E-01 5.42E-01 5.37E-01 5.37E-01 5.15E-01 2.71E-01 5.84E-01 5.84E-01 5.82E-01 5.78E-01	2.98E-01 2.86E-01 1.51E-01 5.40E-01 5.40E-01 5.37E-01 5.15E-01 5.15E-01 5.84E-01 5.84E-01 5.84E-01 5.84E-01 5.84E-01 5.86E-01	2.98E-01 2.86E-01 2.71E-01 1.51E-01 5.40E-01 5.40E-01 5.40E-01 5.40E-01 5.40E-01 5.40E-01 5.45E-01 5.82E-01 5.82E-01 5.82E-01 5.82E-01 5.82E-01 5.82E-01 5.82E-01 5.82E-01
4a – Large Enclosures, Open, TP	0.00E+00	2.11E-01	2.11E-01		2.09E-01	2.09E-01 2.01E-01	2.09E-01 2.01E-01 1.90E-01	2.09E-01 2.01E-01 1.90E-01 1.06E-01	2.09E-01 2.01E-01 1.90E-01 1.06E-01 3.80E-01	2.09E-01 2.01E-01 1.90E-01 1.06E-01 3.80E-01 3.79E-01	2.09E-01 2.01E-01 1.90E-01 1.06E-01 3.80E-01 3.79E-01 3.76E-01	2.09E-01 2.01E-01 1.90E-01 1.06E-01 3.80E-01 3.79E-01 3.76E-01	2.09E-01 2.01E-01 1.90E-01 1.06E-01 3.80E-01 3.79E-01 3.76E-01 3.61E-01	2.09E-01 2.01E-01 1.90E-01 3.80E-01 3.76E-01 3.76E-01 3.42E-01 1.90E-01	2.09E-01 2.01E-01 1.90E-01 3.80E-01 3.76E-01 3.76E-01 3.42E-01 1.90E-01 4.10E-01	2.09E-01 2.01E-01 1.90E-01 3.80E-01 3.76E-01 3.76E-01 3.42E-01 1.90E-01 4.10E-01 4.09E-01	2.09E-01 2.01E-01 1.90E-01 3.80E-01 3.79E-01 3.61E-01 3.42E-01 4.10E-01 4.09E-01 4.06E-01	2.09E-01 2.01E-01 1.90E-01 3.80E-01 3.79E-01 3.76E-01 3.61E-01 4.10E-01 4.09E-01 4.06E-01 3.90E-01	2.09E-01 2.01E-01 1.90E-01 3.80E-01 3.76E-01 3.76E-01 3.42E-01 1.90E-01 4.10E-01 4.09E-01 3.90E-01 3.69E-01	2.09E-01 2.01E-01 1.90E-01 3.80E-01 3.76E-01 3.42E-01 1.90E-01 4.10E-01 4.09E-01 4.06E-01 3.90E-01 3.90E-01 2.05E-01
4a - Large Enclosures, Open, TS/OTP/SIS	0.00E+00	4.12E-01	4.11E-01		4.08E-01	4.08E-01 3.91E-01	3.91E-01 3.71E-01	3.91E-01 3.71E-01 2.06E-01	4.08E-01 3.91E-01 3.71E-01 2.06E-01 7.41E-01	4.08E-01 3.91E-01 3.71E-01 2.06E-01 7.41E-01 7.39E-01	4.08E-01 3.91E-01 3.71E-01 2.06E-01 7.39E-01 7.39E-01	3.91E-01 3.91E-01 2.06E-01 7.39E-01 7.34E-01 7.04E-01	3.91E-01 3.91E-01 2.06E-01 7.41E-01 7.39E-01 7.04E-01 6.67E-01	4.08E-01 3.91E-01 3.71E-01 2.06E-01 7.39E-01 7.34E-01 7.04E-01 6.67E-01 3.71E-01	4.08E-01 3.91E-01 2.06E-01 7.41E-01 7.39E-01 7.04E-01 6.67E-01 3.71E-01	4.08E-01 3.91E-01 2.06E-01 7.34E-01 7.34E-01 7.04E-01 6.67E-01 3.71E-01 7.99E-01	4.08E-01 3.91E-01 2.06E-01 7.39E-01 7.34E-01 7.04E-01 6.67E-01 3.71E-01 7.99E-01 7.99E-01 7.99E-01	4.08E-01 3.91E-01 2.06E-01 7.39E-01 7.34E-01 7.04E-01 6.67E-01 3.71E-01 7.99E-01 7.99E-01 7.97E-01 7.97E-01	3.91E-01 3.91E-01 2.06E-01 7.39E-01 7.34E-01 7.04E-01 6.67E-01 7.99E-01 7.99E-01 7.97E-01 7.99E-01 7.99E-01 7.99E-01 7.99E-01	3.91E-01 3.91E-01 2.06E-01 7.39E-01 7.34E-01 7.04E-01 6.67E-01 3.71E-01 7.99E-01 7.99E-01 7.99E-01 7.99E-01 7.99E-01 7.99E-01 3.99E-01
4a – Large Enclosures, Closed, TP	0.00E+00	1.97E-01	1.96E-01	1 05 0 04	- 0-HC8	1.93E-01 1.87E-01	1.87E-01 1.77E-01	1.87E-01 1.77E-01 9.83E-02	1.87E-01 1.77E-01 9.83E-02 3.54E-01	1.87E-01 1.87E-01 1.77E-01 9.83E-02 3.54E-01 3.53E-01	1.87E-01 1.77E-01 9.83E-02 3.54E-01 3.53E-01 3.50E-01	1.87E-01 1.77E-01 9.83E-02 3.54E-01 3.53E-01 3.50E-01	1.87E-01 1.77E-01 9.83E-02 3.54E-01 3.50E-01 3.36E-01 3.18E-01	1.87E-01 1.77E-01 9.83E-02 3.54E-01 3.53E-01 3.50E-01 3.36E-01 3.36E-01	1.87E-01 1.77E-01 9.83E-02 3.54E-01 3.53E-01 3.36E-01 3.36E-01 3.18E-01 3.18E-01	1.87E-01 1.77E-01 9.83E-02 3.54E-01 3.50E-01 3.36E-01 3.18E-01 1.77E-01 3.80E-01	1.87E-01 1.77E-01 9.83E-02 3.54E-01 3.50E-01 3.36E-01 3.18E-01 1.77E-01 3.81E-01 3.80E-01	1.87E-01 1.77E-01 3.54E-01 3.50E-01 3.36E-01 3.18E-01 1.77E-01 3.80E-01 3.60E-01 3.80E-01 3.60E-01 3.80E-01	1.87E-01 1.77E-01 3.54E-01 3.54E-01 3.50E-01 3.36E-01 3.18E-01 3.81E-01 3.81E-01 3.81E-01 3.81E-01 3.81E-01 3.81E-01 3.81E-01 3.81E-01 3.81E-01 3.81E-01 3.81E-01 3.81E-01 3.81E-01	1.87E-01 1.77E-01 3.54E-01 3.54E-01 3.50E-01 3.36E-01 3.18E-01 1.77E-01 3.80E-01 3.62E-01 3.43E-01
4a – Large Enclosures, Closed, TS/OTP/SIS	0.00E+00	3.65E-01	3.64E-01	3 61E_01	0.0	3.46E-01	3.28E-01	3.28E-01 1.82E-01	3.46E-01 3.28E-01 1.82E-01 6.56E-01	3.28E-01 1.82E-01 6.56E-01 6.54E-01	3.28E-01 1.82E-01 6.56E-01 6.56E-01	3.28E-01 1.82E-01 6.56E-01 6.56E-01 6.50E-01	3.46E-01 3.28E-01 1.82E-01 6.56E-01 6.54E-01 6.24E-01	3.46E-01 3.28E-01 1.82E-01 6.56E-01 6.54E-01 6.24E-01 5.91E-01 3.28E-01	3.46E-01 3.28E-01 1.82E-01 6.56E-01 6.56E-01 6.24E-01 5.91E-01 7.08E-01	3.46E-01 3.28E-01 1.82E-01 6.56E-01 6.56E-01 6.50E-01 6.24E-01 5.91E-01 7.08E-01 7.08E-01	3.28E-01 6.56E-01 6.56E-01 6.24E-01 6.24E-01 7.08E-01 7.00E-01	3.46E-01 3.28E-01 1.82E-01 6.56E-01 6.54E-01 6.24E-01 5.91E-01 7.08E-01 7.05E-01 7.00E-01	3.46E-01 3.28E-01 1.82E-01 6.56E-01 6.54E-01 6.24E-01 7.08E-01 7.08E-01 7.00E-01 6.73E-01	3.46E-01 3.28E-01 1.82E-01 6.56E-01 6.54E-01 5.91E-01 7.08E-01 7.08E-01 7.05E-01 7.05E-01 3.28E-01 3.28E-01 3.28E-01 3.28E-01 3.28E-01 3.28E-01 3.28E-01 3.28E-01 3.28E-01
Maintenance	Ψ	oN S	Very low	Low		Medium	Medium High	Medium High Very high	Medium High Very high No	Medium High Very high No Very low	Medium High Very high No No Very low Low	Medium High Very high No Very low Low Medium	Medium High Very high No Very low Low Medium High	Medium High Very high No Very low Low Medium High	Medium High Very high No Very low Low Medium High Very high No	Medium High Very high No Very low Low Medium High Very high No No	Medium High Very high No Very low Low Medium High Very high No Very low Low	Medium High Very high No Very low Low Medium High Very low No Very low Low Medium Medium	Medium High Very high No Very low Low Medium High Very high No Very low Low High High High High	Medium High Very high No Very low Low Medium High Very low Low No Very low Low Low High Very low Low Very low
Occupancy	High	Medium	Medium	Medium		Medium	Medium	Medium Medium Medium	Medium Medium Medium Low	Medium Medium Low Low	Medium Medium Low Low Low	Medium Medium Low Low Low Low	Medium Medium Low Low Low Low Low Low Low	Medium Medium Low Low Low Low Low Low Low Low	Medium Medium Low Low Low Low Low Low Low Low Low	Medium Medium Low Low Low Low Low Low Low Low Vew Low	Medium Medium Low Low Low Low Low Low Low Low Very Low Very Low	Medium Medium Low Low Low Low Low Low Low Very Low Very Low Very Low	Medium Medium Low Low Low Low Low Low Very Low Very Low Very Low Very Low	Medium Medium Low Low Low Low Low Low Very Low Very Low Very Low Very Low Very Low

(Probability of No Personnel Present [Table 5-6]) × (Smoke Detection Ineffectiveness [Table 5-2] + Smoke Detection Unreliability [NUREG/CR-6850] + Smoke Detection Unavailability [0.01, assumed])

First detection, interruptible fire, without MCR indication, Table C-17

no propagation to secondary combustibles (smoke detector probability of no detection included), very low fuel loading, unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures

Occupancy	Maintenance	4a – Large Enclosures, Closed, TS/QTP/SIS	4a – Large Enclosures, Closed, TP	4a – Large Enclosures, Open, TS/QTP/SIS	4a – Large Enclosures, Open, TP	4b - Medium Enclosures, Closed, TS/QTP/SIS	4b - Medium Enclosures, Closed, TP	4b – Medium Enclosures, Open, TS/QTP/SIS	4b – Medium Enclosures, Open, TP
High	ΙΑ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Medium	٥N	1.82E-01	9.83E-02	2.06E-01	1.06E-01	1.51E-01	1.51E-01	1.65E-01	1.22E-01
Medium	Very low	1.82E-01	9.79E-02	2.05E-01	1.05E-01	1.50E-01	1.50E-01	1.65E-01	1.21E-01
Medium	Pow	1.79E-01	9.67E-02	2.03E-01	1.04E-01	1.48E-01	1.48E-01	1.63E-01	1.20E-01
Medium	Medium	1.68E-01	9.08E-02	1.90E-01	9.76E-02	1.39E-01	1.39E-01	1.53E-01	1.13E-01
Medium	High	1.55E-01	8.37E-02	1.75E-01	9.00E-02	1.28E-01	1.28E-01	1.41E-01	1.04E-01
Medium	Very high	4.60E-02	2.48E-02	5.19E-02	2.66E-02	3.79E-02	3.80E-02	4.16E-02	3.07E-02
Low	٥N	6.20E-01	3.34E-01	7.00E-01	3.59E-01	5.12E-01	5.13E-01	5.62E-01	4.15E-01
Low	Very low	6.17E-01	3.32E-01	6.97E-01	3.57E-01	5.10E-01	5.10E-01	5.59E-01	4.13E-01
Low	MOT	6.11E-01	3.29E-01	6.89E-01	3.54E-01	5.04E-01	5.05E-01	5.53E-01	4.08E-01
Low	Medium	5.73E-01	3.09E-01	6.47E-01	3.32E-01	4.73E-01	4.74E-01	5.20E-01	3.83E-01
Low	High	5.27E-01	2.84E-01	5.96E-01	3.05E-01	4.35E-01	4.36E-01	4.78E-01	3.53E-01
Low	Very high	1.55E-01	8.37E-02	1.75E-01	9.00E-02	1.28E-01	1.28E-01	1.41E-01	1.04E-01
Very Low	٥N	6.97E-01	3.75E-01	7.87E-01	4.03E-01	5.75E-01	5.76E-01	6.31E-01	4.66E-01
Very Low	Very low	6.94E-01	3.74E-01	7.83E-01	4.02E-01	5.73E-01	5.74E-01	6.29E-01	4.64E-01
Very Low	MOT	6.86E-01	3.70E-01	7.75E-01	3.98E-01	5.67E-01	5.68E-01	6.22E-01	4.59E-01
Very Low	Medium	6.44E-01	3.47E-01	7.27E-01	3.73E-01	5.32E-01	5.33E-01	5.84E-01	4.31E-01
Very Low	High	5.92E-01	3.19E-01	6.69E-01	3.43E-01	4.89E-01	4.90E-01	5.37E-01	3.96E-01
Very Low	Very high	1.74E-01	9.39E-02	1.97E-01	1.01E-01	1.44E-01	1.44E-01	1.58E-01	1.17E-01
No	IIV	7.29E-01	3.93E-01	8.24E-01	4.23E-01	6.02E-01	6.03E-01	6.61E-01	4.88E-01

(Probability of No Personnel Present [Table 5-7]) × (Smoke Detection Ineffectiveness [Table 5-2] + Smoke Detection Unreliability [NUREG/CR-6850] + Smoke Detection Unavailability [0.01, assumed])

Table C-18

First detection, growing fire, with MCR indication, without crediting personnel in adjacent spaces,

all fuel loadings, NUREG-2178 Classification Groups 1, 2, 3, and 4 enclosures

Occupancy	Maintenance	All Electrical Cabinets
High	IIY	0.00E+00
Medium	oN	5.50E-03
Medium	Very low	5.48E-03
Medium	MOT	5.44E-03
Medium	Medium	5.22E-03
Medium	High	4.95E-03
Medium	Very high	2.75E-03
Low	oN	9.89E-03
Low	Very low	9.86E-03
Low	MOT	9.79E-03
Low	Medium	9.40E-03
Low	ЧвіН	8.90E-03
Low	Very high	4.95E-03
Very Low	oN	1.07E-02
Very Low	Very low	1.06E-02
Very Low	MOT	1.06E-02
Very Low	Medium	1.01E-0202
Very Low	High	9.59E-03
Very Low	Very high	5.33E-03
NO	II∇	1 10E_02

(Probability of No Personnel Present [Table 5-6]) × ((MCR Indication Unreliability [Section 5.3.3.2] + MCR Operator HEP [Section 5.3.3.3]) – (MCR Indication Unreliability [Section 5.3.3.2] × MCR Operator HEP [Section 5.3.3.3])

Table C-19 First detection, growing fire, with MCR indication,

all fuel loadings, NUREG-2178 Classification Groups 1, 2, 3, and 4 enclosures

Occupancy	Maintenance	All Electrical Cabinets
High	oN	0.00E+00
Medium	oN	2.75E-03
Medium	Very low	2.74E-03
Medium	MOT	2.70E-03
Medium	Medium	2.54E-03
Medium	High	2.34E-03
Medium	Very high	6.92E-04
Low	oN	9.34E-03
Low	Very low	9.30E-03
Low	MOT	9.20E-03
Low	Medium	8.64E-03
Low	Чб!Н	7.95E-03
Low	Very high	2.34E-03
Very Low	No	1.05E-02
Very Low	Very low	1.05E-02
Very Low	MOT	1.03E-02
Very Low	Medium	9.70E-03
Very Low	High	8.92E-03
Very Low	Very high	2.63E-03
No	٥N	1.10E-02

(Probability of No Personnel Present [Table 5-7]) × ((MCR Indication Unreliability [Section 5.3.3.2] + MCR Operator HEP [Section 5.3.3.3]) – (MCR Indication Unreliability [Section 5.3.3.2] × MCR Operator HEP [Section 5.3.3.3])

Table C-20 First detection are

First detection, growing fire, without MCR indication, without crediting personnel in adiacent sp

without crediting personnel in adjacent spaces all fuel loadings, NUREG-2178 Classification Groups 1, 2, 3, and 4 enclosures

Occupancy	Maintenance	All Electrical Cabinets
High	IIY	0.00E+00
Medium	oN	5.00E-01
Medium	Very low	4.99E-01
Medium	row	4.95E-01
Medium	Medium	4.75E-01
Medium	High	4.50E-01
Medium	Very high	2.50E-01
Low	oN	9.00E-01
Low	Very low	8.97E-01
Low	Fow	8.91E-01
Low	Medium	8.55E-01
Low	High	8.10E-01
Low	Very high	4.50E-01
Very Low	oN	9.70E-01
Very Low	Very low	9.67E-01
Very Low	row	9.60E-01
Very Low	Medium	9.22E-01
Very Low	High	8.73E-01
Very Low	Very high	4.85E-01
No	IIY	1.00E+00
Cleanorach of Ne Described	TO I Table (1)	

(Probability of No Personnel Present [Table 5-6])

Table C-21
First detection, growing fire, without MCR indication,

all fuel loadings, NUREG-2178 Classification Groups 1, 2, 3, and 4 enclosures

(Probability of No Personnel Present [Table 5-7])

Table C-22

no propagation to secondary combustibles (smoke detector probability of no detection included), Second detection, growing fire,

default fuel loading, unavailability of 0.01,

NUREG-2178 Classification Groups 1, 2, and 3 enclosures

3 – Power Inverters, TP	3.94E-01
3 – Power Inverters, TS/QTP/SIS	6.91E-01
2 – MCCs and Battery Chargers, TP	1.26E-01
2 - MCCs and Battery Chargers, TS/QTP/SIS	4.71E-01
Switchgears 1 – Switchgears 2 and Load and Load Centers, Centers, TP	2.61E-01
1 – Switchgears and Load Centers, TS/QTP/SIS	6.41E-01
Maintenance	All
Occupancy	All

Smoke Detection Ineffectiveness [Table 5-2] + Smoke Detection Unreliability [NUREG/CR-6850] + Smoke Detection Unavailability [0.01, assumed])

Table C-23

Second detection, growing fire,

no propagation to secondary combustibles (smoke detector probability of no detection included),

default fuel loading, unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures

4c – Small Enclosures N/A, All	4.99E-01
4b – Medium Enclosures Open, TP	3.28E-01
4b – Medium Enclosures Open, TS/QTP/SIS	6.41E-01
4b – Medium Enclosures Closed, TP	2.84E-01 4.84E-01 3.29E-01 7.81E-01 5.07E-01 6.41E-01 3.28E-01 4.99E-01
4b – Medium Enclosures Closed, TS/QTP/SIS	7.81E-01
4a – Large Enclosures Open, TP	3.29E-01
e Enclosures Open, TP TS/QTP/SIS	4.84E-01
, ш	2.84E-01
4a – La Enclos Close TS/QTF	5.80E
Occupancy Maintenance	All
Occupancy	All

(Smoke Detection Ineffectiveness [Table 5-2] + Smoke Detection Unreliability [NUREG/CR-6850] + Smoke Detection Unavailability [0.01, assumed])

Table C-24

Second detection, growing fire,

no propagation to secondary combustibles (smoke detector probability of no detection included),

low fuel loading, unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures

Ad - Large Accupancy Maintenance Closed, TS/QTP/SIS	4a – Large Enclosures, Closed, TP	4a - Large4a - Large4a - Large4b - LargeEnclosures, Closed, TPOpen, TPClosed, TP	4a – Large Enclosures, Open, TP	- Medium closures, closed, QTP/SIS	4b – Medium Enclosures, Closed, TP	4b – Medium Enclosures, Open, TS/QTP/SIS	4b – Medium Enclosures, Open, TP
All All 5.44E-01	5.13E-01	5.97E-01	3.68E-01	5.13E-01 5.97E-01 3.68E-01 5.83E-01 8.55E-01 7.27E-01 4.32E-01	8.55E-01	7.27E-01	4.32E-01

(Smoke Detection Ineffectiveness [Table 5-2] + Smoke Detection Unreliability [NUREG/CR-6850] + Smoke Detection Unavailability [0.01, assumed])

Table C-25

Second detection, growing fire,

no propagation to secondary combustibles (smoke detector probability of no detection included),

very low fuel loading, unavailability of 0.01, NUREG-2178 Classification Group 4 (all other) electrical enclosures

_	
4b – Medium Enclosures, Open, TP	4.88E-01
4b – Medium Enclosures, Open, TS/QTP/SIS	6.61E-01
ge Enclosures, Closed, PP TS/QTP/SIS Closed, TP TS/QTP/SIS Closed, TP TS/QTP/SIS Closed, TP TS/QTP/SIS Closed, TP TS/QTP/SIS Open, TP	4.23E-01 6.02E-01 6.03E-01 6.61E-01 4.88E-01
4b – Medium Enclosures, Closed, TS/QTP/SIS	6.02E-01
a – Lar Iclosur Ipen, T	4.23E-01
4a – Large Enclosures, Enclosures, Open, Closed, TP TS/QTP/SIS (.93E-01 8.24E-01
4a – Large Haclosures, Enclosures, Closed, TP TS/QTP/SIS C	3.93E-01
4a – Large Enclosures, Closed, TS/QTP/SIS	7.29E-01
Maintenance	IIA
Occupancy	IA

(Smoke Detection Ineffectiveness [Table 5-2] + Smoke Detection Unreliability [NUREG/CR-6850] + Smoke Detection Unavailability [0.01,

assumed])

Table C-26

assumes propagation to secondary combustibles (smoke detector probability of no detection not included), Second detection, interruptible and growing fire, unavailability of 0.01,

NUREG-2178 Classification Groups 1, 2, and 3 enclosures

(Smoke Detection Unreliability [NUREG/CR-6850] + Smoke Detection Unavailability [0.01, assumed]- Smoke Detection Unreliability [NUREG/CR-6850] × Smoke Detection Unavailability [0.01, assumed]))

Table C-27

assumes propagation to secondary combustibles (smoke detector probability of no detection not included), Second detection, interruptible and growing fire, unavailability of 0.01,

NUREG-2178 Classification Group 4 (all other) electrical enclosures

4c – Small Enclosures N/A, All	5.95E-02
4b – Medium Enclosures Open, TP	5.95E-02
m Redium Medium Arc – Small Lines Open, TP TS/QTP/SIS	5.95E-02
4b – Medium Enclosures Closed, TP	5E-02 5.95E-02 5.95E-02 5.95E-02 5.95E-02 5.95E-02 5.95E-02 5.95E-02
4b – Medium Enclosures Closed, TS/QTP/SIS	5.95E-02
4a – Large Enclosures Open, TP	5.95E-02
4b – Large Bnclosures Chen, Open, TP Closed, TS/QTP/SIS Chen, TS/QTP/SIS	5.95E-02
4a – Largo Enclosure Closed, Tl	5.95E-02
4a - Enc Cl	5.95E-02
Occupancy Maintenance	All
Occupancy	All

(Smoke Detection Unreliability [NUREG/CR-6850] + Smoke Detection Unavailability [0.01, assumed] - Smoke Detection Unreliability [NUREG/CR-6850] × Smoke Detection Unavailability [0.01, assumed]))

APPENDIX D SENSITIVITY AND UNCERTAINTY

The input parameters developed as part of the methodology described in this report are studied to determine their sensitivity on the calculation of the probability of non-suppression. These sensitivities are developed based on uncertainty ranges of the different input parameters. In this appendix, parameter sensitivity cases and results are presented in Table D-1. Sensitivities on the function (for example, personnel detection, MCR indication, and probability of no detection by a reliable and available automatic smoke detection system) are presented in Table D-2.

Table D-1 Parameter sensitivity cases

Sensitivity	P _{ns}	Percentage Difference	Discussion
Base Case, Example #4, Section 6.4	0.016	N/A	MCC is monitored for equipment trouble in the MCR. The interruptible fire and growing fire suppression rates are 0.149 and 0.100, respectively. Medium occupancy and maintenance rating levels, with credit for adjacent space. This results in a probability that personnel are not present to detect the fire of 0.231. A pre-growth period of 4 minutes is included in the detailed fire modeling of the Interruptible fraction of fires. The ineffectiveness of the automatic smoke detection system is 0.07.
MCR indication: sum sensor/transmitter level, temperature, and pressure probabilities of failure: 1.26E-03	0.016	^	The results of the analysis show that the calculation of P_{ns} is not sensitive to change in the MCR indication probability of failure.
MCR indication: average of sensor/ transmitter level, temperature, and pressure probabilities of failure: 4.19E-04	0.016	^	The results of the analysis show that the calculation of P_{ns} is not sensitive to change in the MCR indication probability of failure.
MCR operator response: screening HEP with error factor of 5: 5E-03	0.016	^	The results of the analysis show that the calculation of $P_{\text{\tiny IS}}$ is not sensitive to a change of the error factor for the MCR operator HEP.
5th percentile suppression rates, interruptible fires: 0.114 growing fire: 0.065	0.028	79	The results show that the calculation of $P_{\rm ns}$ is sensitive to a change in the suppression rate. Using the 5th percentile values, the results of the sensitivity show a 79% increase in the $P_{\rm ns}$.
95th percentile suppression rates, interruptible fires: 0.189 growing fire: 0.142	0.008	49	The results of the analysis show that the calculation of $P_{\rm ns}$ is sensitive to a change in the suppression rate. Using the 5th percentile values, the results of the sensitivity show a 49% decrease in the $P_{\rm ns}$.

Table D-1 Parameter sensitivity cases (continued)

Sensitivity	P	Difference	Discussion
Personnel detection: equal weight to maintenance	0.016	^	The results of the analysis show that the calculation of P_{ns} is not sensitive to a change in the weight associated with the rating of personnel detection associated with maintenance.
Interruptible fire pre-growth period: 1 minute	0.019	23	The results of the analysis show that the calculation of P _{ns} is sensitive to a change in the pre-growth period of an interruptible fire. This change results in an approximate 23% increase in the calculated P _{ns} .
Interruptible fire pre-growth period: 9 minutes	0.012	21	The results of the analysis show that the calculation of P _{ns} is sensitive to a change in the pre-growth period of an interruptible fire. This change results in an approximate 21% decrease in the calculated P _{ns} .
Smoke detection probability of no detection: 98th HRR only in Monte Carlo analysis	0.016	^	The results of the analysis show that the calculation of P _{ns} is not sensitive when the probability of no detection is assessed assuming only 98th percentile fires. Note, this base case result for an MCC with TP cable is already very low. The results may be more sensitive assuming other electrical cabinet classifications.
Smoke detection probability of no detection: Ceiling height above source fixed at 1.5 m in Monte Carlo analysis	0.016	< 1	The results of the analysis show that the calculation of P _{ns} is not sensitive when the probability of no detection is assessed assuming that the vertical distance separating the fire and the smoke detector is fixed to 1.5 m (5 ft). Note, probability of no detection associated with automatic smoke detectors in this base case result for an MCC with TP cable is already very low. The results may be more sensitive assuming other electrical cabinet classifications.
Smoke detection probability of no detection: Ceiling height above source fixed at 6.1 m in Monte Carlo analysis	0.016	^	The results of the analysis show that the calculation of P _{ns} is not sensitive when the probability of no detection is assessed assuming that the vertical distance separating the fire and the smoke detector is fixed to 6.1 m (20 ft). Note, probability of no detection associated with automatic smoke detectors in this base case result for an MCC with TP cable is already very low. The results may be more sensitive assuming other electrical cabinet classifications.
Smoke detection probability of no detection: radial distance to detector can only be 0 m in Monte Carlo analysis	0.016	< 1	The results of the analysis show that the calculation of P _{ns} is not sensitive when the probability of no detection is assessed assuming that the radial distance separating the fire and the smoke detector is fixed to 0 m. Note, probability of no detection associated with automatic smoke detectors in this base case result for an MCC with TP cable is already very low. The results may be more sensitive assuming other electrical cabinet classifications.
Smoke detection probability of no detection: radial distance to detector	0.016	< 1	The results of the analysis show that the calculation of $P_{\rm ns}$ is not sensitive when the probability of no detection is assessed assuming the radial distance separating the fire and the smoke detector is fixed to 6.5 m (21.3 ft).

Table D-1 Parameter sensitivity cases (continued)

Sensitivity	P _{ns}	Percentage Difference	Discussion
can only be 6.5 m in Monte Carlo analysis			Note, probability of no detection associated with automatic smoke detectors in this base case result for an MCC with TP cable is already very low. The results may be more sensitive assuming other electrical cabinet classifications.
Smoke detection probability of no detection:	0.016	\ \	The results of the analysis show that the calculation of P _{ns} is not sensitive when the probability of no detection is assessed assuming that the cabinet is modeled without the obstructed plume bias.
unobstructed cabinet top in Monte Carlo analysis			Note, probability of no detection associated with automatic smoke detectors in this base case result for an MCC with TP cable is already very low. The results may be more sensitive assuming other electrical cabinet classifications.
Interruptible and growing fires split fraction: 0.5/0.5	0.021	35	The results of the analysis show that the calculation of P _{ns} is sensitive when the interruptible and growing fires split fraction is split equally. This change results in a 35% increase in the calculated P _{ns} .
Interruptible and growing fires split fraction: all interruptible fires	600.0	44	The results of the analysis show that the calculation of P _{ns} is sensitive when all fires treated as interruptible fires. This change results in an approximate 44% decrease in the calculated P _{ns} .
Interruptible and growing fires split fraction: all	0.034	114	The results of the analysis show that the calculation of P _{ns} is sensitive when all fires treated as growing fires. This change results in an approximate 114% increase in the
growing fires			calculated P _{ns} .

Table D-2 Function sensitivity cases

Sensitivity	P _{ns}	Percentage Difference	Discussion
Base Case, Example #4, Section 6.4	0.016	N/A	MCC is monitored for equipment trouble in the MCR. The interruptible fire and growing fire suppression rates are 0.149 and 0.100, respectively. The MCC is located in a room that has been determined to have medium occupancy and medium maintenance rating levels. This results in a probability that personnel are not present to detect the fire of 0.231. A pre-growth period of 4 minutes is included in the detailed fire modeling of the interruptible fraction of fires. The effectiveness of the automatic smoke detection system is 0.07.
No MCR indication, Example #1, Section 6.1	0.024	54	The results of the analysis show that the calculation of $P_{\rm ns}$ is sensitive to the inclusion of the plant personnel means of detection. This change results in an approximate 54% change in the calculated $P_{\rm ns}$.
No personnel detection, Section 5.3.3.4	0.016	\ \	The results of the analysis show that the calculation of P_{ns} is not sensitive to the inclusion of the personnel means of detection when the MCR indication function is included.
Exclude Automatic Smoke Detection Probability of No Detection, Section 5.3.3.1	0.016	, 	The results of the analysis show that the calculation of P_{ns} is not sensitive to the inclusion of the automatic smoke detection probability of no detection for a reliable and available system.
Exclude MCR indication and personnel detection	0.029	83	The results of the analysis show that the calculation of $P_{\rm ns}$ is sensitive to the inclusion of the MCR indication and plant personnel means of detection. This change results in an approximate 83% change in the calculated $P_{\rm ns}$.

Sensitivity and Uncertainty

Table D-2 Function sensitivity cases (continued)

Sensitivity	P _{ns}	Percentage Difference	Discussion
Exclude personnel detection and automatic smoke detection probability of no detection	0.016	V	The results of the analysis show that the calculation of $P_{\rm ns}$ is not sensitive to the inclusion of the automatic smoke detection probability of no detection and plant personnel means of detection.
Exclude MCR indication and automatic smoke detection probability of no detection	0.02	24	The results of the analysis show that the calculation of P_{ns} is sensitive to the inclusion of the MCR indication and automatic smoke detection probability means of detection. This change results in an approximate 24% increase in the calculated P_{ns} .

Sensitivity and Uncertainty

The results of these sensitivity cases highlight that greatest impact in the calculation of the P_{ns} results from the inclusion or exclusion of the following:

- The MCR indication means of detection.
- The interruptible and growing fires suppression rates
- The interruptible and growing fires split fraction
- The pre-growth period duration

Sensitivity in the calculation of the P_{ns} to the suppression rate is not an unexpected result. Increasing or decreasing the rate at which fires are estimated to be suppressed should impact the probability of failing to suppress a fire. The sensitivity to the split fraction highlights the difference between the P_{ns} modeled as interruptible fires, with a greater suppression rate and a zero time of detection. Sensitivity to the interruptible fire pre-growth period duration is also expected because it provides a period of time where damage is not modeled to occur for nearly 70% of the fires in electrical cabinets.

The sensitivity to the MCR indication means of detection likely results from the magnitude of the parameters associated with this means of detection. As presented in Figure 5-12, when included, this means of detection multiplies a factor of 0.011 (0.01+0.001- 0.01×0.001) to the estimated probability of detection failure. Outside of occupancy spaces with high and no ratings, the probabilities associated with personnel not being present for detection range from 0.063 to 0.97 and are less influential to the successful detection of a fire.

NRC FORM 335 U.S. NUCLEAR REGULATORY COMMISSION (12-2010)	1. REPORT NUI		
NRCMD 3.7 BIBLIOGRAPHIC DATA SHEET (See instructions on the reverse)	(Assigned by NRC, Add Vol., Supp., Rev., and Addendum Numbers, if any.) NUREG-2230		
2. TITLE AND SUBTITLE	3. DATE	REPORT PUBLISHED	
	MONTH	YEAR	
Methodology for Modeling Fire Growth and Suppression for Electrical Cabinet Fires in Nuclear Power Plants	June	2020	
ructeal fower frants	4. FIN OR GRANT NUMBER		
5. AUTHOR(S)	6. TYPE OF REI	PORT	
N. Melly (NRC), D. Stroup (NRC), S. Cooper (NRC), A. Lindeman (EPRI),		Technical	
M. Chi-Miranda (Jensen-Hughes), E. Collins (Jensen-Hughes), J. Floyd (Jensen-Hughes), O. Gonzalez (Jensen-Hughes), F. Joglar (Jensen-Hughes), S. Montanez (Jensen-Hughes),			
V. Ontiveros (Jensen-Hughes), J. Williamson (Jensen-Hughes)	7. PERIOD COVERED (Inclusive Dates)		
 PERFORMING ORGANIZATION - NAME AND ADDRESS (If NRC, provide Division, Office or Region, U. S. Nuclear Regul contractor, provide name and mailing address.) 	atory Commission,	and mailing address; if	
9. SPONSORING ORGANIZATION - NAME AND ADDRESS (IFNRC, type "Same as above", if contractor, provide NRC Division Commission, and mailing address.) Division of Risk Analysis Office of Nuclear Regulatory Research U.S. Nuclear Regulatory Commission Washington, DC 20555-0001 Block Transport (IFNRC, type "Same as above", if contractor, provide NRC Division Electric Power Research Instituted Support S		n, U. S. Nuclear Regulatory	
10. SUPPLEMENTARY NOTES			
M.H. Salley, NRC Project Manager			
One aspect of the fire PRA methods and data that has not been explicitly re-analyzed is the fire gr suppression response for electrical cabinets. A simplified model of the average time to peak, stead model the ignition source's heat release rate profile. For manual suppression credit, a dense colled spanning three decades is used to represent the fire brigade and plant suppression response. Recer obtaining more detailed information regarding the fire incidents at nuclear power plants. This data to obtain more details on the fire attributes, timeline, and plant impact. This project specifically recabinet fire incident data in an effort to update the methodology to better reflect the observed oper data review served as the basis for amending portions of the fire modeling and suppression response in the context of fire scenario modeling. The set of electrical cabinet fire events were clainterruptible fire categorization. Interruptible fires are those that have observed ignition, but no significant fire to better allow for early plant personnel suppression actions. Additional mathematical been added to better reflect the scenario characteristics. The results of this research may be implest for a more realistic representation of the scenario progression and suppression end states.	ly state, and de- stion of electrical at research effort a collection has eviewed the averating experien- ase to more accesse fire growth a ssified into eith gnificant grower, the detection nual non-suppo- mented in new	ecay are used to cal ignition sources orts focused on senabled researchers ailable electrical nee. Insights from the curately align with and the suppression ther a growing or th for a period of in-suppression event ression bins have and existing FPRA	
12. KEY WORDS/DESCRIPTORS (List words or phrases that will assist researchers in locating the report.)	TO CONTRACTOR	AILABILITY STATEMENT	
Fire events, Fire growth profile, Fire ignition frequency (FIF), Fire probabilistic risk assessmen		unlimited CURITY CLASSIFICATION	
(FPRA), Manual suppression, Non-suppression probability (NSP)	(This		
		unclassified	
	(This	Report)	

unclassified
15. NUMBER OF PAGES

16. PRICE





OFFICIAL BUSINESS

















NUREG-2230

Methodology for Modeling Fire Growth and Suppression Response of Electrical Cabinet Fires in Nuclear Power Plants

June 2020