

RETURN TO 396-SS

40-8027

SEQUOYAH FUELS CORPORATION

POST OFFICE BOX 25861 • OKLAHOMA CITY, OKLAHOMA 73125

April 30, 1986

CERTIFIED MAIL
RETURN RECEIPT REQUESTED

Donald A. Hensch, P.E., Director
Industrial Waste Division
Industrial and Solid Waste Service
Oklahoma State Department of Health
P. O. Box 53551
Oklahoma City, Oklahoma 73152

Re: Sequoyah Facility
Injection Well Closure
Permit IW 68006

Dear Mr. Hensch:

Enclosed for your file is a revised copy of the Industrial Waste Division Injection Well, Plugging and Abandonment Report, correcting the Site Location to SE $\frac{1}{4}$, SW $\frac{1}{4}$, NE $\frac{1}{4}$, Section 21. The location was incorrectly reported on the original submittal as SW $\frac{1}{4}$, SE $\frac{1}{4}$, NE $\frac{1}{4}$, Section 21.

Also attached is a copy of a letter and Forms 1003 and 1002-A to the Oklahoma Corporation Commission providing additional well abandonment information requested by Mr. Max Manlove. We would appreciate your adding this information to your file on Sequoyah Facility injection well.

Please contact me at your earliest convenience if you have any questions concerning this material.

Sincerely,

John C. Stauter

John C. Stauter, Director
Nuclear Licensing & Regulation

JCS:cr
Enclosures



cc: Oklahoma Corporation Commission
Sequoyah County Clerk
William T. Crow, U.S. NRC

FEE NOT REQUIRED

26927

8605270060 860430
PDR ADOCK 04008027
C PDR

A SUBSIDIARY OF KERR-McGEE CORPORATION

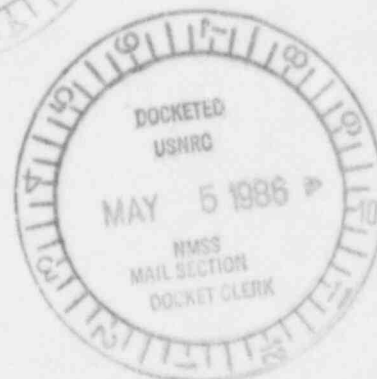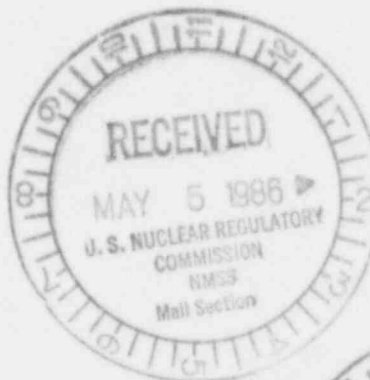

DOCKET NO. 40-8027

CONTROL NO. 26927

DATE OF DOC. 04/30/86

DATE RCVD. 05/05/86

FCUF ☒ PDR ☒

FCAF ☐ LPDR ☒

WM ☐ I&E REF. ☒

WMUP ☐ SAFEGUARDS ☐

FCTC ☐ OTHER ☐

DESCRIPTION:

~~_____~~
~~_____~~
~~_____~~
~~_____~~
~~_____~~

05/06/86 INITIAL CEC



Industrial Waste Division
Oklahoma State Department of Health
P.O. Box 53551
Oklahoma City, Oklahoma 73152
(405) 271-5338

**Injection Well
Plugging and Abandonment Report**

Site: Sequoyah Fuels Corporation Sequoyah Facility Permit No: IW68006


Mailing Address: P.O. Box 610, Gore, Oklahoma 74435 EPA I.D. No: OKD051361183

Site Location: SE $\frac{1}{4}$, SW $\frac{1}{4}$, NE $\frac{1}{4}$, Section 21 (40/30/86)
SW $\frac{1}{4}$, SE $\frac{1}{4}$, NE $\frac{1}{4}$, Section 21 Disposal Well Class: Class 1

Section: 21 Township: 12N Range: 21E

Date of Closure: Started 12/28/85 Completed 12/30/85

Condition of Well: Good



	Casing Size	Cement Mud	Cement or Mud Intervals			
			From	To	Sacks	Manner of Placement
1	Open hole	Class H Cement	3109	1650	1079	Circ & Spot
2	Open hole	Class H Cement	1650	1495	120	CMT Retainer & squeeze
3	7	Class H Cement	1495	Surface	293	Circ & spot
4						
5						

Mud Record: Weight None in well Viscosity Cement Total Depth of the Well 3109 feet

Comment: Well bore - open hole & casing - 100% filled w/cement. Wellhead cut-off in pit, 10' below GL w/steel plate welded on top.

Closure of the above was carried out in accordance with the Rules and Regulations for Industrial Waste Management, ODH Bulletin 0625 and the approved plan.

[Signature] - CSDH 1054 Sequoyah Fuels Corporation

[Signature] Witness Operator

[Signature] Certifying Signatory

Date 1/2/86