

OAKLAND INTERNISTS ASSOCIATES

28625 Northwestern Highway, Suite 200
Southfield, Michigan 48034
Tel. 352-7600

United States
Nuclear Regulatory Commission
Region III
799 Roosevelt Road
Glen Ellyn, Illinois 60137

Dear Dr. Adams:

The following communication represents additional information in response to your letter of 7 December, 1988.


A closeout survey was performed by our physicist (James E. Carey, M.S.) on 12/19/88. The survey of our facility at 23077 Greenfield Road consisted of a visual inspection, a survey of ambient exposure levels with an Eberline E-120 with an HP-190 end-window probe (calibrated 10/17/88). Background readings on the survey meter range from .01 to .03 mr/h. No exposure rates above this background was observed at our facility. No sources were found at visual inspection.

A series of swipe tests were performed throughout our facility (diagram attached*) and the swipes were counted on a Quantum 8 multichannel analyzer +3" x 3" NaI(Tl) well (calibrated 12/23/88). Background in the measuring window (50-500 keV) was 2384 / 10 minutes on 12/23/88. The swipe counts revealed no statistically significant counts above background.

Our physicist certifies that no byproduct material remains at our Greenfield Road facility and no fixed or removable contamination was measured.

*o indicates locations where area surveys were performed and + areas where swipes were performed.

Sincerely,

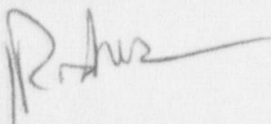

Harold Rodner, M.D.
President
Oakland Internists Associates

8903170211 890215
REG3 LIC30
21-15642-01 PNU

Lawrence
FEE NOT REQUIRED
add up
[Signature]

Rec'd R.I.I.
JAN 19 1989


JAN 19 1989
CONTROL NO. 86731

RECEIVED
JAN 26 1989
1:11 PM

Oakland Internists Associates, P.C.
 The Advance Building
 23077 Greenfield Road Suite 264
 Southfield, Michigan 48075

OFFICE

OFFICE

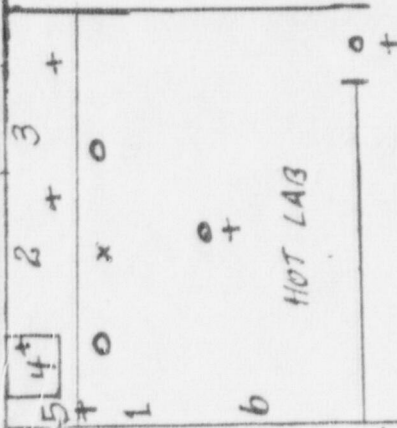

Radioactive Waste (Lead Lined)
 "Dose" Preparation and bricks and lead glass face shield)
 Dose Calibrator (shielded)
 Sink
 G.M. Room Monitor
 Radioactive Package Receipt
 "Dose" Administration Chart

Hallway

Camera
 Console
 Stress Room
 Camera
 Console
 Stress Room

o+

Thyroid Uptake System

o+

Desk

o+

Hallway

o+

Hallway

Elevators

Computer x
 Console x
 o+
 Camera x
 o+
 o+

o+

o+