

**MATERIALS LICENSE**

Pursuant to the Atomic Energy Act of 1954, as amended, the Energy Reorganization Act of 1974 (Public Law 93-438), and Title 10, Code of Federal Regulations, Chapter I, Parts 30, 31, 32, 33, 34, 35, 36, 37, 39, 40, 70 and 71, and in reliance on statements and representations heretofore made by the licensee, a license is hereby issued authorizing the licensee to receive, acquire, possess, and transfer byproduct, source, and special nuclear material designated below; to use such material for the purpose(s) and at the place(s) designated below; to deliver or transfer such material to persons authorized to receive it in accordance with the regulations of the applicable Part(s). This license shall be deemed to contain the conditions specified in Section 183 of the Atomic Energy Act of 1954, as amended, and is subject to all applicable rules, regulations, and orders of the Nuclear Regulatory Commission now or hereafter in effect and to any conditions specified below.

Licensee		In accordance with application dated April 11, 2023,	4. Expiration Date: January 31, 2039
1. Allnex			
2. 252 Heilman Avenue Belmont, WV 26134		3. License No.: 47-35056-01 is renewed in its entirety to read as follows:	5. Docket No.: 030-38632 Reference No.:
6. Byproduct, source, and/or special nuclear material	7. Chemical and/or physical form	8. Maximum amount that licensee may possess at any one time under this license	9. Authorized use
A. Cesium-137	A. Sealed Sources (QSA Globa, Inc., Model CDC.700 or CDC.711M; Texas Nuclear Corporation, Model 57157C)	A. 75 millicuries per source and 75 millicuries total	A. For use in Thermo Process Instruments, L.P. (d/b/a Thermo Fisher Scientific), formerly Texas Nuclear Corporation, Model 5202 fixed gauging devices for control industrial processes.
B. Cesium-137	B. Sealed Sources (QSA Globa, Inc., Model CDC.700 or CDC.711M; Texas Nuclear Corporation, Model 696894)	B. 75 millicuries per source and 135 millicuries total	B. For use in Thermo Process Instruments, L.P. (d/b/a Thermo Fisher Scientific), formerly Texas Nuclear Corporation, Model 5205 fixed gauging devices for controlling industrial processes.


**MATERIALS LICENSE  
SUPPLEMENTARY SHEET**

License No.: 47-35056-01

Docket or Reference No.:  
030-38632

Amendment No. 5  
(Corrected Copy)

6. Byproduct, source, and/or special nuclear material	7. Chemical and/or physical form	8. Maximum amount that licensee may possess at any one time under this license	9. Authorized use
C. Cesium-137	C. Sealed Sources (QSA Global, Inc., Model CDC.700 or CDC.711M; Texas Nuclear Corporation, Model 57157C)	C. 200 millicuries per source and 200 millicuries total	C. For use in Thermo Process Instruments, L.P. (d/b/a Thermo Fisher Scientific), formerly Texas Nuclear Corporation, Model 5206 fixed gauging devices for controlling industrial processes.
D. Cesium-137	D. Sealed Sources (VEGA Americas, Inc. (previously Ohmart/Vega Corporation), Model A-2100, A-2102, A2104, A-57878, A-58804, A-58755, A-60324, A-61234, A-63613)	D. 15 millicuries total	D. For use in VEGA Americas, Inc. (previously Ohmart/Vega Corporation), Model SH-Fx fixed gauging devices for controlling industrial processes.
E. Cesium-137	E. Sealed Sources (Eckert & Ziegler Isotope Products, Model CDC.P4; QSA Global, Model CDC.711M; VEGA Americas, Inc. (previously Ohmart/Vega Corporation), Model A-2100, A-2102, A--2104, A-57878, A-58804, A-58755)	E. 10 millicuries per source and 10 millicuries total	E. For use in VEGA Americas, Inc., Model SHLD1 fixed gauging devices for controlling industrial processes.

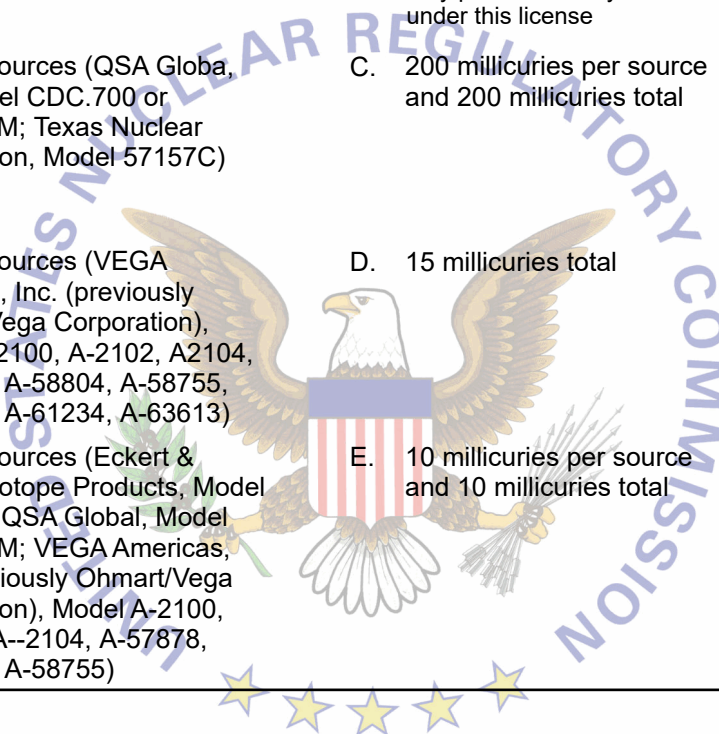

**MATERIALS LICENSE  
SUPPLEMENTARY SHEET**

License No.: 47-35056-01

Docket or Reference No.:  
030-38632Amendment No. 5  
(Corrected Copy)**CONDITIONS**

10. Licensed material shall be used or stored at the licensee's facilities located at 252 Heilman Ave., Belmont, West Virginia, 26134 and may be used at temporary job sites of the licensee anywhere in the United States where the U.S. Nuclear Regulatory Commission maintains jurisdiction for regulating the use of licensed material, including areas of exclusive Federal jurisdiction within Agreement States. If the jurisdiction status of a Federal facility within an Agreement State is unknown, the licensee should contact the Federal agency controlling the job site in question to determine whether the proposed job site is an area of exclusive Federal jurisdiction. Authorization for use of radioactive materials at job sites in Agreement States not under exclusive Federal jurisdiction should be obtained from the appropriate state regulatory agency.
11. Licensed material shall only be used by, or under the supervision of, individuals who have received the training described in the application dated April 11, 2023, and have been designated in writing by the Radiation Safety Officer. The licensee shall maintain records of individuals designated as users for 3 years following the last use of licensed material by the individual.
12. The Radiation Safety Officer (RSO) for this license is Douglas M. Rexroad, II.
13.
  - A. Sealed sources shall be tested for leakage and/or contamination at intervals not to exceed the intervals specified in the certificate of registration issued by the U.S. Nuclear Regulatory Commission under 10 CFR 32.210 or by an Agreement State. In the absence of a registration certificate, sealed sources shall be tested for leakage and/or contamination at intervals not to exceed 6 months, or at such other intervals as specified.
  - B. In the absence of a certificate from a transferor indicating that a leak test has been made within the intervals specified in the certificate of registration issued by the U.S. Nuclear Regulatory Commission under 10 CFR 32.210 or by an Agreement State, prior to the transfer, a sealed source received from another person shall not be put into use until tested and the test results received.
  - C. Sealed sources need not be tested if they contain only hydrogen-3; or they contain only a radioactive gas; or the half-life of the isotope is 30 days or less; or they contain not more than 100 microcuries of beta- and/or gamma-emitting material or not more than 10 microcuries of alpha-emitting material.

**MATERIALS LICENSE  
SUPPLEMENTARY SHEET**

License No.: 47-35056-01

Docket or Reference No.:  
030-38632Amendment No. 5  
(Corrected Copy)

- D. Sealed sources need not be tested if they are in storage and are not being used. However, when they are removed from storage for use or transferred to another person, and have not been tested within the required leak test interval, they shall be tested before use or transfer. No sealed source shall be stored for a period of more than 10 years without being tested for leakage and/or contamination.
- E. The leak test shall be capable of detecting the presence of 185 becquerels (0.005 microcuries) of radioactive material on the test sample. If the test reveals the presence of 185 becquerels (0.005 microcuries) or more of removable contamination, a report shall be filed with the U.S. Nuclear Regulatory Commission in accordance with 10 CFR 30.50(c)(2), and the source shall be removed immediately from service and decontaminated, repaired, or disposed of in accordance with Commission regulations.
- F. Analysis of leak test samples and/or contamination shall be performed by persons specifically licensed by the U.S. Nuclear Regulatory Commission or an Agreement State to perform such services. The licensee is authorized to collect leak test samples but not perform the analysis.
- G. Records of leak test results shall be kept in units of becquerels (microcuries) and shall be maintained for 3 years.
14. The licensee shall conduct a physical inventory every 6 months, or at other intervals approved by the U.S. Nuclear Regulatory Commission, to account for all sealed sources and/or devices received and possessed under the license. Records of inventories shall be maintained for 3 years from the date of each inventory, and shall include the radionuclides, quantities, manufacturer's name and model numbers, and the date of the inventory.
15. Sealed sources containing licensed material shall not be opened or sources removed from source holders by the licensee, except as specifically authorized.
16. A. Each gauge shall be tested for the proper operation of the on-off mechanism (shutter) and indicator, if any, at intervals not to exceed 6 months or at such longer intervals as specified in the certificate of registration issued by the U.S. Nuclear Regulatory Commission pursuant to 10 CFR 32.210 or the equivalent regulations of an Agreement State.

**MATERIALS LICENSE  
SUPPLEMENTARY SHEET**

License No.: 47-35056-01

Docket or Reference No.:  
030-38632Amendment No. 5  
(Corrected Copy)

- B. The periodic on-off mechanism (shutter) and indicator test requirement does not apply to gauges that are stored, not being used, and have the shutter lock mechanism in a locked position. The gauges exempted from this periodic test shall be tested before use. Records of test results shall be maintained for 3 years from the date of each test.
17. The following services shall not be performed by the licensee: (i) relocation, (ii) dismantling, (iii) replacement, (iv) disposal of the sealed source, and (v) non-routine maintenance or repair of components related to the radiological safety of the gauge (i.e., the sealed source, the source holder, source drive mechanism, on-off mechanism (shutter), shutter control, shielding). These services shall be performed only by persons specifically licensed by the U.S. Nuclear Regulatory Commission or an Agreement State to perform such services.
18. (i) Installation, (ii) initial radiation surveys, (iii) removal from service, and (iv) alignment shall be performed only by individuals who have completed the training specified in application dated April 11, 2023, or by persons specifically licensed by the U.S. Nuclear Regulatory Commission or an Agreement State to perform such services.
19. The licensee may initially mount a gauge, if permitted by the certificate of registration issued by the U.S. Nuclear Regulatory Commission or an Agreement State, and under the following conditions:
- A. The gauge must be mounted in accordance with written instructions provided by the manufacturer.
  - B. The gauge must be mounted in a location compatible with the Conditions of Normal Use and Limitations and/or Other Considerations of Use in the certificate of registration issued by the U.S. Nuclear Regulatory Commission or an Agreement State.
  - C. The on-off mechanism (shutter) must be locked in the off position, if applicable, or the source must be otherwise fully shielded.
  - D. The gauge must be received in good conditions (e.g., the package was not damaged).
  - E. The gauge must not require any modification to fit in the proposed location.

**MATERIALS LICENSE  
SUPPLEMENTARY SHEET**

License No.: 47-35056-01

Docket or Reference No.:  
030-38632Amendment No. 5  
(Corrected Copy)

- F. Mounting does not include electrical connection, activation, or operation of the gauge. The source must remain fully shielded, and the gauge may not be used until it is installed and made operational by a person specifically licensed by the U.S. Nuclear Regulatory Commission or an Agreement State to perform such operations.
20. A. The licensee may maintain, repair, or replace device components that are not related to the radiological safety of the device containing licensed material and that do not result in the potential for any portion of the body to come into contact with the primary beam or result in increased radiation levels in accessible areas.
- B. The licensee may not maintain, repair, or replace any of the following device components: (i) the sealed source, (ii) the source holder, (iii) source drive mechanism, (iv) on-off mechanism (shutter), (v) shutter control, (vi) shielding, or (vii) any other component related to the radiological safety of the device, except as provided otherwise by specific condition of this license.
21. Prior to initial use and after installation, relocation, dismantling, alignment, or any other activity involving the source or removal of the shielding, the licensee shall assure that a radiological survey is performed to determine radiation levels in accessible areas around, above, and below the gauge with the shutter open. This survey shall be performed only by persons authorized to perform such services by the U.S. Nuclear Regulatory Commission or an Agreement State.
22. The licensee shall operate each device containing licensed material within the manufacturer's specified temperature and environmental limits such that the shielding and shutter mechanism of the source holder are not compromised.
23. The licensee shall assure that the shutter mechanism of each device containing licensed material is locked in the closed position during periods when a portion of an individual's body may be subject to the direct radiation beam. The licensee shall review and modify, as appropriate, its "lock-out" procedures whenever a new device is obtained to incorporate the device manufacturer's recommendations.
24. Except as specifically provided otherwise in this license, the licensee shall conduct its program in accordance with the statements, representations, and procedures contained in the documents, including any enclosures, listed below. This license condition applies only to those statements, representations, and procedures that are required to be submitted in accordance with the regulations. The U.S. Nuclear Regulatory Commission's regulations shall govern unless the statements, representations, and procedures in the licensee's application and correspondence impose on the licensee requirements that are more restrictive than or in addition to the regulations.

**MATERIALS LICENSE  
SUPPLEMENTARY SHEET**

License No.: 47-35056-01

Docket or Reference No.:  
030-38632

Amendment No. 5  
(Corrected Copy)

- A. Application dated April 11, 2023 [ML23108A261]
- B. Letter dated September 15, 2023 [ML23262A758]



FOR THE U.S. NUCLEAR REGULATORY COMMISSION

Date: January 11, 2024

By: \_\_\_\_\_  
Steven Shaffer  
Region 1