



Constellation Energy Generation, LLC (CEG)
Byron Station
4450 N. German Church Road
Byron, IL 61010-9794
www.constellationenergy.com

September 3, 2026

LTR: BYRON 2026-0059
File: 5A.101
1D.101

United States Nuclear Regulatory Commission
ATTN: Document Control Desk
Washington, DC 20555-0001

Byron Station Unit 2
Renewed Facility Operating License No. NPF-66
NRC Docket No. STN 50-455

Subject: Byron Station Unit 2 Cycle 26 Core Operating Limits Report

In accordance with Technical Specification 5.6.5, "Core Operating Limits Report (COLR)," we are submitting the Unit 2 COLR, Revision 17, for Cycle 26.

Should you have any questions concerning this report, please contact Ms. Zoe Cox, Regulatory Assurance Manager, at (815) 406-2800.

Respectfully,

A handwritten signature in black ink, appearing to read "H. Welt", written over a horizontal line.

Harris Welt
Site Vice President
Byron Generating Station

Attachment: Byron Station Unit 2 Cycle 26, COLR, Revision 17

HW/WH/rf

cc: Regional Administrator – NRC Region III
NRC Senior Resident Inspector – Byron Station

CORE OPERATING LIMITS REPORT (COLR)

FOR

BYRON UNIT 2 CYCLE 26

CONSTELLATION TRACKING ID:

COLR BYRON 2 REVISION 17

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 2 CYCLE 26

1.0 CORE OPERATING LIMITS REPORT

This Core Operating Limits Report (COLR) for Byron Station Unit 2 Cycle 26 has been prepared in accordance with the requirements of Technical Specification 5.6.5 (ITS).

The Technical Specification Safety Limits and Limiting Conditions for Operation (LCOs) affected by this report are listed below:

SL	2.1.1	Reactor Core Safety Limits (SLs)
LCO	3.1.1	SHUTDOWN MARGIN (SDM)
LCO	3.1.3	Moderator Temperature Coefficient (MTC)
LCO	3.1.4	Rod Group Alignment Limits
LCO	3.1.5	Shutdown Bank Insertion Limits
LCO	3.1.6	Control Bank Insertion Limits
LCO	3.1.8	PHYSICS TESTS Exceptions – MODE 2
LCO	3.2.1	Heat Flux Hot Channel Factor ($F_Q(Z)$)
LCO	3.2.2	Nuclear Enthalpy Rise Hot Channel Factor ($F_{N\Delta H}$)
LCO	3.2.3	AXIAL FLUX DIFFERENCE (AFD)
LCO	3.3.1	Reactor Trip System (RTS) Instrumentation
LCO	3.3.9	Boron Dilution Protection System (BDPS)
LCO	3.4.1	Reactor Coolant System (RCS) Pressure, Temperature, and Flow Departure from Nucleate Boiling (DNB) Limits
LCO	3.9.1	Boron Concentration

The portions of the Technical Requirements Manual (TRM) affected by this report are listed below:

TRM TLCO 3.1.b	Boration Flow Paths – Operating
TRM TLCO 3.1.f	Borated Water Sources – Operating
TRM TLCO 3.1.g	Position Indication System – Shutdown
TRM TLCO 3.1.h	Shutdown Margin (SDM) – MODE 1 and MODE 2 with $keff \geq 1.0$
TRM TLCO 3.1.i	Shutdown Margin (SDM) – MODE 5
TRM TLCO 3.1.j	Shutdown and Control Rods
TRM TLCO 3.1.k	Position Indication System – Shutdown (Special Test Exception)

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 2 CYCLE 26

2.0 OPERATING LIMITS

The cycle-specific parameter limits for the specifications listed in Section 1.0 are presented in the following subsections. These limits are applicable for the entire cycle unless otherwise identified. These limits have been developed using the NRC-approved methodologies specified in Technical Specification 5.6.5.

2.1 Reactor Core Safety Limits (SLs) (SL 2.1.1)

2.1.1 In MODES 1 and 2, the combination of Thermal Power, Reactor Coolant System (RCS) highest loop average temperature, and pressurizer pressure shall not exceed the limits specified in Figure 2.1.1.

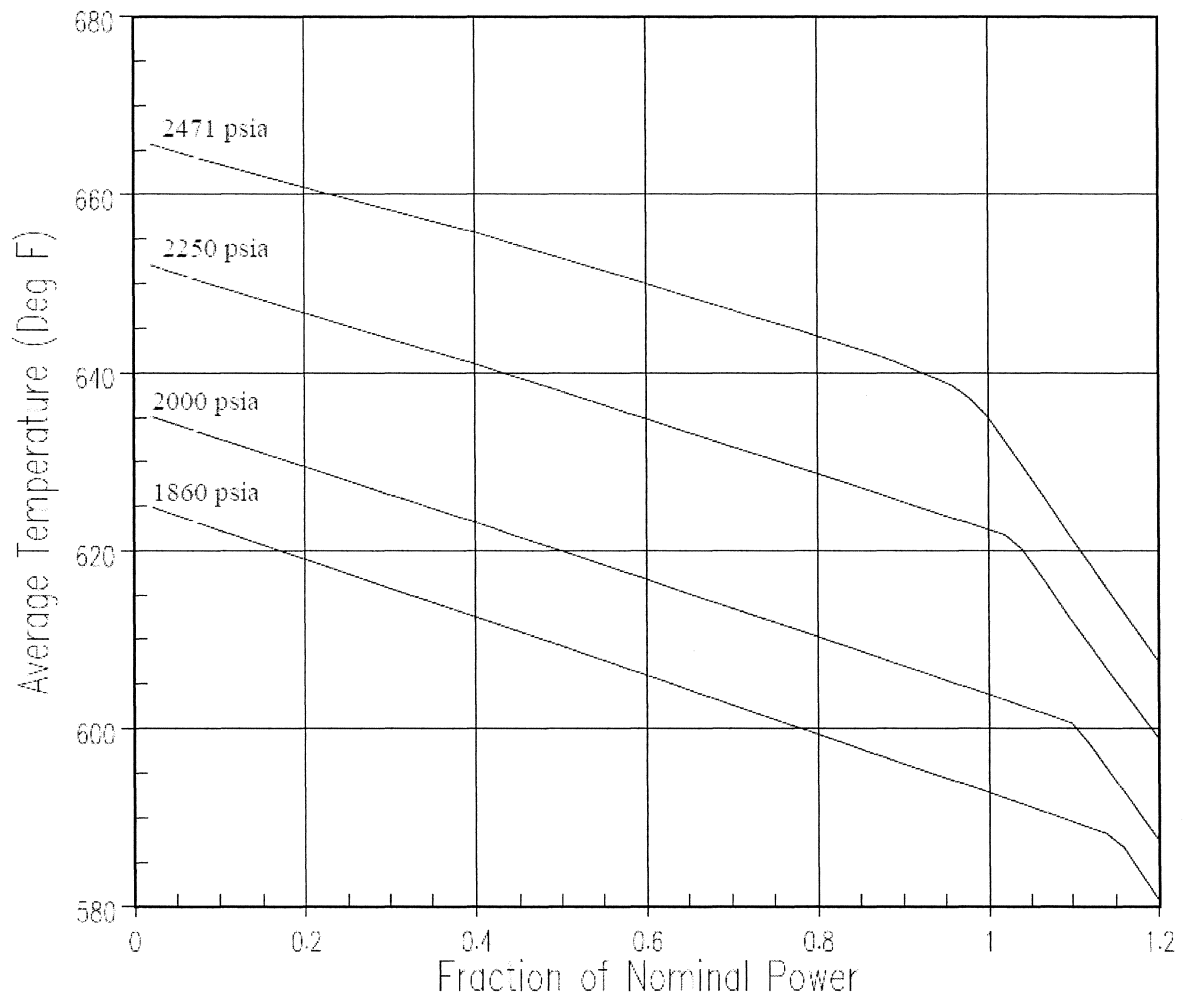


Figure 2.1.1: Reactor Core Limits

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 2 CYCLE 26

2.2 SHUTDOWN MARGIN (SDM)

The SDM limit for MODES 1, 2, 3, and 4 is:

2.2.1 The SDM shall be greater than or equal to 1.3% $\Delta k/k$ (LCOs 3.1.1, 3.1.4, 3.1.5, 3.1.6, 3.1.8, 3.3.9; TRM TLCOs 3.1.b, 3.1.f, 3.1.h, and 3.1.j).

The SDM limit for MODE 5 is:

2.2.2 SDM shall be greater than or equal to 1.3% $\Delta k/k$ (LCO 3.1.1, LCO 3.3.9; TRM TLCOs 3.1.i and 3.1.j).

2.3 Moderator Temperature Coefficient (MTC) (LCO 3.1.3)

The Moderator Temperature Coefficient (MTC) limits are:

2.3.1 The BOL/ARO/HZP-MTC upper limit shall be $+3.943 \times 10^{-5} \Delta k/k/^{\circ}F$.

2.3.2 The EOL/ARO/HFP-MTC lower limit shall be $-4.6 \times 10^{-4} \Delta k/k/^{\circ}F$.

2.3.3 The EOL/ARO/HFP-MTC Surveillance limit at 300 ppm shall be $-3.7 \times 10^{-4} \Delta k/k/^{\circ}F$.

2.3.4 The EOL/ARO/HFP-MTC Surveillance limit at 60 ppm shall be $-4.3 \times 10^{-4} \Delta k/k/^{\circ}F$.

where: BOL stands for Beginning of Cycle Life
ARO stands for All Rods Out
HZP stands for Hot Zero Thermal Power
EOL stands for End of Cycle Life
HFP stands for Hot Full Thermal Power

2.4 Shutdown Bank Insertion Limits (LCO 3.1.5)

2.4.1 All shutdown banks shall be fully withdrawn to at least 224 steps.

2.5 Control Bank Insertion Limits (LCO 3.1.6)

2.5.1 The control banks, with Bank A greater than or equal to 224 steps, shall be limited in physical insertion as shown in Figure 2.5.1.

2.5.2 Each control bank shall be considered fully withdrawn from the core at greater than or equal to 224 steps.


2.5.3 The control banks shall be operated in sequence by withdrawal of Bank A, Bank B, Bank C and Bank D. The control banks shall be sequenced in reverse order upon insertion.

2.5.4 Each control bank not fully withdrawn from the core shall be operated with the following overlap limits as a function of park position:

Park Position (step)	Overlap Limit (step)
228	113

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 2 CYCLE 26

Figure 2.5.1:
Control Bank Insertion Limits Versus Percent Rated Thermal Power

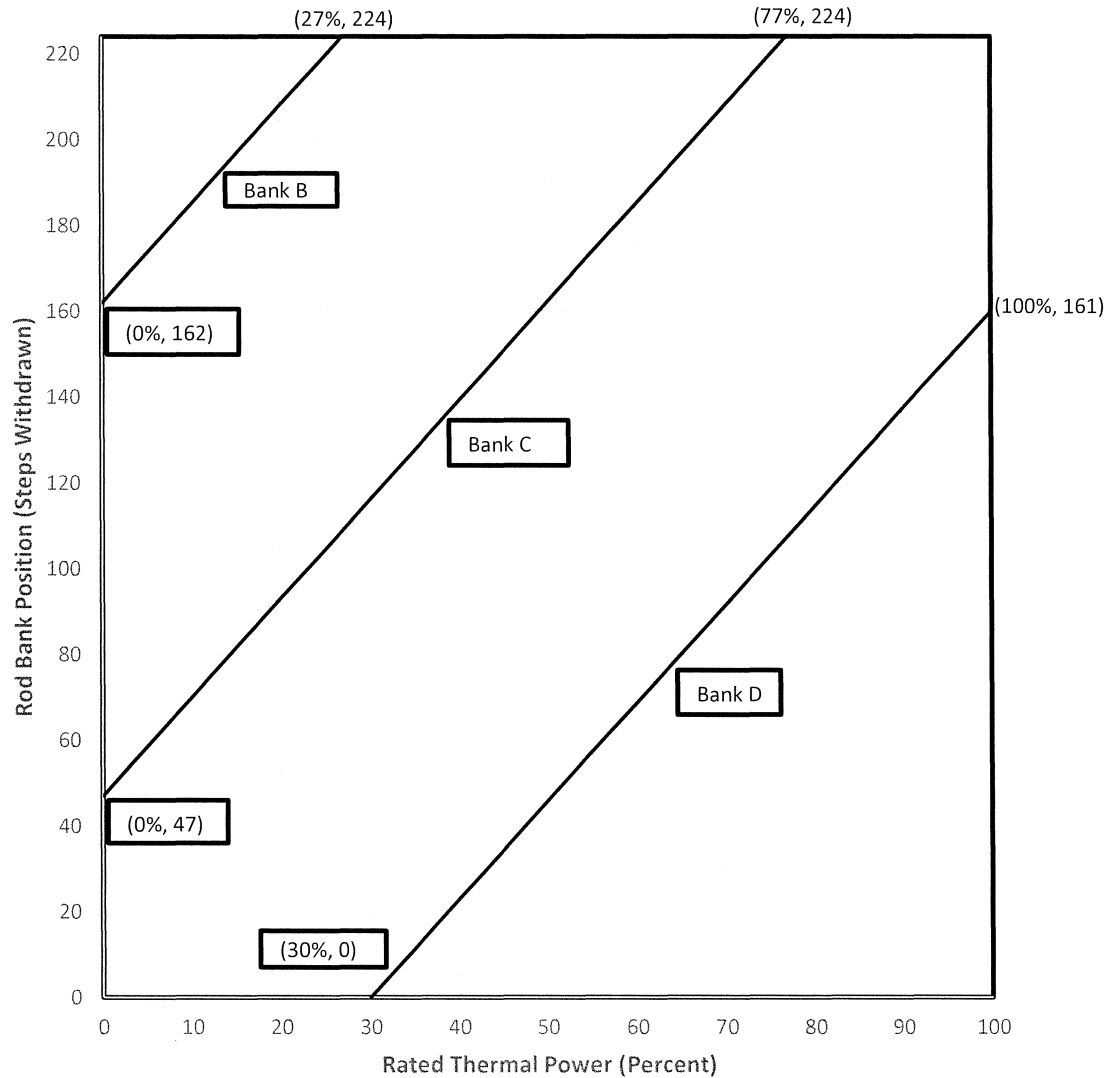

The bank position is given as follows:

Control Bank D: $(161/70) * (P-100) + 161$ (for $30 \leq P \leq 100$)

Where P is defined as the core power (in percent).

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 2 CYCLE 26

2.6 Heat Flux Hot Channel Factor ($F_Q(Z)$) (LCO 3.2.1)

2.6.1 Total Peaking Factor:

$$F_Q(Z) \leq \frac{F_Q^{RTP}}{0.5} \times K(Z) \quad \text{for } P \leq 0.5$$


$$F_Q(Z) \leq \frac{F_Q^{RTP}}{P} \times K(Z) \quad \text{for } P > 0.5$$

where: P = the ratio of THERMAL POWER to RATED THERMAL POWER

$$F_Q^{RTP} = 2.60$$

$K(Z)$ is provided in Figure 2.6.1.

Figure 2.6.1
 $K(Z)$ - Normalized $F_Q(Z)$ as a Function of Core Height

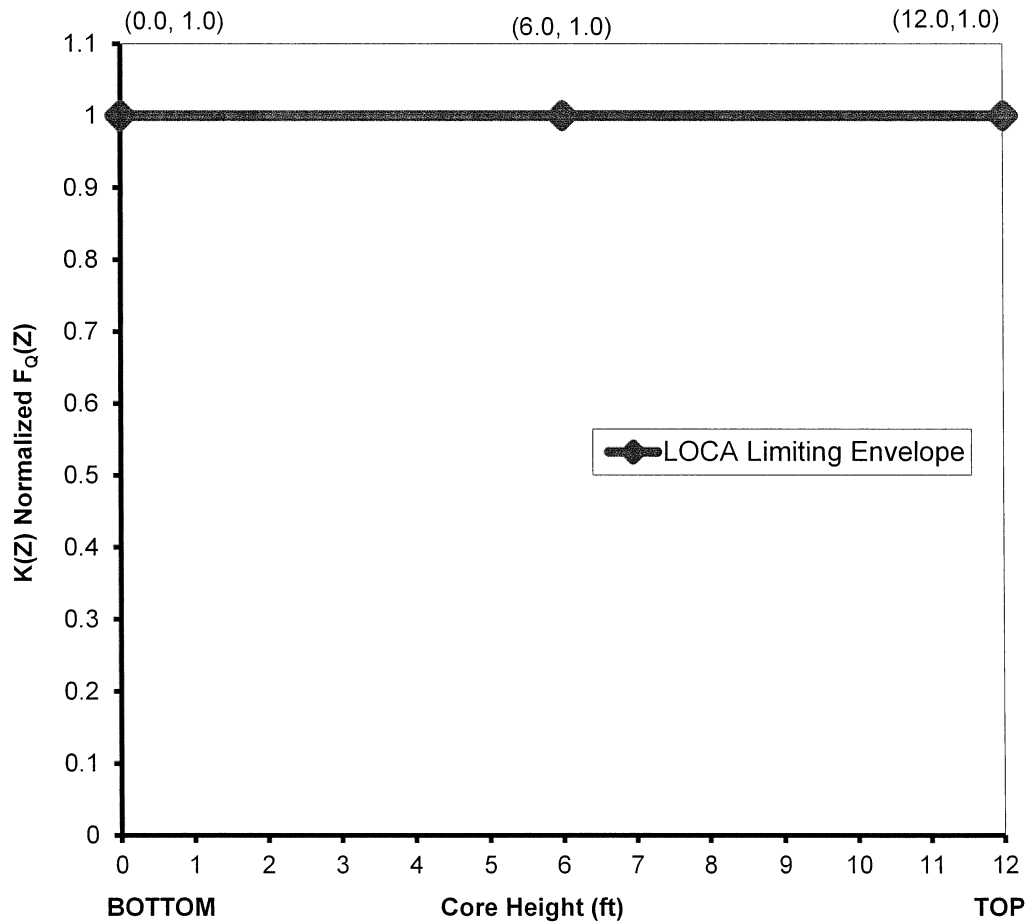

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 2 CYCLE 26

2.6.2 W(Z) Values:

W(Z) is provided as:

- 1) Table 2.6.2.a are the normal operation W(Z) values that correspond to the NORMAL AXIAL FLUX DIFFERENCE (AFD) Acceptable Operation Limits provided in Figure 2.8.1.a. The Normal AFD Acceptable Operation Limits may be invoked at any time and must be used with the corresponding W(Z) values.
- 2) Table 2.6.2.b are the Expanded normal operation W(Z) values that correspond to the EXPANDED AXIAL FLUX DIFFERENCE (AFD) Acceptable Operation Limits provided in Figure 2.8.1.b. The Expanded AFD Acceptable Operation Limits may be invoked at any time and must be used with the corresponding W(Z) values.

Table 2.6.2.c shows the $F_Q^C(Z)$ penalty factors that are greater than 2% per the allowable surveillance frequency. These values shall be used to increase the $F_Q^W(Z)$ as per Surveillance Requirement 3.2.1.2. A 2% penalty factor shall be used at all cycle burnups that are outside the range of Table 2.6.2.c.

Table 2.6.2.d contains the required operating space reduction values for THERMAL POWER and AXIAL FLUX DIFFERENCE (AFD) when $F_Q^W(Z)$ is not within its limits. These values are used in conjunction with Technical Specification LCO 3.2.1 Required Actions B.1 and B.2.

2.6.3 Uncertainty:

The uncertainty, U_{FQ} , to be applied to the Heat Flux Hot Channel Factor $F_Q(Z)$ shall be calculated by the following formula

$$U_{FQ} = U_{qu} \bullet U_e$$

where:

U_{qu} = Base F_Q measurement uncertainty = 1.05

U_e = Engineering uncertainty factor = 1.03

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 2 CYCLE 26

Table 2.6.2.a				
W(Z) versus Core Height for Normal AFD Acceptable Operation Limits in Figure 2.8.1.a (Top and Bottom 8% Excluded per Byron SR 3.2.1.2 Bases)				
Height (feet)	150 MWD/MTU	5000 MWD/MTU	14000 MWD/MTU	20000 MWD/MTU
0.00 (core bottom)	1.2917	1.3662	1.2389	1.1775
0.20	1.2835	1.3548	1.2326	1.1688
0.40	1.2830	1.3504	1.2384	1.1746
0.60	1.2868	1.3503	1.2453	1.1818
0.80	1.2956	1.3538	1.2593	1.1978
1.00	1.2943	1.3467	1.2632	1.2041
1.20	1.2837	1.3318	1.2567	1.1990
1.40	1.2688	1.3127	1.2463	1.1899
1.60	1.2533	1.2924	1.2358	1.1815
1.80	1.2365	1.2706	1.2243	1.1725
2.00	1.2182	1.2469	1.2114	1.1625
2.20	1.1988	1.2236	1.1975	1.1518
2.40	1.1792	1.2024	1.1832	1.1408
2.60	1.1597	1.1810	1.1689	1.1301
2.80	1.1409	1.1601	1.1539	1.1182
3.00	1.1277	1.1403	1.1422	1.1136
3.20	1.1224	1.1269	1.1380	1.1151
3.40	1.1216	1.1232	1.1381	1.1259
3.60	1.1199	1.1221	1.1383	1.1383
3.80	1.1195	1.1210	1.1426	1.1506
4.00	1.1194	1.1196	1.1485	1.1625
4.20	1.1185	1.1175	1.1532	1.1736
4.40	1.1175	1.1150	1.1574	1.1837
4.60	1.1171	1.1128	1.1608	1.1925
4.80	1.1164	1.1104	1.1631	1.1995
5.00	1.1151	1.1087	1.1644	1.2058
5.20	1.1135	1.1077	1.1644	1.2119
5.40	1.1132	1.1068	1.1632	1.2164
5.60	1.1157	1.1075	1.1614	1.2183
5.80	1.1199	1.1095	1.1610	1.2216
6.00	1.1296	1.1134	1.1649	1.2285
6.20	1.1449	1.1182	1.1767	1.2368
6.40	1.1588	1.1216	1.1866	1.2426
6.60	1.1716	1.1265	1.1964	1.2468
6.80	1.1829	1.1339	1.2048	1.2517
7.00	1.1926	1.1430	1.2108	1.2557
7.20	1.2005	1.1527	1.2148	1.2568
7.40	1.2065	1.1615	1.2164	1.2555
7.60	1.2106	1.1691	1.2156	1.2518
7.80	1.2114	1.1754	1.2128	1.2456
8.00	1.2136	1.1802	1.2068	1.2372
8.20	1.2214	1.1838	1.2004	1.2267
8.40	1.2275	1.1862	1.1988	1.2146
8.60	1.2365	1.1866	1.1967	1.2041
8.80	1.2449	1.1909	1.1995	1.1994
9.00	1.2513	1.2057	1.2105	1.1958
9.20	1.2543	1.2281	1.2233	1.1929
9.40	1.2518	1.2544	1.2379	1.2012
9.60	1.2592	1.2829	1.2478	1.2064
9.80	1.2815	1.3109	1.2568	1.2091
10.00	1.3086	1.3398	1.2634	1.2139
10.20	1.3314	1.3713	1.2644	1.2231
10.40	1.3494	1.4016	1.2658	1.2367
10.60	1.3637	1.4283	1.2671	1.2484
10.80	1.3771	1.4507	1.2686	1.2567
11.00	1.3949	1.4740	1.2700	1.2618
11.20	1.3961	1.4872	1.2632	1.2565
11.40	1.3284	1.4646	1.2412	1.2329
11.60	1.2675	1.4319	1.2207	1.2028
11.80	1.2635	1.4137	1.2016	1.1792
12.00 (core top)	1.2453	1.4187	1.1750	1.1459

Note: W(Z) values at 20000 MWD/MTU may be applied to cycle burnups greater than 20000 MWD/MTU to prevent W(Z) function extrapolation

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 2 CYCLE 26

Table 2.6.2.b				
W(Z) versus Core Height for Expanded AFD Acceptable Operation Limits in Figure 2.8.1.b (Top and Bottom 8% Excluded per Byron SR 3.2.1.2 Bases)				
Height (feet)	150 MWD/MTU	5000 MWD/MTU	14000 MWD/MTU	20000 MWD/MTU
0.00 (core bottom)	1.3849	1.4964	1.3316	1.2728
0.20	1.3750	1.4816	1.3239	1.2636
0.40	1.3744	1.4745	1.3290	1.2653
0.60	1.3761	1.4724	1.3354	1.2732
0.80	1.3841	1.4735	1.3492	1.2889
1.00	1.3810	1.4632	1.3520	1.2938
1.20	1.3684	1.4447	1.3439	1.2867
1.40	1.3510	1.4215	1.3316	1.2753
1.60	1.3329	1.3969	1.3189	1.2643
1.80	1.3132	1.3704	1.3050	1.2525
2.00	1.2918	1.3420	1.2894	1.2392
2.20	1.2692	1.3126	1.2725	1.2250
2.40	1.2459	1.2829	1.2550	1.2101
2.60	1.2224	1.2534	1.2371	1.1946
2.80	1.2036	1.2265	1.2187	1.1849
3.00	1.1926	1.2070	1.2017	1.1816
3.20	1.1865	1.1942	1.1901	1.1813
3.40	1.1806	1.1845	1.1844	1.1837
3.60	1.1760	1.1785	1.1800	1.1930
3.80	1.1727	1.1724	1.1807	1.2025
4.00	1.1695	1.1665	1.1833	1.2107
4.20	1.1654	1.1619	1.1846	1.2181
4.40	1.1607	1.1575	1.1853	1.2240
4.60	1.1553	1.1524	1.1849	1.2284
4.80	1.1492	1.1464	1.1834	1.2310
5.00	1.1423	1.1397	1.1807	1.2318
5.20	1.1349	1.1324	1.1765	1.2300
5.40	1.1267	1.1250	1.1710	1.2274
5.60	1.1183	1.1174	1.1662	1.2312
5.80	1.1191	1.1121	1.1664	1.2368
6.00	1.1300	1.1130	1.1733	1.2438
6.20	1.1448	1.1184	1.1837	1.2517
6.40	1.1587	1.1227	1.1926	1.2568
6.60	1.1713	1.1302	1.2012	1.2600
6.80	1.1825	1.1385	1.2082	1.2638
7.00	1.1921	1.1470	1.2128	1.2667
7.20	1.1999	1.1564	1.2152	1.2665
7.40	1.2058	1.1648	1.2152	1.2637
7.60	1.2098	1.1720	1.2129	1.2585
7.80	1.2106	1.1778	1.2085	1.2507
8.00	1.2127	1.1822	1.2010	1.2407
8.20	1.2206	1.1853	1.1930	1.2285
8.40	1.2266	1.1870	1.1903	1.2147
8.60	1.2356	1.1867	1.1857	1.2032
8.80	1.2448	1.1910	1.1900	1.1968
9.00	1.2531	1.2063	1.2022	1.1929
9.20	1.2591	1.2286	1.2142	1.1924
9.40	1.2593	1.2550	1.2283	1.2015
9.60	1.2624	1.2833	1.2378	1.2069
9.80	1.2812	1.3113	1.2464	1.2096
10.00	1.3092	1.3401	1.2522	1.2146
10.20	1.3316	1.3713	1.2531	1.2239
10.40	1.3494	1.4013	1.2596	1.2375
10.60	1.3636	1.4278	1.2711	1.2492
10.80	1.3768	1.4500	1.2805	1.2577
11.00	1.3944	1.4730	1.2875	1.2627
11.20	1.3955	1.4859	1.2863	1.2575
11.40	1.3276	1.4631	1.2655	1.2339
11.60	1.2667	1.4303	1.2391	1.2038
11.80	1.2625	1.4119	1.2132	1.1802
12.00 (core top)	1.2441	1.4166	1.1768	1.1469

Note: W(Z) values at 20000 MWD/MTU may be applied to cycle burnups greater than 20000 MWD/MTU to prevent W(Z) function extrapolation

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 2 CYCLE 26

Table 2.6.2.c Penalty Factors in Excess of 2%	
Cycle Burnup (MWD/MTU)	Penalty Factor $F_Q^C(Z)$
0	1.0200
150	1.0500
400	1.0700
1100	1.0700
2200	1.0350
3700	1.0350
4144	1.0200
5919	1.0200
6100	1.0250
7000	1.0550
7700	1.0550
8600	1.0350
9000	1.0300
10000	1.0300
10579	1.0200
18345	1.0200
18500	1.0300
18800	1.0400
22338	1.0400
24061	1.0400

Notes:

Linear interpolation is adequate for intermediate cycle burnups.

All cycle burnups outside the range of Table 2.6.2.c shall use a 2% penalty factor for compliance with the 3.2.1.2 Surveillance Requirements.

Table 2.6.2.d Required Operating Space Reduction When $F_Q^W(Z)$ Exceeds Its Limits			
Required $F_Q^W(Z)$ Margin Improvement	THERMAL POWER Reduction (% RTP)	Negative AFD Band Reduction (% AFD)	Positive AFD Band Reduction (% AFD)
$\leq 1\%$	$\geq 3\%$	$\geq 1\%$	$\geq 1\%$
$> 1\%$ AND $\leq 2\%$	$\geq 6\%$	$\geq 2\%$	$\geq 2\%$
$> 2\%$ AND $\leq 3\%$	$\geq 9\%$	$\geq 3\%$	$\geq 3\%$
$> 3\%$	$\geq 50\%$	N/A	N/A

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 2 CYCLE 26

2.7 Nuclear Enthalpy Rise Hot Channel Factor ($F_{\Delta H}^{N}$) (LCO 3.2.2)

2.7.1 $F_{\Delta H}^{N} \leq F_{\Delta H}^{RTP} [1.0 + PF_{\Delta H}(1.0 - P)]$

where: P = the ratio of THERMAL POWER to RATED THERMAL POWER (RTP)
 $F_{\Delta H}^{RTP} = 1.63$
 $PF_{\Delta H} = 0.3$

2.7.2 Uncertainty:

The uncertainty, $U_{F_{\Delta H}}$, to be applied to the Nuclear Enthalpy Rise Hot Channel Factor $F_{\Delta H}^{N}$ shall be calculated by the following formula:

$$U_{F_{\Delta H}} = U_{F_{\Delta H}m}$$

where:

$$U_{F_{\Delta H}m} = \text{Base } F_{\Delta H}^{N} \text{ measurement uncertainty} = 1.04$$

2.8 AXIAL FLUX DIFFERENCE (AFD) (LCO 3.2.3)


2.8.1 The AXIAL FLUX DIFFERENCE (AFD) Acceptable Operation Limits are provided in the Figures described below.

- a) Figure 2.8.1.a is the Normal AFD Acceptable Operation Limits associated with the W(Z) values in Table 2.6.2.a. These limits may be modified in accordance with Table 2.6.2.d if LCO 3.2.1 Required Actions B.1 and B.2 must be taken. Prior to changing to Figure 2.8.1.a, confirm that the plant is within the specified AFD envelope.
- b) Figure 2.8.1.b is the Expanded AFD Acceptable Operation Limits associated with the W(Z) values in Table 2.6.2.b. These limits may be modified in accordance with Table 2.6.2.d if LCO 3.2.1 Required Actions B.1 and B.2 must be taken.

2.9 DELETED


CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 2 CYCLE 26

Figure 2.8.1.a:
Normal Axial Flux Difference Limits
as a Function of Rated Thermal Power

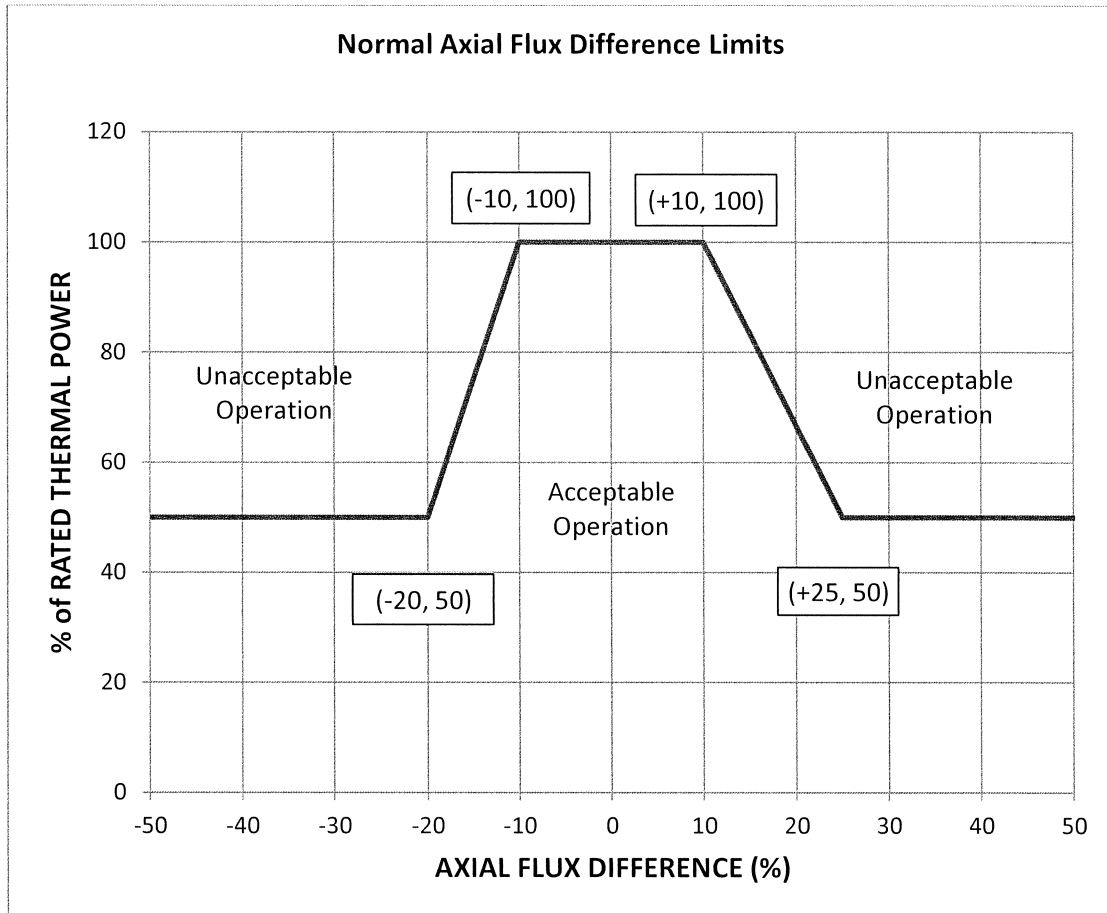

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 2 CYCLE 26

Figure 2.8.1.b:
Expanded Axial Flux Difference Limits
as a Function of Rated Thermal Power

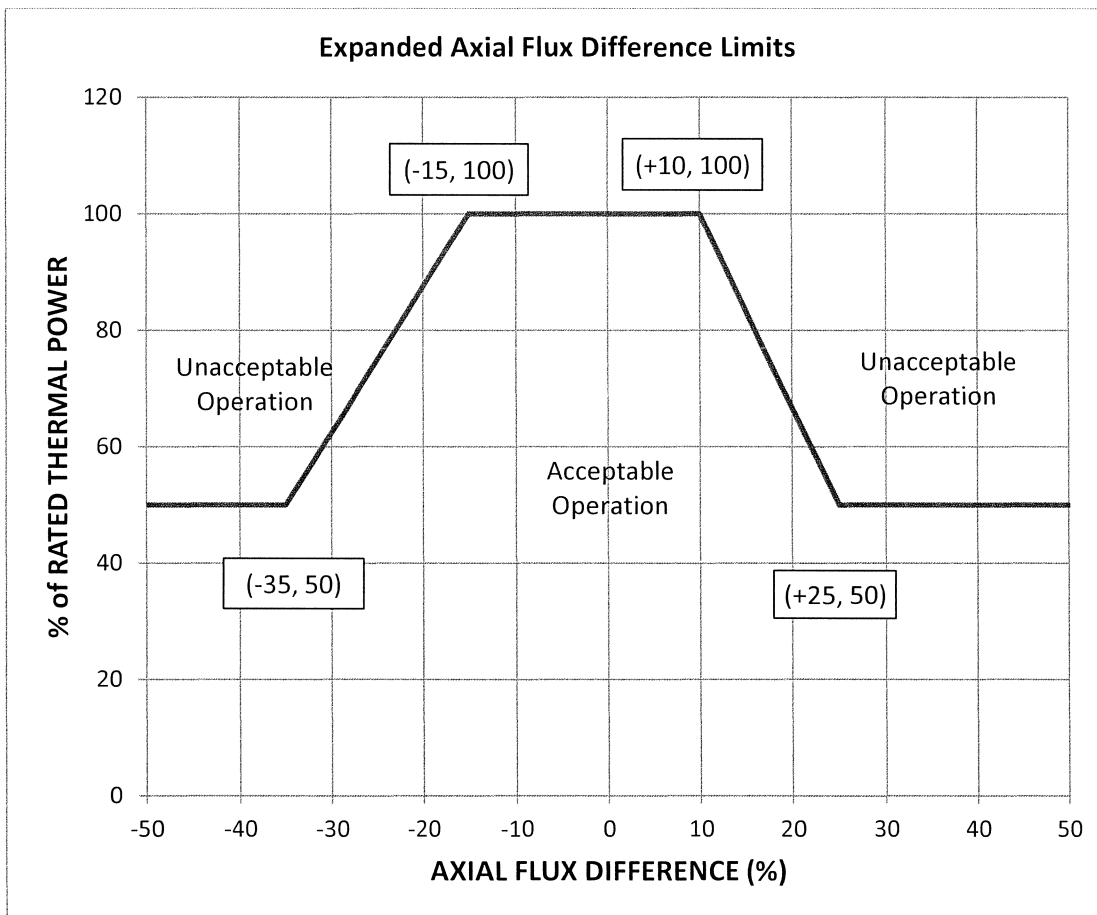

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 2 CYCLE 26

- 2.10 Reactor Trip System (RTS) Instrumentation (LCO 3.3.1) - Overtemperature ΔT Setpoint Parameter Values
- 2.10.1 The Overtemperature ΔT reactor trip setpoint K_1 shall be equal to 1.325.
 - 2.10.2 The Overtemperature ΔT reactor trip setpoint T_{avg} coefficient K_2 shall be equal to 0.0297 / °F.
 - 2.10.3 The Overtemperature ΔT reactor trip setpoint pressure coefficient K_3 shall be equal to 0.00135 / psi.
 - 2.10.4 The nominal T_{avg} at RTP (indicated) T' shall be less than or equal to 583.5 °F.
 - 2.10.5 The nominal RCS operating pressure (indicated) P' shall be equal to 2235 psig.
 - 2.10.6 The measured reactor vessel ΔT lead/lag time constant τ_1 shall be equal to 8 sec.
 - 2.10.7 The measured reactor vessel ΔT lead/lag time constant τ_2 shall be equal to 3 sec.
 - 2.10.8 The measured reactor vessel ΔT lag time constant τ_3 shall be less than or equal to 2 sec.
 - 2.10.9 The measured reactor vessel average temperature lead/lag time constant τ_4 shall be equal to 33 sec.
 - 2.10.10 The measured reactor vessel average temperature lead/lag time constant τ_5 shall be equal to 4 sec.
 - 2.10.11 The measured reactor vessel average temperature lag time constant τ_6 shall be less than or equal to 2 sec.
 - 2.10.12 The $f_1(\Delta I)$ "positive" breakpoint shall be +10% ΔI .
 - 2.10.13 The $f_1(\Delta I)$ "negative" breakpoint shall be -18% ΔI .
 - 2.10.14 The $f_1(\Delta I)$ "positive" slope shall be +3.47% / % ΔI .
 - 2.10.15 The $f_1(\Delta I)$ "negative" slope shall be -2.61% / % ΔI .

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 2 CYCLE 26

- 2.11 Reactor Trip System (RTS) Instrumentation (LCO 3.3.1) - Overpower ΔT Setpoint Parameter Values
- 2.11.1 The Overpower ΔT reactor trip setpoint K_4 shall be equal to 1.072.
 - 2.11.2 The Overpower ΔT reactor trip setpoint T_{avg} rate/lag coefficient K_5 shall be equal to 0.02 / °F for increasing T_{avg} .
 - 2.11.3 The Overpower ΔT reactor trip setpoint T_{avg} rate/lag coefficient K_5 shall be equal to 0 / °F for decreasing T_{avg} .
 - 2.11.4 The Overpower ΔT reactor trip setpoint T_{avg} heatup coefficient K_6 shall be equal to 0.00245 / °F when $T > T''$.
 - 2.11.5 The Overpower ΔT reactor trip setpoint T_{avg} heatup coefficient K_6 shall be equal to 0 / °F when $T \leq T''$.
 - 2.11.6 The nominal T_{avg} at RTP (indicated) T'' shall be less than or equal to 583.5 °F.
 - 2.11.7 The measured reactor vessel ΔT lead/lag time constant τ_1 shall be equal to 8 sec.
 - 2.11.8 The measured reactor vessel ΔT lead/lag time constant τ_2 shall be equal to 3 sec.
 - 2.11.9 The measured reactor vessel ΔT lag time constant τ_3 shall be less than or equal to 2 sec.
 - 2.11.10 The measured reactor vessel average temperature lag time constant τ_6 shall be less than or equal to 2 sec.
 - 2.11.11 The measured reactor vessel average temperature rate/lag time constant τ_7 shall be equal to 10 sec.
 - 2.11.12 The $f_2(\Delta I)$ "positive" breakpoint shall be 0 for all ΔI .
 - 2.11.13 The $f_2(\Delta I)$ "negative" breakpoint shall be 0 for all ΔI .
 - 2.11.14 The $f_2(\Delta I)$ "positive" slope shall be 0 for all ΔI .
 - 2.11.15 The $f_2(\Delta I)$ "negative" slope shall be 0 for all ΔI .

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 2 CYCLE 26

2.12 Reactor Coolant System (RCS) Pressure, Temperature, and Flow Departure from Nucleate Boiling (DNB) Limits (LCO 3.4.1)

2.12.1 The pressurizer pressure shall be greater than or equal to 2209 psig.

2.12.2 The RCS average temperature (T_{avg}) shall be less than or equal to 588.6 °F.

2.12.3 The RCS total flow rate shall be greater than or equal to 386,000 gpm.

2.13 Boron Concentration

2.13.1 The refueling boron concentration shall be greater than or equal to the applicable value given in the Table below (LCO 3.9.1). The reported "prior to initial criticality" value also bounds the end-of-cycle requirements for the previous cycle.

2.13.2 To maintain $keff \leq 0.987$ with all shutdown and control rods fully withdrawn in MODES 3, 4, or 5 (TRM TLCO 3.1.g Required Action B.2 and TRM TLCO 3.1.k.2), the Reactor Coolant System boron concentration shall be greater than or equal to the applicable value given in the Table below.

COLR Section	Conditions	Boron Concentration (ppm)
2.13.1	a) prior to initial criticality	1718
	b) for cycle burnups ≥ 0 MWD/MTU and < 16000 MWD/MTU	1854
	c) for cycle burnups $\geq 16,000$ MWD/MTU	1421
2.13.2	a) prior to initial criticality	1770
	b) for cycle burnups ≥ 0 MWD/MTU and < 16000 MWD/MTU	2078
	c) for cycle burnups ≥ 16000 MWD/MTU	1560