

Enclosure A

**{Calvert Cliffs Nuclear Power Plant
Unit 3}**

**Summary Explanation
of
Emergency Action Levels**

1.0 INTRODUCTION

On October 8, 2003, the Nuclear Regulatory Commission (NRC) issued Regulatory Issue Summary (RIS) 2003-18, "Use of NEI 99-01, Methodology for Development of Emergency Action Levels" as guidance in developing or changing a standard emergency or action level scheme. NEI 99-01, "Methodology for Development of Emergency Action Levels" (Revision 4, January 2003), represents the latest Emergency Action Level (EAL) methodology endorsed by the NRC. Revision 5 was submitted to the NRC for review and endorsement in January 2008. This revision included the resolution of numerous frequently asked questions (FAQs), incorporation of NRC Bulletin 2005-02, changes from industry experience and good practices, and cleanup of editorial typographical errors.

RIS 2003-18 and its two supplements provide guidance on information to be included for EAL submittals to the NRC. The following information is contained in this submittal package:

- Enclosure A: Summary Explanation of Emergency Action Levels
- Enclosure B: EAL Comparisons and Technical Bases For Changes
 - Attachment 1, Description of Changes and Technical Basis
 - Attachment 2, EAL Comparison Table
- Enclosure C: EAL Technical Bases Manual
- Enclosure D: State/Local Government Agreement Documentation

An enclosure providing a list of supporting technical information as recommended by the RIS is not provided separately with this EAL submittal package. The information applicable to this enclosure is referenced as part of the COL application.

This enclosure (Enclosure A) provides a general explanation of the considerations applicable to the {Calvert Cliffs Nuclear Power Plant (CCNPP) Unit 3} EALs and an outline of the contents in this submittal package.

2.0 DISCUSSION

An initial set of Emergency Action Levels (EALs) for the {CCNPP Unit 3}, a U.S. Evolutionary Power Reactor (U.S. EPR) has been developed. This initial set of EALs is based on NEI 99-01 Rev 4, with appropriate changes added to include industry lessons learned and improvements as documented in the submitted version of NEI 99-01 Rev 5 and plant design characteristics unique to the U.S. EPR. The intent of this initial set of EALs is to provide consistent emergency classifications internally and between the U.S. EPR plants to the greatest extent possible, limited only by plant specific design or location.

2.1 EAL Cross References

As discussed above, the EALs are primarily based on NEI 99-01 Rev 5. However, the addition and deletion of Initiating Conditions (ICs) and EALs since endorsement of the original guidance document has led to an inconsistent sequencing of the identification codes. To correct this for human factors consideration, the IC and EAL sequence has been set up to provide a consistent code progression associated with each recognition category sub- group. Attachment 1 of Enclosure B provides cross reference tables for simple association of the NEI and {CCNPP Unit 3} IC identification codes.

2.1 Differences and Deviations

RIS 2003-18, Supplement 1, "Use of Nuclear Energy Institute (NEI) 99-01, Methodology for Development of Emergency Action Levels," was issued by the NRC on July 13, 2004. The RIS included definitions of what is considered an EAL difference and deviation.

A difference is where the site specific EAL, as compared to the basis scheme guidance, differs in wording but agrees in meaning and intent such that classification of the event would be the same.

A deviation is where the site specific EAL, as compared to the basis scheme guidance, differs in wording and is altered in meaning or intent such that classification of the event could be different.

An EAL comparison table is given in Attachment 1 of Enclosure B to provide simple method for contrasting and assessing the differences and deviations between the {CCNPP Unit 3} and NEI EAL sets.

Any {CCNPP Unit 3} EAL (or IC, Fuel Product Barrier (FPB) threshold value or bases statement) that has been evaluated as not meeting the meaning and intent of the NEI 99-01 Rev 4 and Rev 5 guidelines are identified as deviations and are listed as such in Attachment 1 of Enclosure B. The basis for each deviation has been documented in the technical evaluation section to describe the rationale for not adopting the specific NEI guidance wording. Deviations in this evaluation have been separated to include comparisons with the endorsed NEI 99-01 Rev 4 version and the submitted Rev 5 version. The deviations identified and presented in this submittal provide justification that the proposed EAL revisions in aggregate do not constitute a decrease in effectiveness and alternative methods, where appropriate, are in place to ensure the intent of the NEI 99-01 EAL is maintained. The proposed EALs will continue to satisfy the criteria of Appendix E to 10 CFR Part 50 as well as 10 CFR 50.47(b).

An EAL comparison table, Attachment 2 of Enclosure B, is provided in the format given below to allow easy comparison between the wording for NEI 99-01 Rev 4 and Rev 5 against the {CCNPP Unit 3} EALs:

NEI 99-01, Rev 4	NEI 99-01, Rev 5	CCNPP U3 EALs	Difference/Deviation
EAL Identifier:	EAL Identifier:	EAL Identifier:	Rev 4/Rev 5 Differences:
Initiating Condition:	Initiating Condition:	Initiating Condition:	Rev 4/Rev 5 Deviations:
Mode Applicability:	Mode Applicability:	Mode Applicability:	
EAL(s):	EAL(s):	EAL(s):	

RIS 2003-18, Supplement 2, “Use of Nuclear Energy Institute (NEI) 99-01, Methodology for Development of Emergency Action Levels,” was issued by the NRC on December 12, 2005. This RIS included expanded clarification on differences and deviations, as well as administrative changes that are neither differences nor deviations. Examples of global differences and administrative changes utilized in the {CCNPP Unit 3} EALs include the following:

- Use of a different numbering scheme than the NEI 99-01 scheme without changing the intent of the overall EAL scheme.
- Transfer of information from the basis section into the actual EAL that does not change the intent of the EAL.
- Use of synonymous wording.
- EAL format written to conform to site specific writers guides.
- Use of the phrase “Unusual Event” versus “Notification of Unusual Event” to sustain common terminology.

2.3 Operational Modes

The {CCNPP Unit 3} operational modes are contained in the EAL Technical Bases Manual provided in Enclosure C. Operational mode values are as follows:

Mode	Reactivity Condition, K_{eff}	% Rated Thermal Power*	Average Reactor Coolant Temperature
1) Power Operation	≥ 0.99	$> 5\%$	N/A
2) Startup	≥ 0.99	$\leq 5\%$	N/A
3) Hot Standby	< 0.99	N/A	$\geq 350^\circ \text{ F}$
4) Hot Shutdown	< 0.99	N/A	$350^\circ \text{ F} > T_{AVG} > 200^\circ \text{ F}$
5) Cold Shutdown	< 0.99	N/A	$\leq 200^\circ \text{ F}$
6) Refueling	One or more vessel head closure bolts less than fully tensioned.		
D) Defueled	All reactor fuel removed from reactor pressure vessel (full core off load during refueling or extended outage).		

* Excluding decay heat.

2.4 {CCNPP Unit 3} EALs and Technical Bases

The {CCNPP Unit 3} EAL Technical Bases Manual is provided in Enclosure C. Its sections provide the following content:

- Emergency Classification Level (ECL) discussion
- Initiating Condition (IC) discussion
- Emergency Action Level (EAL) and Fission Product Barrier (FPB) discussion
- Operating Mode Applicability
- Definitions for terms having specific meaning to the EALs.
- EAL Matrix Table designed as an evaluation tool used by qualified ERO members to determine, classify and declare emergency events.
- Technical Bases documentation for each EAL and FPB.

2.5 State/Local Government Agreement Documentation

Per 10 CFR Part 50, Appendix E, Section IV.B, initial EALs developed by licensees must be agreed on by offsite emergency response authorities and approved by the NRC prior to implementation.

The applicant worked closely with the state and local government agencies in accordance with the regulatory requirements and guidance. Since a standard EAL scheme for the U.S. EPR has yet to be endorsed by the NRC, state and local agencies have agreed with the scheme used in the development of the EALs. Copies of these agreements are provided in Enclosure D.

3.0 APPLICABLE REGULATIONS AND GUIDANCE

The applicable regulations and guidance that must be met for the Emergency Plans, and changes to EALs, are described below:

5.1 Regulations

Paragraph (a)(1) to Section 10 CFR 50.47, "Emergency Plans," states that no operating license for a nuclear power reactor will be issued unless a finding is made by the NRC that there is reasonable assurance that adequate protective measures can and will be taken in the event of a radiological emergency. §50.47 establishes standards that onsite and offsite emergency response plans must meet for the NRC staff to make a positive finding that there is reasonable assurance that adequate protective measures can and will be taken in the event of a radiological emergency. One of these standards, 10 CFR 50.47(b)(4), stipulates that Emergency Plans include a standard emergency classification and action level scheme.

Section IV.B to 10 CFR 50 Appendix E, "Emergency Planning and Preparedness for Production and Utilization Facilities," provides that Emergency Plans include EALs, which are to be used as criteria for determining the need for notification and participation of local and State agencies, and for determining when and what type of protective measures should be considered to protect the health and safety of individuals both onsite and offsite. EALs are to be based on plant conditions and instrumentation, as well as onsite and offsite radiological monitoring. Appendix E Section IV.B provides that initial EALs shall be discussed and agreed on by the applicant and State and local authorities, be approved by the NRC, and reviewed annually thereafter with State and local authorities.

5.2 Guidance

Revision 4 to Regulatory Guide 1.101 endorsed the guidance contained in NEI 99-01, Revision 4, and is acceptable to the NRC staff as an alternative method to that described in the following guidance for developing EALs required in Section IV.B to Appendix E of 10 CFR Part 50 and 10 CFR 50.47(b)(4):

- Appendix 1 to NUREG-O654/FEMA-REP-I, "Criteria for Preparation and Evaluation of Radiological Emergency Response Plans and Preparedness in Support of Nuclear Power Plants" (November 1980)
- Nuclear Utilities Management Council (NUMARC) document, entitled NESP-007, "Methodology for Development of Emergency Action Levels" (Revision 2, January 1992).

Regulatory Issue Summary (RIS) 2003-18, "Use of NEI 99-01, Methodology for Development of Emergency Action Levels," dated October 8, 2003, provides guidance for developing or changing a standard emergency classification and action level scheme. In addition, RIS 2003-18 provides recommendations to assist licensees, consistent with Section IV.B to Appendix E of Part 50, in determining whether to seek prior NRC approval of deviations from the new guidance.

Supplement 1 to RIS 2003-18, dated July 13, 2004, and Supplement 2 to RIS

2003-18, dated December 12, 2005, were issued to clarify various technical positions regarding EAL revisions.

Enclosure B

**{Calvert Cliffs Nuclear Power Plant
Unit 3}**

**EAL Comparisons
and
Technical Bases for Changes**

{CCNPP Unit 3} TO NEI 99-01 Rev 5 IC CROSS REFERENCE TABLES

The following tables provide cross-references between the NEI 99-01 IC identification number and the {CCNPP U3} IC identification number:

NEI Rev 5 to {CCNPP Unit 3}

NEI	{Unit 3}	NEI	{Unit 3}
FU1	FU1	SU1	SU1
FA1	FA1	SU2	SU5
FS1	FS1	SU3	SU4
FG1	FG1	SU4	SU9
		SU5	SU7
FC1	N/A	SU6	SU6
FC2	FC7	SU8	SU3
FC3	FC3	SA2	SA3
FC4	FC4	SA4	SA4
FC6	FC2	SA5	SA1
FC7	N/A	SS1	SS1
FC8	FC10	SS2	SS3
		SS3	SS2
RC1	N/A	SS6	SS4
RC2	RC5	SG1	SG1
RC4	RC6	SG2	SG3
RC6	RC2		
RC7	N/A	CU1	CU7
RC8	RC10	CU2	CU8
		CU3	CU1
CT1	N/A	CU4	CU10
CT2	CT8	CU6	CU6
CT3	CT3	CU7	CU2
CT4	CT6	CU8	CU3
CT5	CT9	CA1	CA7
CT6	CT2	CA3	CA1
CT7	N/A	CA4	CA10
CT8	CT10	CS1	CS7
		CG1	CG7
AU1	RU1		
AU2	RU2	HU1	HU3
AA1	RA1	HU2	HU4
AA2	RA2	HU3	HU5
AA3	RA3	HU4	HU1
AS1	RS1	HU5	HU6
AG1	RG1	HA1	HA3
		HA2	HA4
		HA3	HA5
		HA4	HA1
		HA5	HA2
		HA6	HA6
		HS2	HS2
		HS3	HS6
		HS4	HS1
		HG1	HG1
		HG2	HG6

{CCNPP Unit 3} to NEI Rev 5

{Unit 3}	NEI	{Unit 3}	NEI
FG1	FG1	SG1	SG1
FS1	FS1	SS1	SS1
FA1	FA1	SA1	SA5
FU1	FU1	SU1	SU1
		SS2	SS3
N/A	FC1	SG3	SG2
FC2	FC6	SS3	SS2
FC3	FC3	SA3	SA2
FC4	FC4	SU3	SU8
FC7	FC2	SS4	SS6
N/A	FC7	SA4	SA4
FC10	FC8	SU4	SU3
		SU5	SU2
N/A	RC1	SU6	SU6
RC2	RC6	SU7	SU5
RC5	RC2	SU9	SU4
RC6	RC4		
N/A	RC7	CA1	CA3
RC10	RC8	CU1	CU3
		CU2	CU7
N/A	CT1	CU3	CU8
CT2	CT6	CU6	CU6
CT3	CT3	CG7	CG1
CT6	CT4	CS7	CS1
N/A	CT7	CA7	CA1
CT8	CT2	CU7	CU1
CT9	CT5	CU8	CU2
CT10	CT8	CA10	CA4
		CU10	CU4
RG1	AG1		
RS1	AS1	HG1	HG1
RA1	AA1	HS1	HS4
RU1	AU1	HA1	HA4
RA2	AA2	HU1	HU4
RU2	AU2	HS2	HS2
RA3	AA3	HA2	HA5
		HA3	HA1
		HU3	HU1
		HA4	HA2
		HU4	HU2
		HA5	HA3
		HU5	HU3
		HG6	HG2
		HS6	HS3
		HA6	HA6
		HU6	HU5

SUMMARY OF DEVIATIONS FROM NEI 99-01

The following tables identify EAL changes that have been evaluated as deviations from the NEI guidance documents and will require prior NRC approval before implementation. A detailed description of the changes and basis for the changes are contained in a following section.

Deviations from NEI 99-01 Rev 4 (including Bulletin 2005-02)

#	NEI	Unit 3	NEI Guidance	Deviation
1	Def	Def	HOSTILE ACTION includes to "take HOSTAGES" within the definition.	Station HOSTILE ACTION definition removes "take HOSTAGES" as an absolute condition.
2	CT2	CT8	Includes PL threshold for loss of containment depressurization equipment.	U.S. EPR design is such that this threshold is not applicable.
3	HS1	HS1	Confirmed Security Event in a Plant VITAL AREA.	HOSTILE ACTION within the PROTECTED AREA.
4	HA4	HA1	Confirmed Security Event in a Plant PROTECTED AREA.	HOSTILE ACTION within the OWNER CONTROLLED AREA or airborne attack threat.
5	HU1	HU3	Vehicle crash into plant structures or systems within PROTECTED AREA boundary.	No vehicle crash UE EAL.
6	SS1 CA3	SS1 CA1	Generic basis included consideration of bus loads.	Removed basis consideration of bus loads.
7	SS6 SA6 SU6	SS4 SA4 SU4	Specifies loss of approximately greater than 75% of plant monitoring instruments in the control room.	U.S. EPR design includes digital monitoring system. Also, compensatory indication is not applicable to U.S. EPR. Removed significant transient to provide progression to SAE EAL.
8	SS4	N/A	Complete Loss of Heat Removal Capability.	No independent loss of heat removal capability.
9	CU3	CU1	Specifies loss of offsite AC power as entry condition.	U.S. EPR specifies emergency busses down to single source.
10	CU1	CU7	Specifies RCS leak rate of 10 or 25 gpm.	Specifies inability to maintain pressurizer level.
11	CU4	CU10	Specifies RCS temp exceeds TS limit.	U.S. EPR qualified exceeding TS limit as due to loss of decay heat removal capability.
12	CU5	N/A	Fuel clad degradation.	No independent fuel clad degradation UE cold EAL.

Deviations from NEI 99-01 Rev 5

#	NEI	Unit 3	NEI Guidance	Deviation
1	Def	Def	HOSTILE ACTION includes to "take HOSTAGES" within the definition.	Station HOSTILE ACTION definition removes "take HOSTAGES" as an absolute condition.
2	CT2	CT8	Includes PL threshold for loss of containment depressurization equipment.	U.S. EPR design is such that this threshold is not applicable.

#	NEI	Unit 3	NEI Guidance	Deviation
7	SS6 SA6 SU6	SS4 SA4 SU4	Specifies loss of approximately greater than 75% of plant monitoring instruments in the control room.	U.S. EPR design includes digital monitoring system. Also, compensatory indication is not applicable to U.S. EPR. Removed significant transient to provide progression to SAE EAL.
11	CU4	CU10	Specifies RCS temp exceeds TS limit.	U.S. EPR qualified exceeding TS limit as due to loss of decay heat removal capability.

Deviation 1 **HOSTILE ACTION Definition** (Bulletin 2005-02 and NEI Rev 5)**Description of the Deviation**

The current definition of HOSTILE ACTION specifically includes the words “take HOSTAGES” as a condition that meets the condition.

U.S. EPR has removed the words “take HOSTAGES” so that security supervision can evaluate the situation in the same manner as all other security events to determine whether the specific incident constitutes a HOSTILE ACTION or not.

NEI Definition

An act toward a NPP or its personnel that includes the use of violent force to destroy equipment, take HOSTAGES, and/or intimidate the licensee to achieve an end. This includes attack by air, land, or water using guns, explosives, PROJECTILES, vehicles, or other devices used to deliver destructive force. Other acts that satisfy the overall intent may be included. HOSTILE ACTION should not be construed to include acts of civil disobedience or felonious acts that are not part of a concerted attack on the NPP. Non-terrorism-based EALs should be used to address such activities (i.e., this may include violent acts between individuals in the owner controlled area).

U.S. EPR Definition

An act toward a nuclear power plant or its personnel that includes the use of violent force to destroy equipment and/or intimidates the licensee to achieve an end. This includes attack by air, land, or water using guns, explosives, projectiles, vehicles, or other devices used to deliver destructive force. Other acts that satisfy the overall intent may be included. Hostile action should not be construed to include acts of civil disobedience or felonious acts that are not part of a concerted attack on the nuclear power plant. Non-terrorism-based EALs should be used to address such activities, (i.e., this may include violent acts between individuals in the owner controlled area).

Technical Basis

A hostage event in and of itself does not necessarily constitute a terrorist attack to the site. Many buildings and areas exist inside the protected area and owner controlled area where a hostage event would pose no threat to plant personnel or plant safety, and the event itself may be completely unrelated to a threat objective (in the same manner as civil disobedience is).

By allowing security personnel to consider each event in the same manner as all other safeguards contingency events, a hostage situation may or may not constitute a hostile action. This change eliminates an unnecessary exception to the threat determination process and potentially prevents the declaration of events that would otherwise not meet the ECL definitions of an Alert or Site Area Emergency.

Supporting Information

None

Deviation 2

NEI EAL: CT2 (NEI Rev 4 and Rev 5)

U.S. EPR EAL: CT8

Operational Modes: 1, 2, 3, 4**Description of the Deviation**

NEI potential loss threshold 3 specifies containment pressure at the depressurization actuation setpoint with insufficient equipment (sprays and coolers) in operation.

U.S. EPR containment design is such that the design basis accidents do not reach containment design pressure, and therefore there is no automatic depressurization actuation setpoint.

Technical Basis

The U.S. EPR containment volume, condensation surface area, and heat capacities are such that the containment design pressure is not exceeded during design basis Loss of Coolant Accident (LOCA) and Main Steam Line Break (MSLB) events. In addition, the containment pressure decreases to less than 50% of the accident analysis values in less than 24 hours thus ensuring that radiological dose consequences are acceptable. Mass and energy releases to the containment during LOCA and MSLB events were calculated using RELAP5/MOD2 (B&W), which is an NRC approved methodology. Containment pressure responses were calculated using the GOTHIC code, also an NRC approved methodology. An automatically actuated containment spray system is therefore not required to mitigate the consequences of a Design Basis Accident, so no automatic actuation setpoint exists for this EAL threshold to be based.

Supporting Information

U.S. EPR FSAR – Section 6.2.1

U.S. EPR FSAR – Section 6.2.2

U.S. EPR FSAR – Section 6.5.2

U.S. EPR FSAR – Section 15.0.3

U.S. EPR FSAR – Section 19.2.3.3

Deviation 3

NEI EAL: HS1 (NEI Rev 4)

U.S. EPR EAL: HS1

Operational Modes: 1, 2, 3, 4, 5, 6, D**Description of the Deviation**

NEI guidance provided multiple security related site area emergency EALs. One site area emergency EAL involved a hostile action within the protected area and another was for a security event in a plant vital area.

The U.S. EPR security related EALs do not include the term 'security event' as a threshold for classification.

Technical Basis

The safeguards contingency plan considers all issues of interest to be security events. Once an event is recognized it is evaluated by trained security personnel and dispositioned appropriately (i.e., no action, logged, reported, response action, etc.). With the addition of the hostile action definition and EALs prescribed by NRC Bulletin 2005-02 and the issuance of NEI 03-12, the previous security related EALs that used the term security event have been effectively superseded. That is, the SAE within the protected area would become applicable prior to the SAE within the vital area.

This change is being made to simplify the security related EALs without causing either more or less site area emergency events to be declared under a full range of scenarios and is consistent with the recommended changes in the version of NEI 99-01 Rev 5 submitted for NRC review.

Supporting Information

None

Deviation 4

NEI EAL: HA4 (NEI Rev 4)

U.S. EPR EAL: HA1

Operational Modes: 1, 2, 3, 4, 5, 6, D**Description of the Deviation**

NEI guidance provided multiple security-related alert EALs. One alert EAL involved a hostile action within the owner controlled area and another was for a security event in the protected area.

The U.S. EPR security related EALs do not include the term 'security event' as a threshold for classification.

Technical Basis

The safeguards contingency plan considers all issues of interest to be security events. Once an event is recognized it is evaluated by trained security personnel and dispositioned appropriately (i.e., no action, logged, reported, response action, etc.). With the addition of the hostile action definition and EALs prescribed by NRC Bulletin 2005-02 and the issuance of NEI 03-12, the previous security related EALs that used the term security event have been effectively superseded. That is, the alert within the owner controlled area would become applicable prior to the alert within the protected area.

This change is being made to simplify the security related EALs without causing either more or less alert events to be declared under a full range of scenarios and is consistent with the recommended changes in the version of NEI 99-01 Rev 5 submitted for NRC review.

Supporting Information

None

Deviation 5

NEI EAL: HU1 (NEI Rev 4)

U.S. EPR EAL: N/A

Operational Modes: 1, 2, 3, 4, 5, 6, D**Description of the Deviation**

The NEI 99-01 Rev 4 IC for natural and destructive phenomena affecting the protected area included an EAL for vehicle crash.

U.S. EPR EALs do not include a vehicle crash at the Unusual Event level.

Technical Basis

The NEI Unusual Event and Alert EALs for a vehicle crash are as follows:

Unusual Event: Vehicle crash into plant structures or systems within PROTECTED AREA boundary.

Alert: Vehicle crash within PROTECTED AREA boundary and resulting in VISIBLE DAMAGE to any (site specific list of) plant structures or equipment therein or control indication of degraded performance of those systems.

In its literal context, the Unusual Event EAL is unnecessarily broad in that it can be interpreted to encompass events involving only minor cosmetic damage up to the VISIBLE DAMAGE that defines the Alert EAL. As such, it does not meet the wording or intent as defined by the Unusual Event ECL. A narrower wording of the EAL does not provide sufficient differentiation for the Alert level to be of value. Therefore, it is not necessary to include an Unusual Event EAL for a vehicle crash simply to provide an escalation pathway for this particular event condition.

This change is being made to eliminate the potential for an unnecessary classification of a minor event and is consistent with the recommended changes in the version of NEI 99-01 Rev 5 submitted for NRC review.

Supporting Information

None

Deviation 6

NEI EAL: SS1/CA3 (NEI Rev 4)

U.S. EPR EAL: SS1/CA1

Operational Modes: SS1 - 1, 2, 3, 4 and CA1 – 5, 6, D**Description of the Deviation**

NEI generic bases guidance specifies that consideration should be given to operable loads necessary to remove decay heat or provide Reactor Vessel makeup capability when evaluating loss of AC power to essential busses. Even though an essential bus may be energized, if necessary loads (i.e., loads that if lost would inhibit decay heat removal capability or Reactor Vessel makeup capability) are not operable on the energized bus then the bus should not be considered operable.

U.S. EPR generic bases did not include this qualification to the EAL.

Technical Basis

Providing a qualification (versus clarification) to the EAL wording from within the basis section creates a situation for potential misclassification. In this case where the EAL wording clearly specifies a loss of all onsite and all offsite AC power, the bases adds that all power need not be lost if make up or decay heat removal are the only loads affected. This is a clear contradiction to the EAL. Since a review of the basis section is not a requirement to classification, this contradiction would need to be remembered by the Emergency Director and an exception taken to the EAL wording must be made in order to declare the event per the basis wording.

This system malfunction IC and EAL is specific to a loss of AC power and need not consider additional system malfunctions already accounted for in other existing EAL categories. Hot mode loss of RCS make up and decay heat removal conditions are directly accounted for in the fission product barrier core temperature, RPV level, RCS leak rate and SG tube leakage / rupture thresholds. Cold mode loss of RCS make up and decay heat removal thresholds are directly accounted for in the RCS leakage and heat sink categories.

This change is being made to eliminate the potential for classification errors and is consistent with the recommended changes in the version of NEI 99-01 Rev 5 submitted for NRC review.

Supporting Information

None

Deviation 7**NEI EAL:** SS6, SA6, SU6 (NEI Rev 4 and Rev 5) **U.S. EPR EAL:** SS4, SA4 and SU4**Operational Modes:** 1, 2, 3, 4**Description of the Deviation**

NEI specified plant annunciation and safety indication EALs to be set at a loss of *all or most (approximately greater than 75%)*.

U.S. EPR specified the EALs to involve a complete loss of the systems that provide annunciation and safety indication (PICS and SICS). Additionally, it removed the Alert significant transient condition to provide progression to the SAE EAL.

Technical BasisAnnunciation/Indication:

The operator-managed control system of the U.S. EPR consists of two integrated subsystems (Process Information Control System (PICS) and Safety Information and Control System (SICS)) each having a substantial degree of redundancy. The U.S. EPR design provides redundant safety system indications powered from separate uninterruptible power supplies. Being one integrated system managing multiple redundant inputs, the availability of annunciation (alarms) and indication are not separable. Therefore, the loss of annunciation will occur only concurrent with the loss of indication. The loss of safety system indicators impacts the determination of the operability status of that specific system or component. System operability status will be further addressed by the system-based EALs directly impacted by those systems.

Quantification of Failure:

Quantification of percentage failure is not useful in a digital control system. The digital control system is an integrated set of fault-tolerant components as compared to an analog control system, which is an assembly of multiple unrelated independent circuits. The failure of fault-tolerant components will likely not show degraded performance in an escalating manner. Failure is anticipated to be a step change (functional to non-functional) instead of a gradual degradation. Once the step change in performance has occurred, the system will likely no longer be operational. This contrasts with the gradual degradation of analog systems as individual circuits are lost.

Compensatory Indicators:

Each subsystem (PICS or SICS) is designed to be independently capable of providing necessary alarms and indications. The total loss of annunciators or indications would therefore require the loss of both PICS and SICS subsystems. The loss of either a PICS or SICS subsystem alone would leave one fully operable subsystem which would continue to provide all indication and annunciation necessary to manage transients. This exceeds the typical "compensatory indications" which would still be burdened by the loss of alarms/annunciation.

PICS Operability:

PICS will be considered inoperable if:

- a. Less than two PICS workstations operable (a workstation is considered operable if 3 or more screens are fully functional)

OR

- b. Data on the PICS is unreliable (e.g. system froze due to common mode application software failure)

SICS Operability:

Based on the fact that the SICS includes a reduced inventory of alarms and indications, one operator should be able to manage all alarms and indications for the safety related parameters on the SICS. Therefore, a loss of all four divisions on both workstations would constitute this loss because the qualified display system monitors of the SICS have the capability to display all four divisions of SICS indications on a single qualified display system monitor.

EAL Comparison

UNUSUAL EVENT - This Initiating Condition (IC) and its associated EAL are intended to recognize the difficulty associated with monitoring plant conditions with degradation of a major portion of the annunciation/indication equipment.

Each subsystem (PICS or SICS) is designed to be fully capable of providing alarms and indications of key safety-related parameters. The total loss of annunciators or indications would require the loss of both PICS and SICS subsystems. The loss of both PICS and SICS subsystems would necessarily include loss of compensatory indications which would meet Alert EAL SA4 criteria (therefore no NOUE could be declared).

Total failure of a single subsystem is a highly unlikely event and establishing an escalation pathway from Unusual Event to Alert to Site Area Emergency is desirable. Therefore, the U.S. EPR has chosen to conservatively establish the total failure of either subsystem (PICS or SICS) as an Unusual Event.

ALERT - This IC and its associated EALs are intended to recognize the difficulty associated with monitoring plant conditions with loss of a major portion of the annunciation/indication equipment.

Two distinct EAL combinations exist under this NEI EAL:

1. NEI EAL 1A and 1B Bullet 1 (Loss of Annunciation/Indication and Transient)

Each subsystem (PICS or SICS) is designed to be fully capable of providing key safety-related alarms and indications for detecting and managing the transient. Since the total loss of annunciator/indications (Loss of both PICS and SICS) excludes the availability compensatory indications (Operability of either PICS or

SICS), there is no equivalent condition to loss of annunciator/indications and transient WITH compensatory indicators available. Conditions meeting NEI EAL Criteria 1A , 1B Bullet 1, and 1B Bullet 2 would instead meet the criteria for a Site Area Emergency under EAL SS4.

The U.S. EPR therefore takes exception to this combination of EAL criteria.

2. NEI EAL 1A and 1B Bullet 2 (Loss of Annunciation/Indication and Compensatory Indication)

U.S. EPR condition 1A and 1B (Loss of PICS and Loss of SICS) is equivalent to NEI conditions 1A and 1B bullet 2 (Loss of annunciation/indication and Loss of compensatory indication).

While there is a difference due to the inherent integration of compensatory indication into each of the two digital subsystems (PICS and SICS), there is no deviation from the intent of this EAL threshold combination.

SITE AREA EMERGENCY - This IC is intended to recognize the threat to plant safety associated with the complete loss of capability of the control room staff to monitor plant response to a SIGNIFICANT TRANSIENT.

A Site Area Emergency is considered to exist if the control room staff cannot monitor safety functions needed for protection of the public while a significant transient is in progress. Quantification is arbitrary; however, if most or all safety system annunciators or indicators are fully lost, there is an increased risk that a degraded plant condition could go undetected.

The U.S. EPR is designed to survive a full offsite load rejection and maintain onsite house loads. Although actions will automatically occur, the inability of the operators to verify proper response increases risk and justifies escalation of emergency classification. A 50% change in power/electrical load was chosen as a reasonable value, less than the design criteria, which was still a substantial challenge to the systems as the threshold criteria.

U.S. EPR deviation in the definition of a significant transient is appropriate for this type of design and is consistent with the conditions warranting an SAE for other reactor design types.

Supporting Information

None

Deviation 8

NEI EAL: SS4 (NEI Rev 4)

U.S. EPR EAL: N/A

Operational Modes: 1, 2, 3, 4**Description of the Deviation**

NEI guidance includes an IC for a complete loss of heat removal capability based on a loss of core cooling and heat sink.

U.S. EPR EALs do not include a separate IC and EAL for this condition.

Technical Basis

Loss of core cooling and loss of heat sink are conditions evaluated directly within the fission product barrier thresholds and indirectly through other system malfunction EALs. Hot mode loss of core cooling and decay heat removal conditions are directly accounted for in the fission product barrier core temperature, RPV level, RCS leak rate and SG tube leakage / rupture thresholds.

This change is consistent with the recommended changes in the version of NEI 99-01 Rev 5 submitted for NRC review.

Supporting Information

None

Deviation 9

NEI EAL: CU3 (NEI Rev 4)

U.S. EPR EAL: CU1

Operational Modes: 5, 6**Description of the Deviation**

The NEI 99-01 hot and cold modes include Unusual Event EALs for a loss of offsite power.

The U.S. EPR Unusual Event cold mode EAL has been revised to specify that onsite AC has also been reduced to a single source of power to the emergency busses.

Technical Basis

The NEI escalation pathway for a loss of AC in the hot modes begins at a Site Area Emergency (loss of all onsite and offsite AC), drops to an Alert (single source of AC), and finishes at an Unusual Event (loss of offsite AC). The escalation pathway for a loss of AC in the cold modes should provide a consistent step change from the hot modes based on the reduced level of risk. NEI guidance for a loss of AC in the cold modes begins at an Alert (loss of all onsite and offsite AC) and ends with an Unusual Event (loss of offsite AC).

The U.S. EPR loss of AC power in the cold modes has been revised to specify that onsite AC has also been reduced to a single source of power as a condition of the Unusual Event. This is consistent with the lower risk associated with the cold modes and the definitions of the ECLs themselves.

Supporting Information

None

Deviation 10

NEI EAL: CU1 (NEI Rev 4)

U.S. EPR EAL: CU7

Operational Modes: 5, 6**Description of the Deviation**

The NEI 99-01 specifies an RCS leak rate of 10 gpm (monitored) and 25 gpm (unmonitored) in the cold modes.

RCS leak rate while in the cold modes cannot be reliably monitored at this level and Technical Specifications, the basis for the values, are not applicable in mode 5. Additionally, the leak rate is based on crack propagation studies which do not apply in above mode 4. Therefore this EAL has been modified.

Technical Basis

NEI suggested the use of leakage in terms of gpm, which are the same values as used in the hot mode NEI EAL SU5.

While the NEI example EALs are applicable in cold shutdown, they use hot mode Technical Specification leakage limits that are not applicable above mode 4. These limits are based on crack propagation with RCS pressure as the major contributor, where the reactor is shut down and depressurized so leak propagation is a concern.

System alignment changes and variations in instrumentation availability above mode 4 would result in the plant operators being significantly challenged to accurately monitor and quantify RCS leakage to the CU1 EAL values. Instrumentation normally available during power operations may not be available when cold due to maintenance activities, and alternate methods to quantify leakage (RCS makeup rate, IRWST levels, pump run times, etc.) would be necessary, but are not accurate to the levels of leakage specified in Technical Specifications for the hot modes of operation.

As an alternative method, U.S. EPR has chosen to use the submitted NEI Rev 5 wording as described in the NRC resolution to the approved EAL FAQ 2006-14 for this site specific EAL.

Supporting Information

None

Deviation 11

NEI EAL: CU4 (NEI Rev 4 and NEI Rev 5)

U.S. EPR EAL: CU10

Operational Modes: 5, 6**Description of the Deviation**

The NEI IC for an unplanned loss of decay heat removal capability includes an EAL for RCS temperatures exceeding the Technical Specification cold shutdown temperature limit.

The U.S. EPR EAL included a qualification that the temperature increase is due to a loss of decay heat removal capability to exclude inadvertent excursions above the limit and are easily corrected when decay heat removal capability is available.

Technical BasisNEI IC/EAL

UNPLANNED loss of decay heat removal capability with irradiated fuel in the RPV.

An UNPLANNED event results in RCS temperature exceeding the Technical Specification cold shutdown temperature limit

U.S. EPR IC/EAL

Loss of decay heat removal capability.

RCS temperature > 200° F due to a loss of decay heat removal capability.

The intent of this EAL is to describe a condition where a loss of a critical system is recognized through exceeding a threshold. However through omission, it extends below the intended condition and may result in classification when decay heat removal is operable and in use. For example, if flow control is not properly adjusted temperatures may momentarily rise above the setpoint, but are quickly restored back within specification.

The EAL as written in the NEI guidance is adequately governed through the Technical Specifications notification process itself. The intent of event classifications was not to declare an emergency that exceeded Technical Specifications if the action statement time period was not exceeded.

The revised wording used in this EAL maintains consistency with the IC and technical basis, but eliminates the potential for unnecessary declaration when decay heat removal systems are available.

Supporting Information

None

Deviation 12

NEI EAL: CU5 (NEI Rev 4)

U.S. EPR EAL: N/A

Operational Modes: 5, 6**Description of the Deviation**

NEI EAL specifies a site specific monitor reading indicating fuel clad degradation greater than Technical Specification allowable limits. However, there are no Technical Specification limits for fuel clad degradation in modes 5 and 6.

Technical BasisNEI EAL #1

U.S. EPR utilizes Gross Failed Fuel Monitor (KUA66 CR001) to monitor for fuel-clad degradation. This monitor is operated only in modes 1, 2, 3 and 4, but is not available in modes 5 or 6 due to required isolation by plant procedure.

The intent of this EAL is met by the radiological recognition category EALs which are applicable in all modes and provide detection of fuel clad degradation and potential degradation in the level of safety of the plant. The following radiological ICs/EALs are applicable to an event resulting in potential fuel clad damage:

RU1 (NEI AU1) – A release of gaseous or liquid radioactivity to the environment that exceeds two times the ODCM limit for 60 minutes or longer.

RU2 (NEI AU2) – Unplanned area radiation monitor or radiation survey > 1000 times normal levels.

RA2 (NEI AA2) – Damage to irradiated fuel or loss of water level that has resulted or will result in the uncovering of irradiated fuel outside the reactor vessel.

In modes 5 and 6, a loss of RCS inventory below the top of active fuel would be the mechanism for potential fuel clad damage. The following system malfunction EALs are applicable to an event resulting in potential fuel clad damage:

CU7 (NEI CU1) – RCS leakage.

CU8 (NEI CU2) – Unplanned loss of RCS inventory.

Additionally, in mode 6, a fuel-handling event is a probable mechanism for potential fuel clad damage. If this event occurred, an Alert classification within the radiological EAL recognition category would be applicable.

NEI EAL #2

This EAL addresses coolant samples exceeding Technical Specifications for iodine spiking. In modes 1, 2 and 3 the associated action statement is to restore within limits a specified period or shutdown. There is no required action below mode 3.

For the condition as described in the NEI EAL, an Unusual Event declaration would be required even though the site is in compliance with Technical Specifications.

The intent of this EAL is met by the radiological recognition category EALs which are applicable in all modes, and the system malfunction EALs applicable in the cold modes as described above.

This change is consistent with the recommended changes in the version of NEI 99-01 Rev 5 submitted for NRC review.

Supporting Information

None

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
Definitions			
<p><u>HOSTILE ACTION (NRC Bulletin 2005-02 Version):</u> An act toward an NPP or its personnel that includes the use of violent force to destroy equipment, take hostages, and/or intimidate the licensee to achieve an end. This includes attack by air, land, or water using guns, explosives, projectiles, vehicles, or other devices used to deliver destructive force. Other acts that satisfy the overall intent may be included.</p>	<p><u>HOSTILE ACTION:</u> An act toward a NPP or its personnel that includes the use of violent force to destroy equipment, take HOSTAGES, and/or intimidate the licensee to achieve an end. This includes attack by air, land, or water using guns, explosives, PROJECTILES, vehicles, or other devices used to deliver destructive force. Other acts that satisfy the overall intent may be included. HOSTILE ACTION should not be construed to include acts of civil disobedience or felonious acts that are not part of a concerted attack on the NPP. Non-terrorism-based EALs should be used to address such activities (i.e., this may include violent acts between individuals in the owner controlled area).</p>	<p><u>HOSTILE ACTION:</u> An act toward a NPP or its personnel that includes the use of violent force to destroy equipment, and/or intimidate the licensee to achieve an end. This includes attack by air, land, or water using guns, explosives, PROJECTILES, vehicles, or other devices used to deliver destructive force. Other acts that satisfy the overall intent may be included. HOSTILE ACTION should not be construed to include acts of civil disobedience or felonious acts that are not part of a concerted attack on the NPP. Non-terrorism-based EALs should be used to address such activities (i.e., this may include violent acts between individuals in the owner controlled area).</p>	<p><u>Bulletin 05-02 Differences</u> Added what should not be considered a hostile action to the definition. <u>Rev 5 Differences</u> None <u>Bulletin 05-02/Rev 5 Deviations (Deviation #1)</u> Removed "take HOSTAGES" as an absolute hostile action event. Hostage situations are evaluated by security personnel under the security contingency plan as all security events are. Based in this evaluation it may or may not rise to the level of HOSTILE ACTION.</p>
<p><u>UNPLANNED:</u> a parameter change or an event that is not the result of an intended evolution and requires corrective or mitigative actions.</p>	<p><u>UNPLANNED:</u> A parameter change or an event that is not the result of an intended evolution and requires corrective or mitigative actions.</p>	<p><u>UNPLANNED:</u> A parameter change or an event, the reasons for which may be known or unknown, that is not the result of an intended evolution and requires corrective or mitigative actions.</p>	<p><u>Rev 4/Rev 5 Differences</u> Added words to allow the term 'unexplained' to fall within the broader context of unplanned. <u>Rev 4/Rev 5 Deviations</u> None</p>
<p><u>VISIBLE DAMAGE:</u> is damage to equipment or structure that is readily observable without measurements, testing, or analysis. Damage is sufficient to cause concern regarding the continued operability or reliability of affected safety structure, system, or component. Example damage includes: deformation due to heat or impact, denting, penetration, rupture, cracking, paint blistering. Surface blemishes (e.g., paint chipping, scratches) should not be included.</p>	<p><u>VISIBLE DAMAGE:</u> Damage to equipment or structure that is readily observable without measurements, testing, or analysis. Damage is sufficient to cause concern regarding the continued operability or reliability of the affected structure, system, or component. Example damage includes: deformation due to heat or impact, denting, penetration, rupture, cracking, and paint blistering. Surface blemishes (e.g., paint chipping, scratches) should not be included.</p>	<p><u>VISIBLE DAMAGE:</u> Damage to equipment or structure that is readily observable without measurements, testing, or analysis and is sufficient to cause concern regarding the continued availability or reliability of the affected structure, system, or component. Example damage includes: deformation due to heat or impact, denting, penetration, rupture, cracking, and paint blistering. Surface blemishes (e.g., paint chipping, scratches) should not be included.</p>	<p><u>Rev 4/Rev 5 Differences</u> The word "operability" was replaced with "availability". This is done to avoid confusion with the need to establish Technical Specification operability when determining EAL applicability. <u>Rev 4/Rev 5 Deviations</u> None</p>
Fission Product Barrier Degradation			
<p><u>FG1</u> Loss of ANY Two Barriers AND Loss or Potential Loss of Third Barrier Op. Modes: Power Operation, Hot Standby, Startup, Hot Shutdown</p>	<p><u>FG1</u> Loss of ANY two barriers AND Loss or Potential Loss of the third barrier. Operating Mode Applicability: Power Operation, Hot Standby, Startup, Hot Shutdown</p>	<p><u>FG1</u> Initiating Condition: Loss of any two barriers and loss or potential loss of the third barrier. Operating Mode Applicability: 1, 2, 3, 4 EALs: Refer to fission product barrier loss and potential loss threshold values to determine barrier status.</p>	<p><u>Rev 4/Rev 5 Differences</u> None <u>Rev 4/Rev 5 Deviations</u> None</p>
<p><u>FS1</u> Loss or Potential Loss of ANY Two Barriers Op. Modes: Power Operation, Hot Standby, Startup, Hot Shutdown</p>	<p><u>FS1</u> Loss or Potential Loss of ANY two barriers. Operating Mode Applicability: Power Operation, Hot Standby, Startup, Hot Shutdown</p>	<p><u>FS1</u> Initiating Condition: Loss or potential loss of any two barriers. Operating Mode Applicability: 1, 2, 3, 4 EALs: Refer to fission product barrier loss and potential loss threshold values to determine barrier status.</p>	<p><u>Rev 4/Rev 5 Differences</u> None <u>Rev 4/Rev 5 Deviations</u> None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>FA1 ANY Loss or ANY Potential Loss of EITHER Fuel Clad OR RCS <i>Op. Modes: Power Operation, Hot Standby, Startup, Hot Shutdown</i></p>	<p>FA1 ANY Loss or ANY Potential Loss of EITHER Fuel Clad OR RCS. Operating Mode Applicability: Power Operation, Hot Standby, Startup, Hot Shutdown</p>	<p>FA1 Initiating Condition: Any loss or any potential loss of either fuel clad or RCS. Operating Mode Applicability: 1, 2, 3, 4 EALs: Refer to fission product barrier loss and potential loss threshold values to determine barrier status.</p>	<p>Rev 4/Rev 5 Differences None Rev 4/Rev 5 Deviations None</p>
<p>FU1 ANY Loss or ANY Potential Loss of Containment <i>Op. Modes: Power Operation, Hot Standby, Startup, Hot Shutdown</i></p>	<p>FU1 ANY Loss or ANY Potential Loss of Containment. Operating Mode Applicability: Power Operation, Hot Standby, Startup, Hot Shutdown</p>	<p>FU1 Initiating Condition: Any loss or any potential loss of containment. Operating Mode Applicability: 1, 2, 3, 4 EALs: Refer to fission product barrier loss and potential loss threshold values to determine barrier status.</p>	<p>Rev 4/Rev 5 Differences None Rev 4/Rev 5 Deviations None</p>
Fuel Clad Barrier			
<p>1. Critical Safety Function Status Loss Core-Cooling Red Potential Loss Core Cooling-Orange OR Heat Sink-Red</p>	<p>1. Critical Safety Function Status Loss A. Core Cooling - Red Entry Conditions Met. Potential Loss A. Core Cooling - Orange Entry Conditions Met. OR B. Heat Sink - Red Entry Conditions Met.</p>	<p>N/A</p>	<p>Note: U.S. EPR does not use CSFST for plant operations. Rev 4/Rev 5 Differences N/A Rev 4/Rev 5 Deviations N/A</p>
<p>5. Containment Radiation Monitor Loss Containment rad monitor reading GREATER THAN (site specific) R/hr Potential Loss Not Applicable</p>	<p>6. Containment Radiation Monitoring Loss A. Containment radiation monitor reading greater than (site specific value). Potential Loss Not Applicable</p>	<p>FC2: Containment Radiation Monitoring Loss 1. Containment radiation monitor ({JYK15 CR101}) > (Graph FC2(L)1). Potential Loss None</p>	<p>Rev 4/Rev 5 Differences Removed the word 'reading' for human factors considerations (minimize extraneous words). Rev 4/Rev 5 Deviations None</p>
<p>3. Core Exit Thermocouple Readings Loss GREATER THAN (site specific) degree F Potential Loss GREATER THAN (site specific) degree F</p>	<p>3. Core Exit Thermocouple Readings Loss A. Core exit thermocouples reading greater than (site specific degree F). Potential Loss A. Core exit thermocouples reading greater than (site specific degree F).</p>	<p>FC3: Core Temperature Loss 1. (Calculated Clad Temperature in Region 3 or higher). Potential Loss 1. (Calculated Clad Temperature in Region 2).</p>	<p>Rev 4 Differences None Rev 5 Differences Used a generalized FPB category title as U.S. EPR does not use CETCs. U.S. EPR uses in-core TCs to develop calculated clad temps which are approximately equivalent to the generic bases. Rev 4/Rev 5 Deviations None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>4. Reactor Vessel Water Level</p> <p>Loss Not Applicable</p> <p>Potential Loss Level LESS than (site specific) value</p>	<p>4. Reactor Vessel Water Level</p> <p>Loss Not Applicable</p> <p>Potential Loss A. RCS/RPV level less than (site specific level for TOAF).</p>	<p>FC4: RPV Level</p> <p>Loss None</p> <p>Potential Loss 1. a. RCS level ($\{JEF10\ CL081\}$) < (FC4(PL)1.a). AND b. (Calculated Clad Temperature in Region 2 or higher).</p>	<p>Rev 4/Rev 5 Differences U.S. EPR cannot measure to TOAF in hot modes. Level indicates lowest measurable value in these modes and includes a threshold for loss of subcooling. This combination is consistent with the meaning and intent of NEI 99-01.</p> <p>Rev 4/Rev 5 Deviations None</p>
<p>2. Primary Coolant Activity Level</p> <p>Loss Coolant Activity GREATER THAN (site specific) Value</p> <p>Potential Loss Not Applicable</p>	<p>2. Primary Coolant Activity Level</p> <p>Loss A. Coolant activity greater than (site specific value).</p> <p>Potential Loss Not Applicable</p>	<p>FC7: RCS Activity</p> <p>Loss 1. Coolant activity > 300 μCi/gm Dose Equivalent I-131.</p> <p>Potential Loss None</p>	<p>Rev 4/Rev 5 Differences None</p> <p>Rev 4/Rev 5 Deviations None</p>
<p>6. Other (Site-Specific) Indications</p> <p>Loss (Site specific) as applicable</p> <p>Potential Loss (Site specific) as applicable</p>	<p>7. Other Site Specific Indications</p> <p>Loss A. (Site specific) as applicable.</p> <p>Potential Loss A. (Site specific) as applicable.</p>	<p>N/A</p>	<p>Note: U.S. EPR does not have any additional FPB thresholds in this category.</p> <p>Rev 4/Rev 5 Differences None</p> <p>Rev 4/Rev 5 Deviations N/A</p>
<p>7. Emergency Director Judgment</p> <p>Any condition in the opinion of the Emergency Director that indicates Loss or Potential Loss of the Fuel Clad Barrier</p>	<p>8. Emergency Director Judgment</p> <p>Loss A. Any condition in the opinion of the Emergency Director that indicates Loss of the Fuel Clad Barrier.</p> <p>Potential Loss A. Any condition in the opinion of the Emergency Director that indicates Potential Loss of the Fuel Clad Barrier.</p>	<p>FC10: Emergency Director Judgment</p> <p>Loss 1. Any condition in the opinion of the Emergency Director that indicates loss of the fuel clad barrier.</p> <p>Potential Loss 1. Any condition in the opinion of the Emergency Director that indicates potential loss of the fuel clad barrier.</p>	<p>Rev 4/Rev 5 Differences None</p> <p>Rev 4/Rev 5 Deviations None</p>
RCS Barrier			
<p>1. Critical Safety Function Status</p> <p>Loss Not Applicable</p> <p>Potential Loss RCS Integrity - Red OR Heat Sink-Red</p>	<p>1. Critical Safety Function Status</p> <p>Loss Not Applicable</p> <p>Potential Loss A. RCS Integrity - Red Entry Conditions Met. OR B. Heat Sink - Red Entry Conditions Met.</p>	<p>N/A</p>	<p>Note: U.S. EPR does not use CSFST for plant operations.</p> <p>Rev 4/Rev 5 Differences N/A</p> <p>Rev 4/Rev 5 Deviations N/A</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>4. Containment Radiation Monitor</p> <p>Loss Containment rad monitor reading GREATER THAN (site specific) R/hr</p> <p>Potential Loss Not Applicable</p>	<p>6. Containment Radiation Monitoring</p> <p>Loss A. Containment radiation monitor reading greater than (site specific value).</p> <p>Potential Loss Not Applicable</p>	<p>RC2: Containment Radiation Monitoring</p> <p>Loss 1. Containment radiation monitor ({JYK15 CR101}) > (RC2(L)1) R/hr.</p> <p>Potential Loss None</p>	<p>Rev 4/Rev 5 Differences Removed the word 'reading' for human factors considerations (minimize extraneous words).</p> <p>Rev 4/Rev 5 Deviations None</p>
<p>2. RCS Leak Rate</p> <p>Loss GREATER THAN available makeup capacity as indicated by a loss of RCS subcooling</p> <p>Potential Loss Unisolable leak exceeding the capacity of one charging pump in the normal charging mode</p>	<p>2. RCS Leak Rate</p> <p>Loss A. RCS leak rate greater than available makeup capacity as indicated by a loss of RCS subcooling.</p> <p>Potential Loss A. RCS leak rate greater than (site specific capacity of one charging pump in the normal charging mode) with Letdown isolated.</p>	<p>RC5: RCS Leak Rate</p> <p>Loss 1. RCS leak rate greater than available makeup capacity as indicated by (Calculated Clad Temperature in Region 2 or higher).</p> <p>Potential Loss 1. RCS leak rate requires operation of second charging pump to maintain pressurizer level.</p>	<p>Rev 4/Rev 5 Differences None</p> <p>Rev 4/Rev 5 Deviations None</p>
<p>3. SG Tube Rupture</p> <p>Loss SGTR that results in an ECCS (SI) Actuation</p> <p>Potential Loss Not Applicable</p>	<p>4. SG Tube Rupture</p> <p>Loss A. RUPTURED SG results in an ECCS (SI) actuation.</p> <p>Potential Loss Not Applicable</p>	<p>RC6: SG Tube Leakage / Rupture</p> <p>Loss 1. RUPTURED SG results in an MHSI actuation.</p> <p>Potential Loss None</p>	<p>Rev 4/Rev 5 Differences Added leakage to FPB category title to allow for consistent numbering with CT6 (NEI CT4).</p> <p>Rev 4/Rev 5 Deviations None</p>
<p>5. Other (Site-Specific) Indications</p> <p>Loss (Site specific) as applicable</p> <p>Potential Loss (Site specific) as applicable</p>	<p>7. Other Site Specific Indications</p> <p>Loss A. (site specific) as applicable.</p> <p>Potential Loss A. (site specific) as applicable.</p>	N/A	<p>Note: U.S. EPR does not have any additional FPB thresholds in this category.</p> <p>Rev 4/Rev 5 Differences N/A</p> <p>Rev 4/Rev 5 Deviations N/A</p>
<p>6. Emergency Director Judgment</p> <p>Any condition in the opinion of the Emergency Director that indicates Loss or Potential Loss of the RCS Barrier</p>	<p>8. Emergency Director Judgment</p> <p>Loss A. Any condition in the opinion of the Emergency Director that indicates Loss of the RCS Barrier.</p> <p>Potential Loss A. Any condition in the opinion of the Emergency Director that indicates Potential Loss of the RCS Barrier.</p>	<p>RC10: Emergency Director Judgment</p> <p>Loss 1. Any condition in the opinion of the Emergency Director that indicates loss of the RCS barrier.</p> <p>Potential Loss 1. Any condition in the opinion of the Emergency Director that indicates potential loss of the RCS barrier.</p>	<p>Rev 4/Rev 5 Differences None</p> <p>Rev 4/Rev 5 Deviations None</p>
Containment Barrier			
<p>1. Critical Safety Function Status</p> <p>Loss Not Applicable</p> <p>Potential Loss Containment-Red</p>	<p>1. Critical Safety Function Status</p> <p>Loss Not Applicable</p> <p>Potential Loss A. Containment - Red Entry Conditions Met.</p>	N/A	<p>Note: U.S. EPR does not use CSFST for plant operations.</p> <p>Rev 4/Rev 5 Differences N/A</p> <p>Rev 4/Rev 5 Deviations N/A</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>6. Significant Radioactive Inventory in Containment</p> <p>Loss Not Applicable</p> <p>Potential Loss Containment rad monitor reading GREATER THAN (site-specific) R/hr</p>	<p>6. Containment Radiation Monitoring</p> <p>Loss Not Applicable</p> <p>Potential Loss A. Containment radiation monitor reading greater than (site specific value).</p>	<p>CT2: Containment Radiation Monitoring</p> <p>Loss None</p> <p>Potential Loss 1. Containment radiation monitor ({{JYK15 CR101}}) > (Graph CT2(L)1).</p>	<p>Rev 4/Rev 5 Differences Removed the word 'reading' for human factors considerations (minimize extraneous words).</p> <p>Rev 4/Rev 5 Deviations None</p>
<p>3. Core Exit Thermocouple Reading</p> <p>Loss Not Applicable</p> <p>Potential Loss Core exit thermocouples in excess of 1200 degrees and restoration procedures not effective within 15 minutes; or, core exit thermocouples in excess of 700 degrees with reactor vessel level below top of active fuel and restoration procedures not effective within 15 minutes</p>	<p>3. Core Exit Thermocouple Readings</p> <p>Loss Not Applicable</p> <p>Potential Loss A. a. Core exit thermocouples in excess of (site specific)° F. AND b. Restoration procedures not effective within 15 minutes. OR B. a. Core exit thermocouples in excess of (site specific)° F. AND b. Reactor vessel level below (site specific level). AND c. Restoration procedures not effective within 15 minutes.</p>	<p>CT3: Core Temperature</p> <p>Loss None</p> <p>Potential Loss 1. a. (Calculated Clad Temperature in Region 4). AND b. Restoration procedures not effective within 15 minutes. OR 2. a. (Calculated Clad Temperature in Region 3). AND b. RCS level ({{JEF10 CL081}}) < (CT3(PL)2.b). AND c. Restoration procedures not effective within 15 minutes.</p>	<p>Rev 4/Rev 5 Differences Used a generalized FPB category title as U.S. EPR does not use CETCs. U.S. EPR uses in-core TCs to develop calculated clad temps which are approximately equivalent to the generic bases. U.S. EPR cannot measure to TOAF in hot modes. Level indicates lowest measurable value in these modes. Combined with the calculated clad temp, this is consistent with the meaning and intent of NEI 99-01.</p> <p>Rev 4/Rev 5 Deviations None</p>
<p>4. SG Secondary Side Release with P to S Leakage</p> <p>Loss RUPTURED S/G is also FAULTED outside of containment</p> <p>OR Primary-to-Secondary leakrate greater than 10 gpm with nonisolable steam release from affected S/G to the environment</p> <p>Potential Loss Not Applicable</p>	<p>4. SG Secondary Side Release with P to S Leakage</p> <p>Loss A. RUPTURED SG is also FAULTED outside of containment.</p> <p>OR B. a. Primary-to-Secondary leak rate greater than 10 gpm. AND b. UNISOLABLE steam release from affected SG to the environment.</p> <p>Potential Loss Not Applicable</p>	<p>CT6: SG Tube Leakage / Rupture</p> <p>Loss 1. RUPTURED SG is also FAULTED outside of containment.</p> <p>OR 2. a. Primary-to-Secondary leak rate > 10 gpm. AND b. UNISOLABLE steam release from affected SG to the environment.</p> <p>Potential Loss None</p>	<p>Rev 4/Rev 5 Differences Revised FPB category title to allow for consistent numbering with RC6 (NEI RC4).</p> <p>Rev 4/Rev 5 Deviations None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>2. Containment Pressure</p> <p>Loss Rapid unexplained decrease following initial increase</p> <p>OR Containment pressure or sump level response not consistent with LOCA conditions</p> <p>Potential Loss (Site-specific) PSIG and increasing</p> <p>OR Explosive mixture exists</p> <p>OR Pressure greater than containment depressurization actuation setpoint with less than one full train of depressurization equipment operating</p>	<p>2. Containment Pressure</p> <p>Loss</p> <p>A. A containment pressure rise followed by a rapid unexplained drop in containment pressure.</p> <p>OR</p> <p>B. Containment pressure or sump level response not consistent with LOCA conditions.</p> <p>Potential Loss</p> <p>A. Containment pressure greater than (site specific value) and rising.</p> <p>OR</p> <p>B. Explosive mixture exists inside containment.</p> <p>OR</p> <p>C. a. Pressure greater than containment depressurization actuation setpoint.</p> <p>AND</p> <p>b. Less than one full train of depressurization equipment operating.</p>	<p>CT8: Containment Pressure</p> <p>Loss</p> <p>1. A containment pressure rise followed by a rapid UNPLANNED drop in containment pressure.</p> <p>OR</p> <p>2. Containment pressure or IRWST level response not consistent with LOCA conditions.</p> <p>Potential Loss</p> <p>1. Containment pressure > 62 psig and rising.</p> <p>OR</p> <p>2. Containment Hydrogen > 4%.</p>	<p>Rev 4/Rev 5 Differences Replace 'unexplained' with unplanned to prevent potential confusion in the use of separate terms.</p> <p>Rev 4/Rev 5 Deviations (Deviation #2) (PL)3: This FPB threshold was not used. Containment spray and coolers are not safety related or credited for emergency depressurization actuation conditions at U.S. EPR.</p>
<p>5. CNMT Isolation Valves Status After CNMT Isolation</p> <p>Loss Valve(s) not closed AND downstream pathway to the environment exists</p> <p>Potential Loss Not Applicable</p>	<p>5. CNMT Isolation Failure or Bypass</p> <p>Loss</p> <p>A. a. Failure of all isolation valves in any one line to close.</p> <p>AND</p> <p>b. Direct downstream pathway to the environment exists after containment isolation signal.</p> <p>Potential Loss Not Applicable</p>	<p>CT9: Containment Isolation Failure or Bypass</p> <p>Loss</p> <p>1. a. Failure of ALL isolation valves in any one line to close.</p> <p>AND</p> <p>b. Direct downstream pathway to the environment exists after containment isolation signal.</p> <p>Potential Loss None</p>	<p>Note: See FAQ 2006-20</p> <p>Rev 4 Differences Specified condition exists after an isolation signal within the EAL wording (makes consistent with IC).</p> <p>Rev 4/Rev 5 Differences None</p> <p>Rev 4/Rev 5 Deviations None</p>
<p>7. Other (Site-Specific) Indications</p> <p>Loss (Site specific) as applicable</p> <p>Potential Loss (Site specific) as applicable</p>	<p>7. Other Site Specific Indications</p> <p>Loss A. (site specific) as applicable.</p> <p>Potential Loss A. (site specific) as applicable.</p>	<p>N/A</p>	<p>Note: U.S. EPR does not have any additional FPB thresholds in this category.</p> <p>Rev 4/Rev 5 Differences N/A</p> <p>Rev 4/Rev 5 Deviations N/A</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>8. Emergency Director Judgment Any condition in the opinion of the Emergency Director that indicates Loss or Potential Loss of the Containment Barrier</p>	<p>8. Emergency Director Judgment</p> <p>Loss</p> <p>A. Any condition in the opinion of the Emergency Director that indicates Loss of the Containment Barrier.</p> <p>Potential Loss</p> <p>A. Any condition in the opinion of the Emergency Director that indicates Potential Loss of the Containment Barrier.</p>	<p>CT10: Emergency Director Judgment</p> <p>Loss</p> <p>1. Any condition in the opinion of the Emergency Director that indicates loss of the containment barrier.</p> <p>Potential Loss</p> <p>1. Any condition in the opinion of the Emergency Director that indicates potential loss of the containment barrier.</p>	<p>Rev 4/Rev 5 Differences</p> <p>None</p> <p>Rev 4/Rev 5 Deviations</p> <p>None</p>
<p>Abnormal Radiological Condition / Abnormal Radiological Effluent Releases</p>			
<p>AG1</p> <p>Initiating Condition -- GENERAL EMERGENCY</p> <p>Offsite Dose Resulting from an Actual or Imminent Release of Gaseous Radioactivity Exceeds 1000 mR TEDE or 5000 mR Thyroid CDE for the Actual or Projected Duration of the Release Using Actual Meteorology.</p> <p>Operating Mode Applicability: All</p> <p>Example Emergency Action Levels: (1 or 2 or 3 or 4)</p> <p><i>Note: If dose assessment results are available at the time of declaration, the classification should be based on EAL #2 instead of EAL #1. While necessary declarations should not be delayed awaiting results, the dose assessment should be initiated / completed in order to determine if the classification should be subsequently escalated.</i></p> <ol style="list-style-type: none"> VALID reading on one or more of the following radiation monitors that exceeds or expected to exceed the reading shown for 15 minutes or longer: (site-specific list) Dose assessment using actual meteorology indicates doses greater than 1000 mR TEDE or 5000 mR thyroid CDE at or beyond the site boundary. A VALID reading sustained for 15 minutes or longer on perimeter radiation monitoring system greater than 1000 mR/hr. (for sites having telemetered perimeter monitors) Field survey results indicate closed window dose rates exceeding 1000 mR/hr expected to continue for more than one hour; or analyses of field survey samples indicate thyroid CDE of 5000 mR for one hour of inhalation, at or beyond site boundary. 	<p>AG1</p> <p>Initiating Condition - GENERAL EMERGENCY</p> <p>Off-site dose resulting from an actual or IMMINENT release of gaseous radioactivity greater than 1000 mrem TEDE or 5000 mrem Thyroid CDE for the actual or projected duration of the release using actual meteorology.</p> <p>Operating Mode Applicability: All</p> <p>Example Emergency Action Levels: (1 or 2 or 3 or 4)</p> <p><i>Note:</i> The Emergency Director should not wait until the applicable time has elapsed, but should declare the event as soon as it is determined that the condition will likely exceed the applicable time. If dose assessment results are available, declaration should be based on dose assessment instead of radiation monitor values. Do not delay declaration awaiting dose assessment results.</p> <ol style="list-style-type: none"> VALID reading on ANY of the following radiation monitors greater than the reading shown for 15 minutes or longer: (site specific monitor list and threshold values) Dose assessment using actual meteorology indicates doses greater than 1000 mrem TEDE or 5000 mrem thyroid CDE at or beyond the site boundary. VALID perimeter radiation monitoring system reading greater than 1000 mR/hr for 15 minutes or longer. (for sites having telemetered perimeter monitors) Field survey results indicate closed window dose rates greater than 1000 mR/hr expected to continue for 60 minutes or longer; or analyses of field survey samples indicate thyroid CDE greater than 5000 mrem for one hour of inhalation, at or beyond site boundary. 	<p>RG1</p> <p>Initiating Condition:</p> <p>Offsite dose resulting from an actual or IMMINENT release of gaseous radioactivity greater than 1000 mRem TEDE or 5000 mRem Thyroid CDE for the actual or projected duration of the release using actual meteorology.</p> <p>Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D</p> <p>EALs:</p> <p><i>Note:</i> If dose assessment results are available, declaration should be based on dose assessment instead of radiation monitor values. Do not delay declaration awaiting dose assessment results.</p> <ol style="list-style-type: none"> Vent Stack Noble Gas ({{KLK90 FR001}}) > (RG1.1) µCi/hr for 15 minutes or longer. <p>OR</p> <ol style="list-style-type: none"> Dose assessment using actual meteorology indicates doses at or beyond the site boundary of EITHER of the following: <ul style="list-style-type: none"> > 1000 mRem TEDE > 5000 mRem CDE Thyroid <p>OR</p> <ol style="list-style-type: none"> Field survey results at or beyond the site boundary indicate EITHER of the following: <ul style="list-style-type: none"> Gamma (closed window) dose rate > 1000 mR/hr for 60 minutes or longer. Air samples analysis > 5000 mRem CDE Thyroid for one hour of inhalation. 	<p>Note: Changes to the nesting format of EALs RG1.2 and RG1.3 are considered administrative.</p> <p>Rev 4 Differences</p> <p>The second note sentence has been moved to the classification description and instructions section and is reworded to match Rev 5.</p> <p>Rev 5 Differences</p> <p>The first note sentence has been moved to the classification description and instructions section as it is applicable to all time imbedded EALs and is a fundamental instruction for classification, not a threshold criterion.</p> <p>Rev 4/Rev 5 Differences</p> <p>Removed 'VALID'. All EALs and FBPs presume valid indications, reports or conditions as explained in the classification description and instructions section. Valid is a fundamental instruction for classification, not a threshold criterion.</p> <p>Removed the word 'reading' for human factors considerations (minimize extraneous words).</p> <p>NEI AG1.3 is N/A for CCNPP U3 because the plant is not equipped with a perimeter radiation monitoring system.</p> <p>Rev 4/Rev 5 Deviations</p> <p>None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>AS1</p> <p>Initiating Condition -- SITE AREA EMERGENCY</p> <p>Offsite Dose Resulting from an Actual or Imminent Release of Gaseous Radioactivity Exceeds 100 mR TEDE or 500 mR Thyroid CDE for the Actual or Projected Duration of the Release.</p> <p>Operating Mode Applicability: All</p> <p>Example Emergency Action Levels: (1 or 2 or 3 or 4)</p> <p><i>Note: If dose assessment results are available at the time of declaration, the classification should be based on EAL #2 instead of EAL #1. While necessary declarations should not be delayed awaiting results, the dose assessment should be initiated / completed in order to determine if the classification should be subsequently escalated.</i></p> <ol style="list-style-type: none"> 1. VALID reading on one or more of the following radiation monitors that exceeds or is expected to exceed the reading shown for 15 minutes or longer: (site-specific list) 2. Dose assessment using actual meteorology indicates doses greater than 100 mR TEDE or 500 mR thyroid CDE at or beyond the site boundary. 3. A VALID reading sustained for 15 minutes or longer on perimeter radiation monitoring system greater than 100 mR/hr. (for sites having telemetered perimeter monitors) 4. Field survey results indicate closed window dose rates exceeding 100 mR/hr expected to continue for more than one hour; or analyses of field survey samples indicate thyroid CDE of 500 mR for one hour of inhalation, at or beyond the site boundary. 	<p>AS1</p> <p>Initiating Condition - SITE AREA EMERGENCY</p> <p>Off-site dose resulting from an actual or IMMEDIATE release of gaseous radioactivity greater than 100 mrem TEDE or 500 mrem Thyroid CDE for the actual or projected duration of the release.</p> <p>Operating Mode Applicability: All</p> <p>Example Emergency Action Levels: (1 or 2 or 3 or 4)</p> <p>Note: The Emergency Director should not wait until the applicable time has elapsed, but should declare the event as soon as it is determined that the condition will likely exceed the applicable time. If dose assessment results are available, declaration should be based on dose assessment instead of radiation monitor values. Do not delay declaration awaiting dose assessment results.</p> <ol style="list-style-type: none"> 1. VALID reading on ANY of the following radiation monitors greater than the reading shown for 15 minutes or longer: (site specific monitor list and threshold values) 2. Dose assessment using actual meteorology indicates doses greater than 100 mrem TEDE or 500 mrem thyroid CDE at or beyond the site boundary. 3. VALID perimeter radiation monitoring system reading greater than 100 mR/hr for 15 minutes or longer. (for sites having telemetered perimeter monitors) 4. Field survey results indicate closed window dose rates greater than 100 mR/hr expected to continue for 60 minutes or longer; or analyses of field survey samples indicate thyroid CDE greater than 500 mrem for one hour of inhalation, at or beyond the site boundary. 	<p>RS1</p> <p>Initiating Condition:</p> <p>Offsite dose resulting from an actual or IMMEDIATE release of gaseous radioactivity greater than 100 mRem TEDE or 500 mRem Thyroid CDE for the actual or projected duration of the release using actual meteorology.</p> <p>Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D</p> <p>EALs:</p> <p>Note: If dose assessment results are available, declaration should be based on dose assessment instead of radiation monitor values. Do not delay declaration awaiting dose assessment results.</p> <ol style="list-style-type: none"> 1. Vent Stack Noble Gas ({{KLK90 FR001}}) > (RS1.1) µCi/hr for 15 minutes or longer. OR 2. Dose assessment using actual meteorology indicates doses at or beyond the site boundary of EITHER of the following: > 100 mRem TEDE > 500 mRem CDE Thyroid OR 3. Field survey results at or beyond the site boundary indicate EITHER of the following: Gamma (closed window) dose rate > 100 mR/hr for 60 minutes or longer. Air sample analysis > 500 mRem CDE Thyroid for one hour of inhalation. 	<p>Note: Changes to the nesting format of EALs RS1.2 and RS1.3 are considered administrative.</p> <p>Rev 4 Differences</p> <p>The second note sentence has been moved to the classification description and instructions section and is reworded to match Rev 5.</p> <p>Rev 5 Differences</p> <p>The first note sentence has been moved to the classification description and instructions section as it is applicable to all time imbedded EALs and is a fundamental instruction for classification, not a threshold criterion.</p> <p>Rev 4/Rev 5 Differences</p> <p>Added IC wording "using actual meteorology" to be consistent with the EAL, basis and RG1 IC (NEI AG1).</p> <p>Removed 'VALID'. All EALs and FBP's presume valid indications, reports or conditions as explained in the classification description and instructions section. Valid is a fundamental instruction for classification, not a threshold criterion.</p> <p>Removed the word 'reading' for human factors considerations (minimize extraneous words).</p> <p>NEI AS1.3 is N/A for CCNPP U3 because the plant is not equipped with a perimeter radiation monitoring system.</p> <p>Rev 4/Rev 5 Deviations</p> <p>None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>AA1</p> <p>Initiating Condition -- ALERT</p> <p>Any UNPLANNED Release of Gaseous or Liquid Radioactivity to the Environment that Exceeds 200 Times the Radiological Effluent Technical Specifications for 15 Minutes or Longer.</p> <p>Operating Mode Applicability: All</p> <p>Example Emergency Action Levels: (1 or 2 or 3 or 4 or 5)</p> <ol style="list-style-type: none"> 1. VALID reading on any effluent monitor that exceeds 200 times the alarm setpoint established by a current radioactivity discharge permit for 15 minutes or longer. 2. VALID reading on one or more of the following radiation monitors that exceeds the reading shown for 15 minutes or longer: (site-specific list) 3. Confirmed sample analyses for gaseous or liquid releases indicates concentrations or release rates, with a release duration of 15 minutes or longer, in excess of 200 times (site-specific Technical Specifications). 4. VALID reading on perimeter radiation monitoring system greater than 10.0 mR/hr above normal background sustained for 15 minutes or longer (for sites having telemetered perimeter monitors). 5. VALID indication on automatic real-time dose assessment capability greater than (site-specific value) for 15 minutes or longer (for sites having such capability). 	<p>AA1</p> <p>Initiating Condition - ALERT</p> <p>Any release of gaseous or liquid radioactivity to the environment greater than 200 times the Radiological Effluent Technical Specifications/ODCM for 15 minutes or longer.</p> <p>Operating Mode Applicability: All</p> <p>Example Emergency Action Levels: (1 or 2 or 3 or 4 or 5)</p> <p>Note: The Emergency Director should not wait until the applicable time has elapsed, but should declare the event as soon as it is determined that the release duration has exceeded, or will likely exceed, the applicable time. In the absence of data to the contrary, assume that the release duration has exceeded the applicable time if an ongoing release is detected and the release start time is unknown.</p> <ol style="list-style-type: none"> 1. VALID reading on ANY of the following radiation monitors greater than the reading shown for 15 minutes or longer: (site specific monitor list and threshold values) 2. VALID reading on any effluent monitor reading greater than 200 times the alarm setpoint established by a current radioactivity discharge permit for 15 minutes or longer. 3. Confirmed sample analyses for gaseous or liquid releases indicates concentrations or release rates greater than 200 times (site specific RETS values) for 15 minutes or longer. 4. VALID reading on perimeter radiation monitoring system reading greater than 10.0 mR/hr above normal* background for 15 minutes or longer. (for sites having telemetered perimeter monitors) 5. VALID indication on automatic real-time dose assessment capability indicating greater than (site specific value) for 15 minutes or longer. (for sites having such capability) <p>* Normal can be considered as the highest reading in the past twenty-four hours excluding the current peak value.</p>	<p>RA1</p> <p>Initiating Condition:</p> <p>Any release of gaseous or liquid radioactivity to the environment greater than 200 times the ODCM limit for 15 minutes or longer.</p> <p>Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D</p> <p>EALs:</p> <p>Note: In the absence of data to the contrary, assume that the release duration has exceeded the applicable time if an ongoing release is detected and the release start time is unknown.</p> <ol style="list-style-type: none"> 1. Vent Stack Noble Gas ({{KLK90 FR001}}) > (RA1.1) μCi/hr for 15 minutes or longer. <p>OR</p> <ol style="list-style-type: none"> 2. ANY of the following effluent monitors > 200 times the high alarm setpoint established by a current radioactivity discharge permit for 15 minutes or longer: Rad Waste Building Transfer Tank Discharge Line Activity Monitor ({{KPK29 CR001/002}}) Discharge permit specified monitor <p>OR</p> <ol style="list-style-type: none"> 3. Confirmed sample analysis for gaseous or liquid releases > 200 times the ODCM limit for 15 minutes or longer. 	<p>Rev 4 Differences</p> <p>Removed unplanned from the IC. Plant operations do not allow for the release of radioactivity > 200x ODCM.</p> <p>Added note for unknown duration to match Rev 5.</p> <p>Rev 5 Differences</p> <p>The first note sentence has been moved to the classification description and instructions section as it is applicable to all time imbedded EALs and is a fundamental instruction for classification, not a threshold criterion.</p> <p>Rev 4/Rev 5 Differences</p> <p>Removed 'VALID'. All EALs and FBPs presume valid indications, reports or conditions as explained in the classification description and instructions section. Valid is a fundamental instruction for classification, not a threshold criterion.</p> <p>Removed the words 'reading' and 'indicate' for human factors considerations (minimize extraneous words).</p> <p>RA1.2 specifies high alarm which is set at a fraction of the ODCM limit.</p> <p>NEI AA1.4 is N/A for CCNPP U3 because the plant is not equipped with a perimeter radiation monitoring system.</p> <p>NEI AA1.5 is N/A for CCNPP U3 because the plant is not equipped with an automatic real-time dose assessment system.</p> <p>Rev 4/Rev 5 Deviations</p> <p>None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>AU1</p> <p>Initiating Condition -- NOTIF OF UNUSUAL EVENT</p> <p>Any UNPLANNED Release of Gaseous or Liquid Radioactivity to the Environment that Exceeds Two Times the Radiological Effluent Technical Specifications for 60 Minutes or Longer.</p> <p>Operating Mode Applicability: All</p> <p>Example Emergency Action Levels: (1 or 2 or 3 or 4 or 5)</p> <ol style="list-style-type: none"> 1. VALID reading on any effluent monitor that exceeds two times the alarm setpoint established by a current radioactivity discharge permit for 60 minutes or longer. 2. VALID reading on one or more of the following radiation monitors that exceeds the reading shown for 60 minutes or longer: (site-specific list) 3. Confirmed sample analyses for gaseous or liquid releases indicates concentrations or release rates, with a release duration of 60 minutes or longer, in excess of two times (site-specific Technical Specifications). 4. VALID reading on perimeter radiation monitoring system greater than 0.10 mR/hr above normal background sustained for 60 minutes or longer (for sites having telemetered perimeter monitors). 5. VALID indication on automatic real-time dose assessment capability greater than (site-specific value) for 60 minutes or longer (for sites having such capability). 	<p>AU1</p> <p>Initiating Condition - NOTIF OF UNUSUAL EVENT</p> <p>Any release of gaseous or liquid radioactivity to the environment greater than 2 times the Radiological Effluent Technical Specifications/ODCM for 60 minutes or longer.</p> <p>Operating Mode Applicability: All</p> <p>Example Emergency Action Levels: (1 or 2 or 3 or 4 or 5)</p> <p>Note: The Emergency Director should not wait until the applicable time has elapsed, but should declare the event as soon as it is determined that the release duration has exceeded, or will likely exceed, the applicable time. In the absence of data to the contrary, assume that the release duration has exceeded the applicable time if an ongoing release is detected and the release start time is unknown.</p> <ol style="list-style-type: none"> 1. VALID reading on ANY of the following radiation monitors greater than the reading shown for 60 minutes or longer: (site specific monitor list and threshold values) 2. VAILD reading on any effluent monitor reading greater than 2 times the alarm setpoint established by a current radioactivity discharge permit for 60 minutes or longer. 3. Confirmed sample analyses for gaseous or liquid releases indicates concentrations or release rates greater than 2 times (site specific RETS values) for 60 minutes or longer. 4. VAILD reading on perimeter radiation monitoring system reading greater than 0.10 mR/hr above normal* background for 60 minutes or longer. (for sites having telemetered perimeter monitors) 5. VAILD indication on automatic real-time dose assessment capability indicating greater than (site specific value) for 60 minutes or longer. (for sites having such capability) <p>* Normal can be considered as the highest reading in the past twenty-four hours excluding the current peak value.</p>	<p>RU1</p> <p>Initiating Condition:</p> <p>Any release of gaseous or liquid radioactivity to the environment greater than 2 times the ODCM limit for 60 minutes or longer.</p> <p>Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D</p> <p>EALs:</p> <p>Note: In the absence of data to the contrary, assume that the release duration has exceeded the applicable time if an ongoing release is detected and the release start time is unknown.</p> <ol style="list-style-type: none"> 1. Vent Stack Noble Gas ({KLK90 FR001}) > (RU1.1) μCi/hr for 60 minutes or longer. <p>OR</p> <ol style="list-style-type: none"> 2. ANY of the following effluent monitors > 2 times the high alarm setpoint established by a current radioactivity discharge permit for 60 minutes or longer: Rad Waste Building Transfer Tank Discharge Line Activity Monitor ({KPK29 CR001/002}) Discharge permit specified monitor <p>OR</p> <ol style="list-style-type: none"> 3. Confirmed sample analysis for gaseous or liquid releases > 2 times the ODCM limit for 60 minutes or longer. 	<p>Rev 4 Differences</p> <p>Removed unplanned from the IC plant operations do not allow for the release of radioactivity > 2x ODCM.</p> <p>Added note for unknown duration to match Rev 5.</p> <p>Rev 5 Differences</p> <p>The first note sentence has been moved to the classification description and instructions section as it is applicable to all time imbedded EALs and is a fundamental instruction for classification, not a threshold criterion.</p> <p>Rev 4/Rev 5 Differences</p> <p>Removed 'VALID'. All EALs and FBPs presume valid indications, reports or conditions as explained in the classification description and instructions section. Valid is a fundamental instruction for classification, not a threshold criterion. Removed the words 'reading' and 'indicate' for human factors considerations (minimize extraneous words).</p> <p>RU1.2 specifies high alarm which is set at a fraction of the ODCM limit.</p> <p>NEI AU1.4 is N/A for CCNPP U3 because the plant is not equipped with a perimeter radiation monitoring system.</p> <p>NEI AU1.5 is N/A for CCNPP U3 because the plant is not equipped with a automatic real-time dose assessment system.</p> <p>Rev 4/Rev 5 Deviations</p> <p>None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>AA2</p> <p>Initiating Condition -- ALERT</p> <p>Damage to Irradiated Fuel or Loss of Water Level that Has or Will Result in the Uncovering of Irradiated Fuel Outside the Reactor Vessel.</p> <p>Operating Mode Applicability: All</p> <p>Example Emergency Action Levels: (1 or 2)</p> <ol style="list-style-type: none"> 1. A VALID (site-specific) alarm or reading on one or more of the following radiation monitors: (site-specific monitors) Refuel Floor Area Radiation Monitor Fuel Handling Building Ventilation Monitor Refueling Bridge Area Radiation Monitor 2. Water level less than (site-specific) feet for the reactor refueling cavity, spent fuel pool and fuel transfer canal that will result in irradiated fuel uncovering. 	<p>AA2</p> <p>Initiating Condition - ALERT</p> <p>Damage to irradiated fuel or loss of water level that has resulted or will result in the uncovering of irradiated fuel outside the reactor vessel.</p> <p>Operating Mode Applicability: All</p> <p>Example Emergency Action Levels: (1 or 2)</p> <ol style="list-style-type: none"> 1. A water level drop in the reactor refueling cavity, spent fuel pool or fuel transfer canal that will result in irradiated fuel becoming uncovered. 2. A VALID alarm or (site specific elevated reading) on ANY of the following due to damage to irradiated fuel or loss of water level. (site specific radiation monitors) 	<p>RA2</p> <p>Initiating Condition:</p> <p>Damage to irradiated fuel or loss of water level that has resulted or will result in the uncovering of irradiated fuel outside the reactor vessel.</p> <p>Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D</p> <p>EALs:</p> <ol style="list-style-type: none"> 1. A water level drop in the reactor refueling cavity, spent fuel pool or fuel transfer canal that will result in irradiated fuel becoming uncovered. <p>OR</p> <ol style="list-style-type: none"> 2. >1000 mR/hr on ANY of the following due to damage to irradiated fuel or loss of water level: Reactor Building Refueling Bridge Area Dose Rate Monitor ({JYK15 CR003}) Fuel Building Spent Fuel Mast Bridge Dose Rate Monitor ({JYK28 CR002}) Fuel Building Fuel Pool Dose Rate Monitor ({JYK28 CR001}) Transfer Pit Dose Rate Monitor ({JYK23 CR001}) 	<p>Note: See FAQ 2006-13</p> <p>Rev 4 Differences</p> <p>Removed site specific level value from AA2.2 to allow predictive declaration per Rev 5.</p> <p>Rev 4/Rev 5 Differences</p> <p>Removed 'VALID'. All EALs and FBP's presume valid indications, reports or conditions as explained in the classification description and instructions section. Valid is a fundamental instruction for classification, not a threshold criterion.</p> <p>Rev 4/Rev 5 Deviations</p> <p>None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>AU2 Initiating Condition -- NOTIF OF UNUSUAL EVENT Unexpected Increase in Plant Radiation. Operating Mode Applicability: All Example Emergency Action Levels: (1 or 2)</p> <ol style="list-style-type: none"> 1. a. VALID (site-specific) indication of uncontrolled water level decrease in the reactor refueling cavity, spent fuel pool, or fuel transfer canal with all irradiated fuel assemblies remaining covered by water. <p style="text-align: center;">AND</p> <ol style="list-style-type: none"> b. Unplanned VALID (site-specific) Direct Area Radiation Monitor reading increases 2. Unplanned VALID Direct Area Radiation Monitor readings increases by a factor of 1000 over normal* levels. <p>*Normal levels can be considered as the highest reading in the past twenty-four hours excluding the current peak value.</p>	<p>AU2 Initiating Condition - NOTIF OF UNUSUAL EVENT UNPLANNED rise in plant radiation levels. Operating Mode Applicability: All Example Emergency Action Levels: (1 or 2)</p> <ol style="list-style-type: none"> 1. a. UNPLANNED water level drop in a reactor refueling pathway as indicated by (site specific level or indication). <p style="text-align: center;">AND</p> <ol style="list-style-type: none"> b. VALID Area Radiation Monitor reading rise on (site specific list). 2. UNPLANNED VALID Area Radiation Monitor readings or survey results indicate a rise by a factor of 1000 over normal* levels. <p>*Normal levels can be considered as the highest reading in the past twenty-four hours excluding the current peak value.</p>	<p>RU2 Initiating Condition: UNPLANNED rise in plant radiation levels. Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D EALs:</p> <ol style="list-style-type: none"> 1. a. UNPLANNED water level drop in the reactor refueling cavity, spent fuel pool or fuel transfer canal as indicated by ANY of the following: Reactor refueling cavity level ({FAK31 CL003 or CL004}) < (RU2.1.a(b1)) feet. Spent fuel pool level ({FAL18 CL001}) < (RU2.1.a(b2)) feet. Fuel transfer canal level ({FAL18 CL004 or CL005}) < (RU2.1.a(b3)) feet. Report of visual observation. <p style="text-align: center;">AND</p> <ol style="list-style-type: none"> b. Area radiation monitor rise on ANY of the following: Reactor Building Refueling Bridge Area Dose Rate Monitor ({JYK15 CR003}) Fuel Building Spent Fuel Mast Bridge Dose Rate Monitor ({JYK28 CR002}) Fuel Building Fuel Pool Dose Rate Monitor ({JYK28 CR001}) Transfer Pit Dose Rate Monitor ({JYK23 CR001}) <p style="text-align: center;">OR</p> <ol style="list-style-type: none"> 2. UNPLANNED area radiation monitor or radiation survey > 1000 times NORMAL LEVELS. 	<p>Rev 4 Differences Changed 'unexpected' to 'unplanned' in the IC to match EAL wording and Rev 5. Added 'or survey results' to AU2.2 wording to account for areas without ARMs and to match Rev 5.</p> <p>Rev 5 Differences Specified components of 'reactor refueling pathway' to be consistent with RA2 (AA2). Removed asterisk note for 'normal' as NORMAL LEVELS is a defined term.</p> <p>Rev 4/Rev 5 Differences Removed 'VALID'. All EALs and FBPs presume valid indications, reports or conditions as explained in the classification description and instructions section. Valid is a fundamental instruction for classification, not a threshold criterion. Removed the words 'reading' and 'indicate' for human factors considerations (minimize extraneous words).</p> <p>Rev 4/Rev 5 Deviations None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>AA3 Initiating Condition -- ALERT Release of Radioactive Material or Increases in Radiation Levels Within the Facility That Impedes Operation of Systems Required to Maintain Safe Operations or to Establish or Maintain Cold Shutdown Operating Mode Applicability: All Example Emergency Action Levels: (1 or 2) 1. VALID (site-specific) radiation monitor readings GREATER THAN 15 mR/hr in areas requiring continuous occupancy to maintain plant safety functions: (Site-specific) list 2. VALID (site-specific) radiation monitor readings GREATER THAN <site specific> values in areas requiring infrequent access to maintain plant safety functions. (Site-specific) list</p>	<p>AA3 Initiating Condition - ALERT Rise in radiation levels within the facility that impedes operation of systems required to maintain plant safety functions. Operating Mode Applicability: All Example Emergency Action Levels: (1 or 2) 1. Dose rate greater than 15 mR/hr ANY of the following areas requiring continuous occupancy to maintain plant safety functions: (site specific area list)</p>	<p>RA3 Initiating Condition: Rise in radiation levels within the facility that impedes operation of systems required to maintain plant safety functions. Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D EALs: 1. Dose rate > 15 mR/hr in ANY of the following areas requiring continuous occupancy to maintain plant safety functions: Control Room Central Alarm Station</p>	<p>Note: See FAQ 2006-25 Rev 4 Differences Removed 'release of radioactive material' from IC as the EALs do not require that condition to be met. The change eliminates an inconsistency and matches Rev 5. Removed 'VALID'. All EALs and FBP's presume valid indications, reports or conditions as explained in the classification description and instructions section. Valid is a fundamental instruction for classification, not a threshold criterion. Rev 5 Differences None Rev 4/Rev 5 Deviations None</p>
Hazards and Other Conditions Affecting Plant Safety			
<p>HG1 (NRC Bulletin 2005-02 Version) Initiating Condition - GENERAL EMERGENCY Security Event Resulting in Loss of Physical Control of the Facility. Operating Mode Applicability: All Example Emergency Action Level: 1. A HOSTILE FORCE has taken control of plant equipment such that plant personnel are unable to operate equipment required to maintain safety functions.</p>	<p>HG1 Initiating Condition - GENERAL EMERGENCY HOSTILE ACTION resulting in loss of physical control of the facility. Operating Mode Applicability: All Example Emergency Action Level: (1 or 2) 1. A HOSTILE ACTION has occurred such that plant personnel are unable to operate equipment required to maintain safety functions. 2. A HOSTILE ACTION has caused failure of Spent Fuel Cooling Systems and IMMEDIATE fuel damage is likely for a freshly off-loaded reactor core in pool.</p>	<p>HG1 Initiating Condition: HOSTILE ACTION resulting in loss of physical control of the facility. Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D EALs: 1. A HOSTILE ACTION has occurred such that plant personnel are unable to operate equipment required to maintain safety functions. OR 2. A HOSTILE ACTION has caused failure of spent fuel cooling systems and IMMEDIATE fuel damage is likely.</p>	<p>Rev 4 Differences Replaced security event with hostile action to provide connection with a defined term. Reworded for hostile action versus hostile force to match new IC wording. Added second threshold for fuel pool events (pulled from basis). Rev 5 Differences Removed 'for a freshly off-loaded reactor core in pool' to eliminate unnecessary complication. Operators do not track days since offload in the control Room and imminent damage should apply for any type of fuel in the pool. Rev 4/Rev 5 Deviations None</p>
<p>HS1 (NRC Bulletin 2005-02 Version) Initiating Condition - SITE AREA EMERGENCY Confirmed Security Event in a Plant VITAL AREA. Operating Mode Applicability: All Example Emergency Action Level: 1. Other security events as determined from (site-specific) Safeguards Contingency Plan and reported by the (site-specific) security shift supervision.</p>		<p>HS1 Initiating Condition: HOSTILE ACTION within the PROTECTED AREA. Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D EALs: 1. A HOSTILE ACTION is occurring or has occurred within the PROTECTED AREA as reported by the Security Shift Supervisor.</p>	<p>Rev 4 Differences Replaced security event with hostile action to provide connection with a defined term. Rev 4 Deviations (Deviation #3) Combined with NEI HS4 for consistency with Rev 5 as a SAE within the protected area would become applicable prior to the SAE within the vital area.</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p><u>HS4 (NRC Bulletin 2005-02 Version)</u> Initiating Condition - SITE AREA EMERGENCY Site Attack. Operating Mode Applicability: All Example Emergency Action Level: 1. A notification from the site security force that an armed attack, explosive attack, airliner impact, or other HOSTILE ACTION is occurring or has occurred within the PROTECTED AREA.</p>	<p><u>HS4</u> Initiating Condition - SITE AREA EMERGENCY HOSTILE ACTION within the PROTECTED AREA. Operating Mode Applicability: All Example Emergency Action Level: 1. A HOSTILE ACTION is occurring or has occurred within the PROTECTED AREA as reported by the (site security shift supervision).</p>	<p><u>HS1</u> Initiating Condition: HOSTILE ACTION within the PROTECTED AREA. Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D EALs: 1. A HOSTILE ACTION is occurring or has occurred within the PROTECTED AREA as reported by the Security Shift Supervisor.</p>	<p><u>Rev 4 Differences</u> Reworded IC to better describe EAL and for consistency with Rev 5. <u>Rev 5 Differences</u> None <u>Rev 4/Rev 5 Deviations</u> None</p>
<p><u>HA4 (NRC Bulletin 2005-02 Version)</u> Initiating Condition - ALERT Confirmed Security Event in a Plant PROTECTED AREA. Operating Mode Applicability: All Example Emergency Action Level: 1. Other security events as determined from (site-specific) Safeguards Contingency Plan and reported by the (site-specific) security shift supervision.</p>		<p><u>HA1</u> Initiating Condition: HOSTILE ACTION within the OWNER CONTROLLED AREA or airborne attack threat. Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D EALs: 1. A HOSTILE ACTION is occurring or has occurred within the OWNER CONTROLLED AREA as reported by the Security Shift Supervisor. OR 2. A validated notification from the NRC of a LARGE AIRCRAFT attack threat within 30 minutes of the site.</p>	<p><u>Rev 4 Differences</u> Replaced security event with hostile action to provide connection with a defined term. <u>Rev 4 Deviations (Deviation #4)</u> Combined with NEI HA8 for consistency with Rev 5 as an Alert within the owner controlled area would become applicable prior to the Alert within the protected area.</p>
<p><u>HA8 (NRC Bulletin 2005-02 Version)</u> Initiating Condition - ALERT Notification of HOSTILE ACTION within the OCA. Operating Mode Applicability: All Example Emergency Action Level: 1. A notification from the site security force that an armed attack, explosive attack, airliner impact or other HOSTILE ACTION is occurring or has occurred within the OCA.</p>	<p><u>HA4</u> Initiating Condition - ALERT HOSTILE ACTION within the OWNER CONTROLLED AREA or airborne attack threat. Operating Mode Applicability: All Example Emergency Action Level: (1 or 2) 1. A HOSTILE ACTION is occurring or has occurred within the OWNER CONTROLLED AREA as reported by the (site specific security shift supervision). 2. A validated notification from NRC of an airliner attack threat within 30 minutes of the site.</p>	<p><u>HA1</u> Initiating Condition: HOSTILE ACTION within the OWNER CONTROLLED AREA or airborne attack threat. Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D EALs: 1. A HOSTILE ACTION is occurring or has occurred within the OWNER CONTROLLED AREA as reported by the Security Shift Supervisor. OR 2. A validated notification from the NRC of a LARGE AIRCRAFT attack threat within 30 minutes of the site.</p>	<p><u>Rev 4 Differences</u> Combined NEI ICs HA1 and HA8. <u>Rev 4/Rev 5 Differences</u> Changed airliner to large aircraft. Using large aircraft includes non-airline owned large aircraft and is therefore more comprehensive and appropriate, while maintaining the meaning and intent. <u>Rev 4/Rev 5 Deviations</u> None</p>
<p><u>HA1 (NRC Bulletin 2005-02 Version)</u> Initiating Condition - ALERT Notification of an Airborne Attack Threat. Operating Mode Applicability: All Example Emergency Action Level: 1. A validated notification from NRC of an airliner attack threat less than 30 minutes away.</p>			

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>HU4 (NRC Bulletin 2005-02 Version) Initiating Condition – NOTIF OF UNUSUAL EVENT Confirmed Security Event Which Indicates a Potential Degradation in the Level of Safety of the Plant. Operating Mode Applicability: All Example Emergency Action Level: 1. Security events as determined from (site-specific) Safeguards Contingency Plan and reported by the (site-specific) security shift supervision. 2. A credible site-specific security threat notification. 3. A validated notification from NRC providing information on an aircraft threat greater than 30 minutes away.</p>	<p>HU4 Initiating Condition – NOTIF OF UNUSUAL EVENT Confirmed SECURITY CONDITION or threat which indicates a potential degradation in the level of safety of the plant. Operating Mode Applicability: All Example Emergency Action Levels: (1 or 2 or 3) 1. A SECURITY CONDITION that does NOT involve a HOSTILE ACTION as reported by the (site specific security shift supervision). 2. A credible site specific security threat notification. 3. A validated notification from NRC providing information of an aircraft threat.</p>	<p>HU1 Initiating Condition: Confirmed SECURITY CONDITION or threat which indicates a potential degradation in the level of safety of the plant. Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D EALs: 1. A SECURITY CONDITION that does not involve a HOSTILE ACTION as reported by the Security Shift Supervisor. OR 2. A credible site specific security threat notification. OR 3. A validated notification from the NRC providing information of an aircraft threat.</p>	<p>Rev 4 Differences Replaced 'security events' with 'security condition' as a new defined term to be incorporated in the safeguards contingency plan. Eliminated 30 minute criteria to resolve gap for small aircraft within 30 minutes. Rev 5 Differences None Rev 4/Rev 5 Deviations None</p>
<p>HS2 Initiating Condition – SITE AREA EMERGENCY Control Room Evacuation Has Been Initiated and Plant Control Cannot Be Established. Operating Mode Applicability: All Example Emergency Action Level: 1. Control room evacuation has been initiated. AND Control of the plant cannot be established per (site-specific) procedure within (site-specific) minutes.</p>	<p>HS2 Initiating Condition - SITE AREA EMERGENCY Control room evacuation has been initiated and plant control cannot be established. Operating Mode Applicability: All Example Emergency Action Level: 1. a. Control room evacuation has been initiated. AND b. Control of the plant cannot be established within (site specific minutes).</p>	<p>HS2 Initiating Condition: Control Room evacuation has been initiated and plant control cannot be established. Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D EALs: 1. a. Control Room evacuation has been initiated. AND b. Control of the plant cannot be established within 15 minutes.</p>	<p>Rev 4 Differences Removed reference to a site specific procedure. Rev 5 Differences None Rev 4/Rev 5 Deviations None</p>
<p>HA5 Initiating Condition -- ALERT Control Room Evacuation Has Been Initiated. Operating Mode Applicability: All Example Emergency Action Level: 1. Entry into (site-specific) procedure for control room evacuation.</p>	<p>HA5 Initiating Condition - ALERT Control room evacuation has been initiated. Operating Mode Applicability: All Example Emergency Action Level: 1. (Site-specific procedure) requires control room evacuation.</p>	<p>HA2 Initiating Condition: Control Room evacuation has been initiated. Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D EALs: 1. Control Room evacuation has been initiated.</p>	<p>Rev 4/Rev 5 Differences Reworded EAL to be consistent with IC and to eliminate the need to rely on a procedure reference as a threshold (human factors). This does not change the meaning or intent. Rev 4/Rev 5 Deviations None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation							
<p>HA1 Initiating Condition -- ALERT Natural and Destructive Phenomena Affecting the Plant VITAL AREA. Operating Mode Applicability: All Example Emergency Action Levels: (1 or 2 or 3 or 4 or 5 or 6) 1. (Site-Specific) method indicates Seismic Event greater than Operating Basis Earthquake (OBE). 2. Tornado or high winds greater than (site-specific) mph within PROTECTED AREA boundary and resulting in VISIBLE DAMAGE to any of the following plant structures / equipment or Control Room indication of degraded performance of those systems. Reactor Building Intake Building Ultimate Heat Sink Refueling Water Storage Tank Diesel Generator Building Turbine Building Condensate Storage Tank Control Room Other (Site-Specific) Structures. 3. Vehicle crash within PROTECTED AREA boundary and resulting in VISIBLE DAMAGE to any of the following plant structures or equipment therein or control indication of degraded performance of those systems: Reactor Building Intake Building Ultimate Heat Sink Refueling Water Storage Tank Diesel Generator Building Turbine Building Condensate Storage Tank Control Room Other (Site-Specific) Structures. 4. Turbine failure-generated missiles result in any VISIBLE DAMAGE to or penetration of any of the following plant areas: (site-specific) list. 5. Uncontrolled flooding in (site-specific) areas of the plant that results in degraded safety system performance as indicated in the control room or that creates industrial safety hazards (e.g., electric shock) that precludes access necessary to operate or monitor safety equipment. 6. (Site-Specific) occurrences within PROTECTED AREA boundary and resulting in VISIBLE DAMAGE to plant structures containing equipment necessary for safe shutdown, or has caused damage as evidenced by control room indication of degraded performance of those systems.</p>	<p>HA1 Initiating Condition - ALERT Natural or destructive phenomena affecting VITAL AREAS. Operating Mode Applicability: All Example EALs: (1 or 2 or 3 or 4 or 5 or 6) 1. a. Seismic event greater than Operating Basis Earthquake (OBE) as indicated by (site specific seismic instrumentation) reading (site-specific OBE limit). AND b. Earthquake confirmed by ANY of the following: Earthquake felt in plant National Earthquake Center Control Room indication of degraded performance of systems required for the safe shutdown of the plant. 2. Tornado striking or high winds greater than (site specific mph) resulting in VISIBLE DAMAGE to ANY of the following structures containing safety systems or components OR control room indication of degraded performance of those safety systems: (site specific structure list) 3. Internal flooding in ANY of the following areas resulting in an electrical shock hazard that precludes access to operate or monitor safety equipment OR control room indication of degraded performance of those safety systems: (site specific area list) 4. Turbine failure-generated PROJECTILES resulting in VISIBLE DAMAGE to or penetration of ANY of the following structures containing safety systems or components OR control room indication of degraded performance of those safety systems: (site specific structure list) 5. Vehicle crash resulting in VISIBLE DAMAGE to ANY of the following structures containing safety systems or components OR control room indication of degraded performance of those safety systems: (site specific structure list) 6. (Site specific occurrences) resulting in VISIBLE DAMAGE to ANY of the following structures containing safety systems or components OR control room indication of degraded performance of those safety systems: (site specific structure list)</p>	<p>HA3 Initiating Condition: Natural or destructive phenomena affecting VITAL AREAS. Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D EALs: 1. a. Seismic event > OBE as indicated by PICS seismic monitoring system. AND b. Earthquake confirmed by ANY of the following: Earthquake felt in plant National Earthquake Center Control Room indication of degraded performance of systems required for the safe shutdown of the plant. OR 2. Tornado or high winds > {45 m/sec (100 mph)} resulting in EITHER of the following: VISIBLE DAMAGE to ANY structures in Table H-1 areas containing safety systems or components. Control Room indication of degraded performance of those safety systems. OR 3. Internal flooding in Table H-1 areas resulting in EITHER of the following: Electrical shock hazard that precludes access to operate or monitor safety equipment. Control Room indication of degraded performance of those safety systems. OR 4. {Bay water level > 39.4 feet (12.0 meters)} {Mean Sea Level}} resulting in EITHER of the following: VISIBLE DAMAGE to ANY structures in Table H-1 areas containing safety systems or components. Control Room indication of degraded performance of those safety systems. OR 5. Turbine failure-generated PROJECTILES resulting in EITHER of the following: VISIBLE DAMAGE to or penetration of ANY structures in Table H-1 areas containing safety systems or components. Control Room indication of degraded performance of those safety systems. OR 6. Vehicle crash resulting in EITHER of the following: VISIBLE DAMAGE to ANY structures in Table H-1 areas containing safety systems or components. Control Room indication of degraded performance of those safety systems.</p>	<p>Note: Changes to the nesting format of EALs HA3.2-6 are considered administrative. Rev 4 Differences Added control room indication as an additional criterion for turbine and flooding EALs. Rev 5 Differences Removed HA3.2 tornado 'striking' as it is irrelevant whether it strikes or not if it causes visible damage to structures containing safety systems or components. Rev 4/Rev 5 Differences Altered the EAL sequence to allow for site specific external flooding EAL to follow internal flooding EAL (human factors). Rev 4/Rev 5 Deviations None Table <table border="1" data-bbox="2349 979 2878 1233"> <thead> <tr> <th>Table H-1: Safe Shutdown Vital Areas</th> </tr> </thead> <tbody> <tr> <td>Control Room</td> </tr> <tr> <td>Safeguards Buildings</td> </tr> <tr> <td>Containment</td> </tr> <tr> <td>Nuclear Auxiliary Building</td> </tr> <tr> <td>Emergency Power Generating Buildings</td> </tr> <tr> <td>ESW Cooling Towers</td> </tr> </tbody> </table></p>	Table H-1: Safe Shutdown Vital Areas	Control Room	Safeguards Buildings	Containment	Nuclear Auxiliary Building	Emergency Power Generating Buildings	ESW Cooling Towers
Table H-1: Safe Shutdown Vital Areas										
Control Room										
Safeguards Buildings										
Containment										
Nuclear Auxiliary Building										
Emergency Power Generating Buildings										
ESW Cooling Towers										

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation							
<p>HU1</p> <p>Initiating Condition -- NOTIF OF UNUSUAL EVENT</p> <p>Natural and Destructive Phenomena Affecting the PROTECTED AREA.</p> <p>Operating Mode Applicability: All</p> <p>Example Emergency Action Level: (1 or 2 or 3 or 4 or 5 or 6 or 7)</p> <ol style="list-style-type: none"> (Site-Specific) method indicates felt earthquake. Report by plant personnel of tornado or high winds greater than (site-specific) mph striking within PROTECTED AREA boundary. Vehicle crash into plant structures or systems within PROTECTED AREA boundary. Report by plant personnel of an unanticipated EXPLOSION within PROTECTED AREA boundary resulting in VISIBLE DAMAGE to permanent structure or equipment. Report of turbine failure resulting in casing penetration or damage to turbine or generator seals. Uncontrolled flooding in (site-specific) areas of the plant that has the potential to affect safety related equipment needed for the current operating mode. (Site-Specific) occurrences affecting the PROTECTED AREA. 	<p>HU1</p> <p>Initiating Condition - NOTIF OF UNUSUAL EVENT</p> <p>Natural or destructive phenomena affecting the PROTECTED AREA.</p> <p>Operating Mode Applicability: All</p> <p>Example Emergency Action Level: (1 or 2 or 3 or 4 or 5 or 6)</p> <ol style="list-style-type: none"> Seismic event identified by ANY 2 of the following: <ul style="list-style-type: none"> Seismic event confirmed by (site-specific indication or method) Earthquake felt in plant National Earthquake Center Tornado striking within the PROTECTED AREA or high winds greater than (site-specific mph). Internal flooding that has the potential to affect safety related equipment required by Technical Specifications for the current operating mode in ANY of the following areas: <ul style="list-style-type: none"> (site specific area list) Turbine failure resulting in casing penetration or damage to turbine or generator seals (Site specific occurrences affecting PROTECTED AREA). 	<p>HU3</p> <p>Initiating Condition:</p> <p>Natural or destructive phenomena affecting the PROTECTED AREA.</p> <p>Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D</p> <p>EALs:</p> <ol style="list-style-type: none"> <ol style="list-style-type: none"> Seismic event trigger as indicated by PICS seismic monitoring system. <p>AND</p> <ol style="list-style-type: none"> Earthquake confirmed by EITHER of the following: <ul style="list-style-type: none"> Earthquake felt in plant National Earthquake Center <p>OR</p> <ol style="list-style-type: none"> Tornado within the PROTECTED AREA. <p>OR</p> <ol style="list-style-type: none"> High winds > {45 m/sec (100 mph)}. <p>OR</p> <ol style="list-style-type: none"> Internal flooding in Table H-1 areas that has the potential to affect safety related equipment required by Technical Specifications for the current operating mode. <p>OR</p> <ol style="list-style-type: none"> {Bay water level > 39.4 feet (12.0 meters)} {Mean Sea Level}}. <p>OR</p> <ol style="list-style-type: none"> Turbine failure resulting in casing penetration or damage to turbine or generator seals. <table border="1" data-bbox="1672 1306 2219 1560"> <thead> <tr> <th>Table H-1: Safe Shutdown Vital Areas</th> </tr> </thead> <tbody> <tr> <td>Control Room</td> </tr> <tr> <td>Safeguards Buildings</td> </tr> <tr> <td>Containment</td> </tr> <tr> <td>Nuclear Auxiliary Building</td> </tr> <tr> <td>Emergency Power Generating Buildings</td> </tr> <tr> <td>ESW Cooling Towers</td> </tr> </tbody> </table>	Table H-1: Safe Shutdown Vital Areas	Control Room	Safeguards Buildings	Containment	Nuclear Auxiliary Building	Emergency Power Generating Buildings	ESW Cooling Towers	<p>Note: See FAQ 2006-22.</p> <p>Note: Changes to the nesting format of EAL HU3.2 is considered administrative.</p> <p>Rev 4 Differences</p> <p>Moved explosion EAL to HU4.</p> <p>Removed 'report' stipulation from EALs to minimize unnecessary wording and match Rev 5.</p> <p>Removed 'uncontrolled' from flooding EAL as any flooding that has the potential to affect safety related equipment meets the intent of the UE ECL.</p> <p>Rev 5 Differences</p> <p>Nested HU3.1 to match HA3.1. NEI wording was established to accommodate plants that were not capable measuring ground motion at the UE level. U.S. EPR is capable of such monitoring.</p> <p>Removed HU3.2 tornado 'striking' as it is irrelevant whether it strikes within the protected area if the tornado itself is within the protected area.</p> <p>Rev 4/Rev 5 Differences</p> <p>Altered the EAL sequence to allow for site specific external flooding EAL to follow internal flooding EAL (human factors).</p> <p>Rev 4 Deviations (Deviation #5)</p> <p>Removed vehicle crash at the UE ECL. A crash of this type is too broad in that it can encompass minor cosmetic damage up to VISIBLE DAMAGE (which is covered by the Alert).</p> <p>Rev 5 Deviations</p> <p>None</p>
Table H-1: Safe Shutdown Vital Areas										
Control Room										
Safeguards Buildings										
Containment										
Nuclear Auxiliary Building										
Emergency Power Generating Buildings										
ESW Cooling Towers										

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation							
<p>HA2 Initiating Condition -- ALERT FIRE or EXPLOSION Affecting the Operability of Plant Safety Systems Required to Establish or Maintain Safe Shutdown. Operating Mode Applicability: All Example Emergency Action Level: 1. FIRE or EXPLOSION in any of the following (site-specific) areas: (Site-specific) list AND Affected system parameter indications show degraded performance or plant personnel report VISIBLE DAMAGE to permanent structures or equipment within the specified area</p>	<p>HA2 Initiating Condition - ALERT FIRE or EXPLOSION affecting the operability of plant safety systems required to establish or maintain safe shutdown. Operating Mode Applicability: All Example Emergency Action Level: 1. FIRE or EXPLOSION resulting in VISIBLE DAMAGE to ANY of the following structures containing safety systems or components OR control room indication of degraded performance of those safety systems: (site specific structure list)</p>	<p>HA4 Initiating Condition: FIRE or EXPLOSION affecting the operability of plant safety systems required to establish or maintain safe shutdown. Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D EALs: 1. FIRE or EXPLOSION resulting in EITHER of the following: VISIBLE DAMAGE to ANY structures in Table H-1 areas containing safety systems or components. Control Room indication of degraded performance of those safety systems.</p> <table border="1" data-bbox="1712 713 2262 969"> <thead> <tr> <th>Table H-1: Safe Shutdown Vital Areas</th> </tr> </thead> <tbody> <tr><td>Control Room</td></tr> <tr><td>Safeguards Buildings</td></tr> <tr><td>Containment</td></tr> <tr><td>Nuclear Auxiliary Building</td></tr> <tr><td>Emergency Power Generating Buildings</td></tr> <tr><td>ESW Cooling Towers</td></tr> </tbody> </table>	Table H-1: Safe Shutdown Vital Areas	Control Room	Safeguards Buildings	Containment	Nuclear Auxiliary Building	Emergency Power Generating Buildings	ESW Cooling Towers	<p>Note: Changes to the nesting format of EAL HA4.1 is considered administrative. Rev 4/Rev 5 Differences None Rev 4/Rev 5 Deviations None</p>
Table H-1: Safe Shutdown Vital Areas										
Control Room										
Safeguards Buildings										
Containment										
Nuclear Auxiliary Building										
Emergency Power Generating Buildings										
ESW Cooling Towers										
<p>HU2 Initiating Condition -- NOTIF OF UNUSUAL EVENT FIRE Within PROTECTED AREA Boundary Not Extinguished Within 15 Minutes of Detection. Operating Mode Applicability: All Example Emergency Action Level: 1. FIRE in buildings or areas contiguous to any of the following (site-specific) areas not extinguished within 15 minutes of control room notification or verification of a control room alarm: (Site-specific) list</p>	<p>HU2 Initiating Condition - NOTIF OF UNUSUAL EVENT FIRE within the PROTECTED AREA not extinguished within 15 minutes of detection or EXPLOSION within the PROTECTED AREA. Operating Mode Applicability: All Example Emergency Action Level: (1 or 2) Note: The Emergency Director should not wait until the applicable time has elapsed, but should declare the event as soon as it is determined that the duration has exceeded, or will likely exceed, the applicable time. 1. FIRE not extinguished within 15 minutes of control room notification or verification of a control room FIRE alarm in ANY of the following areas: (site specific area list) 2. EXPLOSION within the PROTECTED AREA.</p>	<p>HU4 Initiating Condition: FIRE within the PROTECTED AREA not extinguished within 15 minutes of detection or EXPLOSION within the PROTECTED AREA. Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D EALs: 1. FIRE not extinguished within 15 minutes of Control Room notification or verification of a Control Room FIRE alarm in actual contact with or immediately adjacent to ANY of the Table H-1 areas.</p> <table border="1" data-bbox="1672 1423 2222 1679"> <thead> <tr> <th>Table H-1: Safe Shutdown Vital Areas</th> </tr> </thead> <tbody> <tr><td>Control Room</td></tr> <tr><td>Safeguards Buildings</td></tr> <tr><td>Containment</td></tr> <tr><td>Nuclear Auxiliary Building</td></tr> <tr><td>Emergency Power Generating Buildings</td></tr> <tr><td>ESW Cooling Towers</td></tr> </tbody> </table> <p>OR 2. EXPLOSION within the PROTECTED AREA.</p>	Table H-1: Safe Shutdown Vital Areas	Control Room	Safeguards Buildings	Containment	Nuclear Auxiliary Building	Emergency Power Generating Buildings	ESW Cooling Towers	<p>Rev 4 Differences Replaced 'contiguous' with 'in actual contact with or immediately adjacent to' to simplify understanding. Moved explosion EAL NEI HU1 into this IC and removed reference to visible damage as it is already implicit in the definition of explosion. Rev 5 Differences Note content has been moved to the classification description and instructions section as it is applicable to all time imbedded EALs and is a fundamental instruction for classification, not a threshold criterion. Added 'in actual contact with or immediately adjacent to' from the basis section to HU4.1 to support the use of table H-1. Rev 4/Rev 5 Deviations None</p>
Table H-1: Safe Shutdown Vital Areas										
Control Room										
Safeguards Buildings										
Containment										
Nuclear Auxiliary Building										
Emergency Power Generating Buildings										
ESW Cooling Towers										

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>HA3 Initiating Condition -- ALERT Release of Toxic or Flammable Gases Within or Contiguous to a VITAL AREA Which Jeopardizes Operation of Systems Required to Maintain Safe Operations or Establish or Maintain Safe Shutdown. Operating Mode Applicability: All Example Emergency Action Levels: (1 or 2)</p> <ol style="list-style-type: none"> 1. Report or detection of toxic gases within or contiguous to a VITAL AREA in concentrations that may result in an atmosphere IMMEDIATELY DANGEROUS TO LIFE AND HEALTH (IDLH). 2. Report or detection of gases in concentration greater than the LOWER FLAMMABILITY LIMIT within or contiguous to a VITAL AREA. 	<p>HA3 Initiating Condition - ALERT Access to a VITAL AREA is prohibited due to toxic, corrosive, asphyxiant or flammable gases which jeopardize operation of operating equipment required to maintain safe operations or safely shutdown the reactor. Operating Mode Applicability: All Example Emergency Action Levels:</p> <p>Note: If the equipment in the stated area was already inoperable, or out of service, before the event occurred, then this EAL should not be declared as it will have no adverse impact on the ability of the plant to safely operate or safely shutdown beyond that already allowed by Technical Specifications at the time of the event.</p> <ol style="list-style-type: none"> 1. Access to a VITAL AREA is prohibited due to toxic, corrosive, asphyxiant or flammable gases which jeopardize operation of systems required to maintain safe operations or safely shutdown the reactor. 	<p>HA5 Initiating Condition: Access to a VITAL AREA is prohibited due to toxic, corrosive, asphyxiant or flammable gases which jeopardize the ability to safely operate or shutdown the reactor. Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D EALs:</p> <p>Note: If the equipment in the VITAL AREA was inoperable or out of service before the event occurred, then this EAL should not be declared as it will have no adverse impact on the ability to safely operate or shutdown the plant beyond that allowed by Technical Specifications at the time of the event.</p> <ol style="list-style-type: none"> 1. Access to a VITAL AREA is prohibited due to toxic, corrosive, asphyxiant or flammable gases which jeopardize the ability to safely operate or shutdown the reactor. 	<p>Note: See FAQ 2006-24. Rev 4 Differences Reworded IC and EAL for readability and added corrosive and asphyxiant to list. Rev 5 Differences Reworded IC, note and EAL for readability. Rev 4/Rev 5 Deviations None</p>
<p>HU3 Initiating Condition – NOTIF OF UNUSUAL EVENT Release of Toxic or Flammable Gases Deemed Detrimental to Normal Operation of the Plant. Operating Mode Applicability: All Example Emergency Action Levels: (1 or 2)</p> <ol style="list-style-type: none"> 1. Report or detection of toxic or flammable gases that has or could enter the site area boundary in amounts that can affect NORMAL PLANT OPERATIONS. 2. Report by Local, County or State Officials for evacuation or sheltering of site personnel based on an offsite event. 	<p>HU3 Initiating Condition – NOTIF OF UNUSUAL EVENT Release of toxic, corrosive, asphyxiant or flammable gases deemed detrimental to NORMAL PLANT OPERATIONS. Operating Mode Applicability: All Example Emergency Action Levels: (1 or 2)</p> <ol style="list-style-type: none"> 1. Toxic, corrosive, asphyxiant or flammable gases in amounts that have or could adversely affect NORMAL PLANT OPERATIONS. 2. Report by local, county or state officials for evacuation or sheltering of site personnel based on an off-site event. 	<p>HU5 Initiating Condition: Release of toxic, corrosive, asphyxiant or flammable gases deemed detrimental to NORMAL PLANT OPERATIONS. Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D EALs:</p> <ol style="list-style-type: none"> 1. Toxic, corrosive, asphyxiant or flammable gases in amounts that have or could adversely affect NORMAL PLANT OPERATIONS. <p>OR</p> <ol style="list-style-type: none"> 2. Report by local, county or state officials for evacuation or sheltering of site personnel based on an offsite event. 	<p>Note: See FAQ 2006-23. Rev 4 Differences Added corrosive and asphyxiant to list. Removed 'report or detection' from EAL #1 to minimize extraneous words. Rev 5 Differences None Rev 4/Rev 5 Deviations None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>HG2</p> <p>Initiating Condition – GENERAL EMERGENCY</p> <p>Other Conditions Existing Which in the Judgment of the Emergency Director Warrant Declaration of General Emergency.</p> <p>Operating Mode Applicability: All</p> <p>Example Emergency Action Level:</p> <ol style="list-style-type: none"> Other conditions exist which in the judgment of the Emergency Director indicate that events are in process or have occurred which involve actual or imminent substantial core degradation or melting with potential for loss of containment integrity. Releases can be reasonably expected to exceed EPA Protective Action Guideline exposure levels offsite for more than the immediate site area. 	<p>HG2</p> <p>Initiating Condition - GENERAL EMERGENCY</p> <p>Other conditions exist which in the judgment of the Emergency Director warrant declaration of a General Emergency.</p> <p>Operating Mode Applicability: All</p> <p>Example Emergency Action Level:</p> <ol style="list-style-type: none"> Other conditions exist which in the judgment of the Emergency Director indicate that events are in progress or have occurred which involve actual or IMMINENT substantial core degradation or melting with potential for loss of containment integrity or HOSTILE ACTION that results in an actual loss of physical control of the facility. Releases can be reasonably expected to exceed EPA Protective Action Guideline exposure levels off-site for more than the immediate site area. 	<p>HG6</p> <p>Initiating Condition:</p> <p>Other conditions exist which in the judgment of the Emergency Director warrant declaration of General Emergency.</p> <p>Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D</p> <p>EALs:</p> <ol style="list-style-type: none"> Other conditions exist which in the judgment of the Emergency Director indicate that events are in progress or have occurred which involve actual or imminent substantial core degradation or melting with potential for loss of containment integrity or HOSTILE ACTION that results in an actual loss of physical control of the facility. Releases can be reasonably expected to exceed EPA Protective Action Guideline exposure levels offsite for more than the immediate site area. 	<p>Rev 4 Differences</p> <p>Updated EAL to match ECL definition based on Bulletin 2005-02 changes that add threat related considerations.</p> <p>Rev 5 Differences</p> <p>None</p> <p>Rev 4/Rev 5 Deviations</p> <p>None</p>
<p>HS3</p> <p>Initiating Condition – SITE AREA EMERGENCY</p> <p>Other Conditions Existing Which in the Judgment of the Emergency Director Warrant Declaration of Site Area Emergency.</p> <p>Operating Mode Applicability: All</p> <p>Example Emergency Action Level:</p> <ol style="list-style-type: none"> Other conditions exist which in the judgment of the Emergency Director indicate that events are in process or have occurred which involve actual or likely major failures of plant functions needed for protection of the public. Any releases are not expected to result in exposure levels which exceed EPA Protective Action Guideline exposure levels beyond the site boundary. 	<p>HS3</p> <p>Initiating Condition - SITE AREA EMERGENCY</p> <p>Other conditions exist which in the judgment of the Emergency Director warrant declaration of a Site Area Emergency.</p> <p>Operating Mode Applicability: All</p> <p>Example Emergency Action Level:</p> <ol style="list-style-type: none"> Other conditions exist which in the judgment of the Emergency Director indicate that events are in progress or have occurred which involve actual or likely major failures of plant functions needed for protection of the public or HOSTILE ACTION that results in intentional damage or malicious acts; (1) toward site personnel or equipment that could lead to the likely failure of or; (2) that prevent effective access to equipment needed for the protection of the public. Any releases are not expected to result in exposure levels which exceed EPA Protective Action Guideline exposure levels beyond the site boundary. 	<p>HS6</p> <p>Initiating Condition:</p> <p>Other conditions exist which in the judgment of the Emergency Director warrant declaration of Site Area Emergency.</p> <p>Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D</p> <p>EALs:</p> <ol style="list-style-type: none"> Other conditions exist which in the judgment of the Emergency Director indicate that events are in progress or have occurred which involve actual or likely major failures of plant functions needed for protection of the public or HOSTILE ACTION that results in intentional damage or malicious acts; (1) toward site personnel or equipment that could lead to the likely failure of or, (2) that prevent effective access to equipment needed for the protection of the public. Any releases are not expected to result in exposure levels which exceed EPA Protective Action Guideline exposure levels beyond the site boundary. 	<p>Rev 4 Differences</p> <p>Updated EAL to match ECL definition based on Bulletin 2005-02 changes that add threat related considerations.</p> <p>Rev 5 Differences</p> <p>None</p> <p>Rev 4/Rev 5 Deviations</p> <p>None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>HA6 Initiating Condition -- ALERT Other Conditions Existing Which in the Judgment of the Emergency Director Warrant Declaration of an Alert. Operating Mode Applicability: All Example Emergency Action Level: 1. Other conditions exist which in the judgment of the Emergency Director indicate that events are in process or have occurred which involve actual or likely potential substantial degradation of the level of safety of the plant. Any releases are expected to be limited to small fractions of the EPA Protective Action Guideline exposure levels.</p>	<p>HA6 Initiating Condition - ALERT Other conditions exist which in the judgment of the Emergency Director warrant declaration of an Alert. Operating Mode Applicability: All Example Emergency Action Level: 1. Other conditions exist which in the judgment of the Emergency Director indicate that events are in progress or have occurred which involve actual or potential substantial degradation of the level of safety of the plant or a security event that involves probable life threatening risk to site personnel or damage to site equipment because of HOSTILE ACTION. Any releases are expected to be limited to small fractions of the EPA Protective Action Guideline exposure levels.</p>	<p>HA6 Initiating Condition: Other conditions exist which in the judgment of the Emergency Director warrant declaration of an Alert. Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D EALs: 1. Other conditions exist which in the judgment of the Emergency Director indicate that events are in progress or have occurred which involve actual or potential substantial degradation of the level of safety of the plant or a security event that involves probable life threatening risk to site personnel or damage to site equipment because of HOSTILE ACTION. Any releases are expected to be limited to small fractions of the EPA Protective Action Guideline exposure levels.</p>	<p>Rev 4 Differences Updated EAL to match ECL definition based on Bulletin 2005-02 changes that add threat related considerations. Rev 5 Differences None Rev 4/Rev 5 Deviations None</p>
<p>HU5 Initiating Condition – NOTIF OF UNUSUAL EVENT Other Conditions Existing Which in the Judgment of the Emergency Director Warrant Declaration of a NOUE. Operating Mode Applicability: All Example Emergency Action Level: 1. Other conditions exist which in the judgment of the Emergency Director indicate that events are in process or have occurred which indicate a potential degradation of the level of safety of the plant. No releases of radioactive material requiring offsite response or monitoring are expected unless further degradation of safety systems occurs.</p>	<p>HU5 Initiating Condition – NOTIF OF UNUSUAL EVENT Other conditions exist which in the judgment of the Emergency Director warrant declaration of a NOUE. Operating Mode Applicability: All Example Emergency Action Level: 1. Other conditions exist which in the judgment of the Emergency Director indicate that events are in progress or have occurred which indicate a potential degradation of the level of safety of the plant or indicate a security threat to facility protection has been initiated. No releases of radioactive material requiring off-site response or monitoring are expected unless further degradation of safety systems occurs.</p>	<p>HU6 Initiating Condition: Other conditions exist which in the judgment of the Emergency Director warrant declaration of an Unusual Event. Operating Mode Applicability: 1, 2, 3, 4, 5, 6, D EALs: 1. Other conditions exist which in the judgment of the Emergency Director indicate that events are in progress or have occurred which indicate a potential degradation of the level of safety of the plant or indicate a security threat to facility protection has been initiated. No releases of radioactive material requiring offsite response or monitoring are expected unless further degradation of safety systems occurs.</p>	<p>Rev 4 Differences Updated EAL to match ECL definition based on Bulletin 2005-02 changes that add threat related considerations. Rev 5 Differences None Rev 4/Rev 5 Deviations None</p>

NEI 99-01 Rev. 4 System Malfunctions - Hot	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>SG1</p> <p>Initiating Condition -- GENERAL EMERGENCY</p> <p>Prolonged Loss of All Offsite Power and Prolonged Loss of All Onsite AC Power to Essential Busses.</p> <p>Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown</p> <p>Example Emergency Action Level:</p> <p>1. Loss of power to (site-specific) transformers.</p> <p>AND</p> <p>Failure of (site-specific) emergency diesel generators to supply power to emergency busses.</p> <p>AND</p> <p>Either of the following: (a or b)</p> <p>a. Restoration of at least one emergency bus within (site-specific) hours is <u>not</u> likely</p> <p>OR</p> <p>b. (Site-Specific) Indication of continuing degradation of core cooling based on Fission Product Barrier monitoring.</p>	<p>SG1</p> <p>Initiating Condition - GENERAL EMERGENCY</p> <p>Prolonged loss of all Off-site and all On-Site AC power to emergency busses.</p> <p>Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown</p> <p>Example Emergency Action Level:</p> <p>1. a. Loss of all off-site and on-site AC power to (site specific emergency busses).</p> <p>AND</p> <p>b. EITHER of the following:</p> <p>Restoration of at least one emergency bus in less than (site specific hours) is not likely.</p> <p>(Site specific Indication of continuing degradation of core cooling based on Fission Product Barrier monitoring.)</p>	<p>SG1</p> <p>Initiating Condition:</p> <p>Prolonged loss of all offsite and all onsite AC power to emergency busses.</p> <p>Operating Mode Applicability: 1, 2, 3, 4</p> <p>EALs:</p> <p>1. a. Loss of ALL offsite and ALL onsite AC power to 31, 32, 33 and 34 BDA busses.</p> <p>AND</p> <p>b. EITHER of the following:</p> <p>Restoration of at least one emergency bus within 2 hours is not likely.</p> <p>(Calculated Clad Temperature in Region 4).</p>	<p>Note: See FAQ 2006-16.</p> <p>Rev 4 Differences</p> <p>Replaced 'essential busses' with 'emergency busses' and replaced transformer designations with the emergency bus designations.</p> <p>Removed threshold for DGs as it was redundant to the loss of all power to the emergency busses.</p> <p>Rev 5 Differences</p> <p>None</p> <p>Rev 4/Rev 5 Deviations</p> <p>None</p>
<p>SS1</p> <p>Initiating Condition -- SITE AREA EMERGENCY</p> <p>Loss of All Offsite Power and Loss of All Onsite AC Power to Essential Busses.</p> <p>Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown</p> <p>Example Emergency Action Level:</p> <p>1. Loss of power to (site-specific) transformers.</p> <p>AND</p> <p>Failure of (site-specific) emergency generators to supply power to emergency busses.</p> <p>AND</p> <p>Failure to restore power to at least one emergency bus within (site-specific) minutes from the time of loss of both offsite and onsite AC power.</p>	<p>SS1</p> <p>Initiating Condition - SITE AREA EMERGENCY</p> <p>Loss of all Off-site and all On-Site AC power to emergency busses for 15 minutes or longer.</p> <p>Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown</p> <p>Example Emergency Action Level:</p> <p>Note: The Emergency Director should not wait until the applicable time has elapsed, but should declare the event as soon as it is determined that the condition has exceeded, or will likely exceed, the applicable time.</p> <p>1. Loss of all Off-Site and all On-Site AC power to (site specific emergency busses) for 15 minutes or longer.</p>	<p>SS1</p> <p>Initiating Condition:</p> <p>Loss of all offsite and all onsite AC power to emergency busses for 15 minutes or longer.</p> <p>Operating Mode Applicability: 1, 2, 3, 4</p> <p>EALs:</p> <p>1. Loss of ALL offsite and ALL onsite AC power to 31, 32, 33 and 34 BDA busses for 15 minutes or longer.</p>	<p>Note: See FAQ 2006-03.</p> <p>Rev 4 Differences</p> <p>Replaced 'essential busses' with 'emergency busses' and replaced transformer designations with the emergency bus designations.</p> <p>Removed threshold for DGs as it was redundant to the loss of all power to the emergency busses.</p> <p>Combined imbedded time criteria into single EAL.</p> <p>Rev 5 Differences</p> <p>Note content has been moved to the classification description and instructions section as it is applicable to all time imbedded EALs and is a fundamental instruction for classification, not a threshold criterion.</p> <p>Rev 4 Deviations (Deviation #6)</p> <p>Deleted generic EAL basis guidance related to evaluating the critical loads on the emergency busses (MU and DHR). Losses of these systems are fully covered within the fission product barrier thresholds.</p> <p>Rev 5 Deviations</p> <p>None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>SA5</p> <p>Initiating Condition -- ALERT</p> <p>AC power capability to essential busses reduced to a single power source for greater than 15 minutes such that any additional single failure would result in station blackout.</p> <p>Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown</p> <p>Example Emergency Action Level:</p> <p>1. AC power capability to site-specific essential busses reduced to a single power source for greater than 15 minutes</p> <p>AND</p> <p>Any additional single failure will result in station blackout.</p>	<p>SA5</p> <p>Initiating Condition - ALERT</p> <p>AC power capability to emergency busses reduced to a single power source for 15 minutes or longer such that any additional single failure would result in station blackout.</p> <p>Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown</p> <p>Example Emergency Action Level:</p> <p>Note: The Emergency Director should not wait until the applicable time has elapsed, but should declare the event as soon as it is determined that the condition has exceeded, or will likely exceed, the applicable time.</p> <p>1. a. AC power capability to (site-specific emergency busses) reduced to a single power source for 15 minutes or longer.</p> <p>AND</p> <p>b. Any additional single failure will result in station blackout.</p>	<p>SA1</p> <p>Initiating Condition:</p> <p>AC power capability to emergency busses reduced to a single source for 15 minutes or longer.</p> <p>Operating Mode Applicability: 1, 2, 3, 4</p> <p>EALs:</p> <p>1. AC power to 31, 32, 33 and 34 BDA busses is reduced to a single source for 15 minutes or longer.</p>	<p>Rev 4 Differences</p> <p>Replaced 'essential busses' with 'emergency busses'.</p> <p>Rev 5 Differences</p> <p>Note content has been moved to the classification description and instructions section as it is applicable to all time imbedded EALs and is a fundamental instruction for classification, not a threshold criterion.</p> <p>Rev 4/Rev 5 Differences</p> <p>Removed IC and threshold wording on the additional single failure. The reference to station blackout is inaccurate (additional loss to emergency bus may not result in a blackout if power is being backfed to non-vital busses) and the threshold is sufficient on its own to describe the single source conditions.</p> <p>Rev 4/Rev 5 Deviations</p> <p>None</p>
<p>SU1</p> <p>Initiating Condition -- NOTIF OF UNUSUAL EVENT</p> <p>Loss of All Offsite Power to Essential Busses for Greater Than 15 Minutes.</p> <p>Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown</p> <p>Example Emergency Action Level:</p> <p>1. Loss of power to (site-specific) transformers for greater than 15 minutes.</p> <p>AND</p> <p>At least (site-specific) emergency generators are supplying power to emergency busses.</p>	<p>SU1</p> <p>Initiating Condition - NOTIF OF UNUSUAL EVENT</p> <p>Loss of all Off-site AC power to emergency busses for 15 minutes or longer.</p> <p>Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown</p> <p>Example Emergency Action Level:</p> <p>Note: The Emergency Director should not wait until the applicable time has elapsed, but should declare the event as soon as it is determined that the condition has exceeded, or will likely exceed, the applicable time.</p> <p>1. Loss of all off-site AC power to (site specific emergency busses) for 15 minutes or longer.</p>	<p>SU1</p> <p>Initiating Condition:</p> <p>Loss of all offsite AC power to emergency busses for 15 minutes or longer.</p> <p>Operating Mode Applicability: 1, 2, 3, 4</p> <p>EALs:</p> <p>1. Loss of ALL offsite AC power to 31, 32, 33 and 34 BDA busses for 15 minutes or longer.</p>	<p>Note: See FAQ 2006-02.</p> <p>Rev 4 Differences</p> <p>Removed second threshold (DG running) as it was irrelevant to the EAL. If it is not running the Alert is met.</p> <p>Rev 5 Differences</p> <p>Note content has been moved to the classification description and instructions section as it is applicable to all time imbedded EALs and is a fundamental instruction for classification, not a threshold criterion.</p> <p>Rev 4/Rev 5 Deviations</p> <p>None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>SS3 Initiating Condition -- SITE AREA EMERGENCY Loss of All Vital DC Power. Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown Example Emergency Action Level: 1. Loss of All Vital DC Power based on (site-specific) bus voltage indications for greater than 15 minutes.</p>	<p>SS3 Initiating Condition - SITE AREA EMERGENCY Loss of all vital DC power for 15 minutes or longer. Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown Example Emergency Action Level: Note: The Emergency Director should not wait until the applicable time has elapsed, but should declare the event as soon as it is determined that the condition has exceeded, or will likely exceed, the applicable time. 1. Less than (site specific bus voltage indication) on all (site specific Vital DC busses) for 15 minutes or longer.</p>	<p>SS2 Initiating Condition: Loss of required DC power for 15 minutes or longer. Operating Mode Applicability: 1, 2, 3, 4 EALs: 1. < 210 VDC on the required 31, 32, 33 and 34 BUC busses for 15 minutes or longer.</p>	<p>Rev 4 Differences None Rev 5 Differences Note content has been moved to the classification description and instructions section as it is applicable to all time imbedded EALs and is a fundamental instruction for classification, not a threshold criterion. Rev 4/Rev 5 Deviations None</p>
<p>SG2 Initiating Condition -- GENERAL EMERGENCY Failure of the Reactor Protection System to Complete an Automatic Scram and Manual Scram was NOT Successful and There is Indication of an Extreme Challenge to the Ability to Cool the Core. Operating Mode Applicability: Power Operation, Startup Example Emergency Action Level: 1. Indications exist that automatic and manual scram were not successful. AND Either of the following: (a or b) a. Indication(s) exists that the core cooling is extremely challenged. OR b. Indication(s) exists that heat removal is extremely challenged.</p>	<p>SG2 Initiating Condition - GENERAL EMERGENCY Automatic Scram (Trip) and all manual actions fail to shutdown the reactor and indication of an extreme challenge to the ability to cool the core exists. Operating Mode Applicability: Power Operation, Startup Example Emergency Action Level: 1. a. An automatic scram (trip) failed to shutdown the reactor. AND b. All manual actions do not shutdown the reactor as indicated by (site specific indications of reactor not shutdown). AND c. EITHER of the following exist or have occurred due to continued power generation: (Site specific indication that core cooling is extremely challenged.) (Site specific indication that heat removal is extremely challenged.)</p>	<p>SG3 Initiating Condition: Automatic trip and all manual actions failed to shutdown the reactor and indication of an extreme challenge to the ability to cool the core exists. Operating Mode Applicability: 1, 2 EALs: 1. a. An automatic reactor trip failed to shutdown the reactor as indicated by reactor power > 5%. AND b. All manual trip actions failed to shutdown the reactor as indicated by reactor power > 5%. AND c. EITHER of the following have occurred: (Calculated Clad Temperature in Region 3 or higher). Loss of all four trains of Emergency Feedwater.</p>	<p>Rev 4 Differences Defined the specific power level for the 'indications' that exist. Rev 5 Differences Added reactor power threshold to SG3.1.a to provide consistent wording throughout the escalation pathway. Reworded SG3.1.b from 'do not shutdown' to 'failed to shutdown' to match IC and SG3.1.a wording (human factors). This does not change the meaning or intent. Also specified manual 'trip' actions to distinguish from emergency boration actions. Removed the SG3.1.c words 'exist or' for human factors considerations (minimize extraneous words). Removed the SG3.1.c words 'due to continued power generation' since continued power generation will not cause a loss of all four EFW trains. The NEI EAL does not specify reactor control console limitations. U.S. EPR generic basis added wording to allow all actions to shutdown the reactor for differentiation from the lower level ATWS EALs. Rev 4/Rev 5 Deviations None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>SS2 Initiating Condition -- SITE AREA EMERGENCY Failure of Reactor Protection System Instrumentation to Complete or Initiate an Automatic Reactor Scram Once a Reactor Protection System Setpoint Has Been Exceeded and Manual Scram Was NOT Successful. Operating Mode Applicability: Power Operation, Startup Example Emergency Action Level: 1. Indication(s) exist that automatic and manual scram were not successful.</p>	<p>SS2 Initiating Condition - SITE AREA EMERGENCY Automatic Scram (Trip) fails to shutdown the reactor and manual actions taken from the reactor control console are not successful in shutting down the reactor. Operating Mode Applicability: Power Operation, Startup Example Emergency Action Level: 1. a. An automatic scram (trip) failed to shutdown the reactor. AND b. Manual actions taken at the reactor control console do not shutdown the reactor as indicated by (site specific indications of reactor not shutdown).</p>	<p>SS3 Initiating Condition: Automatic trip failed to shutdown the reactor and manual actions taken from the reactor control console failed to shutdown the reactor. Operating Mode Applicability: 1, 2 EALs: 1. a. An automatic reactor trip failed to shutdown the reactor as indicated by reactor power > 5%. AND b. Manual trip actions taken at the reactor control console failed to shutdown the reactor as indicated by reactor power > 5%.</p>	<p>Rev 4 Differences Defined the specific power level for the 'indications' that exist. Rev 5 Differences Added reactor power threshold to SS3.1.a to provide consistent wording throughout the escalation pathway. Reworded IC and SS3.1.b from 'do not shutdown' to 'failed to shutdown' to match SG3 IC and SS3.1.a wording (human factors). This does not change the meaning or intent. Also specified manual 'trip' actions to distinguish from emergency boration actions. Rev 4/Rev 5 Deviations None</p>
<p>SA2 Initiating Condition -- ALERT Failure of Reactor Protection System Instrumentation to Complete or Initiate an Automatic Reactor Scram Once a Reactor Protection System Setpoint Has Been Exceeded and Manual Scram Was Successful. Operating Mode Applicability: Power Operation, Startup, Hot Standby Example Emergency Action Level: 1. Indication(s) exist that indicate that reactor protection system setpoint was exceeded and automatic scram did not occur, and a successful manual scram occurred.</p>	<p>SA2 Initiating Condition - ALERT Automatic Scram (Trip) fails to shutdown the reactor and the manual actions taken from the reactor control console are successful in shutting down the reactor. Operating Mode Applicability: Power Operation, Startup Example Emergency Action Level: 1. a. An automatic scram (trip) failed to shutdown the reactor. AND b. Manual actions taken at the reactor control console successfully shutdown the reactor as indicated by (site specific indications of plant shutdown).</p>	<p>SA3 Initiating Condition: Automatic trip failed to shutdown the reactor. Operating Mode Applicability: 1, 2 EALs: 1. An automatic reactor trip failed to shutdown the reactor as indicated by reactor power > 5%.</p>	<p>Rev 4/Rev 5 Differences Manual action removed as extraneous wording from the IC and EAL. Failure of the automatic trip alone is sufficient for the Alert level EAL. There is no alteration to the meaning or intent with this change. No more or fewer declarations would result from the change. Added reactor power threshold to SA3.1.a to provide consistent wording throughout the escalation pathway. Rev 4/Rev 5 Deviations None</p>
<p>SU8 Initiating Condition -- NOTIF OF UNUSUAL EVENT Inadvertent Criticality. Operating Mode Applicability: Hot Standby, Hot Shutdown Example Emergency Action Level: (1 or 2) 1. An UNPLANNED extended positive period observed on nuclear instrumentation. 2. An UNPLANNED sustained positive startup rate observed on nuclear instrumentation.</p>	<p>SU8 Initiating Condition - NOTIF OF UNUSUAL EVENT Inadvertent Criticality. OPERATING MODE APPLICABILITY: Hot Standby, Hot Shutdown Example Emergency Action Level: 1. UNPLANNED sustained positive period observed on nuclear instrumentation. (BWR) 1. UNPLANNED sustained positive startup rate observed on nuclear instrumentation. (PWR)</p>	<p>SU3 Initiating Condition: Inadvertent criticality. Operating Mode Applicability: 3, 4 EALs: 1. UNPLANNED sustained positive startup rate observed on nuclear instrumentation.</p>	<p>Rev 4/Rev 5 Differences None Rev 4/Rev 5 Deviations None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>SS6</p> <p>Initiating Condition -- SITE AREA EMERGENCY</p> <p>Inability to Monitor a SIGNIFICANT TRANSIENT in Progress.</p> <p>Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown</p> <p>Example Emergency Action Level:</p> <p>1. a. Loss of most or all (site-specific) annunciators associated with safety systems.</p> <p>AND</p> <p>b. Compensatory non-alarming indications are unavailable.</p> <p>AND</p> <p>c. Indications needed to monitor (site-specific) safety functions are unavailable.</p> <p>AND</p> <p>d. SIGNIFICANT TRANSIENT in progress.</p>	<p>SS6</p> <p>Initiating Condition - SITE AREA EMERGENCY</p> <p>Inability to monitor a SIGNIFICANT TRANSIENT in progress.</p> <p>Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown</p> <p>Example Emergency Action Level: (1 and 2)</p> <p>Note: The Emergency Director should not wait until the applicable time has elapsed, but should declare the event as soon as it is determined that the condition has exceeded, or will likely exceed, the applicable time.</p> <p>1. a. Loss of greater than approximately 75% of the following for 15 minutes or longer:</p> <p style="padding-left: 40px;">(Site specific control room safety system annunciation)</p> <p>OR</p> <p style="padding-left: 40px;">(Site specific control room safety system indication)</p> <p>AND</p> <p>b. A SIGNIFICANT TRANSIENT is in progress.</p> <p>AND</p> <p>c. Compensatory indications are unavailable.</p>	<p>SS4</p> <p>Initiating Condition:</p> <p>Loss of all monitoring functions for 15 minutes or longer with a SIGNIFICANT TRANSIENT in progress.</p> <p>Operating Mode Applicability: 1, 2, 3, 4</p> <p>EALs:</p> <p>1. a. Loss of SICS for 15 minutes or longer.</p> <p>AND</p> <p>b. Loss of PICS for 15 minutes or longer.</p> <p>AND</p> <p>c. ANY of the following SIGNIFICANT TRANSIENTS are in progress:</p> <p style="padding-left: 40px;">Automatic runback > 50% thermal power</p> <p style="padding-left: 40px;">Electrical load rejection > 50% full electrical load</p> <p style="padding-left: 40px;">Reactor trip</p> <p style="padding-left: 40px;">MHSI actuation</p>	<p>Rev 5 Differences</p> <p>Note content has been moved to the classification description and instructions section as it is applicable to all time imbedded EALs and is a fundamental instruction for classification, not a threshold criterion.</p> <p>Rev 4/Rev 5 Differences</p> <p>Reworded IC to reflect EAL conditions and provide logical intuitive progression pathway.</p> <p>Rev 4/Rev 5 Deviations (Deviation #7)</p> <p>Loss of most or all (Rev 4) and loss of greater than approximately 75% (Rev 5) removed to account for U.S. EPR digital monitoring system design.</p> <p>Compensatory indication criterion was removed. Compensatory indication is not applicable U.S. EPR.</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>SA4</p> <p>Initiating Condition -- ALERT</p> <p>UNPLANNED Loss of Most or All Safety System Annunciation or Indication in Control Room With Either (1) a SIGNIFICANT TRANSIENT in Progress, or (2) Compensatory Non-Alarming Indicators are Unavailable.</p> <p>Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown</p> <p>Example Emergency Action Level:</p> <p>1. UNPLANNED loss of most or all (site-specific) annunciators or indicators associated with safety systems for greater than 15 minutes.</p> <p>AND</p> <p>Either of the following: (a or b)</p> <p>a. A SIGNIFICANT TRANSIENT is in progress.</p> <p>OR</p> <p>b. Compensatory non-alarming indications are unavailable.</p>	<p>SA4</p> <p>Initiating Condition - ALERT</p> <p>UNPLANNED Loss of safety system annunciation or indication in the Control Room with EITHER (1) a SIGNIFICANT TRANSIENT in progress, or (2) compensatory indicators unavailable.</p> <p>Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown</p> <p>Example Emergency Action Level: (1 and 2)</p> <p>Note: The Emergency Director should not wait until the applicable time has elapsed, but should declare the event as soon as it is determined that the condition has exceeded, or will likely exceed, the applicable time.</p> <p>1. a. UNPLANNED loss of greater than approximately 75% of the following for 15 minutes or longer:</p> <p>(Site specific control room safety system annunciation)</p> <p>(Site specific control room safety system indication)</p> <p>b. EITHER of the following:</p> <p>A SIGNIFICANT TRANSIENT is in progress.</p> <p>Compensatory indications are unavailable.</p>	<p>SA4</p> <p>Initiating Condition:</p> <p>Loss of all monitoring functions for 15 minutes or longer.</p> <p>Operating Mode Applicability: 1, 2, 3, 4</p> <p>EALs:</p> <p>1. a. Loss of SICS for 15 minutes or longer.</p> <p>AND</p> <p>b. Loss of PICS for 15 minutes or longer.</p>	<p>Rev 5 Differences</p> <p>Note content has been moved to the classification description and instructions section as it is applicable to all time imbedded EALs and is a fundamental instruction for classification, not a threshold criterion.</p> <p>Rev 4/Rev 5 Differences</p> <p>Reworded IC to reflect EAL conditions and provide logical intuitive progression pathway.</p> <p>Removed the unplanned restriction from the IC and EAL since U.S. EPR operations do not allow for the removal of SICS or PICS while in the hot modes.</p> <p>Rev 4/Rev 5 Deviations (Deviation #7)</p> <p>Loss of most or all (Rev 4) and loss of greater than approximately 75% (Rev 5) removed to account for U.S. EPR digital monitoring system design.</p> <p>Compensatory indication criterion was removed. Compensatory indication is not applicable U.S. EPR.</p> <p>Removed significant transient to provide progression to SAE EAL.</p>
<p>SU3</p> <p>Initiating Condition -- NOTIF OF UNUSUAL EVENT</p> <p>UNPLANNED Loss of Most or All Safety System Annunciation or Indication in The Control Room for Greater Than 15 Minutes</p> <p>Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown</p> <p>Example Emergency Action Level:</p> <p>1. UNPLANNED loss of most or all (site-specific) annunciators or indicators associated with safety systems for greater than 15 minutes.</p>	<p>SU3</p> <p>Initiating Condition - NOTIF OF UNUSUAL EVENT</p> <p>UNPLANNED loss of safety system annunciation or indication in the control room for 15 minutes or longer.</p> <p>Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown</p> <p>Example Emergency Action Level:</p> <p>Note: The Emergency Director should not wait until the applicable time has elapsed, but should declare the event as soon as it is determined that the condition has exceeded, or will likely exceed, the applicable time.</p> <p>1. UNPLANNED loss of greater than approximately 75% of the following for 15 minutes or longer:</p> <p>a. (Site specific control room safety system annunciation)</p> <p>OR</p> <p>b. (Site specific control room safety system indication)</p>	<p>SU4</p> <p>Initiating Condition:</p> <p>Degradation of monitoring functions for 15 minutes or longer.</p> <p>Operating Mode Applicability: 1, 2, 3, 4</p> <p>EALs:</p> <p>1. Loss of SICS for 15 minutes or longer.</p> <p>OR</p> <p>2. Loss of PICS for 15 minutes or longer.</p>	<p>Rev 5 Differences</p> <p>Note content has been moved to the classification description and instructions section as it is applicable to all time imbedded EALs and is a fundamental instruction for classification, not a threshold criterion.</p> <p>Rev 4/Rev 5 Differences</p> <p>Reworded IC to reflect EAL conditions and provide logical intuitive progression pathway.</p> <p>Removed the unplanned restriction from the IC and EAL since U.S. EPR operations do not allow for the removal of SICS or PICS while in the hot modes.</p> <p>Rev 4/Rev 5 Deviations (Deviation #7)</p> <p>Loss of most or all (Rev 4) and loss of greater than approximately 75% (Rev 5) removed to account for U.S. EPR digital monitoring system design.</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>SU2</p> <p>Initiating Condition -- NOTIF OF UNUSUAL EVENT Inability to Reach Required Shutdown Within Technical Specification Limits.</p> <p>Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown</p> <p>Example Emergency Action Level:</p> <ol style="list-style-type: none"> Plant is not brought to required operating mode within (site-specific) Technical Specifications LCO Action Statement Time. 	<p>SU2</p> <p>Initiating Condition - NOTIF OF UNUSUAL EVENT Inability to reach required shutdown within Technical Specification limits.</p> <p>Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown</p> <p>Example Emergency Action Level:</p> <ol style="list-style-type: none"> Plant is not brought to required operating mode within Technical Specifications LCO Action Statement Time. 	<p>SU5</p> <p>Initiating Condition: Inability to reach required operating mode within Technical Specification limits.</p> <p>Operating Mode Applicability: 1, 2, 3, 4</p> <p>EALs:</p> <ol style="list-style-type: none"> Plant is not brought to required operating mode within Technical Specifications LCO action completion time. 	<p>Rev4/Rev 5 Differences Replaced 'shutdown' with 'operating mode' in the IC to more accurately reflect the EAL wording and the intent of the bases.</p> <p>Rev 4/Rev 5 Deviations None</p>
<p>SU6</p> <p>Initiating Condition -- NOTIF OF UNUSUAL EVENT UNPLANNED Loss of All Onsite or Offsite Communications Capabilities.</p> <p>Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown</p> <p>Example Emergency Action Levels: (1 or 2)</p> <ol style="list-style-type: none"> Loss of all (site-specific list) onsite communications capability affecting the ability to perform routine operations. Loss of all (site-specific list) offsite communications capability. 	<p>SU6</p> <p>Initiating Condition - NOTIF OF UNUSUAL EVENT Loss of all On-site or Off-site communications capabilities.</p> <p>Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown</p> <p>Example Emergency Action Levels: (1 or 2)</p> <ol style="list-style-type: none"> Loss of all of the following on-site communication methods affecting the ability to perform routine operations. (site specific list of communications methods) Loss of all of the following off-site communication methods affecting the ability to perform offsite notifications. (site specific list of communications methods) 	<p>SU6</p> <p>Initiating Condition: Loss of all onsite or offsite communications capabilities.</p> <p>Operating Mode Applicability: 1, 2, 3, 4</p> <p>EALs:</p> <ol style="list-style-type: none"> Loss of ALL of the following onsite communication methods affecting the ability to perform routine operations: {Radios} {Plant Page} {Internal Telephone Systems} <p>OR</p> <ol style="list-style-type: none"> Loss of ALL of the following offsite communications methods affecting the ability to perform offsite notifications: {Dedicated Offsite Alerting System} NRC Emergency Notification System - ENS NRC Health Physics Network - HPN {External Telephone Systems} 	<p>Rev 4 Differences Specified offsite communications capability as related to notifications. Removed UNPLANNED from the IC to reflect EAL wording. There are no planned maintenance practices that would disable all onsite or all offsite communications capabilities. This change does not alter the meaning or intent of the NEI EAL.</p> <p>Rev 5 Differences None</p> <p>Rev 4/Rev 5 Deviations None</p>
<p>SU5</p> <p>Initiating Condition -- NOTIF OF UNUSUAL EVENT RCS Leakage.</p> <p>Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown</p> <p>Example Emergency Action Levels: (1 or 2)</p> <ol style="list-style-type: none"> Unidentified or pressure boundary leakage greater than 10 gpm. Identified leakage greater than 25 gpm. 	<p>SU5</p> <p>Initiating Condition - NOTIF OF UNUSUAL EVENT RCS leakage.</p> <p>Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown</p> <p>Example Emergency Action Levels: (1 or 2)</p> <ol style="list-style-type: none"> Unidentified or pressure boundary leakage greater than 10 gpm. Identified leakage greater than 25 gpm. 	<p>SU7</p> <p>Initiating Condition: RCS leakage.</p> <p>Operating Mode Applicability: 1, 2, 3, 4</p> <p>EALs:</p> <ol style="list-style-type: none"> Unidentified or pressure boundary leakage > 10 gpm. <p>OR</p> <ol style="list-style-type: none"> Identified leakage > 25 gpm. 	<p>Rev4/Rev 5 Differences None</p> <p>Rev 4/Rev 5 Deviations None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>SU4 Initiating Condition -- NOTIF OF UNUSUAL EVENT Fuel Clad Degradation. Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown Example Emergency Action Levels: (1 or 2) 1. (Site-specific) radiation monitor readings indicating fuel clad degradation greater than Technical Specification allowable limits. 2. (Site-specific) coolant sample activity value indicating fuel clad degradation greater than Technical Specification allowable limits.</p>	<p>SU4 Initiating Condition - NOTIF OF UNUSUAL EVENT Fuel Clad degradation. Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown Example Emergency Action Levels: (1 or 2) 1. (Site specific radiation monitor readings indicating fuel clad degradation greater than Technical Specification allowable limits.) 2. (Site specific coolant sample activity value indicating fuel clad degradation greater than Technical Specification allowable limits.)</p>	<p>SU9 Initiating Condition: Fuel clad degradation. Operating Mode Applicability: 1, 2, 3, 4 EALs: 1. Gross Failed Fuel Monitor ({{KUA66 CR001}}) > (SU9.1) cpm. OR 2. Coolant sample activity > 1.0 µCi/gm dose equivalent I-131.</p>	<p>Rev4/Rev 5 Differences None Rev 4/Rev 5 Deviations None</p>
<p>SS4 Initiating Condition -- SITE AREA EMERGENCY Complete Loss of Heat Removal Capability. Operating Mode Applicability: Power Operation, Startup, Hot Standby, Hot Shutdown Example Emergency Action Level: 1. Loss of core cooling and heat sink (PWR). 2. Heat Capacity Temperature Limit Curve exceeded (BWR).</p>			<p>Rev4 Differences None Rev 4 Deviations (Deviation #8) Deleted EAL as condition is met in other system malfunction and fission product barrier EALs. This change is consistent with Rev 5.</p>

NEI 99-01 Rev. 4 System Malfunctions - Cold	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>CA3</p> <p>Initiating Condition -- ALERT</p> <p>Loss of All Offsite Power and Loss of All Onsite AC Power to Essential Busses.</p> <p>Operating Mode Applicability: Cold Shutdown, Refueling, Defueled</p> <p>Example Emergency Action Level:</p> <ol style="list-style-type: none"> 1. a. Loss of power to (site-specific) transformers. <p style="padding-left: 20px;">AND</p> <ol style="list-style-type: none"> b. Failure of (site-specific) emergency generators to supply power to emergency busses. <p style="padding-left: 20px;">AND</p> <ol style="list-style-type: none"> c. Failure to restore power to at least one emergency bus within 15 minutes from the time of loss of both offsite and onsite AC power. 	<p>CA3</p> <p>Initiating Condition - ALERT</p> <p>Loss of all Off-site and all On-Site AC power to emergency busses for 15 minutes or longer.</p> <p>Operating Mode Applicability: Cold Shutdown, Refueling, Defueled</p> <p>Example Emergency Action Level:</p> <p>Note: The Emergency Director should not wait until the applicable time has elapsed, but should declare the event as soon as it is determined that the condition will likely exceed the applicable time.</p> <ol style="list-style-type: none"> 1. Loss of all Off-Site and On-Site power to (site specific emergency busses) for 15 minutes or longer. 	<p>CA1</p> <p>Initiating Condition:</p> <p>Loss of all offsite and all onsite AC power to emergency busses for 15 minutes or longer.</p> <p>Operating Mode Applicability: 5, 6, D</p> <p>EALs:</p> <ol style="list-style-type: none"> 1. Loss of ALL offsite and ALL onsite AC power to 31, 32, 33 and 34 BDA busses for 15 minutes or longer. 	<p>Note: See FAQs 2006-04 and 2006-18.</p> <p>Rev 4 Differences</p> <p>Replaced 'essential busses' with 'emergency busses' and replaced transformer designations with the emergency bus designations.</p> <p>Removed threshold for DGs as it was redundant to the loss of all power to the emergency busses.</p> <p>Combined imbedded time criteria into single EAL.</p> <p>Rev 5 Differences</p> <p>Note content has been moved to the classification description and instructions section as it is applicable to all time imbedded EALs and is a fundamental instruction for classification, not a threshold criterion.</p> <p>Rev 4 Deviations (Deviation #6)</p> <p>Deleted generic EAL basis guidance related to evaluating the critical loads on the emergency busses (MU and DHR). Losses of these systems are fully covered within the cold mode RCS leakage and heat sink EALs.</p> <p>Rev 5 Deviations</p> <p>None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>CU3</p> <p>Initiating Condition -- NOTIF OF UNUSUAL EVENT</p> <p>Loss of All Offsite Power to Essential Busses for Greater Than 15 Minutes.</p> <p>Operating Mode Applicability: Cold Shutdown, Refueling</p> <p>Example Emergency Action Level:</p> <ol style="list-style-type: none"> 1. a. Loss of power to (site-specific) transformers for greater than 15 minutes. <p style="text-align: center;">AND</p> <ol style="list-style-type: none"> b. At least (site-specific) emergency generators are supplying power to emergency busses. 	<p>CU3</p> <p>Initiating Condition - NOTIF OF UNUSUAL EVENT</p> <p>AC power capability to emergency busses reduced to a single power source for 15 minutes or longer such that any additional single failure would result in station blackout</p> <p>Operating Mode Applicability: Cold Shutdown, Refueling</p> <p>Example Emergency Action Level:</p> <p>Note: The Emergency Director should not wait until the applicable time has elapsed, but should declare the event as soon as it is determined that the condition will likely exceed the applicable time.</p> <ol style="list-style-type: none"> 1. a. AC power capability to (site specific emergency busses) reduced to a single power source for 15 minutes or longer. <p style="text-align: center;">AND</p> <ol style="list-style-type: none"> b. Any additional single power source failure will result in station blackout. 	<p>CU1</p> <p>Initiating Condition:</p> <p>AC power capability to emergency busses reduced to a single source for 15 minutes or longer.</p> <p>Operating Mode Applicability: 5, 6</p> <p>EALs:</p> <ol style="list-style-type: none"> 1. AC power to 31, 32, 33 and 34 BDA busses is reduced to a single source for 15 minutes or longer. 	<p>Note: See FAQ 2006-17.</p> <p>Rev 4 Differences</p> <p>Replaced 'essential busses' with 'emergency busses' and replaced transformer designations with the emergency bus designations.</p> <p>Rev 5 Differences</p> <p>Note content has been moved to the classification description and instructions section as it is applicable to all time imbedded EALs and is a fundamental instruction for classification, not a threshold criterion.</p> <p>Removed the condition for single source remaining as its loss constitutes an Alert. Threshold 1 is sufficient for the UE declaration and continues to meet the meaning and the intent of the EAL.</p> <p>Rev 4 Deviations (Deviation #9)</p> <p>CU1 IC and EAL changed to reflect equivalent conditions of SA1 (NEI SA5). Loss of offsite power in cold modes does not meet the definition of UE, can be planned and performed for maintenance and poses no safety risk when onsite power is available.</p> <p>Rev 5 Deviations</p> <p>None</p>
<p>CU7</p> <p>Initiating Condition -- NOTIF OF UNUSUAL EVENT</p> <p>UNPLANNED Loss of Required DC Power for Greater than 15 Minutes.</p> <p>Operating Mode Applicability: Cold Shutdown, Refueling</p> <p>Example Emergency Action Level:</p> <ol style="list-style-type: none"> 1. a. UNPLANNED Loss of Vital DC power to required DC busses based on (site-specific) bus voltage indications. <p style="text-align: center;">AND</p> <ol style="list-style-type: none"> b. Failure to restore power to at least one required DC bus within 15 minutes from the time of loss. 	<p>CU7</p> <p>Initiating Condition - NOTIF OF UNUSUAL EVENT</p> <p>Loss of required DC power for 15 minutes or longer.</p> <p>Operating Mode Applicability: Cold Shutdown, Refueling</p> <p>Example Emergency Action Level:</p> <p>Note: The Emergency Director should not wait until the applicable time has elapsed, but should declare the event as soon as it is determined that the condition will likely exceed the applicable time.</p> <ol style="list-style-type: none"> 1. Less than (site specific bus voltage indication) on required Vital DC busses for 15 minutes or longer. 	<p>CU2</p> <p>Initiating Condition:</p> <p>Loss of required DC power for 15 minutes or longer.</p> <p>Operating Mode Applicability: 5, 6</p> <p>EALs:</p> <ol style="list-style-type: none"> 1. < 210 VDC on the required 31, 32, 33 and 34 BUC busses for 15 minutes or longer. 	<p>Rev 4 Differences</p> <p>Removed UNPLANNED from the IC and EAL wording. There are no planned maintenance practices that would allow required DC voltage to drop to that value. This change does not alter the meaning or intent of the NEI EAL.</p> <p>Rev 5 Differences</p> <p>Note content has been moved to the classification description and instructions section as it is applicable to all time imbedded EALs and is a fundamental instruction for classification, not a threshold criterion.</p> <p>Rev 4/Rev 5 Deviations</p> <p>None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>CU8 Initiating Condition -- NOTIF OF UNUSUAL EVENT Inadvertent Criticality. Operating Mode Applicability: Cold Shutdown, Refueling Example Emergency Action Levels: (1 or 2) 1. An UNPLANNED extended positive period observed on nuclear instrumentation. 2. An UNPLANNED sustained positive startup rate observed on nuclear instrumentation.</p>	<p>CU8 Initiating Condition - NOTIF OF UNUSUAL EVENT Inadvertent criticality. Operating Mode Applicability: Cold Shutdown, Refueling Example Emergency Action Levels: 1. UNPLANNED sustained positive period observed on nuclear instrumentation. (BWR) 1. UNPLANNED sustained positive startup rate observed on nuclear instrumentation. (PWR)</p>	<p>CU3 Initiating Condition: Inadvertent criticality. Operating Mode Applicability: 5, 6 EALs: 1. UNPLANNED sustained positive startup rate observed on nuclear instrumentation.</p>	<p>Rev 4/Rev 5 Differences None Rev 4/Rev 5 Deviations None</p>
<p>CU6 Initiating Condition -- NOTIF OF UNUSUAL EVENT UNPLANNED Loss of All Onsite or Offsite Communications Capabilities. Operating Mode Applicability: Cold Shutdown, Refueling Example Emergency Action Levels: (1 or 2) 1. Loss of all (site-specific list) onsite communications capability affecting the ability to perform routine operations. 2. Loss of all (site-specific list) offsite communications capability.</p>	<p>CU6 Initiating Condition - NOTIF OF UNUSUAL EVENT Loss of all On-site or Off-site communications capabilities. Operating Mode Applicability: Cold Shutdown, Refueling, Defueled Example Emergency Action Levels: (1 or 2) 1. Loss of all of the following on-site communication methods affecting the ability to perform routine operations. (site specific list of communications methods) 2. Loss of all of the following off-site communication methods affecting the ability to perform offsite notifications. (site specific list of communications methods)</p>	<p>CU6 Initiating Condition: Loss of all onsite or offsite communications capabilities. Operating Mode Applicability: 5, 6, D EALs: 1. Loss of ALL of the following onsite communication methods affecting the ability to perform routine operations: {Radios} {Plant Page} {Internal Telephone Systems} OR 2. Loss of ALL of the following offsite communications methods affecting the ability to perform offsite notifications: {Dedicated Offsite Alerting System} NRC Emergency Notification System - ENS NRC Health Physics Network - HPN {External Telephone Systems}</p>	<p>Rev 4 Differences Removed UNPLANNED from the IC and EAL wording (unplanned is not in the Rev 4 EAL). There are no planned maintenance practices that would disable all onsite or all offsite communications capabilities. This change does not alter the meaning or intent of the NEI EAL. Rev 5 Differences None Rev 4/Rev 5 Deviations None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation									
<p>CG1</p> <p>Initiating Condition -- GENERAL EMERGENCY</p> <p>Loss of Reactor Vessel Inventory Affecting Fuel Clad Integrity with Containment Challenged with Irradiated Fuel in the Reactor Vessel.</p> <p>Operating Mode Applicability: Cold Shutdown, Refueling</p> <p>Example Emergency Action Level: (1 and 2 and 3)</p> <ol style="list-style-type: none"> 1. Loss of Reactor Vessel inventory as indicated by unexplained {site-specific} sump and tank level increase 2. Reactor Vessel Level: <ol style="list-style-type: none"> a. less than TOAF for > 30 minutes <p>OR</p> <ol style="list-style-type: none"> b. cannot be monitored with Indication of core uncover for > 30 minutes as evidenced by one or more of the following: <ul style="list-style-type: none"> Containment High Range Radiation Monitor reading > {site-specific} setpoint Erratic Source Range Monitor Indication Other {site-specific} indications 3. {Site specific} indication of CONTAINMENT challenged as indicated by one or more of the following: <ul style="list-style-type: none"> Explosive mixture inside containment Pressure above {site specific} value CONTAINMENT CLOSURE <u>not</u> established 	<p>CG1</p> <p>Initiating Condition - GENERAL EMERGENCY</p> <p>Loss of RCS/RPV inventory affecting fuel clad integrity with containment challenged.</p> <p>Operating Mode Applicability: Cold Shutdown, Refueling</p> <p>Example Emergency Action Level: (1 or 2)</p> <p>Note: The Emergency Director should not wait until the applicable time has elapsed, but should declare the event as soon as it is determined that the condition will likely exceed the applicable time.</p> <ol style="list-style-type: none"> 1. a. RCS/RPV level less than (site specific level for TOAF) for 30 minutes or longer. <p>AND</p> <ol style="list-style-type: none"> b. ANY containment challenge indication (see Table): <ol style="list-style-type: none"> 2. a. RCS/RPV level cannot be monitored with core uncover indicated by ANY of the following for 30 minutes or longer. <ul style="list-style-type: none"> (Site specific radiation monitor) reading greater than (site specific setpoint). Erratic source range monitor indication. UNPLANNED level rise in (site specific sump or tank). (Other site specific indications) <p>AND</p> <ol style="list-style-type: none"> b. ANY containment challenge indication (see Table): <table border="1" data-bbox="919 1221 1578 1447"> <thead> <tr> <th>Table: Containment Challenge Indications</th> </tr> </thead> <tbody> <tr> <td>CONTAINMENT CLOSURE not established.</td> </tr> <tr> <td>(Site specific explosive mixture) inside containment.</td> </tr> <tr> <td>UNPLANNED rise in containment pressure.</td> </tr> <tr> <td>Secondary containment radiation monitor reading above (site specific value). (BWR only)</td> </tr> </tbody> </table>	Table: Containment Challenge Indications	CONTAINMENT CLOSURE not established.	(Site specific explosive mixture) inside containment.	UNPLANNED rise in containment pressure.	Secondary containment radiation monitor reading above (site specific value). (BWR only)	<p>CG7</p> <p>Initiating Condition:</p> <p>Loss of RPV inventory affecting fuel clad integrity with containment challenged.</p> <p>Operating Mode Applicability: 5, 6</p> <p>EALs:</p> <ol style="list-style-type: none"> 1. a. RPV level < {96.0 feet (29.3 meters)} (top of active fuel) for 30 minutes or longer. <p>AND</p> <ol style="list-style-type: none"> b. ANY Table C-1 containment challenge indications. <p>OR</p> <ol style="list-style-type: none"> 2. a. RPV level cannot be monitored with core uncover indicated by ANY of the following for 30 minutes or longer: <ul style="list-style-type: none"> Reactor Building Refueling Bridge Area Dose Rate Monitor ({JYK15 CR003}) > (CG7.2.a(b1)) mR/hr. Erratic source range monitor indication. UNPLANNED level rise in IRWST. <p>AND</p> <ol style="list-style-type: none"> b. ANY Table C-1 containment challenge indications. <table border="1" data-bbox="1641 1084 2281 1241"> <thead> <tr> <th>Table C-1: Containment Challenge Indications</th> </tr> </thead> <tbody> <tr> <td>CONTAINMENT CLOSURE not established.</td> </tr> <tr> <td>Hydrogen concentration > 4% inside containment.</td> </tr> <tr> <td>UNPLANNED rise in containment pressure.</td> </tr> </tbody> </table>	Table C-1: Containment Challenge Indications	CONTAINMENT CLOSURE not established.	Hydrogen concentration > 4% inside containment.	UNPLANNED rise in containment pressure.	<p>Note: See FAQ 2006-19.</p> <p>Note: Changes to the nesting format of EAL CG7.2.a is considered administrative.</p> <p>Rev 4 Differences</p> <p>Reorganized thresholds into 2 EALs (vice 1 from Rev 4) to simplify recognition. Meaning and intent was not altered.</p> <p>Rev 5 Differences</p> <p>Note content has been moved to the classification description and instructions section as it is applicable to all time imbedded EALs and is a fundamental instruction for classification, not a threshold criterion.</p> <p>Rev 4/Rev 5 Differences</p> <p>Removed the word 'reading' CG7.2.a bullet 1 (NEI CG1.2.a bullet 1) for human factors considerations (minimize extraneous words).</p> <p>Rev 4/Rev 5 Deviations</p> <p>None</p>
Table: Containment Challenge Indications												
CONTAINMENT CLOSURE not established.												
(Site specific explosive mixture) inside containment.												
UNPLANNED rise in containment pressure.												
Secondary containment radiation monitor reading above (site specific value). (BWR only)												
Table C-1: Containment Challenge Indications												
CONTAINMENT CLOSURE not established.												
Hydrogen concentration > 4% inside containment.												
UNPLANNED rise in containment pressure.												

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>CS1 Initiating Condition -- SITE AREA EMERGENCY Loss of Reactor Vessel Inventory Affecting Core Decay Heat Removal Capability. Operating Mode Applicability: Cold Shutdown Example Emergency Action Levels: (1 or 2) 1. With CONTAINMENT CLOSURE <u>not</u> established: a. Reactor Vessel inventory as indicated by Reactor Vessel level less than {site-specific level} (6" below the low-low ECCS actuation setpoint) (BWR) (6" below the bottom ID of the RCS loop) (PWR) OR b. Reactor Vessel level cannot be monitored for > 30 minutes with a loss of Reactor Vessel inventory as indicated by unexplained {site-specific} sump and tank level increase 2. With CONTAINMENT CLOSURE established a. Reactor Vessel inventory as indicated by Reactor Vessel level less than TOAF OR b. Reactor Vessel level cannot be monitored for > 30 minutes with a loss of Reactor Vessel inventory as indicated by either: Unexplained {site-specific} sump and tank level increase Erratic Source Range Monitor Indication</p>	<p>CS1 Initiating Condition - SITE AREA EMERGENCY Loss of RCS/RPV inventory affecting core decay heat removal capability. Operating Mode Applicability: Cold Shutdown, Refueling Example Emergency Action Levels: (1 or 2 or 3) Note: The Emergency Director should not wait until the applicable time has elapsed, but should declare the event as soon as it is determined that the condition will likely exceed the applicable time. 1. With CONTAINMENT CLOSURE not established, RCS/RPV level less than (site specific level). (6" below the bottom ID of the RCS loop) (PWR) (6" below the low-low ECCS actuation setpoint) (BWR) OR 2. With CONTAINMENT CLOSURE established, RCS/RPV level less than (site specific level for TOAF). OR 3. RCS/RPV level cannot be monitored for 30 minutes or longer with a loss of RCS/RPV inventory as indicated by ANY of the following: (Site specific radiation monitor) reading greater than (site specific value). Erratic Source Range Monitor Indication. Unexplained level rise in (site specific sump or tank).</p>	<p>CS7 Initiating Condition: Loss of RPV inventory affecting core decay heat removal capability. Operating Mode Applicability: 5, 6 EALs: 1. a. CONTAINMENT CLOSURE not established. AND b. Loss of RPV inventory as indicated by RCS level ({JEF10 CL081}) < (CS7.1.b). OR 2. a. CONTAINMENT CLOSURE established. AND b. RPV level < {96.0 feet (29.3 meters)} (top of active fuel). OR 3. a. RCS level cannot be monitored for 30 minutes or longer. AND b. Loss of RPV inventory as indicated by ANY of the following: Reactor Building Refueling Bridge Area Dose Rate Monitor ({JYK15 CR003}) > (CS7.3.b(b1)) mR/hr. Erratic source range monitor indication. UNPLANNED level rise in IRWST.</p>	<p>Note: See FAQs 2006-09 and 2006-10. Note: Changes to the nesting format of EALs CS7.1, CS7.2 and CS7.3 are considered administrative. Rev 4 Differences Reorganized thresholds into 2 EALs (vice 1 from Rev 4) to simplify recognition. Meaning and intent was not altered. Rev 5 Differences Note content has been moved to the classification description and instructions section as it is applicable to all time imbedded EALs and is a fundamental instruction for classification, not a threshold criterion. The CS7.1 RCS level indication is the lowest accurate reading possible, but is higher than the guidance setpoint. Added wording 'Loss of RPV inventory as indicated by' to CS7.1.b to maintain consistency with CA7.1 wording in the escalation pathway. Rev 4/Rev 5 Differences Removed the word 'reading' CS7.3.a bullet 1 (NEI CS1.3.a bullet 1) for human factors considerations (minimize extraneous words). Replace 'unexplained' with 'unplanned' to match wording of CG7.2 (NEI CG1.2) and to prevent potential confusion in the use of separate terms. Rev 4/Rev 5 Deviations None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>CS2 Initiating Condition -- SITE AREA EMERGENCY Loss of Reactor Vessel Inventory Affecting Core Decay Heat Removal Capability with Irradiated Fuel in the Reactor Vessel. Operating Mode Applicability: Refueling Example Emergency Action Levels: (1 or 2) 1. With CONTAINMENT CLOSURE <u>not</u> established: a. Reactor Vessel inventory as indicated by Reactor Vessel level less than {site-specific level} (6" below the bottom ID of the RCS loop) (PWR) OR b. Reactor Vessel level cannot be monitored with Indication of core uncover as evidenced by one or more of the following: Containment High Range Radiation Monitor reading > {site-specific} setpoint Erratic Source Range Monitor Indication Other {site-specific} indications 2. With CONTAINMENT CLOSURE established a. Reactor Vessel inventory as indicated by Reactor Vessel level less than TOAF OR b. Reactor Vessel level cannot be monitored with Indication of core uncover as evidenced by one or more of the following: Containment High Range Radiation Monitor reading > {site-specific} setpoint Erratic Source Range Monitor Indication Other {site-specific} indications</p>			<p>Note: See FAQs 2006-05 and 2006-11. Rev 4 Differences CS2 thresholds were addressed in CS1 so that a single IC covering cold shutdown and refueling could be utilized. Rev 4 Deviations None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>CA1 Initiating Condition -- ALERT Loss of RCS Inventory. Operating Mode Applicability: Cold Shutdown Example Emergency Action Levels: (1 or 2)</p> <ol style="list-style-type: none"> 1. Loss of RCS inventory as indicated by Reactor Vessel level less than {site-specific level}. (low-low ECCS actuation setpoint) (BWR) (bottom ID of the RCS loop) (PWR) 2. a. Loss of RCS inventory as indicated by unexplained {site-specific} sump and tank level increase AND b. RCS level cannot be monitored for > 15 minutes <hr/> <p>CA2 Initiating Condition -- ALERT Loss of Reactor Vessel Inventory with Irradiated Fuel in the Reactor Vessel. Operating Mode Applicability: Refueling Example Emergency Action Levels: (1 or 2)</p> <ol style="list-style-type: none"> 1. Loss of RPV inventory as indicated by RPV level less than {site-specific level}. (low-low ECCS actuation setpoint) (BWR) (bottom ID of the RCS loop) (PWR) 2. a. Loss of RPV inventory as indicated by unexplained {site-specific} sump and tank level increase AND b. RPV level cannot be monitored for > 15 minutes 	<p>CA1 Initiating Condition - ALERT Loss of RCS/RPV inventory. Operating Mode Applicability: Cold Shutdown, Refueling Example Emergency Action Levels: (1 or 2)</p> <p>Note: The Emergency Director should not wait until the applicable time has elapsed, but should declare the event as soon as it is determined that the condition will likely exceed the applicable time.</p> <ol style="list-style-type: none"> 1. Loss of RCS/RPV inventory as indicated by level less than (site specific level). (<i>Low-Low ECCS actuation setpoint / Level 2 (BWR)</i>) (<i>Bottom ID of the RCS loop (PWR)</i>) 2. RCS/RPV level cannot be monitored for 15 minutes or longer with a loss of RCS/RPV inventory as indicated by an unexplained level rise in (site specific sump or tank). 	<p>CA7 Initiating Condition: Loss of RPV inventory. Operating Mode Applicability: 5, 6 EALs:</p> <ol style="list-style-type: none"> 1. Loss of RPV inventory as indicated by RCS level ({JEF10 CL081}) < (CA7.1). <p>OR</p> <ol style="list-style-type: none"> 2. a. RCS level cannot be monitored for 15 minutes or longer. AND b. Loss of RPV inventory as indicated by UNPLANNED level rise in IRWST. 	<p>Note: See FAQs 2006-01, 2006-06, 2006-07 and 2006-08. Note: Changes to the nesting format of EAL CA7.2 is considered administrative.</p> <p>Rev 4 Differences Combined NEI CA1 and CA2 as they are the same IC and EALs.</p> <p>Rev 5 Differences Note content has been moved to the classification description and instructions section as it is applicable to all time imbedded EALs and is a fundamental instruction for classification, not a threshold criterion.</p> <p>Rev 4/Rev 5 Differences The CA7.1 RCS level indication is the lowest accurate reading possible, but is higher than the guidance setpoint. Replace 'unexplained' with 'unplanned' to match wording of CG7.2 (NEI CG1.2) and to prevent potential confusion in the use of separate terms.</p> <p>Rev 4/Rev 5 Deviations None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>CU1</p> <p>Initiating Condition -- NOTIF OF UNUSUAL EVENT</p> <p>RCS Leakage.</p> <p>Operating Mode Applicability: Cold Shutdown</p> <p>Example Emergency Action Levels: (1 or 2)</p> <ol style="list-style-type: none"> 1. Unidentified or pressure boundary leakage greater than 10 gpm. 2. Identified leakage greater than 25 gpm. 	<p>CU1</p> <p>Initiating Condition - NOTIF OF UNUSUAL EVENT</p> <p>RCS Leakage.</p> <p>Operating Mode Applicability: Cold Shutdown</p> <p>Example Emergency Action Levels:</p> <p>Note: The Emergency Director should not wait until the applicable time has elapsed, but should declare the event as soon as it is determined that the condition will likely exceed the applicable time.</p> <ol style="list-style-type: none"> 1. RCS leakage results in the inability to maintain or restore RPV level greater than (site specific low level RPS actuation setpoint) for 15 minutes or longer. (<i>BWR</i>) 1. RCS leakage results in the inability to maintain or restore level within (site specific pressurizer or RCS/RPV level target band) for 15 minutes or longer. (<i>PWR</i>) 	<p>CU7</p> <p>Initiating Condition:</p> <p>RCS leakage.</p> <p>Operating Mode Applicability: 5</p> <p>EALs:</p> <ol style="list-style-type: none"> 1. RCS leakage results in the inability to maintain or restore RCS level > Procedure Established Minimum Level for 15 minutes or longer. 	<p>Note: See FAQ 2006-14.</p> <p>Rev 4 Differences</p> <p>Specified the method of leakage identification in cold shutdown that is available to meet the intent of NEI CU1.</p> <p>Rev 5 Differences</p> <p>Note content has been moved to the classification description and instructions section as it is applicable to all time imbedded EALs and is a fundamental instruction for classification, not a threshold criterion.</p> <p>Rev 4 Deviations (Deviation #10)</p> <p>A leak rate at the specified value may be exceeded without losing the ability to maintain level in the specified band. Although NRC staff agrees with this change, it must still be considered a deviation until Rev 5 is endorsed.</p> <p>Rev 5 Deviations</p> <p>None</p>
<p>CU2</p> <p>Initiating Condition -- NOTIF OF UNUSUAL EVENT</p> <p>UNPLANNED Loss of RCS Inventory with Irradiated Fuel in the Reactor Vessel.</p> <p>Operating Mode Applicability: Refueling</p> <p>Example Emergency Action Levels: (1 or 2)</p> <ol style="list-style-type: none"> 1. UNPLANNED RCS level decrease below the Reactor Vessel flange for ≥ 15 minutes 2. a. Loss of Reactor Vessel inventory as indicated by unexplained {site-specific} sump and tank level increase <p>AND</p> <ol style="list-style-type: none"> b. Reactor Vessel level cannot be monitored 	<p>CU2</p> <p>Initiating Condition - NOTIF OF UNUSUAL EVENT</p> <p>UNPLANNED Loss of RCS/RPV inventory.</p> <p>Operating Mode Applicability: Refueling</p> <p>Example Emergency Action Levels: (1 or 2)</p> <p>Note: The Emergency Director should not wait until the applicable time has elapsed, but should declare the event as soon as it is determined that the condition will likely exceed the applicable time.</p> <ol style="list-style-type: none"> 1. UNPLANNED RCS/RPV level drop as indicated by either of the following” <ul style="list-style-type: none"> RCS water level drop below the RPV flange for 15 minutes or longer; RCS water level drop below the planned RCS level band for the given evolution if the Technical Specification controlled RCS level band is already below the RPV flange. 2. RCS/RPV level cannot be monitored with a loss of RCS/RPV inventory as indicated by an unexplained level rise in (site specific sump or tank). 	<p>CU8</p> <p>Initiating Condition:</p> <p>Loss of RCS inventory.</p> <p>Operating Mode Applicability: 6</p> <p>EALs:</p> <ol style="list-style-type: none"> 1. a. RCS level drop below the RPV flange for 15 minutes or longer when the RCS level band is established above the RPV flange. <p>OR</p> <ul style="list-style-type: none"> b. RCS level drop < Procedure Established Minimum Level for 15 minutes or longer when the RCS level band is established below the RPV flange. 2. a. RCS level cannot be monitored. <p>AND</p> <ul style="list-style-type: none"> b. Loss of RPV inventory as indicated by UNPLANNED level rise in IRWST. 	<p>Note: Changes to the nesting format of EAL CU8 is considered administrative.</p> <p>Rev 4 Differences</p> <p>Removed ‘with irradiated fuel in reactor vessel’ from IC as it is not applicable in the specified mode.</p> <p>Rev 5 Differences</p> <p>Note content has been moved to the classification description and instructions section as it is applicable to all time imbedded EALs and is a fundamental instruction for classification, not a threshold criterion.</p> <p>Rev 4/Rev 5 Differences</p> <p>Removed unplanned from the IC and EAL #1 as plant operations do not plan for level control outside the TS established bands.</p> <p>Replace ‘unexplained’ with ‘unplanned’ to match wording of CG7.2 (NEI CG1.2) and to prevent potential confusion in the use of separate terms.</p> <p>Rev 4/Rev 5 Deviations</p> <p>None</p>

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation																						
<p>CA4</p> <p>Initiating Condition -- ALERT</p> <p>Inability to Maintain Plant in Cold Shutdown with Irradiated Fuel in the Reactor Vessel.</p> <p>Operating Mode Applicability: Cold Shutdown, Refueling</p> <p>Example Emergency Action Levels: (EAL 1 or 2 or 3)</p> <ol style="list-style-type: none"> 1. With CONTAINMENT CLOSURE <u>and</u> RCS integrity <u>not</u> established an UNPLANNED event results in RCS temperature exceeding the Technical Specification cold shutdown temperature limit. 2. With CONTAINMENT CLOSURE established <u>and</u> RCS integrity <u>not</u> established <u>or</u> RCS inventory reduced an UNPLANNED event results in RCS temperature exceeding the Technical Specification cold shutdown temperature limit for greater than 20 minutes¹. 3. An UNPLANNED event results in RCS temperature exceeding the Technical Specification cold shutdown temperature limit for greater than 60 minutes¹ or results in an RCS pressure increase of greater than {site specific} psig. <p>(1) if an RCS heat removal system is in operation within this time frame and RCS temperature is being reduced then this EAL is not applicable.</p>	<p>CA4</p> <p>Initiating Condition - ALERT</p> <p>Inability to Maintain Plant in Cold Shutdown with Irradiated Fuel in the RPV.</p> <p>Operating Mode Applicability: Cold Shutdown, Refueling</p> <p>Example Emergency Action Levels: (EAL 1 or 2)</p> <ol style="list-style-type: none"> 1. An UNPLANNED event results in RCS temperature greater than (site specific Technical Specification cold shutdown temperature limit) for greater than the specified duration on table. <table border="1" data-bbox="957 620 1578 951"> <caption>Table: RCS Reheat Duration Thresholds</caption> <thead> <tr> <th>RCS</th> <th>Containment Closure</th> <th>Duration</th> </tr> </thead> <tbody> <tr> <td>Intact (with full inventory (PWR))</td> <td>N/A</td> <td>60 minutes*</td> </tr> <tr> <td rowspan="2">Not Intact (OR reduced inventory (PWR))</td> <td>Established</td> <td>20 minutes*</td> </tr> <tr> <td>Not Established</td> <td>0 minutes</td> </tr> </tbody> </table> <p>* If an RCS heat removal system is in operation within this time frame and RCS temperature is being reduced, the EAL is not applicable.</p> <ol style="list-style-type: none"> 2. An UNPLANNED event results in RCS pressure increase greater than 10 psi due to a loss of RCS cooling. (PWR- This EAL does not apply in Solid Plant conditions.) 	RCS	Containment Closure	Duration	Intact (with full inventory (PWR))	N/A	60 minutes*	Not Intact (OR reduced inventory (PWR))	Established	20 minutes*	Not Established	0 minutes	<p>CA10</p> <p>Initiating Condition:</p> <p>Inability to maintain plant in cold shutdown.</p> <p>Operating Mode Applicability: 5, 6</p> <p>EALs:</p> <ol style="list-style-type: none"> 1. RCS temperature > 200° F for the specified duration on Table C-2. <table border="1" data-bbox="1672 540 2293 770"> <caption>Table C-2: RCS Reheat Duration Thresholds</caption> <thead> <tr> <th>RCS</th> <th>Cont Closure</th> <th>Duration</th> </tr> </thead> <tbody> <tr> <td>Intact with Full Inventory</td> <td>N/A</td> <td>> 60 minutes*</td> </tr> <tr> <td rowspan="2">Not Intact OR Reduced Inventory</td> <td>Established</td> <td>> 20 minutes*</td> </tr> <tr> <td>Not Established</td> <td>0 minutes</td> </tr> </tbody> </table> <p>* If an RCS heat removal system is in operation within this time frame and RCS temperature is being reduced, this EAL is not applicable.</p> <p>OR</p> <ol style="list-style-type: none"> 2. RCS pressure rise > 10 psig due to a loss of RCS cooling (this EAL does not apply in solid plant conditions). 	RCS	Cont Closure	Duration	Intact with Full Inventory	N/A	> 60 minutes*	Not Intact OR Reduced Inventory	Established	> 20 minutes*	Not Established	0 minutes	<p>Rev 4 Differences</p> <p>Converted EAL wording to a table structure to simplify recognition of the criteria.</p> <p>Rev 4/Rev 5 Differences</p> <p>Removed IC wording "with Irradiated Fuel in the RPV" as it does not apply in defueled mode and to be consistent with the other S recognition category ICs.</p> <p>Removed 'An unplanned event results in' from CA10.1 as no planned evolutions are conducted that intentionally violate the TS cold shutdown temperature limit (irrelevant wording).</p> <p>Removed 'An unplanned event results in' from CA10.2 as no planned event would include a loss of RCS cooling causing RCS pressure to rise > 10 psi (irrelevant wording).</p> <p>Modified generic basis wording to reflect 'intact' terminology.</p> <p>Rev 4/Rev 5 Deviations</p> <p>None</p>
RCS	Containment Closure	Duration																							
Intact (with full inventory (PWR))	N/A	60 minutes*																							
Not Intact (OR reduced inventory (PWR))	Established	20 minutes*																							
	Not Established	0 minutes																							
RCS	Cont Closure	Duration																							
Intact with Full Inventory	N/A	> 60 minutes*																							
Not Intact OR Reduced Inventory	Established	> 20 minutes*																							
	Not Established	0 minutes																							

NEI 99-01 Rev. 4	NEI 99-01 Rev. 5	New EALs	Difference or Deviation
<p>CU4</p> <p>Initiating Condition -- NOTIF OF UNUSUAL EVENT</p> <p>UNPLANNED Loss of Decay Heat Removal Capability with Irradiated Fuel in the Reactor Vessel.</p> <p>Operating Mode Applicability: Cold Shutdown, Refueling</p> <p>Example Emergency Action Levels: (1 or 2)</p> <ol style="list-style-type: none"> 1. An UNPLANNED event results in RCS temperature exceeding the Technical Specification cold shutdown temperature limit 2. Loss of all RCS temperature and Reactor Vessel level indication for > 15 minutes. 	<p>CU4</p> <p>Initiating Condition - NOTIF OF UNUSUAL EVENT</p> <p>UNPLANNED loss of decay heat removal capability with irradiated fuel in the RPV.</p> <p>Operating Mode Applicability: Cold Shutdown, Refueling</p> <p>Example Emergency Action Levels: (1 or 2)</p> <p>Note: The Emergency Director should not wait until the applicable time has elapsed, but should declare the event as soon as it is determined that the condition will likely exceed the applicable time.</p> <ol style="list-style-type: none"> 1. UNPLANNED event results in RCS temperature exceeding the Technical Specification cold shutdown temperature limit. 2. Loss of all RCS temperature and RCS/RPV level indication for 15 minutes or longer. 	<p>CU10</p> <p>Initiating Condition:</p> <p>Loss of decay heat removal capability.</p> <p>Operating Mode Applicability: 5, 6</p> <p>EALs:</p> <ol style="list-style-type: none"> 1. RCS temperature > 200° F due to a loss of decay heat removal capability. <p>OR</p> <ol style="list-style-type: none"> 2. Loss of ALL RCS temperature and RCS level indication for 15 minutes or longer. 	<p>Note: See FAQ 2006-12.</p> <p>Rev 5 Differences</p> <p>Note content has been moved to the classification description and instructions section as it is applicable to all time imbedded EALs and is a fundamental instruction for classification, not a threshold criterion.</p> <p>Removed 'unplanned from CU10.2 as no planned event would include a loss of all temperature and level indication (irrelevant wording).</p> <p>Rev 4/Rev 5 Differences</p> <p>Removed IC wording 'unplanned' as no planned evolutions are conducted that would intentionally cause a loss of decay heat removal capability sufficient to exceed TS limits.</p> <p>Removed IC wording 'with Irradiated Fuel in the RPV' as it does not apply in defueled mode and to be consistent with the other S recognition category ICs.</p> <p>Removed 'An unplanned event results in' from CU10.1 as no planned evolutions are conducted that intentionally violate the TS cold shutdown temperature limit (irrelevant wording).</p> <p>Rev 4/Rev5 Deviations (Deviation #11)</p> <p>Added 'due to a loss of decay heat removal capability' to CU10.1 to preclude a momentary excursion above the Technical Specification cold shutdown temperature limit when the heat removal function is available (CA10 basis wording).</p>
<p>CU5</p> <p>Initiating Condition -- NOTIF OF UNUSUAL EVENT</p> <p>Fuel Clad Degradation.</p> <p>Operating Mode Applicability: Cold Shutdown, Refueling</p> <p>Example Emergency Action Levels: (1 or 2)</p> <ol style="list-style-type: none"> 1. (Site-specific) radiation monitor readings indicating fuel clad degradation greater than Technical Specification allowable limits. 2. (Site-specific) coolant sample activity value indicating fuel clad degradation greater than Technical Specification allowable limits. 	<p>N/A</p>		<p>Note: See FAQ 2006-15.</p> <p>Rev 4 Deviations (Deviation #12)</p> <p>Deleted this IC. There is no TS limit for RCS activity in modes 5 and 6. Rad monitor reading increase would be covered under RU2 (NEI AU2).</p>

Enclosure C

{Calvert Cliffs Nuclear Power Plant

Unit 3}

EAL Technical Bases Manual

Emergency Classification Levels (ECLs)

Nuclear power plant emergencies are separated into four Emergency Classification Levels (ECLs): Unusual Event, Alert, Site Area Emergency, and General Emergency. The ECLs are escalated from least severe to most severe according to relative threat to the health and safety of the public and emergency workers. An ECL is determined to be met by identifying abnormal conditions and then comparing them to Initiating Conditions (ICs) through Emergency Action Levels (EAL) and Fission Product Barrier (FPB) threshold values as discussed below. When multiple EALs are met, event declaration is based in the highest ECL reached.

UNUSUAL EVENT: Events are in progress or have occurred which indicate a potential degradation of the level of safety of the plant or indicate a security threat to facility protection has been initiated. No releases of radioactive material requiring offsite response or monitoring are expected unless further degradation of safety systems occurs.

ALERT: Events are in progress or have occurred which involve an actual or potential substantial degradation of the level of safety of the plant or a security event that involves probable life threatening risk to site personnel or damage to site equipment because of HOSTILE ACTION. Any releases are expected to be limited to small fractions of the EPA Protective Action Guideline exposure levels.

SITE AREA EMERGENCY: Events are in progress or have occurred which involve an actual or likely major failures of plant functions needed for protection of the public or HOSTILE ACTION that results in intentional damage or malicious acts; 1) toward site personnel or equipment that could lead to the likely failure of or; 2) that prevent effective access to equipment needed for the protection of the public. Any releases are not expected to result in exposure levels which exceed EPA Protective Action Guideline exposure levels beyond the site boundary.

GENERAL EMERGENCY: Events are in progress or have occurred which involve actual or imminent substantial core degradation or melting with potential for loss of containment integrity or HOSTILE ACTION that results in an actual loss of physical control of the facility. Releases can be reasonably expected to exceed EPA Protective Action Guideline exposure levels offsite for more than the immediate site area.

A state or phase called RECOVERY may be entered prior to returning to a normal organization and operation. Recovery provides dedicated resources and organizational structure in support of restoration and communication activities following the termination of the emergency event.

Initiating Conditions (ICs)

The ICs provide a general description emergency conditions that are organized beneath the broader categories of the ECLs. The IC can be a continuous, measurable condition that is outside Technical Specifications, or it can encompass events such as fires or system/equipment failures.

Each IC is given a unique identification code consisting of two letters and one number. The first letter identifies the recognition category, the second letter identifies the ECL, and the number identifies the sequence of the IC within the recognition category. The EAL identification codes are developed as follows:

Recognition Categories

- "F" FISSION PRODUCT BARRIER DEGRADATION
- "R" RADIOLOGICAL EFFLUENT / ABNORMAL RADIATION LEVELS
- "H" HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY
- "S" SYSTEM MALFUNCTIONS - HOT
- "C" SYSTEM MALFUNCTIONS - COLD

Emergency Classification Levels

- "U" UNUSUAL EVENT
- "A" ALERT
- "S" SITE AREA EMERGENCY
- "G" GENERAL EMERGENCY

Emergency Action Levels (EALs) and Fission Product Barriers (FPBs)

EALs are predetermined, site specific, observable conditions below the ICs that place the state of the plant in a given ECL.

EALs are individually identified by the IC identification code followed by the EAL number, such as RG1.1 for a major effluent release or HA3.2 for high winds.

Fission Product Barriers (FPBs) are given unique three character identification codes and are further subdivided into loss and potential loss categories. Since meeting or exceeding a FPB does not necessarily result in an ECL, the first two letters simply identify the particular barrier by abbreviation. The number in the FPB identification code associates it with a particular FPB recognition category. The FPB identification codes are developed as follows:

Barrier Abbreviation

- “FC” FUEL CLAD
- “RC” REACTOR COOLANT
- “CT” CONTAINMENT

FPB Recognition Categories

- “1” CRITICAL SAFETY FUNCTION STATUS
- “2” CONTAINMENT RADIATION MONITORING
- “3” CORE TEMPERATURE
- “4” RPV LEVEL
- “5” RCS LEAK RATE
- “6” SG TUBE LEAKAGE / RUPTURE
- “7” RCS ACTIVITY
- “8” CONTAINMENT CONDITIONS
- “9” CONTAINMENT ISOLATION FAILURE
- “10” ED JUDGMENT

FPBs are treated the same as EALs in that they are applicable only as long as the condition(s) that meet or exceed their thresholds exist. This is in contrast to ECLs which once declared, remain in place until termination or recovery.

For EALs that contain time imbedded criterion, the Emergency Director should not wait until the applicable time period has elapsed, but should declare the event as soon as it is determined that the condition will likely exceed the applicable time.

Equipment used for monitoring and evaluating plant conditions include routine instrumentation, backup or redundant instrumentation, and the use of other parameter instrumentation that can provide indirect indication.

- When an EAL or FPB refers to a specific instrument or indication that is unavailable prior to an event, alternate indication must be identified to compensate for the loss until the primary indication is restored for the applicable operating mode. Instrumentation used to classify events cannot be removed from service without also implementing adequate compensatory measures.
- When an EAL or FPB refers to a specific instrument or indication that is known to be inaccurate or becomes unavailable during an event (such as off scale high or low), other direct or indirect instrumentation must be used whenever possible. If there are no other direct or indirect means available, then the EAL or FPB can be assumed to have been exceeded consistent with its previous valid trend.

EALs and FPBs are predicated on unplanned events. A planned evolution involves actions to address limitations imposed by the evolution, performance of surveillance testing, and implementation of controls prior to knowingly exceeding a threshold. Planned evolutions to test, manipulate, repair, perform maintenance or modifications to systems and equipment that will knowingly result in an EAL or FPB being met or exceeded are not subject to event declaration as long as the planned actions or compensatory measures do not meet an ECL with regard to level of safety and the evolution proceeds as planned.

All EALs and FPBs assume valid indications, reports or conditions. Indications, reports or conditions are considered valid when they are verified by (1) an instrument channel check, or (2) indications on related or redundant indications, or (3) by direct observation by plant personnel, such that doubt related to the indication's operability, the condition's existence, or the report's accuracy is removed. Implicit in this definition is the need for timely assessment.

Operating Mode Applicability

For purposes of event classification, the following operating mode applicability definitions establish the conditions when the EAL or FPB thresholds represent a threat:

Mode	Reactivity Condition, K_{eff}	% Rated Thermal Power*	Average Reactor Coolant Temperature
1) Power Operation	≥ 0.99	$> 5\%$	N/A
2) Startup	≥ 0.99	$\leq 5\%$	N/A
3) Hot Standby	< 0.99	N/A	$\geq 350^\circ \text{ F}$
4) Hot Shutdown	< 0.99	N/A	$350^\circ \text{ F} > T_{AVG} > 200^\circ \text{ F}$
5) Cold Shutdown	< 0.99	N/A	$\leq 200^\circ \text{ F}$
6) Refueling	One or more vessel head closure bolts less than fully tensioned.		
D) Defueled	All reactor fuel removed from reactor pressure vessel (full core off load during refueling or extended outage).		

* Excluding decay heat.

ICs are based on the operating mode that exists at the time the event occurred, prior to any protective system or operator action initiated in response.

For events that occur in Cold Shutdown or Refueling, escalation is via EALs that have Cold Shutdown or Refueling for mode applicability, even if Hot Shutdown (or a higher mode) is entered during any subsequent heat-up. In particular, the FPB threshold values are applicable only to events that initiate in Hot Shutdown or higher. If there is a change in operating mode following an event declaration, any subsequent events involving EALs outside of the current declaration escalation path will be evaluated on the mode of the plant at the time the subsequent events occur.

EAL Technical Basis Manual Content

Definitions

A list of definitions is provided for terms having specific meaning to the EALs. EAL terminology definitions are provided with the intent to be used for a particular IC or EAL/FPB threshold value and may not be applicable to other uses of that term in other procedures outside the Emergency Preparedness Program.

EAL Matrix Table

The EAL Technical Basis Manual contains five EAL matrix tables based on the different EAL recognition categories

The EAL matrix is designed as an evaluation tool that organizes the ECLs from the highest (General Emergency) on the left to the lowest (Unusual Event) on the right. Evaluating the EALs for each ECL from highest to lowest reduces the possibility that an event will be under classified. All recognition categories are to be reviewed for applicability prior to event declaration.

Other user aids such as wallboards may be developed from the matrix table to support evaluation of abnormal conditions in other human factored formats.

EAL Documentation Format

Each EAL within the technical bases manual is documented in the following manner:

- IC Identification Number
- Initiating Condition
- Operating Mode Applicability
- EALs or FPB Threshold Value(s)
- Basis
 - ◆ Generic
 - ◆ Site (or U.S. EPR) Specific
- Basis Reference(s)

Definitions

AFFECTING SAFE SHUTDOWN: Event in progress has adversely affected functions that are necessary to bring the plant to and maintain it in the applicable hot or cold shutdown condition. Plant condition applicability is determined by Technical Specification LCOs in effect.

Example 1: Event causes damage that results in entry into an LCO that requires the plant to be placed in hot shutdown. Hot shutdown is achievable, but cold shutdown is not. This event is not “affecting safe shutdown.”

Example 2: Event causes damage that results in entry into an LCO that requires the plant to be placed in cold shutdown. Hot shutdown is achievable, but cold shutdown is not. This event is “affecting safe shutdown.”

BOMB: An explosive device suspected of having sufficient force to damage plant systems or structures.

CIVIL DISTURBANCE: A group of persons violently protesting station operations or activities at the site.

CONFINEMENT BOUNDARY: The barrier(s) between areas containing radioactive substances and the environment.

CONTAINMENT CLOSURE: The procedurally defined actions taken to secure primary containment and its associated structures, systems, and components as a functional barrier to fission product release under existing plant conditions.

EXPLOSION: A rapid, violent, unconfined combustion, or catastrophic failure of pressurized equipment that imparts energy of sufficient force to potentially damage permanent structures, systems, or components.

FAULTED: In a steam generator, the existence of secondary side leakage that results in an uncontrolled drop in steam generator pressure or the steam generator being completely depressurized.

FIRE: Combustion characterized by heat and light. Sources of smoke such as slipping drive belts or overheated electrical equipment do not constitute fire. Observation of flame is preferred but is not required if large quantities of smoke and heat are observed.

HOSTAGE: A person(s) held as leverage against the station to ensure that demands will be met by the station.

HOSTILE ACTION: An act toward a nuclear power plant or its personnel that includes the use of violent force to destroy equipment and/or intimidates the licensee to achieve an end. This includes attack by air, land, or water using guns, explosives, projectiles, vehicles, or other devices used to deliver destructive force. Other acts that satisfy the overall intent may be included. Hostile action should not be construed to include acts of civil disobedience or felonious acts that are not part of a concerted attack on the nuclear power plant. Non-terrorism-based EALs should be used to address such activities, (e.g., violent acts between individuals in the owner controlled area).

HOSTILE FORCE: One or more individuals who are engaged in a determined assault, overtly or by stealth and deception, equipped with suitable weapons capable of killing, maiming, or causing destruction.

IMMINENT: Mitigation actions have been ineffective, additional actions are not expected to be successful, and trended information indicates that the event or condition will occur. Where IMMEDIATE timeframes are specified, they shall apply.

INTRUSION / INTRUDER: A person(s) present in a specified area without authorization. Discovery of a bomb in a specified area is indication of intrusion into that area by a hostile force.

LARGE AIRCRAFT: Aircraft as large as or larger than passenger airliners or air cargo / freight planes (for example; 737, DC9, MD80, MD90, 717 or C-130). Examples of aircraft that would not be considered large are general aviation Cessna, Piper and Lear type private planes as well as police, medical and media helicopters.

NORMAL LEVELS: The highest reading in the past twenty-four hours excluding the current peak value.

NORMAL PLANT OPERATIONS: Activities at the plant site associated with routine testing, maintenance, or equipment operations, in accordance with normal operating or administrative procedures. Entry into abnormal or emergency operating procedures, or deviation from normal security or radiological controls posture, is a departure from normal plant operations.

OWNER CONTROLLED AREA: The property associated with the station and owned by the company. Access is normally limited to persons entering for official business.

PROJECTILE: An object directed toward a Nuclear Power Plant that could cause concern for its continued operability, reliability, or personnel safety.

PROTECTED AREA: An area that normally encompasses all controlled areas within the security protected area fence.

RUPTURED: In a steam generator, existence of primary-to-secondary leakage of a magnitude sufficient to require or cause a reactor trip and safety injection.

SECURITY CONDITION: Any Security Event as listed in the approved security contingency plan that constitutes a threat/compromise to site security, threat/risk to site personnel, or a potential degradation to the level of safety of the plant. A SECURITY CONDITION does not involve HOSTILE ACTION.

SIGNIFICANT TRANSIENT: An unplanned event involving one or more of the following: (1) automatic runback >50% thermal reactor power, (2) electrical load rejection >50% full electrical load, (3) reactor trip, or (4) MHSI actuation.

STRIKE ACTION: A work stoppage within the PROTECTED AREA by a body of workers to enforce compliance with demands made on management. The strike action must threaten to interrupt normal plant operations.

UNISOLABLE: A breach or leak that cannot be isolated from the Control Room.

UNPLANNED: A parameter change or an event, the reasons for which may be known or unknown, that is not the result of an intended evolution and requires corrective or mitigative actions.

VISIBLE DAMAGE: Damage to equipment or structure that is readily observable without measurements, testing, or analysis and is sufficient to cause concern regarding the continued availability or reliability of the affected structure, system, or component. Example damage includes: deformation due to heat or impact, denting, penetration, rupture, cracking, and paint blistering. Surface blemishes (e.g., paint chipping, scratches) should not be included.

VITAL AREA: Any area, normally within the Protected Area that contains equipment, systems, components, or material, the failure, destruction, or release of which could directly or indirectly endanger the public health and safety by exposure to radiation.

Abbreviations

AC	Alternating Current
BWR	Boiling Water Reactor
CDE	Committed Dose Equivalent
CFR	Code of Federal Regulations
CSFST	Critical Safety Function Status Tree
DC	Direct Current
EAL	Emergency Action Level
ECCS	Emergency Core Cooling System
ECL	Emergency Classification Level
EPA	Environmental Protection Agency
EPRI	Electric Power Research Institute
ESW	Emergency Service Water
FAA	Federal Aviation Administration
FBI	Federal Bureau of Investigation
FSAR	Final Safety Analysis Report
GE	General Emergency
IC	Initiating Condition
Keff	Effective Neutron Multiplication Factor
LCO	Limiting Condition of Operation
LOCA	Loss of Coolant Accident
MHSI	Medium Head Safety Injection
MSIV	Main Steam Isolation Valve
mR	milliRoentgen
NEI	Nuclear Energy Institute
NRC	Nuclear Regulatory Commission
NORAD	North American Aerospace Defense Command
NUMARC	Nuclear Management and Resources Council
OBE	Operating Basis Earthquake
OCA	Owner Controlled Area
ODCM	Offsite Dose Calculation Manual
ORO	Offsite Response Organization
PRA	Probabilistic Risk Assessment
PWR	Pressurized Water Reactor
PSIG	Pounds per Square Inch Gauge
R	Roentgen
RCS	Reactor Coolant System
REM	Roentgen Equivalent Man
RPV	Reactor Pressure Vessel
SCBA	Self-Contained Breathing Apparatus
SG	Steam Generator
SI	Safety Injection
SPDS	Safety Parameter Display System
TEDE	Total Effective Dose Equivalent
TOAF	Top of Active Fuel
UE	Unusual Event
U.S. EPR	U.S Evolutionary Pressurized Water Reactor

FISSION PRODUCT BARRIER DEGRADATION

Modes: 1 – Power Operation, 2 – Startup, 3 – Hot Standby, 4 – Hot Shutdown, 5 – Cold Shutdown, 6 – Refueling, D – Defueled

GENERAL EMERGENCY		SITE AREA EMERGENCY		ALERT		UNUSUAL EVENT	
FG1	1 2 3 4	FS1	1 2 3 4	FA1	1 2 3 4	FU1	1 2 3 4
1. Loss of any two barriers and loss or potential loss of the third barrier.		1. Loss or potential loss of any two barriers.		1. Any loss or any potential loss of either fuel clad or RCS.		1. Any loss or any potential loss of containment.	

(Add FC2 containment rad graph here (damage curve based on 300 µCi/gm DEI-131))

(Add CT2 containment rad graph here (damage curve based on 20% fuel clad))

Sub-Category	FC – Fuel Clad		RC – Reactor Coolant System		CT - Containment	
	Loss	Potential Loss	Loss	Potential Loss	Loss	Potential Loss
2. Containment Radiation Monitoring	1. Containment radiation monitor ({JYK15 CR101}) > (Graph FC2(L)1).	None	1. Containment radiation monitor ({JYK15 CR101}) > (RC2(L)1) R/hr.	None	None	1. Containment radiation monitor ({JYK15 CR101}) > (Graph CT2(PL)1).
3. Core Temperature	1. (Calculated Clad Temperature in Region 3 or higher).	1. (Calculated Clad Temperature in Region 2).	None	None	None	1. a. (Calculated Clad Temperature in Region 4). AND b. Restoration procedures not effective within 15 minutes. OR 2. a. (Calculated Clad Temperature in Region 3). AND b. RCS level ({JEF10 CL081}) < (CT3(PL)2.b). AND c. Restoration procedures not effective within 15 minutes.

FISSION PRODUCT BARRIER DEGRADATION

Modes: 1 – Power Operation, 2 – Startup, 3 – Hot Standby, 4 – Hot Shutdown, 5 – Cold Shutdown, 6 – Refueling, D – Defueled

GENERAL EMERGENCY		SITE AREA EMERGENCY		ALERT		UNUSUAL EVENT	
FG1	1 2 3 4	FS1	1 2 3 4	FA1	1 2 3 4	FU1	1 2 3 4
Loss of any two barriers and Loss or Potential Loss of the third barrier.		Loss or Potential Loss of any two barriers.		Any Loss or any Potential Loss of either Fuel Clad or RCS.		Any Loss or any Potential Loss of Containment.	

Sub-Category	FC – Fuel Clad		RC – Reactor Coolant System		CT - Containment	
	Loss	Potential Loss	Loss	Potential Loss	Loss	Potential Loss
4. RPV Level	None	1. a. RCS level ({JEF10 CL081}) < (FC4(PL)1.a). AND b. (Calculated Clad Temperature in Region 2 or higher).	None	None	None	None
5. RCS Leak Rate	None	None	1. RCS leak rate greater than available makeup capacity as indicated by (Calculated Clad Temperature in Region 2 or higher).	1. RCS leak rate requires operation of second charging pump to maintain pressurizer level.	None	None
6. SG Tube Leakage / Rupture	None	None	1. RUPTURED SG results in an MHSI actuation.	None	1. RUPTURED SG is also FAULTED outside of containment. OR 2. a. Primary-to-Secondary leak rate > 10 gpm. AND b. UNISOLABLE steam release from affected SG to the environment.	None
7. RCS Activity	1. Coolant activity > 300 µCi/gm Dose Equivalent I-131.	None	None	None	None	None
8. Containment Pressure	None	None	None	None	1. A containment pressure rise followed by a rapid UNPLANNED drop in containment pressure. OR 2. Containment pressure or IRWST level response not consistent with LOCA conditions.	1. Containment pressure > 62 psig and rising. OR 2. Containment Hydrogen > 4%.
9. Containment Isolation Failure	None	None	None	None	1. a. Failure of ALL isolation valves in any one line to close. AND b. Direct downstream pathway to the environment exists after containment isolation signal.	None
10. ED Judgment	1. Any condition in the opinion of the Emergency Director that indicates loss of the fuel clad barrier.	1. Any condition in the opinion of the Emergency Director that indicates potential loss of the fuel clad barrier.	1. Any condition in the opinion of the Emergency Director that indicates loss of the RCS barrier.	1. Any condition in the opinion of the Emergency Director that indicates potential loss of the RCS barrier.	1. Any condition in the opinion of the Emergency Director that indicates loss of the containment barrier.	1. Any condition in the opinion of the Emergency Director that indicates potential loss of the containment barrier.

RADIOLOGICAL EFFLUENT / ABNORMAL RADIATION LEVELS

Modes: 1 – Power Operation, 2 – Startup, 3 – Hot Standby, 4 – Hot Shutdown, 5 – Cold Shutdown, 6 – Refueling, D – Defueled

	GENERAL EMERGENCY	SITE AREA EMERGENCY	ALERT	UNUSUAL EVENT
Radiological Effluents	<p>RG1 1 2 3 4 5 6 D</p> <p>Offsite dose resulting from an actual or IMMEDIATE release of gaseous radioactivity greater than 1000 mRem (10mSv) TEDE or 5000 mRem (50 mSv) Thyroid CDE for the actual or projected duration of the release using actual meteorology.</p> <p>EALs:</p> <p>Note: If dose assessment results are available, declaration should be based on dose assessment instead of radiation monitor values. Do not delay declaration awaiting dose assessment results.</p> <ol style="list-style-type: none"> Vent Stack Noble Gas ({KLK90 FR001}) > {RG1.1} $\mu\text{Ci/hr}$ for 15 minutes or longer. <p>OR</p> <ol style="list-style-type: none"> Dose assessment using actual meteorology indicates doses at or beyond the site boundary of EITHER of the following: <ul style="list-style-type: none"> > 1000 mRem TEDE > 5000 mRem CDE Thyroid <p>OR</p> <ol style="list-style-type: none"> Field survey results at or beyond the site boundary indicate EITHER of the following: <ul style="list-style-type: none"> Gamma (closed window) dose rate > 1000 mR/hr for 60 minutes or longer. Air sample analysis > 5000 mRem CDE Thyroid for one hour of inhalation. 	<p>RS1 1 2 3 4 5 6 D</p> <p>Offsite dose resulting from an actual or IMMEDIATE release of gaseous radioactivity greater than 100 mRem (1 mSv) TEDE or 500 mRem (5 mSv) Thyroid CDE for the actual or projected duration of the release using actual meteorology.</p> <p>EALs:</p> <p>Note: If dose assessment results are available, declaration should be based on dose assessment instead of radiation monitor values. Do not delay declaration awaiting dose assessment results.</p> <ol style="list-style-type: none"> Vent Stack Noble Gas ({KLK90 FR001}) > {RS1.1} $\mu\text{Ci/hr}$ for 15 minutes or longer. <p>OR</p> <ol style="list-style-type: none"> Dose assessment using actual meteorology indicates doses at or beyond the site boundary of EITHER of the following: <ul style="list-style-type: none"> > 100 mRem TEDE > 500 mRem CDE Thyroid <p>OR</p> <ol style="list-style-type: none"> Field survey results at or beyond the site boundary indicate EITHER of the following: <ul style="list-style-type: none"> Gamma (closed window) dose rate > 100 mR/hr for 60 minutes or longer. Air sample analysis > 500 mRem CDE Thyroid for one hour of inhalation. 	<p>RA1 1 2 3 4 5 6 D</p> <p>Any release of gaseous or liquid radioactivity to the environment greater than 200 times the ODCM limit for 15 minutes or longer.</p> <p>EALs:</p> <p>Note: In the absence of data to the contrary, assume that the release duration has exceeded the applicable time if an ongoing release is detected and the release start time is unknown.</p> <ol style="list-style-type: none"> Vent Stack Noble Gas ({KLK90 FR001}) > {RA1.1} $\mu\text{Ci/hr}$ for 15 minutes or longer. <p>OR</p> <ol style="list-style-type: none"> ANY of the following effluent monitors > 200 times the high alarm setpoint established by a current radioactivity discharge permit for 15 minutes or longer: <ul style="list-style-type: none"> Rad Waste Building Transfer Tank Discharge Line Activity Monitor ({KPK29 CR001/002}) Discharge permit specified monitor <p>OR</p> <ol style="list-style-type: none"> Confirmed sample analysis for gaseous or liquid releases > 200 times the ODCM limit for 15 minutes or longer. 	<p>RU1 1 2 3 4 5 6 D</p> <p>Any release of gaseous or liquid radioactivity to the environment greater than 2 times the ODCM limit for 60 minutes or longer.</p> <p>EALs:</p> <p>Note: In the absence of data to the contrary, assume that the release duration has exceeded the applicable time if an ongoing release is detected and the release start time is unknown.</p> <ol style="list-style-type: none"> Vent Stack Noble Gas ({KLK90 FR001}) > {RU1.1} $\mu\text{Ci/hr}$ for 60 minutes or longer. <p>OR</p> <ol style="list-style-type: none"> ANY of the following effluent monitors > 2 times the high alarm setpoint established by a current radioactivity discharge permit for 60 minutes or longer: <ul style="list-style-type: none"> Rad Waste Building Transfer Tank Discharge Line Activity Monitor ({KPK29 CR001/002}) Discharge permit specified monitor <p>OR</p> <ol style="list-style-type: none"> Confirmed sample analysis for gaseous or liquid releases > 2 times the ODCM limit for 60 minutes or longer.

RADIOLOGICAL EFFLUENT / ABNORMAL RADIATION LEVELS

Modes: 1 – Power Operation, 2 – Startup, 3 – Hot Standby, 4 – Hot Shutdown, 5 – Cold Shutdown, 6 – Refueling, D – Defueled

		GENERAL EMERGENCY	SITE AREA EMERGENCY	ALERT	UNUSUAL EVENT
Abnormal Radiation Levels				<p>RA2 1 2 3 4 5 6 D</p> <p>Damage to irradiated fuel or loss of water level that has resulted or will result in the uncovering of irradiated fuel outside the reactor vessel.</p> <p>EALs:</p> <ol style="list-style-type: none"> A water level drop in the reactor refueling cavity, spent fuel pool or fuel transfer canal that will result in irradiated fuel becoming uncovered. <p>OR</p> <ol style="list-style-type: none"> >1000 mR/hr on ANY of the following due to damage to irradiated fuel or loss of water level: <ul style="list-style-type: none"> Reactor Building Refueling Bridge Area Dose Rate Monitor ({JYK15 CR003}) Fuel Building Spent Fuel Mast Bridge Dose Rate Monitor ({JYK28 CR002}) Fuel Building Fuel Pool Dose Rate Monitor ({JYK28 CR001}) Transfer Pit Dose Rate Monitor ({JYK23 CR001}) 	<p>RU2 1 2 3 4 5 6 D</p> <p>UNPLANNED rise in plant radiation levels.</p> <p>EALs:</p> <ol style="list-style-type: none"> <ol style="list-style-type: none"> UNPLANNED water level drop in the reactor refueling cavity, spent fuel pool or fuel transfer canal as indicated by ANY of the following: <ul style="list-style-type: none"> Reactor refueling cavity level ({FAK31 CL003 or CL004}) < (RU2.1.a(b1)) feet. Spent fuel pool level ({FAL18 CL001}) < (RU2.1.a(b2)) feet. Fuel transfer canal level ({FAL18 CL004 or CL005}) < (RU2.1.a(b3)) feet. Report of visual observation. <p>AND</p> <ol style="list-style-type: none"> Area radiation monitor rise on ANY of the following: <ul style="list-style-type: none"> Reactor Building Refueling Bridge Area Dose Rate Monitor ({JYK15 CR003}) Fuel Building Spent Fuel Mast Bridge Dose Rate Monitor ({JYK28 CR002}) Fuel Building Fuel Pool Dose Rate Monitor ({JYK28 CR001}) Transfer Pit Dose Rate Monitor ({JYK23 CR001}) <p>OR</p> <ol style="list-style-type: none"> UNPLANNED area radiation monitor or radiation survey > 1000 times NORMAL LEVELS.
				<p>RA3 1 2 3 4 5 6 D</p> <p>Rise in radiation levels within the facility that impedes operation of systems required to maintain plant safety functions.</p> <p>EALs:</p> <ol style="list-style-type: none"> Dose rate > 15 mR/hr in ANY of the following areas requiring continuous occupancy to maintain plant safety functions: <ul style="list-style-type: none"> Control Room Central Alarm Station 	

HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY

Modes: 1 – Power Operation, 2 – Startup, 3 – Hot Standby, 4 – Hot Shutdown, 5 – Cold Shutdown, 6 – Refueling, D – Defueled

		GENERAL EMERGENCY	SITE AREA EMERGENCY	ALERT	UNUSUAL EVENT
Security		<p>HG1 1 2 3 4 5 6 D</p> <p>HOSTILE ACTION resulting in loss of physical control of the facility.</p> <p>EALs:</p> <ol style="list-style-type: none"> A HOSTILE ACTION has occurred such that plant personnel are unable to operate equipment required to maintain safety functions. <p>OR</p> <ol style="list-style-type: none"> A HOSTILE ACTION has caused failure of spent fuel cooling systems and IMMEDIATE fuel damage is likely. 	<p>HS1 1 2 3 4 5 6 D</p> <p>HOSTILE ACTION within the PROTECTED AREA.</p> <p>EALs:</p> <ol style="list-style-type: none"> A HOSTILE ACTION is occurring or has occurred within the PROTECTED AREA as reported by the Security Shift Supervisor. 	<p>HA1 1 2 3 4 5 6 D</p> <p>HOSTILE ACTION within the OWNER CONTROLLED AREA or airborne attack threat.</p> <p>EALs:</p> <ol style="list-style-type: none"> A HOSTILE ACTION is occurring or has occurred within the OWNER CONTROLLED AREA as reported by the Security Shift Supervisor. <p>OR</p> <ol style="list-style-type: none"> A validated notification from the NRC of a LARGE AIRCRAFT attack threat within 30 minutes of the site. 	<p>HU1 1 2 3 4 5 6 D</p> <p>Confirmed SECURITY CONDITION or threat which indicates a potential degradation in the level of safety of the plant.</p> <p>EALs:</p> <ol style="list-style-type: none"> A SECURITY CONDITION that does not involve a HOSTILE ACTION as reported by the Security Shift Supervisor. <p>OR</p> <ol style="list-style-type: none"> A credible site specific security threat notification. <p>OR</p> <ol style="list-style-type: none"> A validated notification from the NRC providing information of an aircraft threat.
	CR Evacuation		<p>HS2 1 2 3 4 5 6 D</p> <p>Control Room evacuation has been initiated and plant control cannot be established.</p> <p>EALs:</p> <ol style="list-style-type: none"> <ol style="list-style-type: none"> Control Room evacuation has been initiated. <p>AND</p> <ol style="list-style-type: none"> <ol style="list-style-type: none"> Control of the plant cannot be established within 15 minutes. 	<p>HA2 1 2 3 4 5 6 D</p> <p>Control Room evacuation has been initiated.</p> <p>EALs:</p> <ol style="list-style-type: none"> Control Room evacuation has been initiated. 	

HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY

Modes: 1 – Power Operation, 2 – Startup, 3 – Hot Standby, 4 – Hot Shutdown, 5 – Cold Shutdown, 6 – Refueling, D – Defueled

GENERAL EMERGENCY		SITE AREA EMERGENCY		ALERT		UNUSUAL EVENT	
Natural or Destructive Phenomena		<p>Table H-1: Safe Shutdown Vital Areas</p> <ul style="list-style-type: none"> • Control Room • Safeguards Buildings • Containment • Nuclear Auxiliary Building • Emergency Power Generating Buildings • ESW Cooling Towers 		<p>HA3 1 2 3 4 5 6 D</p> <p>Natural or destructive phenomena affecting VITAL AREAS.</p> <p>EALs:</p> <ol style="list-style-type: none"> 1. a. Seismic event > OBE as indicated by PICS seismic monitoring system. <p>AND</p> <ol style="list-style-type: none"> b. Earthquake confirmed by ANY of the following: <ul style="list-style-type: none"> • Earthquake felt in plant • National Earthquake Center • Control Room indication of degraded performance of systems required for the safe shutdown of the plant. <p>OR</p> <ol style="list-style-type: none"> 2. Tornado or high winds > {45 m/sec (100 mph)} resulting in EITHER of the following: <ul style="list-style-type: none"> • VISIBLE DAMAGE to ANY structures in Table H-1 areas containing safety systems or components. • Control Room indication of degraded performance of those safety systems. <p>OR</p> <ol style="list-style-type: none"> 3. Internal flooding in Table H-1 areas resulting in EITHER of the following: <ul style="list-style-type: none"> • Electrical shock hazard that precludes access to operate or monitor safety equipment. • Control Room indication of degraded performance of those safety systems. <p>OR</p> <ol style="list-style-type: none"> 4. {Bay water level > {39.4 feet 12.0 meters}} {Mean Sea Level}} resulting in EITHER of the following: <ul style="list-style-type: none"> • VISIBLE DAMAGE to ANY structures in Table H-1 areas containing safety systems or components. • Control Room indication of degraded performance of those safety systems. <p>OR</p> <ol style="list-style-type: none"> 5. Turbine failure-generated PROJECTILES resulting in EITHER of the following: <ul style="list-style-type: none"> • VISIBLE DAMAGE to or penetration of ANY structures in Table H-1 areas containing safety systems or components. • Control Room indication of degraded performance of those safety systems. <p>OR</p> <ol style="list-style-type: none"> 6. Vehicle crash resulting in EITHER of the following: <ul style="list-style-type: none"> • VISIBLE DAMAGE to ANY structures in Table H-1 areas containing safety systems or components. • Control Room indication of degraded performance of those safety systems. 	<p>HU3 1 2 3 4 5 6 D</p> <p>Natural or destructive phenomena affecting the PROTECTED AREA.</p> <p>EALs:</p> <ol style="list-style-type: none"> 1. a. Seismic event trigger as indicated by PICS seismic monitoring system. <p>AND</p> <ol style="list-style-type: none"> b. Earthquake confirmed by EITHER of the following: <ul style="list-style-type: none"> • Earthquake felt in plant • National Earthquake Center <p>OR</p> <ol style="list-style-type: none"> 2. a. Tornado within the PROTECTED AREA. <p>OR</p> <ol style="list-style-type: none"> b. High winds > {45 m/sec (100 mph)}. <p>OR</p> <ol style="list-style-type: none"> 3. Internal flooding in Table H-1 areas that has the potential to affect safety related equipment required by Technical Specifications for the current operating mode. <p>OR</p> <ol style="list-style-type: none"> 4. {Bay water level > {39.4 feet (12.0 meters)} {Mean Sea Level}}. <p>OR</p> <ol style="list-style-type: none"> 5. Turbine failure resulting in casing penetration or damage to turbine or generator seals. 		

HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY

Modes: 1 – Power Operation, 2 – Startup, 3 – Hot Standby, 4 – Hot Shutdown, 5 – Cold Shutdown, 6 – Refueling, D – Defueled

GENERAL EMERGENCY		SITE AREA EMERGENCY		ALERT		UNUSUAL EVENT	
Fire / Explosion		<table border="1"> <tr> <td> Table H-1: Safe Shutdown Vital Areas <ul style="list-style-type: none"> Control Room Safeguards Buildings Containment Nuclear Auxiliary Building Emergency Power Generating Buildings ESW Cooling Towers </td> </tr> </table>	Table H-1: Safe Shutdown Vital Areas <ul style="list-style-type: none"> Control Room Safeguards Buildings Containment Nuclear Auxiliary Building Emergency Power Generating Buildings ESW Cooling Towers 		HA4 1 2 3 4 5 6 D FIRE or EXPLOSION affecting the operability of plant safety systems required to establish or maintain safe shutdown. EALs: 1. FIRE or EXPLOSION resulting in EITHER of the following: <ul style="list-style-type: none"> VISIBLE DAMAGE to ANY structures in Table H-1 areas containing safety systems or components. Control Room indication of degraded performance of those safety systems. 	HU4 1 2 3 4 5 6 D FIRE within the PROTECTED AREA not extinguished within 15 minutes of detection or EXPLOSION within the PROTECTED AREA. EALs: 1. FIRE not extinguished within 15 minutes of Control Room notification or verification of a Control Room FIRE alarm in actual contact with or immediately adjacent to ANY of the Table H-1 areas. OR 2. EXPLOSION within the PROTECTED AREA.	
	Table H-1: Safe Shutdown Vital Areas <ul style="list-style-type: none"> Control Room Safeguards Buildings Containment Nuclear Auxiliary Building Emergency Power Generating Buildings ESW Cooling Towers 						
	Toxic Gas			HA5 1 2 3 4 5 6 D Access to a VITAL AREA is prohibited due to toxic, corrosive, asphyxiant or flammable gases which jeopardize the ability to safely operate or shutdown the reactor. Note: If the equipment in the VITAL AREA was inoperable or out of service before the event occurred, then this EAL should not be declared as it will have no adverse impact on the ability to safely operate or shutdown the plant beyond that allowed by Technical Specifications at the time of the event. EALs: 1. Access to a VITAL AREA is prohibited due to toxic, corrosive, asphyxiant or flammable gases which jeopardize the ability to safely operate or shutdown the reactor.	HU5 1 2 3 4 5 6 D Release of toxic, corrosive, asphyxiant or flammable gases deemed detrimental to NORMAL PLANT OPERATIONS. EALs: 1. Toxic, corrosive, asphyxiant or flammable gases in amounts that have or could adversely affect NORMAL PLANT OPERATIONS. OR 2. Report by local, county or state officials for evacuation or sheltering of site personnel based on an offsite event.		
HG6 1 2 3 4 5 6 D Other conditions exist which in the judgment of the Emergency Director warrant declaration of General Emergency. EALs: 1. Other conditions exist which in the judgment of the Emergency Director indicate that events are in progress or have occurred which involve actual or imminent substantial core degradation or melting with potential for loss of containment integrity or HOSTILE ACTION that results in an actual loss of physical control of the facility. Releases can be reasonably expected to exceed EPA Protective Action Guideline exposure levels offsite for more than the immediate site area.		HS6 1 2 3 4 5 6 D Other conditions exist which in the judgment of the Emergency Director warrant declaration of Site Area Emergency. EALs: 1. Other conditions exist which in the judgment of the Emergency Director indicate that events are in progress or have occurred which involve actual or likely major failures of plant functions needed for protection of the public or HOSTILE ACTION that results in intentional damage or malicious acts; (1) toward site personnel or equipment that could lead to the likely failure of or, (2) that prevent effective access to equipment needed for the protection of the public. Any releases are not expected to result in exposure levels which exceed EPA Protective Action Guideline exposure levels beyond the site boundary.	HA6 1 2 3 4 5 6 D Other conditions exist which in the judgment of the Emergency Director warrant declaration of an Alert. EALs: 1. Other conditions exist which in the judgment of the Emergency Director indicate that events are in progress or have occurred which involve actual or potential substantial degradation of the level of safety of the plant or a security event that involves probable life threatening risk to site personnel or damage to site equipment because of HOSTILE ACTION. Any releases are expected to be limited to small fractions of the EPA Protective Action Guideline exposure levels.	HU6 1 2 3 4 5 6 D Other conditions exist which in the judgment of the Emergency Director warrant declaration of an Unusual Event. EALs: 1. Other conditions exist which in the judgment of the Emergency Director indicate that events are in progress or have occurred which indicate a potential degradation of the level of safety of the plant or indicate a security threat to facility protection has been initiated. No releases of radioactive material requiring offsite response or monitoring are expected unless further degradation of safety systems occurs.			

SYSTEM MALFUNCTIONS - HOT

Modes: 1 – Power Operation, 2 – Startup, 3 – Hot Standby, 4 – Hot Shutdown, 5 – Cold Shutdown, 6 – Refueling, D – Defueled

	GENERAL EMERGENCY	SITE AREA EMERGENCY	ALERT	UNUSUAL EVENT
Loss of AC	<p>SG1 1 2 3 4</p> <p>Prolonged loss of all offsite and all onsite AC power to emergency busses.</p> <p>EALs:</p> <p>1. a. Loss of ALL offsite and ALL onsite AC power to 31, 32, 33 and 34 BDA busses.</p> <p>AND</p> <p>b. EITHER of the following:</p> <ul style="list-style-type: none"> • Restoration of at least one emergency bus within 2 hours is not likely. • (Calculated Clad Temperature in Region 4). 	<p>SS1 1 2 3 4</p> <p>Loss of all offsite and all onsite AC power to emergency busses for 15 minutes or longer.</p> <p>EALs:</p> <p>1. Loss of ALL offsite and ALL onsite AC power to 31, 32, 33 and 34 BDA busses for 15 minutes or longer.</p>	<p>SA1 1 2 3 4</p> <p>AC power capability to emergency busses reduced to a single source for 15 minutes or longer.</p> <p>EALs:</p> <p>1. AC power to 31, 32, 33 and 34 BDA busses is reduced to a single source for 15 minutes or longer.</p>	<p>SU1 1 2 3 4</p> <p>Loss of all offsite AC power to emergency busses for 15 minutes or longer.</p> <p>EALs:</p> <p>1. Loss of ALL offsite AC power to 31, 32, 33 and 34 BDA busses for 15 minutes or longer.</p>
Loss of DC		<p>SS2 1 2 3 4</p> <p>Loss of vital DC power for 15 minutes or longer.</p> <p>EALs:</p> <p>1. < 210 VDC on the vital 31, 32, 33 and 34 BUC busses for 15 minutes or longer.</p>		
Failure of Protection Systems	<p>SG3 1 2</p> <p>Automatic trip and all manual actions failed to shutdown the reactor and indication of an extreme challenge to the ability to cool the core exists.</p> <p>EALs:</p> <p>1. a. An automatic reactor trip failed to shutdown the reactor as indicated by reactor power > 5%.</p> <p>AND</p> <p>b. All manual actions failed to shutdown the reactor as indicated by reactor power > 5%.</p> <p>AND</p> <p>c. EITHER of the following have occurred:</p> <ul style="list-style-type: none"> • (Calculated Clad Temperature in Region 3 or higher). • Loss of all four trains of Emergency Feedwater. 	<p>SS3 1 2</p> <p>Automatic trip failed to shutdown the reactor and manual actions taken from the reactor control console failed to shutdown the reactor.</p> <p>EALs:</p> <p>1. a. An automatic reactor trip failed to shutdown the reactor as indicated by reactor power > 5%.</p> <p>AND</p> <p>b. Manual actions taken at the reactor control console failed to shutdown the reactor as indicated by reactor power > 5%.</p>	<p>SA3 1 2</p> <p>Automatic trip failed to shutdown the reactor.</p> <p>EALs:</p> <p>1. An automatic reactor trip failed to shutdown the reactor as indicated by reactor power > 5%.</p>	<p>SU3 3 4</p> <p>Inadvertent criticality.</p> <p>EALs:</p> <p>1. UNPLANNED sustained positive startup rate observed on nuclear instrumentation.</p>

SYSTEM MALFUNCTIONS - HOT

Modes: 1 – Power Operation, 2 – Startup, 3 – Hot Standby, 4 – Hot Shutdown, 5 – Cold Shutdown, 6 – Refueling, D – Defueled

GENERAL EMERGENCY		SITE AREA EMERGENCY		ALERT		UNUSUAL EVENT	
Plant Monitoring		<p>SS4 1 2 3 4</p> <p>Loss of all monitoring functions for 15 minutes or longer with a SIGNIFICANT TRANSIENT in progress.</p> <p>EALs:</p> <p>1. a. Loss of SICS for 15 minutes or longer.</p> <p style="padding-left: 20px;">AND</p> <p>b. Loss of PICS for 15 minutes or longer.</p> <p style="padding-left: 20px;">AND</p> <p>c. ANY of the following SIGNIFICANT TRANSIENTS are in progress:</p> <ul style="list-style-type: none"> • Automatic runback > 50% thermal power • Electrical load reject > 50% full load • Reactor trip • MHSI actuation 		<p>SA4 1 2 3 4</p> <p>Loss of all monitoring functions for 15 minutes or longer.</p> <p>EALs:</p> <p>1. a. Loss of SICS for 15 minutes or longer.</p> <p style="padding-left: 20px;">AND</p> <p>b. Loss of PICS for 15 minutes or longer.</p>		<p>SU4 1 2 3 4</p> <p>Degradation of monitoring functions for 15 minutes or longer.</p> <p>EALs:</p> <p>1. Loss of SICS for 15 minutes or longer.</p> <p style="padding-left: 20px;">OR</p> <p>2. Loss of PICS for 15 minutes or longer.</p>	
	T.S. Limits					<p>SU5 1 2 3 4</p> <p>Inability to reach required operating mode within Technical Specification limits.</p> <p>EALs:</p> <p>1. Plant is not brought to required operating mode within Technical Specifications LCO action completion time.</p>	
	Communications					<p>SU6 1 2 3 4</p> <p>Loss of all onsite or offsite communications capabilities.</p> <p>EALs:</p> <p>1. Loss of ALL of the following onsite communication methods affecting the ability to perform routine operations:</p> <ul style="list-style-type: none"> • {Radios} • {Plant Page} • {Internal Telephone Systems} <p style="padding-left: 20px;">OR</p> <p>2. Loss of ALL of the following offsite communications methods affecting the ability to perform offsite notifications:</p> <ul style="list-style-type: none"> • {Dedicated Offsite Alerting System } • NRC Emergency Notification System - ENS • NRC Health Physics Network - HPN • {External Telephone Systems} 	

SYSTEM MALFUNCTIONS - HOT

Modes: 1 – Power Operation, 2 – Startup, 3 – Hot Standby, 4 – Hot Shutdown, 5 – Cold Shutdown, 6 – Refueling, D – Defueled

		GENERAL EMERGENCY	SITE AREA EMERGENCY	ALERT	UNUSUAL EVENT
RCS Leakage					<p>SU7 1 2 3 4 RCS leakage.</p> <p>EALs:</p> <p>1. Unidentified or pressure boundary leakage > 10 gpm.</p> <p style="text-align: center;">OR</p> <p>2. Identified leakage > 25 gpm.</p>
Fuel Clad Degradation					<p>SU9 1 2 3 4 Fuel clad degradation.</p> <p>EALs:</p> <p>1. Gross Failed Fuel Monitor ({KUA66 CR001}) > (SU9.1) cpm.</p> <p style="text-align: center;">OR</p> <p>2. Coolant sample activity > 1.0 µCi/gm dose equivalent I-131.</p>

SYSTEM MALFUNCTIONS - COLD

Modes: 1 – Power Operation, 2 – Startup, 3 – Hot Standby, 4 – Hot Shutdown, 5 – Cold Shutdown, 6 – Refueling, D – Defueled

GENERAL EMERGENCY		SITE AREA EMERGENCY		ALERT		UNUSUAL EVENT	
Loss of AC				CA1 5 6 D Loss of all offsite and all onsite AC power to emergency busses for 15 minutes or longer. EALs: 1. Loss of all offsite and all onsite AC power to 31, 32, 33 and 34 BDA busses for 15 minutes or longer.		CU1 5 6 AC power capability to emergency busses reduced to a single source for 15 minutes or longer. EALs: 1. AC power to 31, 32, 33 and 34 BDA busses is reduced to a single source for 15 minutes or longer.	
Loss of DC						CU2 5 6 Loss of required DC power for 15 minutes or longer. EALs: 1. < 210 VDC on the required 31, 32, 33 and 34 BUC busses for 15 minutes or longer.	
Failure of Protection System						CU3 5 6 Inadvertent criticality. EALs: 1. UNPLANNED sustained positive startup rate observed on nuclear instrumentation.	
Communications						CU6 5 6 D Loss of all onsite or offsite communications capabilities. EALs: 1. Loss of ALL of the following onsite communication methods affecting the ability to perform routine operations: <ul style="list-style-type: none"> • {Radios} • {Plant Page} • {Internal Telephone Systems} OR 2. Loss of ALL of the following offsite communications methods affecting the ability to perform offsite notifications: <ul style="list-style-type: none"> • {Dedicated Offsite Alerting System } • NRC Emergency Notification System - ENS • NRC Health Physics Network - HPN • {External Telephone Systems} 	

SYSTEM MALFUNCTIONS - COLD

Modes: 1 – Power Operation, 2 – Startup, 3 – Hot Standby, 4 – Hot Shutdown, 5 – Cold Shutdown, 6 – Refueling, D – Defueled

	GENERAL EMERGENCY	SITE AREA EMERGENCY	ALERT	UNUSUAL EVENT											
RCS Leakage	<p>CG7 5 6</p> <p>Loss of RPV inventory affecting fuel clad integrity with containment challenged.</p> <p>EALs:</p> <ol style="list-style-type: none"> 1. a. RPV level < {96.0 feet (29.3 meters)} (top of active fuel) for 30 minutes or longer. <p style="text-align: center;">AND</p> <ol style="list-style-type: none"> b. ANY Table C-1 containment challenge indications. <p style="text-align: center;">OR</p> <ol style="list-style-type: none"> 2. a. RPV level cannot be monitored with core uncover indicated by ANY of the following for 30 minutes or longer: <ul style="list-style-type: none"> • Reactor Building Refueling Bridge Area Dose Rate Monitor ({JYK15 CR003}) > (CG7.2.a(b1)) mR/hr. • Erratic source range monitor indication. • UNPLANNED level rise in IRWST. <p style="text-align: center;">AND</p> <ol style="list-style-type: none"> b. ANY Table C-1 containment challenge indications. <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> <p>Table C-1: Containment Challenge Indications</p> <ul style="list-style-type: none"> • CONTAINMENT CLOSURE not established. • Hydrogen concentration > 4% inside containment. • UNPLANNED rise in containment pressure. </div>	<p>CS7 5 6</p> <p>Loss of RPV inventory affecting core decay heat removal capability.</p> <p>EALs:</p> <ol style="list-style-type: none"> 1. a. CONTAINMENT CLOSURE not established. <p style="text-align: center;">AND</p> <ol style="list-style-type: none"> b. Loss of RPV inventory as indicated by RCS level ({JEF10 CL081}) < (CS7.1.b). <p style="text-align: center;">OR</p> <ol style="list-style-type: none"> 2. a. CONTAINMENT CLOSURE established. <p style="text-align: center;">AND</p> <ol style="list-style-type: none"> b. RPV level < {96.0 feet (29.3 meters)} (top of active fuel). <p style="text-align: center;">OR</p> <ol style="list-style-type: none"> 3. a. RCS level cannot be monitored for 30 minutes or longer. <p style="text-align: center;">AND</p> <ol style="list-style-type: none"> b. Loss of RPV inventory as indicated by ANY of the following: <ul style="list-style-type: none"> • Reactor Building Refueling Bridge Area Dose Rate Monitor ({JYK15 CR003}) > (CS7.3.b(b1)) mR/hr. • Erratic source range monitor indication. • UNPLANNED level rise in IRWST. 	<p>CA7 5 6</p> <p>Loss of RPV inventory.</p> <p>EALs:</p> <ol style="list-style-type: none"> 1. Loss of RPV inventory as indicated by RCS level ({JEF10 CL081}) < (CA7.1). <p style="text-align: center;">OR</p> <ol style="list-style-type: none"> 2. a. RCS level cannot be monitored for 15 minutes or longer. <p style="text-align: center;">AND</p> <ol style="list-style-type: none"> b. Loss of RPV inventory as indicated by UNPLANNED level rise in IRWST. 	<p>CU7 5</p> <p>RCS leakage.</p> <p>EALs:</p> <ol style="list-style-type: none"> 1. RCS leakage results in the inability to maintain or restore RCS level > Procedure Established Minimum Level for 15 minutes or longer. 											
	Heat Sink		<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p style="text-align: center;">Table C-2: RCS Reheat Duration Thresholds</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>RCS</th> <th>Cont Closure</th> <th>Duration</th> </tr> </thead> <tbody> <tr> <td>Intact with Full Inventory</td> <td>N/A</td> <td>> 60 min*</td> </tr> <tr> <td rowspan="2">Not Intact OR Reduced Inventory</td> <td>Established</td> <td>> 20 min*</td> </tr> <tr> <td>Not Established</td> <td>0 min</td> </tr> </tbody> </table> </div> <p>* If an RCS heat removal system is in operation within this time frame and RCS temperature is being reduced, this EAL is not applicable.</p>	RCS	Cont Closure	Duration	Intact with Full Inventory	N/A	> 60 min*	Not Intact OR Reduced Inventory	Established	> 20 min*	Not Established	0 min	<p>CA10 5 6</p> <p>Inability to maintain plant in cold shutdown.</p> <p>EALs:</p> <ol style="list-style-type: none"> 1. RCS temperature > 200° F for the specified duration on Table C-2. <p style="text-align: center;">OR</p> <ol style="list-style-type: none"> 2. RCS pressure rise > 10 psig due to a loss of RCS cooling (this EAL does not apply in solid plant conditions).
RCS	Cont Closure	Duration													
Intact with Full Inventory	N/A	> 60 min*													
Not Intact OR Reduced Inventory	Established	> 20 min*													
	Not Established	0 min													
			<p>CA10 5 6</p> <p>Inability to maintain plant in cold shutdown.</p> <p>EALs:</p> <ol style="list-style-type: none"> 1. RCS temperature > 200° F for the specified duration on Table C-2. <p style="text-align: center;">OR</p> <ol style="list-style-type: none"> 2. RCS pressure rise > 10 psig due to a loss of RCS cooling (this EAL does not apply in solid plant conditions). 	<p>CU10 5 6</p> <p>Loss of decay heat removal capability.</p> <p>EALs:</p> <ol style="list-style-type: none"> 1. RCS temperature > 200° F due to a loss of decay heat removal capability. <p style="text-align: center;">OR</p> <ol style="list-style-type: none"> 2. Loss of ALL RCS temperature and RCS level indication for 15 minutes or longer. 											

**RECOGNITION CATEGORY
FISSION PRODUCT BARRIER DEGRADATION****FG1****Initiating Condition:**

Loss of any two barriers and loss or potential loss of the third barrier.

Operating Mode Applicability:

1, 2, 3, 4

EALs:

Refer to fission product barrier loss and potential loss threshold values to determine barrier status.

Basis:**Generic**

Fuel cladding, RCS and containment comprise the fission product barriers.

At the General Emergency classification level each barrier is weighted equally.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, Tables 5-F-1 and 5-F-3

**RECOGNITION CATEGORY
FISSION PRODUCT BARRIER DEGRADATION****FS1****Initiating Condition:**

Loss or potential loss of any two barriers.

Operating Mode Applicability:

1, 2, 3, 4

EALs:

Refer to fission product barrier loss and potential loss threshold values to determine barrier status.

Basis:**Generic**

Fuel cladding, RCS and containment comprise the fission product barriers.

At the Site Area Emergency classification level, each barrier is weighted equally.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, Tables 5-F-1 and 5-F-3

**RECOGNITION CATEGORY
FISSION PRODUCT BARRIER DEGRADATION****FA1****Initiating Condition:**

Any loss or any potential loss of either fuel clad or RCS.

Operating Mode Applicability:

1, 2, 3, 4

EALs:

Refer to fission product barrier loss and potential loss threshold values to determine barrier status.

Basis:**Generic**

Fuel cladding, RCS and containment comprise the fission product barriers.

The fuel cladding and RCS barriers are weighted more heavily than the containment barrier. Unlike the containment barrier, loss or potential loss of either the fuel cladding or RCS barrier may result in the relocation of radioactive materials or degradation of core cooling capability. Note that the loss or potential loss of containment barrier in combination with loss or potential loss of either fuel cladding or RCS barrier results in declaration of a Site Area Emergency under FS1.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, Tables 5-F-1 and 5-F-3

**RECOGNITION CATEGORY
FISSION PRODUCT BARRIER DEGRADATION****FU1****Initiating Condition:**

Any loss or any potential loss of containment.

Operating Mode Applicability:

1, 2, 3, 4

EALs:

Refer to fission product barrier loss and potential loss threshold values to determine barrier status.

Basis:**Generic**

Fuel cladding, RCS and containment comprise the fission product barriers.

Unlike the Fuel cladding and RCS barriers, the loss of either of which results in an Alert under FA1, loss of the containment barrier in and of itself does not result in the relocation of radioactive materials or the potential for degradation of core cooling capability. However, loss or potential loss of the containment barrier in combination with the loss or potential loss of either the Fuel cladding or RCS barrier results in declaration of a Site Area Emergency under FS1.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, Tables 5-F-1 and 5-F-3

**RECOGNITION CATEGORY
FISSION PRODUCT BARRIER DEGRADATION**

Containment Radiation Monitoring**FC2****Loss:**

1. Containment radiation monitor ({{JYK15 CR101}}) > **(Graph FC2(L)1)**.

(Add FC2 containment rad graph here (damage curve based on 300 $\mu\text{Ci/gm}$ DEI-131))

Potential Loss:

None

Basis:**Generic**

The site (U.S. EPR) specific reading is a value which indicates the release of reactor coolant, with elevated activity indicative of fuel damage, into the containment.

The reading should be calculated assuming the instantaneous release and dispersal of the reactor coolant noble gas and iodine inventory associated with a concentration of 300 $\mu\text{Ci/gm}$ dose equivalent I-131 into the containment atmosphere.

Reactor coolant concentrations of this magnitude are several times larger than the maximum concentrations (including iodine spiking) allowed within technical specifications and are therefore indicative of fuel damage.

This value is higher than that specified for RCS barrier Loss threshold #1.

There is no Potential Loss threshold associated with this item.

Site (U.S. EPR) Specific

(To be added to support EAL value/wording)

Basis Reference(s):

1. NEI 99-01 Rev 5, Table 5-F-3
2. (TS, CALC, procedure or drawing references)

**RECOGNITION CATEGORY
FISSION PRODUCT BARRIER DEGRADATION**

Core Temperature**FC3****Loss:**

1. (Calculated Clad Temperature in **Region 3 or higher**).

Potential Loss:

1. (Calculated Clad Temperature in **Region 2**).

Basis:**Generic****Loss Threshold #1**

The site (U.S. EPR) specific reading should correspond to significant superheating of the coolant.

This value typically corresponds to the core exit temperature reading that indicates core cooling - RED for plants with CSFST, which is usually about 1200° F.

Potential Loss Threshold #1

The site (U.S. EPR) specific reading should correspond to loss of subcooling.

This value typically corresponds to the core exit temperature reading that indicates core cooling - ORANGE for plants with CSFST, which is usually about 700° to 900° F.

Site (U.S. EPR) Specific**Loss Threshold #1**

(To be added to support EAL value/wording)

Potential Loss Threshold #1

(To be added to support EAL value/wording)

Basis Reference(s):

1. NEI 99-01 Rev 5, Table 5-F-3
2. (TS, CALC, procedure or drawing references)

**RECOGNITION CATEGORY
FISSION PRODUCT BARRIER DEGRADATION**

RPV Level**FC4****Loss:**

None

Potential Loss:

1. a. RCS level ($\{JEF10\ CL081\}$) < **(FC4(PL)1.a)**.
AND
 - b. (Calculated Clad Temperature in **Region 2 or higher**).

Basis:**Generic**

There is no Loss threshold associated with this item.

The site (U.S. EPR) specific value for the Potential Loss threshold corresponds to the top of the active fuel.

Site (U.S. EPR) Specific

For the U.S.EPR, TOAF cannot be read by installed level instrumentation in Modes 1-4. The lowest indicated reactor water level is the bottom of the reactor coolant hot legs (Plant Elevation $\{+ 101.9\ \text{feet}\ (31.1\ \text{meters})\}$).

Basis Reference(s):

1. NEI 99-01 Rev 5, Table 5-F-3
2. 02-DCD-JAA-1200A0-001
3. 02-DCD-PPY-JE-4001-000

**RECOGNITION CATEGORY
FISSION PRODUCT BARRIER DEGRADATION****RCS Activity****FC7****Loss:**

1. Coolant activity > **300 $\mu\text{Ci/gm}$** Dose Equivalent I-131.

Potential Loss:

None

Basis:**Generic**

The site (U.S. EPR) specific value corresponds to 300 $\mu\text{Ci/gm}$ I-131 equivalent. Assessment by the EAL Task Force indicates that this amount of coolant activity is well above that expected for iodine spikes and corresponds to less than 5% fuel clad damage. This amount of radioactivity indicates significant clad damage and thus the Fuel Clad Barrier is considered lost.

There is no Potential Loss threshold associated with this item.

Site (U.S. EPR) Specific

(To be added to support EAL value/wording)

Basis Reference(s):

1. NEI 99-01 Rev 5, Table 5-F-3
2. (TS, CALC, procedure or drawing references)

**RECOGNITION CATEGORY
FISSION PRODUCT BARRIER DEGRADATION**

Emergency Director Judgment**FC10****Loss:**

1. Any condition in the opinion of the Emergency Director that indicates loss of the fuel clad barrier.

Potential Loss:

1. Any condition in the opinion of the Emergency Director that indicates potential loss of the fuel clad barrier.

Basis:**Generic**

These thresholds address any other factors that are to be used by the Emergency Director in determining whether the fuel clad barrier is lost or potentially lost. In addition, the inability to monitor the barrier should also be incorporated in this EAL as a factor in Emergency Director judgment that the barrier may be considered lost or potentially lost.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, Table 5-F-3

**RECOGNITION CATEGORY
FISSION PRODUCT BARRIER DEGRADATION**

Containment Radiation Monitoring**RC2****Loss:**

1. Containment radiation monitor ({JYK15 CR101}) > (RC2(L)1) R/hr.

Potential Loss:

None

Basis:**Generic**

The site (U.S. EPR) specific reading is a value which indicates the release of reactor coolant to the containment.

The reading should be calculated assuming the instantaneous release and dispersal of the reactor coolant noble gas and iodine inventory associated with normal operating concentrations (i.e., within T/S) into the containment atmosphere.

This reading will be less than that specified for FC2(L)1. Thus, this threshold would be indicative of a RCS leak only.

There is no Potential Loss threshold associated with this item.

Site (U.S. EPR) Specific

(To be added to support EAL value/wording)

Basis Reference(s):

1. NEI 99-01 Rev 5, Table 5-F-3
2. (TS, CALC, procedure or drawing references)

**RECOGNITION CATEGORY
FISSION PRODUCT BARRIER DEGRADATION****RCS Leak Rate****RC5****Loss:**

1. RCS leak rate greater than available makeup capacity as indicated by (Calculated Clad Temperature in **Region 2 or higher**).

Potential Loss:

1. RCS leak rate requires operation of second charging pump to maintain pressurizer level.

Basis:**Generic****Loss Threshold #1**

This threshold addresses conditions where leakage from the RCS is greater than available inventory control capacity such that a loss of subcooling has occurred. The loss of subcooling is the fundamental indication that the inventory control systems are inadequate in maintaining RCS pressure and inventory against the mass loss through the leak.

Potential Loss Threshold #1

This threshold is based on the apparent inability to maintain normal liquid inventory within the Reactor Coolant System (RCS) by normal operation of the Chemical and Volume Control System which is considered to be the flow rate equivalent to one charging/makeup pump discharging to the header. Isolating letdown is a standard abnormal operating procedure action and may prevent unnecessary classifications when a non-RCS leakage path such as a CVCS leak exists. The intent of this condition is met if attempts to isolate letdown are NOT successful. Additional charging/makeup pumps being required is indicative of a substantial RCS leak.

Site (U.S. EPR) Specific**Loss Threshold #1**

(To be added to support EAL value/wording)

Basis Reference(s):

1. NEI 99-01 Rev 5, Table 5-F-3
2. (TS, CALC, procedure or drawing references)

**RECOGNITION CATEGORY
FISSION PRODUCT BARRIER DEGRADATION**

SG Tube Leakage / Rupture**RC6****Loss:**

1. RUPTURED SG results in an MHSI actuation.

Potential Loss:

None

Basis:**Generic**

This threshold addresses the full spectrum of Steam Generator (SG) tube rupture events in conjunction with Containment barrier Loss thresholds. It addresses RUPTURED SG(s) for which the leakage is large enough to cause actuation of ECCS (SI). This is consistent to the RCS leak rate barrier Potential Loss threshold.

There is no Potential Loss threshold associated with this item.

Site (U.S. EPR) Specific

U.S. EPR Medium Head Safety Injection (MHSI) is the equivalent to the NEI standard Safety Injection (SI).

Basis Reference(s):

1. NEI 99-01 Rev 5, Table 5-F-3

**RECOGNITION CATEGORY
FISSION PRODUCT BARRIER DEGRADATION**

Emergency Director Judgment**RC10****Loss:**

1. Any condition in the opinion of the Emergency Director that indicates loss of the RCS barrier.

Potential Loss:

1. Any condition in the opinion of the Emergency Director that indicates potential loss of the RCS barrier.

Basis:**Generic**

These thresholds address any other factors that are to be used by the Emergency Director in determining whether the RCS barrier is lost or potentially lost. In addition, the inability to monitor the barrier should also be incorporated in this EAL as a factor in Emergency Director judgment that the barrier may be considered lost or potentially lost.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, Table 5-F-3

**RECOGNITION CATEGORY
FISSION PRODUCT BARRIER DEGRADATION**

Containment Radiation Monitoring

CT2

Loss:

None

Potential Loss:

1. Containment radiation monitor ({{JYK15 CR101}}) > **(Graph CT2(PL)1)**.

(Add CT2 containment rad graph here (damage curve based on 20% fuel clad))

Basis:

Generic

There is no Loss threshold associated with this item.

The site (U.S. EPR) specific reading is a value which indicates significant fuel damage well in excess of the thresholds associated with both loss of Fuel Clad and loss of RCS barriers. As stated in Section 3.8 of NEI 99-01 Rev 5, a major release of radioactivity requiring off-site protective actions from core damage is not possible unless a major failure of fuel cladding allows radioactive material to be released from the core into the reactor coolant.

Regardless of whether containment is challenged, this amount of activity in containment, if released, could have such severe consequences that it is prudent to treat this as a potential loss of containment, such that a General Emergency declaration is warranted.

NUREG-1228, "Source Estimations During Incident Response to Severe Nuclear Power Plant Accidents," indicates that such conditions do not exist when the amount of clad damage is less than 20%.

Site (U.S. EPR) Specific

(To be added to support EAL value/wording)

Basis Reference(s):

1. NEI 99-01 Rev 5, Table 5-F-3
2. (TS, CALC, procedure or drawing references)

**RECOGNITION CATEGORY
FISSION PRODUCT BARRIER DEGRADATION**

Core Temperature**CT3****Loss:**

None

Potential Loss:

1. a. (Calculated Clad Temperature in **Region 4**).
AND
- b. Restoration procedures not effective within **15 minutes**.
- OR**
2. a. (Calculated Clad Temperature in **Region 3**).
AND
- b. RCS level ($\{\text{JEF10 CL081}\}$) < **(CT3(PL)2.b)**.
AND
- c. Restoration procedures not effective within **15 minutes**.

Basis:**Generic**

There is no Loss threshold associated with this item.

The conditions in these thresholds represent an IMMEDIATE core melt sequence which, if not corrected, could lead to vessel failure and an increased potential for containment failure. In conjunction with the Core Cooling and RCS Leakage criteria in the Fuel and RCS barrier columns, this threshold would result in the declaration of a General Emergency -- loss of two barriers and the potential loss of a third. If the function restoration procedures are ineffective, there is no "success" path.

The function restoration procedures are those emergency operating procedures that address the recovery of the core cooling critical safety functions. The procedure is considered effective if the temperature is decreasing or if the vessel water level is increasing.

Severe accident analyses (e.g., NUREG-1150) have concluded that function restoration procedures can arrest core degradation within the reactor vessel in a significant fraction of the core damage scenarios, and that the likelihood of containment failure is very small in these events. Given this, it is appropriate to provide a reasonable period to allow function restoration procedures to arrest the core melt sequence.

Whether or not the procedures will be effective should be apparent within 15 minutes. The Emergency Director should make the declaration as soon as it is determined that the procedures have been, or will be ineffective.

**RECOGNITION CATEGORY
FISSION PRODUCT BARRIER DEGRADATION**

CT3 (continued)

Site (U.S. EPR) Specific

Potential Loss Threshold #1

(To be added to support EAL value/wording)

Potential Loss Threshold #2

For the U.S.EPR, TOAF cannot be read by installed level instrumentation in Modes 1-4. The lowest indicated reactor water level is the bottom of the reactor coolant hot legs (Plant Elevation {+ 101.9 feet (31.1 m)}).

Basis Reference(s):

1. NEI 99-01 Rev 5, Table 5-F-3
2. 02-DCD-JAA-1200A0-001
3. 02-DCD-PPY-JE-4001-000

**RECOGNITION CATEGORY
FISSION PRODUCT BARRIER DEGRADATION**

SG Tube Leakage / Rupture**CT6****Loss:**

1. RUPTURED SG is also FAULTED outside of containment.
OR
2. a. Primary-to-Secondary leak rate > **10 gpm.**
AND
b. UNISOLABLE steam release from affected SG to the environment.

Potential Loss:

None

Basis:**Generic**

The loss threshold recognizes that SG tube leakage can represent a bypass of the Containment barrier as well as a loss of the RCS barrier.

Users should realize that the two loss thresholds could be considered redundant. This was recognized during the development process. The inclusion of an threshold that uses Emergency Procedure commonly used terms like "RUPTURED and FAULTED" adds to the ease of the classification process and has been included based on this human factor concern.

This threshold results in an Unusual Event for smaller breaks that; (1) do not exceed the normal charging/makeup capacity threshold in RCS leak rate barrier Potential Loss threshold, or (2) do not result in ECCS actuation in RCS SG tube rupture barrier Loss threshold. For larger breaks, RCS barrier threshold criteria would result in an Alert. For SG tube ruptures which may involve multiple steam generators or unisolable secondary line breaks, this threshold would exist in conjunction with RCS barrier thresholds and would result in a Site Area Emergency.

Loss Threshold #1

This threshold addresses the condition in which a RUPTURED steam generator is also FAULTED. This condition represents a bypass of the RCS and containment barriers and is a subset of the second threshold. In conjunction with RCS leak rate barrier loss threshold, this would always result in the declaration of a Site Area Emergency.

**RECOGNITION CATEGORY
FISSION PRODUCT BARRIER DEGRADATION****CT6 (continued)**Loss Threshold #2

This threshold addresses SG tube leaks that exceed 10 gpm in conjunction with a UNISOLABLE release path to the environment from the affected steam generator. The threshold for establishing the UNISOLABLE secondary side release is intended to be a prolonged release of radioactivity from the RUPTURED steam generator directly to the environment. This could be expected to occur when the main condenser is unavailable to accept the contaminated steam (i.e., SG tube rupture with concurrent loss of off-site power and the RUPTURED steam generator is required for plant cooldown or a stuck open relief valve). If the main condenser is available, there may be releases via air ejectors, gland seal exhausters, and other similar controlled, and often monitored, pathways. These pathways do not meet the intent of a UNISOLABLE release path to the environment. These minor releases are assessed using Abnormal Rad Levels / Radiological Effluent ICs.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, Table 5-F-3

**RECOGNITION CATEGORY
FISSION PRODUCT BARRIER DEGRADATION****Containment Pressure****CT8****Loss:**

1. A containment pressure rise followed by a rapid UNPLANNED drop in containment pressure.
OR
2. Containment pressure or IRWST level response not consistent with LOCA conditions.

Potential Loss:

1. Containment pressure > **62 psig** and rising.
OR
2. Containment Hydrogen > **4%**.

Basis:**Generic****Loss Thresholds #1 and #2**

Rapid UNPLANNED loss of pressure (i.e., not attributable to containment spray or condensation effects) following an initial pressure increase from a primary or secondary high energy line break indicates a loss of containment integrity. Containment pressure and sump levels should increase as a result of mass and energy release into containment from a LOCA. Thus, sump level or pressure not increasing indicates containment bypass and a loss of containment integrity.

This indicator relies on operator recognition of an UNPLANNED response for the condition and therefore does not have a specific value associated with it. The UNPLANNED response is important because it is the indicator for a containment bypass condition.

Potential Loss Threshold #1

The site (U.S. EPR) specific pressure is based on the containment design pressure.

Potential Loss Threshold #2

Existence of an explosive mixture means a hydrogen and oxygen concentration of at least the lower deflagration limit curve exists.

Potential Loss Threshold #3

This threshold represents a potential loss of containment in that the containment heat removal/depressurization system (e.g., containment sprays, ice condenser fans, etc., but not including containment venting strategies) are either lost or performing in a degraded manner, as indicated by containment pressure greater than the setpoint at which the equipment was supposed to have actuated.

**RECOGNITION CATEGORY
FISSION PRODUCT BARRIER DEGRADATION****CT8 (continued)****Site (U.S. EPR) Specific****Potential Loss Threshold #3**

The U.S. EPR containment volume, condensation surface area, and heat capacities are such that the containment design pressure is not exceeded during design basis Loss of Coolant Accident (LOCA) and Main Steam Line Break (MSLB) events. In addition, the containment pressure decreases to less than 50% of the accident analysis values in less than 24 hours thus ensuring that radiological dose consequences are acceptable. Mass and energy releases to the containment during LOCA and MSLB events were calculated using RELAP5/MOD2 (B&W), which is an NRC approved methodology. Containment pressure responses were calculated using the GOTHIC code, also an NRC approved methodology. An automatically actuated containment spray system is therefore not required to mitigate the consequences of a Design Basis Accident, so no automatic actuation setpoint exists for this EAL threshold to be based on.

Basis Reference(s):

1. NEI 99-01 Rev 5, Table 5-F-3
2. U.S. EPR FSAR – Section 6.2.1
3. U.S. EPR FSAR – Section 6.2.2
4. U.S. EPR FSAR – Section 6.5.2
5. U.S. EPR FSAR – Section 15.0.3
6. U.S. EPR FSAR – Section 19.2.3.3

**RECOGNITION CATEGORY
FISSION PRODUCT BARRIER DEGRADATION****Containment Isolation Failure or Bypass****CT9****Loss:**

1. a. Failure of **ALL** isolation valves in any one line to close.
AND
 - b. Direct downstream pathway to the environment exists after containment isolation signal.

Potential Loss:

None

Basis:**Generic**

This threshold addresses incomplete containment isolation that allows direct release to the environment.

The use of the modifier “direct” in defining the release path discriminates against release paths through interfacing liquid systems. The existence of an in-line charcoal filter does not make a release path indirect since the filter is not effective at removing fission product noble gases. Typical filters have an efficiency of 95-99% removal of iodine. Given the magnitude of the core inventory of iodine, significant releases could still occur. In addition, since the fission product release would be driven by boiling in the reactor vessel, the high humidity in the release stream can be expected to render the filters ineffective in a short period.

There is no Potential Loss threshold associated with this item.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 4, Table 5-F-4

**RECOGNITION CATEGORY
FISSION PRODUCT BARRIER DEGRADATION**

Emergency Director Judgment**CT10****Loss:**

1. Any condition in the opinion of the Emergency Director that indicates loss of the containment barrier.

Potential Loss:

1. Any condition in the opinion of the Emergency Director that indicates potential loss of the containment barrier.

Basis:**Generic**

These thresholds address any other factors that are to be used by the Emergency Director in determining whether the Containment barrier is lost or potentially lost. In addition, the inability to monitor the barrier should also be incorporated in this threshold as a factor in Emergency Director judgment that the barrier may be considered lost or potentially lost.

The Containment barrier should not be declared lost or potentially lost based on exceeding Technical Specification action statement criteria, unless there is an event in progress requiring mitigation by the Containment barrier. When no event is in progress (Loss or Potential Loss of either Fuel Clad and/or RCS) the Containment barrier status is addressed by Technical Specifications.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, Table 5-F-3

RECOGNITION CATEGORY
RADIOLOGICAL EFFLUENTS / ABNORMAL RADIATION LEVELS

RG1

Initiating Condition:

Offsite dose resulting from an actual or IMMEDIATE release of gaseous radioactivity greater than 1000 mRem TEDE or 5000 mRem Thyroid CDE for the actual or projected duration of the release using actual meteorology.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EALs:

Note: If dose assessment results are available, declaration should be based on dose assessment instead of radiation monitor values. Do not delay declaration awaiting dose assessment results.

1. Vent Stack Noble Gas ({KLK90 FR001}) > {RG1.1} $\mu\text{Ci/hr}$ for **15 minutes** or longer.
OR
2. Dose assessment using actual meteorology indicates doses at or beyond the site boundary of **EITHER** of the following:
 - > **1000 mRem** TEDE
 - > **5000 mRem** CDE Thyroid**OR**
3. Field survey results at or beyond the site boundary indicate **EITHER** of the following:
 - Gamma (closed window) dose rate > **1000 mR/hr** for **60 minutes** or longer.
 - Air sample analysis > **5000 mRem** CDE Thyroid for one hour of inhalation.

Basis:

Generic

This IC addresses radioactivity releases that result in doses at or beyond the site boundary that exceed the EPA Protective Action Guides (PAGs). Public protective actions will be necessary. Releases of this magnitude are associated with the failure of plant systems needed for the protection of the public and likely involve fuel damage.

The EPA PAGs are expressed in terms of the sum of the effective dose equivalent (EDE) and the committed effective dose equivalent (CEDE), or as the thyroid committed dose equivalent (CDE). For the purpose of these IC/EALs, the dose quantity total effective dose equivalent (TEDE), as defined in 10 CFR 20, is used in lieu of "...sum of EDE and CEDE...."

The TEDE dose is set at the EPA PAG, while the 5000 mrem thyroid CDE was established in consideration of the 1:5 ratio of the EPA PAG for TEDE and thyroid CDE.

RECOGNITION CATEGORY
RADIOLOGICAL EFFLUENTS / ABNORMAL RADIATION LEVELS
RG1 (continued)

EAL #1

The site (U.S. EPR) specific monitor list in EAL #1 should include effluent monitors on all potential release pathways.

The monitor reading EALs should be determined using a dose assessment method that back calculates from the dose values specified in the IC. Since doses are generally not monitored in real-time, it is suggested that a release duration of one hour be assumed, and that the EALs be based on a site boundary (or beyond) dose of 1000 mrem whole body or 5000 mrem thyroid in one hour, whichever is more limiting (as was done for EALs #2 and #3). If individual site analyses indicate a longer or shorter duration for the period in which the substantial portion of the activity is released, the longer duration should be used.

The meteorology used should be the same as those used for determining RU1 and RA1 monitor reading EALs. The same source term (noble gases, particulates, and halogens) may also be used as long as it maintains a realistic and near linear escalation between the EALs for the four classifications. If proper escalations do not result from the use of the same source term, if the calculated values are unrealistically high, or if correlation between the values and dose assessment values does not exist, then consider using an accident source term for RS1 and RG1 calculations.

Since dose assessment is based on actual meteorology, whereas the monitor reading EAL is not, the results from these assessments may indicate that the classification is not warranted, or may indicate that a higher classification is warranted. For this reason, emergency implementing procedures should call for the timely performance of dose assessments using actual meteorology and release information. If the results of these dose assessments are available when the classification is made (e.g., initiated at a lower classification level), the dose assessment results override the monitor reading EAL.

Site (U.S. EPR) SpecificEAL #1

{To be added to support EAL value/wording}

Basis Reference(s):

1. NEI 99-01 Rev 5, AG1
2. {TS, CALC, procedure or drawing references}

RECOGNITION CATEGORY
RADIOLOGICAL EFFLUENTS / ABNORMAL RADIATION LEVELS

RS1

Initiating Condition:

Offsite dose resulting from an actual or IMMEDIATE release of gaseous radioactivity greater than 100 mRem TEDE or 500 mRem Thyroid CDE for the actual or projected duration of the release using actual meteorology.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EALs:

Note: If dose assessment results are available, declaration should be based on dose assessment instead of radiation monitor values. Do not delay declaration awaiting dose assessment results.

1. Vent Stack Noble Gas ({KLK90 FR001}) > {RS1.1} $\mu\text{Ci/hr}$ for **15 minutes** or longer.

OR

2. Dose assessment using actual meteorology indicates doses at or beyond the site boundary of **EITHER** of the following:

- > **100 mRem** TEDE
- > **500 mRem** CDE Thyroid

OR

3. Field survey results at or beyond the site boundary indicate **EITHER** of the following:
 - Gamma (closed window) dose rate > **100 mR/hr** for **60 minutes** or longer.
 - Air sample analysis > **500 mRem** CDE Thyroid for one hour of inhalation.

Basis:

Generic

This IC addresses radioactivity releases that result in doses at or beyond the site boundary that exceed 10% of the EPA Protective Action Guides (PAGs). Releases of this magnitude are associated with the failure of plant systems needed for the protection of the public.

The EPA PAGs are expressed in terms of the sum of the effective dose equivalent (EDE) and the committed effective dose equivalent (CEDE), or as the thyroid committed dose equivalent (CDE). For the purpose of these IC/EALs, the dose quantity total effective dose equivalent (TEDE), as defined in 10 CFR 20, is used in lieu of "...sum of EDE and CEDE...."

The TEDE dose is set at 10% of the EPA PAG, while the 500 mrem thyroid CDE was established in consideration of the 1:5 ratio of the EPA PAG for TEDE and thyroid CDE.

RECOGNITION CATEGORY
RADIOLOGICAL EFFLUENTS / ABNORMAL RADIATION LEVELS
RS1 (continued)

EAL #1

The site (U.S. EPR) specific monitor list in EAL #1 should include effluent monitors on all potential release pathways.

The monitor reading EALs should be determined using a dose assessment method that back calculates from the dose values specified in the IC. Since doses are generally not monitored in real-time, it is suggested that a release duration of one hour be assumed, and that the EALs be based on a site boundary (or beyond) dose of 100 mrem whole body or 500 mrem thyroid in one hour, whichever is more limiting (as was done for EALs #2 and #3). If individual site analyses indicate a longer or shorter duration for the period in which the substantial portion of the activity is released, the longer duration should be used.

The meteorology used should be the same as those used for determining RU1 and RA1 monitor reading EALs. The same source term (noble gases, particulates, and halogens) may also be used as long as it maintains a realistic and near linear escalation between the EALs for the four classifications. If proper escalations do not result from the use of the same source term, if the calculated values are unrealistically high, or if correlation between the values and dose assessment values does not exist, then consider using an accident source term for RS1 and RG1 calculations.

Since dose assessment is based on actual meteorology, whereas the monitor reading EAL is not, the results from these assessments may indicate that the classification is not warranted, or may indicate that a higher classification is warranted. For this reason, emergency implementing procedures should call for the timely performance of dose assessments using actual meteorology and release information. If the results of these dose assessments are available when the classification is made (e.g., initiated at a lower classification level), the dose assessment results override the monitor reading EAL.

Site (U.S. EPR) SpecificEAL #1

{To be added to support EAL value/wording}

Basis Reference(s):

1. NEI 99-01 Rev 5, AS1
2. {TS, CALC, procedure or drawing references}

RECOGNITION CATEGORY
RADIOLOGICAL EFFLUENTS / ABNORMAL RADIATION LEVELS

RA1

Initiating Condition:

Any release of gaseous or liquid radioactivity to the environment greater than 200 times the ODCM limit for 15 minutes or longer.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EALs:

Note: In the absence of data to the contrary, assume that the release duration has exceeded the applicable time if an ongoing release is detected and the release start time is unknown.

1. Vent Stack Noble Gas ({KLK90 FR001}) > {RA1.1} $\mu\text{Ci/hr}$ for **15 minutes** or longer.

OR

2. **ANY** of the following effluent monitors > **200 times the high alarm setpoint** established by a current radioactivity discharge permit for **15 minutes** or longer:
 - Rad Waste Building Transfer Tank Discharge Line Activity Monitor (KPK29 CR001/002)
 - Discharge permit specified monitor

OR

3. Confirmed sample analysis for gaseous or liquid releases > **200 times the ODCM limit** for **15 minutes** or longer.

Basis:

Generic

This IC addresses an actual or substantial potential decrease in the level of safety of the plant as indicated by a radiological release that exceeds regulatory commitments for an extended period of time.

Nuclear power plants incorporate features intended to control the release of radioactive effluents to the environment. Further, there are administrative controls established to prevent unintentional releases, or control and monitor intentional releases. These controls are located in the Offsite Dose Calculation Manual (ODCM). The occurrence of extended, uncontrolled radioactive releases to the environment is indicative of a degradation in these features and/or controls.

The ODCM multiples are specified in RU1 and RA1 only to distinguish between non-emergency conditions, and from each other. While these multiples obviously correspond to an off-site dose or dose rate, the emphasis in classifying these events is the degradation in the level of safety of the plant, not the magnitude of the associated dose or dose rate.

RECOGNITION CATEGORY
RADIOLOGICAL EFFLUENTS / ABNORMAL RADIATION LEVELS
RA1 (continued)

Releases should not be prorated or averaged. For example, a release exceeding 600x ODCM for 5 minutes does not meet the threshold.

This EAL includes any release for which a radioactivity discharge permit was not prepared, or a release that exceeds the conditions (e.g., minimum dilution flow, maximum discharge flow, alarm setpoints, etc.) on the applicable permit.

EAL #1

This EAL is intended for sites that have established effluent monitoring on non-routine release pathways for which a discharge permit would not normally be prepared.

To ensure a realistic near-linear escalation path, a value should be selected roughly half-way between the RU1 EAL #1 value and the value calculated for RS1 EAL #1 value. The value will be based on radiation monitor readings to exceed 200 times the Technical Specification limit and releases are not terminated within 60 minutes. The ODCM establishes a methodology for determining effluent radiation monitor setpoints. The ODCM specifies default source terms and, for gaseous releases, prescribes the use of pre-determined annual average meteorology in the most limiting downwind sector for showing compliance with the regulatory commitments. This EAL can be determined using this methodology if appropriate.

EAL #2

This EAL addresses radioactivity releases, that for whatever reason, cause effluent radiation monitor readings to exceed the threshold identified in the IC established by the radioactivity discharge permit. This value may be associated with a planned batch release, or a continuous release path.

In either case, the value is established by the ODCM to warn of a release that is not in compliance. Indexing the EAL to the ODCM setpoints in this manner insures that the EAL will never be less than the setpoint established by a specific discharge permit.

EAL #3

This EAL addresses uncontrolled releases that are detected by sample analyses, particularly on unmonitored pathways, e.g., spills of radioactive liquids into storm drains, heat exchanger leakage in river water systems, etc.

Site (U.S. EPR) Specific

The U.S. EPR Radiological Effluent Controls Program (RECP) limits either are the same or less restrictive than the ODCM.

EAL #1

{To be added to support EAL value/wording}

EAL #2

An elevated monitor reading while the effluent flow path is isolated is not considered a VALID reading.

RECOGNITION CATEGORY
RADIOLOGICAL EFFLUENTS / ABNORMAL RADIATION LEVELS
RA1 (continued)

The effluent monitors listed are those normally used for planned discharges. If a discharge is performed using a different flowpath or effluent monitor (e.g., a portable or temporary effluent monitor), then the declaration criteria will be based on the monitor specified in the Discharge Permit.

Should 200 times the high alarm setpoint result in an offscale high meter reading, then the EAL would be considered met when the meter goes offscale high for 15 minutes or longer, provided there are no other direct or indirect means available to determine actual value.

EAL #3

Grab samples are used to; determine release concentrations or release rates, confirm meter readings, or indicate the need for sampling when the effluent monitors are not in service or other alarms occur. The maximum instantaneous release rate limits are calculated in accordance with the ODCM. These are indicated on approved discharge permit release packages.

Basis Reference(s):

1. NEI 99-01 Rev 5, AA1
2. {TS, CALC, procedure or drawing references}

RECOGNITION CATEGORY
RADIOLOGICAL EFFLUENTS / ABNORMAL RADIATION LEVELS

RU1

Initiating Condition:

Any release of gaseous or liquid radioactivity to the environment greater than 2 times the ODCM limit for 60 minutes or longer.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EALs:

Note: In the absence of data to the contrary, assume that the release duration has exceeded the applicable time if an ongoing release is detected and the release start time is unknown.

1. Vent Stack Noble Gas ({KLLK90 FR001}) > {RU1.1} $\mu\text{Ci/hr}$ for **60 minutes** or longer.

OR

2. **ANY** of the following effluent monitors > **2 times the high alarm setpoint** established by a current radioactivity discharge permit for **60 minutes** or longer:
 - Rad Waste Building Transfer Tank Discharge Line Activity Monitor ({KPK29 CR001/002})
 - Discharge permit specified monitor

OR

3. Confirmed sample analysis for gaseous or liquid releases > **2 times the ODCM limit** for **60 minutes** or longer.

Basis:

Generic

This IC addresses a potential decrease in the level of safety of the plant as indicated by a radiological release that exceeds regulatory commitments for an extended period of time.

Nuclear power plants incorporate features intended to control the release of radioactive effluents to the environment. Further, there are administrative controls established to prevent unintentional releases, or control and monitor intentional releases. These controls are located in the Offsite Dose Calculation Manual (ODCM). The occurrence of extended, uncontrolled radioactive releases to the environment is indicative of a degradation in these features and/or controls.

The ODCM multiples are specified in RU1 and RA1 only to distinguish between non-emergency conditions, and from each other. While these multiples obviously correspond to an off-site dose or dose rate, the emphasis in classifying these events is the degradation in the level of safety of the plant, not the magnitude of the associated dose or dose rate.

RECOGNITION CATEGORY
RADIOLOGICAL EFFLUENTS / ABNORMAL RADIATION LEVELS
RU1 (continued)

Releases should not be prorated or averaged. For example, a release exceeding 4x ODCM for 30 minutes does not meet the threshold.

This EAL includes any release for which a radioactivity discharge permit was not prepared, or a release that exceeds the conditions (e.g., minimum dilution flow, maximum discharge flow, alarm setpoints, etc.) on the applicable permit.

EAL #1

This EAL addresses radioactivity releases, that for whatever reason, cause effluent radiation monitor readings to exceed the threshold identified in the IC.

This EAL is intended for sites that have established effluent monitoring on non-routine release pathways for which a discharge permit would not normally be prepared.

The ODCM establishes a methodology for determining effluent radiation monitor setpoints. The ODCM specifies default source terms and, for gaseous releases, prescribes the use of pre-determined annual average meteorology in the most limiting downwind sector for showing compliance with the regulatory commitments. This EAL is determined using this methodology.

EAL #2

This EAL addresses radioactivity releases, that for whatever reason, cause effluent radiation monitor readings to exceed the threshold identified in the IC established by the radioactivity discharge permit. This value may be associated with a planned batch release, or a continuous release path.

In either case, the value is established by the ODCM to warn of a release that is not in compliance. Indexing the EAL to the ODCM setpoints in this manner insures that the EAL will never be less than the setpoint established by a specific discharge permit.

EAL #3

This EAL addresses uncontrolled releases that are detected by sample analyses, particularly on unmonitored pathways, e.g., spills of radioactive liquids into storm drains, heat exchanger leakage in river water systems, etc.

Site (U.S. EPR) Specific

The U.S. EPR Radiological Effluent Controls Program (RECP) limits either are the same or less restrictive than the ODCM.

EAL #1

{To be added to support EAL value/wording}

EAL #2

An elevated monitor reading while the effluent flow path is isolated is not considered a VALID reading.

RECOGNITION CATEGORY
RADIOLOGICAL EFFLUENTS / ABNORMAL RADIATION LEVELS
RU1 (continued)

The effluent monitors listed are those normally used for planned discharges. If a discharge is performed using a different flowpath or effluent monitor (e.g., a portable or temporary effluent monitor), then the declaration criteria will be based on the monitor specified in the Discharge Permit.

EAL #3

Grab samples are used to; determine release concentrations or release rates, confirm meter readings, or indicate the need for sampling when the effluent monitors are not in service or other alarms occur. The maximum instantaneous release rate limits are calculated in accordance with the ODCM. These are indicated on approved discharge permit release packages.

Basis Reference(s):

1. NEI 99-01 Rev 5, AU1
2. {TS, CALC, procedure or drawing references}

RECOGNITION CATEGORY
RADIOLOGICAL EFFLUENTS / ABNORMAL RADIATION LEVELS

RA2

Initiating Condition:

Damage to irradiated fuel or loss of water level that has resulted or will result in the uncovering of irradiated fuel outside the reactor vessel.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EALs:

1. A water level drop in the reactor refueling cavity, spent fuel pool or fuel transfer canal that will result in irradiated fuel becoming uncovered.
- OR**
2. **>1000 mR/hr** on **ANY** of the following due to damage to irradiated fuel or loss of water level:
 - Reactor Building Refueling Bridge Area Dose Rate Monitor ({{JYK15 CR003}})
 - Fuel Building Spent Fuel Mast Bridge Dose Rate Monitor ({{JYK28 CR002}})
 - Fuel Building Fuel Pool Dose Rate Monitor ({{JYK28 CR001}})
 - Transfer Pit Dose Rate Monitor ({{JYK23 CR001}})

Basis:

Generic

This IC addresses increases in radiation dose rates within plant buildings, and may be a precursor to a radioactivity release to the environment. These events represent a loss of control over radioactive material and represent an actual or substantial potential degradation in the level of safety of the plant.

These events escalate from RU2 in that fuel activity has been released, or is anticipated due to fuel heatup. This IC applies to spent fuel requiring water coverage and is not intended to address spent fuel which is licensed for dry storage.

EAL #1

Site (U.S. EPR) specific indications may include instrumentation such as water level and local area radiation monitors, and personnel (e.g., refueling crew) reports. If available, video cameras may allow remote observation. Depending on available level instrumentation, the declaration threshold may need to be based on indications of water makeup rate or decrease in water storage tank level.

RECOGNITION CATEGORY
RADIOLOGICAL EFFLUENTS / ABNORMAL RADIATION LEVELS
RA2 (continued)

EAL #2

This EAL addresses radiation monitor indications of fuel uncover and/or fuel damage. Increased ventilation monitor readings may be indication of a radioactivity release from the fuel, confirming that damage has occurred. Increased background at the ventilation monitor due to water level decrease may mask increased ventilation exhaust airborne activity and needs to be considered.

While a radiation monitor could detect an increase in dose rate due to a drop in the water level, it might not be a reliable indication of whether or not the fuel is covered.

For example, a refueling bridge radiation monitor reading may increase due to planned evolutions such as head lift, or even a fuel assembly being raised in the manipulator mast. Also, a monitor could in fact be properly responding to a known event involving transfer or relocation of a source, stored in or near the fuel pool or responding to a planned evolution such as removal of the reactor head. Generally, increased radiation monitor indications will need to be combined with another indicator (or personnel report) of water loss.

Site (U.S. EPR) SpecificEAL #2

NUREG/CR-4982, "Severe Accident in Spent Fuel Pools in Support of Generic Safety Issue 82," (July, 1987) indicates that even if corrective actions are not taken when spent fuel becomes uncovered, no prompt fatalities are predicted and the risk of injury is low. Therefore, a period of time will be available to take corrective actions prior to the actual onset of fuel damage.

Visual observation of spent fuel uncover represents a major ALARA concern in that radiation levels could exceed 10,000 R/hr on the refuel bridge when fuel uncover begins. The value of 1000 mR/hr was conservatively chosen for classification purposes.

Basis Reference(s):

1. NEI 99-01 Rev 5, AA2
2. Information Notice No. 90-08, KR-85 Hazards from Decayed Fuel

RECOGNITION CATEGORY
RADIOLOGICAL EFFLUENTS / ABNORMAL RADIATION LEVELS

RU2

Initiating Condition:

UNPLANNED rise in plant radiation levels.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EALs:

1. a. UNPLANNED water level drop in the reactor refueling cavity, spent fuel pool or fuel transfer canal as indicated by **ANY** of the following:
 - Reactor refueling cavity level ({FAK31 CL003 or CL004}) < **(RU2.1.a(b1)) feet.**
 - Spent fuel pool level ({FAL18 CL001}) < **(RU2.1.a(b2)) feet.**
 - Fuel transfer canal level ({FAL18 CL004 or CL005}) < **(RU2.1.a(b3)) feet.**
 - Report of visual observation.

AND

- b. Area radiation monitor rise on **ANY** of the following:
 - Reactor Building Refueling Bridge Area Dose Rate Monitor ({JYK15 CR003})
 - Fuel Building Spent Fuel Mast Bridge Dose Rate Monitor ({JYK28 CR002})
 - Fuel Building Fuel Pool Dose Rate Monitor ({JYK28 CR001})
 - Transfer Pit Dose Rate Monitor ({JYK23 CR001})

OR

2. UNPLANNED area radiation monitor or radiation survey > **1000 times NORMAL LEVELS.**

Basis:

Generic

This IC addresses increased radiation levels as a result of water level decreases above irradiated fuel or events that have resulted, or may result, in UNPLANNED increases in radiation dose rates within plant buildings. These radiation increases represent a loss of control over radioactive material and represent a potential degradation in the level of safety of the plant.

RECOGNITION CATEGORY
RADIOLOGICAL EFFLUENTS / ABNORMAL RADIATION LEVELS
RU2 (continued)

EAL #1

Site (U.S. EPR) specific indications may include instrumentation such as water level and local area radiation monitors, and personnel (e.g., refueling crew) reports. If available, video cameras may allow remote observation. Depending on available level instrumentation, the declaration threshold may need to be based on indications of water makeup rate or decrease in water storage tank level.

While a radiation monitor could detect an increase in dose rate due to a drop in the water level, it might not be a reliable indication of whether or not the fuel is covered.

For example, a refueling bridge radiation monitor reading may increase due to planned evolutions such as head lift, or even a fuel assembly being raised in the manipulator mast. Also, a monitor could in fact be properly responding to a known event involving transfer or relocation of a source, stored in or near the fuel pool or responding to a planned evolution such as removal of the reactor head. Generally, increased radiation monitor indications will need to be combined with another indicator (or personnel report) of water loss.

For refueling events where the water level drops below the RPV flange classification would be via CU8.

EAL #2

This EAL addresses increases in plant radiation levels that represent a loss of control of radioactive material resulting in a potential degradation in the level of safety of the plant.

This EAL excludes radiation level increases that result from planned activities such as use of radiographic sources and movement of radioactive waste materials.

Site (U.S. EPR) SpecificEAL #1

(To be added to support EAL value/wording)

Basis Reference(s):

1. NEI 99-01 Rev 5, AU2
2. Information Notice No. 90-08, KR-85 Hazards from Decayed Fuel
3. (TS, CALC, procedure or drawing references)

RECOGNITION CATEGORY
RADIOLOGICAL EFFLUENTS / ABNORMAL RADIATION LEVELS

RA3

Initiating Condition:

Rise in radiation levels within the facility that impedes operation of systems required to maintain plant safety functions.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EALs:

1. Dose rate > **15 mR/hr** in **ANY** of the following areas requiring continuous occupancy to maintain plant safety functions:
 - Control Room
 - Central Alarm Station

Basis:

Generic

This IC addresses increased radiation levels that impact continued operation in areas requiring continuous occupancy to maintain safe operation or to perform a safe shutdown.

The cause and/or magnitude of the increase in radiation levels is not a concern of this IC. The Emergency Director must consider the source or cause of the increased radiation levels and determine if any other IC may be involved.

The value of 15mR/hr is derived from the GDC 19 value of 5 rem in 30 days with adjustment for expected occupancy times. Although Section III.D.3 of NUREG-0737, "Clarification of TMI Action Plan Requirements", provides that the 15 mR/hr value can be averaged over the 30 days, the value is used here without averaging, as a 30 day duration implies an event potentially more significant than an Alert.

Areas requiring continuous occupancy include the control room and, as appropriate to the site, any other control stations that are staffed continuously, such as a radwaste control room, or a security alarm station.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, AA3
2. {TS, CALC, procedure or drawing references}

**RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY**

HG1

Initiating Condition:

HOSTILE ACTION resulting in loss of physical control of the facility.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EALs:

1. A HOSTILE ACTION has occurred such that plant personnel are unable to operate equipment required to maintain safety functions.

OR

2. A HOSTILE ACTION has caused failure of spent fuel cooling systems and IMMEDIATE fuel damage is likely.

Basis:

Generic

EAL #1

This EAL encompasses conditions under which a HOSTILE ACTION has resulted in a loss of physical control of VITAL AREAS (containing vital equipment or controls of vital equipment) required to maintain safety functions and control of that equipment cannot be transferred to and operated from another location.

Typically, these safety functions are reactivity control (ability to shut down the reactor and keep it shutdown), RCS inventory (ability to cool the core), and secondary heat removal (ability to maintain a heat sink).

Loss of physical control of the control room or remote shutdown capability alone may not prevent the ability to maintain safety functions. Design of the remote shutdown capability and the location of the transfer switches should be taken into account. Primary emphasis should be placed on those components and instruments that supply protection for and information about safety functions.

If control of the plant equipment necessary to maintain safety functions can be transferred to another location, then the threshold is not met.

EAL #2

This EAL addresses failure of spent fuel cooling systems as a result of HOSTILE ACTION if IMMEDIATE fuel damage is likely, such as when a freshly off-loaded reactor core is in the spent fuel pool.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, HG1

**RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY**

HS1

Initiating Condition:

HOSTILE ACTION within the PROTECTED AREA.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EALs:

1. A HOSTILE ACTION is occurring or has occurred within the PROTECTED AREA as reported by the Security Shift Supervisor.

Basis:

Generic

This condition represents an escalated threat to plant safety above that contained in the Alert in that a HOSTILE FORCE has progressed from the OWNER CONTROLLED AREA to the PROTECTED AREA.

This EAL addresses the contingency for a very rapid progression of events, such as that experienced on September 11, 2001. It is not premised solely on the potential for a radiological release. Rather the issue includes the need for rapid assistance due to the possibility for significant and indeterminate damage from additional air, land or water attack elements.

The fact that the site is under serious attack with minimal time available for further preparation or additional assistance to arrive requires ORO readiness and preparation for the implementation of protective measures.

This EAL addresses the potential for a very rapid progression of events due to a HOSTILE ACTION. It is not intended to address incidents that are accidental events or acts of civil disobedience, such as small aircraft impact, hunters, or physical disputes between employees within the PROTECTED AREA. Those events are adequately addressed by other EALs.

Although nuclear plant security officers are well trained and prepared to protect against HOSTILE ACTION, it is appropriate for OROs to be notified and encouraged to begin preparations for public protective actions (if they do not normally) to be better prepared should it be necessary to consider further actions.

If not previously notified by NRC that the airborne HOSTILE ACTION was intentional, then it would be expected, although not certain, that notification by an appropriate Federal agency would follow. In this case, appropriate federal agency is intended to be NORAD, FBI, FAA or NRC. However, the declaration should not be unduly delayed awaiting Federal notification.

Site (U.S. EPR) Specific

None

**RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY
HS1 (continued)**

Basis Reference(s):

1. NEI 99-01 Rev 5, HS4

**RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY**

HA1

Initiating Condition:

HOSTILE ACTION within the OWNER CONTROLLED AREA or airborne attack threat.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EALs:

1. A HOSTILE ACTION is occurring or has occurred within the OWNER CONTROLLED AREA as reported by the Security Shift Supervisor.
- OR**
2. A validated notification from the NRC of a LARGE AIRCRAFT attack threat within **30 minutes** of the site.

Basis:

Generic

These EALs address the contingency for a very rapid progression of events, such as that experienced on September 11, 2001. They are not premised solely on the potential for a radiological release. Rather the issue includes the need for rapid assistance due to the possibility for significant and indeterminate damage from additional air, land or water attack elements.

The fact that the site is under serious attack or is an identified attack target with minimal time available for further preparation or additional assistance to arrive requires a heightened state of readiness and implementation of protective measures that can be effective (such as on-site evacuation, dispersal or sheltering).

EAL #1

This EAL addresses the potential for a very rapid progression of events due to a HOSTILE ACTION. It is not intended to address incidents that are accidental events or acts of civil disobedience, such as small aircraft impact, hunters, or physical disputes between employees within the OCA. Those events are adequately addressed by other EALs.

Note that this EAL is applicable for any HOSTILE ACTION occurring, or that has occurred, in the OWNER CONTROLLED AREA. This includes ISFSI's that may be outside the PROTECTED AREA but still within the OWNER CONTROLLED AREA.

Although nuclear plant security officers are well trained and prepared to protect against HOSTILE ACTION, it is appropriate for OROs to be notified and encouraged to begin activation (if they do not normally) to be better prepared should it be necessary to consider further actions.

RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY
HA1 (continued)

If not previously notified by the NRC that the airborne HOSTILE ACTION was intentional, then it would be expected, although not certain, that notification by an appropriate Federal agency would follow. In this case, appropriate federal agency is intended to be NORAD, FBI, FAA or NRC. However, the declaration should not be unduly delayed awaiting Federal notification.

EAL #2

This EAL addresses the immediacy of an expected threat arrival or impact on the site within a relatively short time.

The intent of this EAL is to ensure that notifications for the airliner attack threat are made in a timely manner and that OROs and plant personnel are at a state of heightened awareness regarding the credible threat. Airliner is meant to be a large aircraft with the potential for causing significant damage to the plant.

This EAL is met when a plant receives information regarding an airliner attack threat from NRC and the airliner is within 30 minutes of the plant. Only the plant to which the specific threat is made need declare the Alert.

The NRC Headquarters Operations Officer (HOO) will communicate to the licensee if the threat involves an airliner (airliner is meant to be a large aircraft with the potential for causing significant damage to the plant). The status and size of the plane may be provided by NORAD through the NRC.

Site (U.S. EPR) Specific

EAL #2

LARGE AIRCRAFT is the U.S. EPR specific term used for airliner.

Basis Reference(s):

1. NEI 99-01 Rev 5, HA4

**RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY**

HU1

Initiating Condition:

Confirmed SECURITY CONDITION or threat which indicates a potential degradation in the level of safety of the plant.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EALs:

1. A SECURITY CONDITION that does not involve a HOSTILE ACTION as reported by the Security Shift Supervisor.
OR
2. A credible site specific security threat notification.
OR
3. A validated notification from the NRC providing information of an aircraft threat.

Basis:

Generic

Security events which do not represent a potential degradation in the level of safety of the plant are reported under 10 CFR 73.71 or in some cases under 10 CFR 50.72. Security events assessed as HOSTILE ACTIONS are classifiable under HA8, HS4 and HG1.

A higher initial classification could be made based upon the nature and timing of the security threat and potential consequences. The licensee shall consider upgrading the emergency response status and emergency classification level in accordance with the site's Safeguards Contingency Plan and Emergency Plan.

EAL #1

Reference is made to site (U.S. EPR) specific security shift supervision because these individuals are the designated personnel on-site qualified and trained to confirm that a security event is occurring or has occurred. Training on security event classification confirmation is closely controlled due to the strict secrecy controls placed on the plant Safeguards Contingency Plan.

This threshold is based on site specific security plans. Site specific Safeguards Contingency Plans are based on guidance provided by NEI 03-12.

EAL #2

This threshold is included to ensure that appropriate notifications for the security threat are made in a timely manner. This includes information of a credible threat. Only the plant to which the specific threat is made need declare the Notification of an Unusual Event.

RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY
HU1 (continued)

The determination of “credible” is made through use of information found in the site specific Safeguards Contingency Plan.

EAL #3

The intent of this EAL is to ensure that notifications for the aircraft threat are made in a timely manner and that OROs and plant personnel are at a state of heightened awareness regarding the credible threat. It is not the intent of this EAL to replace existing non-hostile related EALs involving aircraft.

This EAL is met when a plant receives information regarding an aircraft threat from NRC. Validation is performed by calling the NRC or by other approved methods of authentication. Only the plant to which the specific threat is made need declare the Unusual Event.

The NRC Headquarters Operations Officer (HOO) will communicate to the licensee if the threat involves an airliner (airliner is meant to be a large aircraft with the potential for causing significant damage to the plant). The status and size of the plane may be provided by NORAD through the NRC.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, HU4

**RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY**

HS2

Initiating Condition:

Control Room evacuation has been initiated and plant control cannot be established.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EALs:

1. a. Control Room evacuation has been initiated.
AND
- b. Control of the plant cannot be established within **15 minutes**.

Basis:

Generic

The intent of this IC is to capture those events where control of the plant cannot be reestablished in a timely manner. In this case, expeditious transfer of control of safety systems has not occurred (although fission product barrier damage may not yet be indicated).

The intent of the EAL is to establish control of important plant equipment and knowledge of important plant parameters in a timely manner. Primary emphasis should be placed on those components and instruments that supply protection for and information about safety functions. Typically, these safety functions are reactivity control (ability to shutdown the reactor and maintain it shutdown), RCS inventory (ability to cool the core), and secondary heat removal (ability to maintain a heat sink).

The determination of whether or not control is established at the remote shutdown panel is based on Emergency Director (ED) judgment. The Emergency Director is expected to make a reasonable, informed judgment within the site specific time for transfer that the licensee has control of the plant from the remote shutdown panel.

The site specific time for transfer is based on analysis or assessments as to how quickly control must be reestablished without core uncovering and/or core damage. This time should not exceed 15 minutes without additional justification.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01, Rev 5 HS2

**RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY**

HA2**Initiating Condition:**

Control Room evacuation has been initiated.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EALs:

1. Control Room evacuation has been initiated.

Basis:**Generic**

With the control room evacuated, additional support, monitoring and direction through the Technical Support Center and/or other emergency response facilities may be necessary.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01, Rev 5 HA5

**RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY**

HA3**Initiating Condition:**

Natural or destructive phenomena affecting VITAL AREAS.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EALs:

1. a. Seismic event > **OBE** as indicated by PICS seismic monitoring system.
AND
 - b. Earthquake confirmed by **ANY** of the following:
 - Earthquake felt in plant
 - National Earthquake Center
 - Control Room indication of degraded performance of systems required for the safe shutdown of the plant.

OR

2. Tornado or high winds > **{45 m/sec (100 mph)}** resulting in **EITHER** of the following:
 - **VISIBLE DAMAGE** to **ANY** structures in **Table H-1** areas containing safety systems or components.
 - Control Room indication of degraded performance of those safety systems.

OR

3. Internal flooding in **Table H-1** areas resulting in **EITHER** of the following:
 - Electrical shock hazard that precludes access to operate or monitor safety equipment.
 - Control Room indication of degraded performance of those safety systems.

OR

4. **{Bay water level > {39.4 feet (12.0 meters)} {Mean Sea Level}}** resulting in **EITHER** of the following:
 - **VISIBLE DAMAGE** to **ANY** structures in **Table H-1** areas containing safety systems or components.
 - Control Room indication of degraded performance of those safety systems.

OR

5. Turbine failure-generated **PROJECTILES** resulting in **EITHER** of the following:
 - **VISIBLE DAMAGE** to or penetration of **ANY** structures in **Table H-1** areas containing safety systems or components.
 - Control Room indication of degraded performance of those safety systems.

OR

RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY
HA3 (continued)

6. Vehicle crash resulting in **EITHER** of the following:
- **VISIBLE DAMAGE** to **ANY** structures in **Table H-1** areas containing safety systems or components.
 - Control Room indication of degraded performance of those safety systems.

Table H-1: Safe Shutdown Vital Areas
<ul style="list-style-type: none"> • Control Room • Safeguards Buildings • Containment • Nuclear Auxiliary Building • Emergency Power Generating Buildings • ESW Cooling Towers

Basis:

Generic

These EALs escalate from HU3 in that the occurrence of the event has resulted in **VISIBLE DAMAGE** to plant structures or areas containing equipment necessary for a safe shutdown, or has caused damage to the safety systems in those structures evidenced by control room indications of degraded system response or performance. The occurrence of **VISIBLE DAMAGE** and/or degraded system response is intended to discriminate against lesser events. The initial report should not be interpreted as mandating a lengthy damage assessment prior to classification. No attempt is made in this EAL to assess the actual magnitude of the damage. The significance here is not that a particular system or structure was damaged, but rather, that the event was of sufficient magnitude to cause this degradation.

EALs #2 - #6

These EALs should specify site (U.S. EPR) specific structures or areas that contain safety system, or component and functions required for safe shutdown of the plant. Site specific Safe Shutdown Analysis should be consulted for equipment and plant areas required to establish or maintain safe shutdown.

EAL #1

Seismic events of this magnitude can result in a **VITAL AREA** being subjected to forces beyond design limits, and thus damage may be assumed to have occurred to plant safety systems.

This threshold should be based on site specific FSAR design basis. See EPRI-sponsored "Guidelines for Nuclear Plant Response to an Earthquake", dated October 1989, for information on seismic event categories.

The National Earthquake Center can confirm if an earthquake has occurred in the area of the plant.

RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY
HA3 (continued)

EAL #2

This EAL is based on a tornado striking (touching down) or high winds that have caused VISIBLE DAMAGE to structures containing functions or systems required for safe shutdown of the plant.

The high wind value should be based on site (U. S. EPR) specific FSAR design basis as long as it is within the range of the instrumentation available for wind speed.

EAL #3

This EAL addresses the effect of internal flooding caused by events such as component failures, equipment misalignment, or outage activity mishaps. It is based on the degraded performance of systems, or has created industrial safety hazards (e.g., electrical shock) that preclude necessary access to operate or monitor safety equipment. The inability to access, operate or monitor safety equipment represents an actual or substantial potential degradation of the level of safety of the plant.

Flooding as used in this EAL describes a condition where water is entering the room faster than installed equipment is capable of removal, resulting in a rise of water level within the room. Classification of this EAL should not be delayed while corrective actions are being taken to isolate the water source.

The site (U.S. EPR) specific areas include those areas that contain systems required for safe shutdown of the plant, which are not designed to be partially or fully submerged. The plant's IPEEE (PRA) may provide insight into areas to be considered when developing this EAL.

EAL #4

This EAL addresses other site specific phenomena that result in VISIBLE DAMAGE to VITAL AREAS or results in indication of damage to safety structures, systems, or components containing functions and systems required for safe shutdown of the plant (such as hurricane, flood, or seiche) that can also be precursors of more serious events.

EAL #5

This EAL addresses the threat to safety related equipment imposed by PROJECTILES generated by main turbine rotating component failures. Therefore, this EAL is consistent with the definition of an ALERT in that the potential exists for actual or substantial potential degradation of the level of safety of the plant.

The site (U.S. EPR) specific list of areas should include all areas containing safety structure, system, or component, their controls, and their power supplies.

RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY
HA3 (continued)

EAL #6

This EAL addresses vehicle crashes within the PROTECTED AREA that results in VISIBLE DAMAGE to VITAL AREAS or indication of damage to safety structures, systems, or components containing functions and systems required for safe shutdown of the plant.

Site (U.S. EPR) Specific**EAL #1**

As defined in the EPRI-sponsored "Guidelines for Nuclear Plant Response to an Earthquake", dated October 1989, a "felt earthquake" is: "An earthquake of sufficient intensity such that: (a) the inventory ground motion is felt at the nuclear plant site and recognized as an earthquake based on a consensus of Control Room operators on duty at the time, and (b) for plants with operable seismic instrumentation, the seismic switches of the plant are activated.

The U.S. EPR Maximum Probable Earthquake is 0.30g.

EAL #2

The U.S.EPR maximum wind speed is 145 miles per hour, however the actual wind speed value to be used in the EAL is limited to the lower of (1) the maximum design wind speed of 145 miles per hour or (2) the maximum recordable wind speed based on the site specific meteorological equipment.

Wind speed is obtained from meteorological data in the Control Room that is averaged over a 15 minute period to prevent instantaneous wind gusts or fluctuations from affecting the measurement.

EAL #4

{The U.S. EPR maximum surge is 39.4 feet (12.0 meters) NGVD29, which will be considered to be Mean Sea Level (MSL) at CCNPP site.}

Basis Reference(s):

1. NEI 99-01, Rev 5 HA1
2. U.S. EPR FSAR Section 3.7.1.1.1
3. U.S. EPR FSAR Section 3.3
4. U.S.EPR FSAR Section 3.4.2
- {5. CCNPP Unit 3 FSAR Section 2.4.1.1}

**RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY**

HU3

Initiating Condition:

Natural or destructive phenomena affecting the PROTECTED AREA.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EALs:

1.
 - a. Seismic event trigger as indicated by PICS seismic monitoring system.
AND
 - b. Earthquake confirmed by **EITHER** of the following:
 - Earthquake felt in plant
 - National Earthquake Center

OR
2.
 - a. Tornado within the PROTECTED AREA.
OR
 - b. High winds > {45 m/sec (100 mph)}.

OR
 3. Internal flooding in **Table H-1** areas that has the potential to affect safety related equipment required by Technical Specifications for the current operating mode.
OR
 4. {Bay water level > {39.4 feet (12.0 meters)} {Mean Sea Level}}.
OR
 5. Turbine failure resulting in casing penetration or damage to turbine or generator seals.

Table H-1: Safe Shutdown Vital Areas

- | |
|---|
| <ul style="list-style-type: none"> • Control Room • Safeguards Buildings • Containment • Nuclear Auxiliary Building • Emergency Power Generating Buildings • ESW Cooling Towers |
|---|

RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY
HU3 (continued)

Basis:**Generic**

These EALs are categorized on the basis of the occurrence of an event of sufficient magnitude to be of concern to plant operators.

EAL #1

Damage may be caused to some portions of the site, but should not affect ability of safety functions to operate.

As defined in the EPRI-sponsored Guidelines for Nuclear Plant Response to an Earthquake, dated October 1989, a "felt earthquake" is: An earthquake of sufficient intensity such that: (a) the vibratory ground motion is felt at the nuclear plant site and recognized as an earthquake based on a consensus of control room operators on duty at the time, and (b) for plants with operable seismic instrumentation, the seismic switches of the plant are activated.

For most plants with seismic instrumentation, the seismic switches are set at an acceleration of about 0.01g. This EAL should be developed on site specific basis. The method of detection can be based on instrumentation, validated by a reliable source, or operator assessment.

The National Earthquake Center can confirm if an earthquake has occurred in the area of the plant.

EAL #2

This EAL is based on a tornado striking (touching down) or high winds within the PROTECTED AREA.

The high wind value should be based on site (U.S. EPR) specific FSAR design basis as long as it is within the range of the instrumentation available for wind speed.

EAL #3

This EAL addresses the effect of internal flooding caused by events such as component failures, equipment misalignment, or outage activity mishaps.

The site specific areas include those areas that contain systems required for safe shutdown of the plant, which are not designed to be partially or fully submerged. The plant's IPEEE (PRA) may provide insight into areas to be considered when developing this EAL.

EAL #4

This EAL addresses other site specific phenomena (such as hurricane, flood, or seiche) that can also be precursors of more serious events.

RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY
HU3 (continued)

EAL #5

This EAL addresses main turbine rotating component failures of sufficient magnitude to cause observable damage to the turbine casing or to the seals of the turbine generator. Generator seal damage observed after generator purge does not meet the intent of this EAL because it did not impact normal operation of the plant.

Of major concern is the potential for leakage of combustible fluids (lubricating oils) and gases (hydrogen cooling) to the plant environs. Actual FIRES and flammable gas build up are appropriately classified via HA4 and HU4.

This EAL is consistent with the definition of an Unusual Event while maintaining the anticipatory nature desired and recognizing the risk to non-safety related equipment.

Site (U.S. EPR) SpecificEAL #1

PICS indication of trigger actuation (minimal level of earthquake to initiate recorder) is appropriate as seismic system indication of detection of earthquake.

EAL #2

The U.S.EPR maximum wind speed is 145 miles per hour, however the actual wind speed value to be used in the EAL is limited to the lower of (1) the maximum design wind speed of 145 miles per hour or (2) the maximum recordable wind speed based on the site specific meteorological equipment. Wind speed is obtained from meteorological data in the Control Room that is averaged over a 15 minute period to prevent instantaneous wind gusts or fluctuations from affecting the measurement.

EAL #4

{The U.S. EPR maximum surge is 39.4 feet (12.0 meters) NGVD29, which will be considered to be Mean Sea Level (MSL) at CCNPP site.}

Basis Reference(s):

1. NEI 99-01, Rev 5 HU1
2. U.S. EPR FSAR Section 3.4.2
- {3. CCNPP Unit 3 FSAR Section 2.4.1.1}

**RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY**

HA4

Initiating Condition:

FIRE or EXPLOSION affecting the operability of plant safety systems required to establish or maintain safe shutdown.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EALs:

1. FIRE or EXPLOSION resulting in **EITHER** of the following:
 - VISIBLE DAMAGE to **ANY** structures in **Table H-1** areas containing safety systems or components.
 - Control Room indication of degraded performance of those safety systems.

Table H-1: Safe Shutdown Vital Areas

- | |
|---|
| <ul style="list-style-type: none"> • Control Room • Safeguards Buildings • Containment • Nuclear Auxiliary Building • Emergency Power Generating Buildings • ESW Cooling Towers |
|---|

Basis:

Generic

VISIBLE DAMAGE is used to identify the magnitude of the FIRE or EXPLOSION and to discriminate against minor FIRES and EXPLOSIONS.

The reference to structures containing safety systems or components is included to discriminate against FIRES or EXPLOSIONS in areas having a low probability of affecting safe operation. The significance here is not that a safety system was degraded but the fact that the FIRE or EXPLOSION was large enough to cause damage to these systems.

The use of VISIBLE DAMAGE should not be interpreted as mandating a lengthy damage assessment prior to classification. The declaration of an Alert and the activation of the Technical Support Center will provide the Emergency Director with the resources needed to perform detailed damage assessments.

The Emergency Director also needs to consider any security aspects of the EXPLOSION.

RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY
HA4 (continued)

This EAL should specify site (U.S. EPR) specific structures or areas that contain safety system, or component and functions required for safe shutdown of the plant. Site specific Safe Shutdown Analysis should be consulted for equipment and plant areas required to establish or maintain safe shutdown.

Site (U.S. EPR) Specific

A steam line break or steam explosion that damages permanent structures or equipment in one of these areas would be classified under this EAL.

Basis Reference(s):

1. NEI 99-01, Rev 5 HA2

**RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY**

HU4

Initiating Condition:

FIRE within the PROTECTED AREA not extinguished within 15 minutes of detection or EXPLOSION within the PROTECTED AREA.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EALs:

1. FIRE not extinguished within **15 minutes** of Control Room notification or verification of a Control Room FIRE alarm in actual contact with or immediately adjacent to **ANY** of the **Table H-1** areas.

OR

2. EXPLOSION within the PROTECTED AREA.

Table H-1: Safe Shutdown Vital Areas

- | |
|---|
| <ul style="list-style-type: none"> • Control Room • Safeguards Buildings • Containment • Nuclear Auxiliary Building • Emergency Power Generating Buildings • ESW Cooling Towers |
|---|

Basis:

Generic

This EAL addresses the magnitude and extent of FIRES or EXPLOSIONS that may be potentially significant precursors of damage to safety systems. It addresses the FIRE / EXPLOSION, and not the degradation in performance of affected systems that may result.

As used here, detection is visual observation and report by plant personnel or sensor alarm indication.

EAL #1

The 15 minute time period begins with a credible notification that a FIRE is occurring, or indication of a fire detection system alarm/actuation. Verification of a fire detection system alarm/actuation includes actions that can be taken within the control room or other nearby site specific location to ensure that it is not spurious. An alarm is assumed to be an indication of a FIRE unless it is disproved within the 15 minute period by personnel dispatched to the scene. In other words, a personnel report from the scene may be used to disprove a sensor alarm if received within 15 minutes of the alarm, but shall not be required to verify the alarm.

RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY
HU4 (continued)

The intent of this 15 minute duration is to size the FIRE and to discriminate against small FIRES that are readily extinguished (e.g., smoldering waste paper basket).

The site specific list should be limited and applies to buildings and areas in actual contact with or immediately adjacent to VITAL AREAS or other significant buildings or areas. The intent of this IC is not to include buildings (i.e., warehouses) or areas that are not in actual contact with or immediately adjacent to VITAL AREAS. This excludes FIRES within administration buildings, waste-basket FIRES, and other small FIRES of no safety consequence. Immediately adjacent implies that the area immediately adjacent contains or may contain equipment or cabling that could impact equipment located in VITAL AREAS or the fire could damage equipment inside VITAL AREAS or that precludes access to VITAL AREAS.

EAL #2

This EAL addresses only those EXPLOSIONS of sufficient force to damage permanent structures or equipment within the PROTECTED AREA.

No attempt is made to assess the actual magnitude of the damage. The occurrence of the EXPLOSION is sufficient for declaration.

The Emergency director also needs to consider any security aspects of the EXPLOSION, if applicable.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01, Rev 5 HU2

**RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY**

HA5

Initiating Condition:

Access to a VITAL AREA is prohibited due to toxic, corrosive, asphyxiant or flammable gases which jeopardize the ability to safely operate or shutdown the reactor.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EALs:

1. Access to a VITAL AREA is prohibited due to toxic, corrosive, asphyxiant or flammable gases which jeopardize the ability to safely operate or shutdown the reactor.

Basis:

Generic

Gases in a VITAL AREA can affect the ability to safely operate or safely shutdown the reactor.

The fact that SCBA may be worn does not eliminate the need to declare the event.

Declaration should not be delayed for confirmation from atmospheric testing if the atmosphere poses an immediate threat of severe exposure to gases. This could be based upon documented analysis, indication of personal ill effects from exposure, or operating experience with the hazards.

If the equipment in the stated area was already inoperable, or out of service, before the event occurred, then this EAL should not be declared as it will have no adverse impact on the ability of the plant to safely operate or safely shutdown beyond that already allowed by Technical Specifications at the time of the event.

An asphyxiant is a gas capable of reducing the level of oxygen in the body to dangerous levels. Most commonly, asphyxiants work by merely displacing air in an enclosed environment. This reduces the concentration of oxygen below the normal level of around 19%, which can lead to breathing difficulties, unconsciousness or even death.

An uncontrolled release of flammable gasses within a facility structure has the potential to affect safe operation of the plant by limiting either operator or equipment operations due to the potential for ignition and resulting equipment damage/personnel injury. Flammable gasses, such as hydrogen and acetylene, are routinely used to maintain plant systems (hydrogen) or to repair equipment/components (acetylene - used in welding). This EAL assumes concentrations of flammable gasses which can ignite/support combustion.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01, Rev 5 HA3

**RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY**

HU5

Initiating Condition:

Release of toxic, corrosive, asphyxiant or flammable gases deemed detrimental to NORMAL PLANT OPERATIONS.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EALs:

1. Toxic, corrosive, asphyxiant or flammable gases in amounts that have or could adversely affect NORMAL PLANT OPERATIONS.

OR

2. Report by local, county or state officials for evacuation or sheltering of site personnel based on an offsite event.

Basis:

Generic

This EAL is based on the release of toxic, corrosive, asphyxiant or flammable gases of sufficient quantity to affect NORMAL PLANT OPERATIONS or personnel safety.

The fact that SCBA may be worn does not eliminate the need to declare the event.

This IC is not intended to require significant assessment or quantification. It assumes an uncontrolled process that has the potential to affect plant operations or personnel safety. This would preclude small or incidental releases, or releases that do not impact structures needed for plant operation.

An asphyxiant is a gas capable of reducing the level of oxygen in the body to dangerous levels. Most commonly, asphyxiants work by merely displacing air in an enclosed environment. This reduces the concentration of oxygen below the normal level of around 19%, which can lead to breathing difficulties, unconsciousness or even death.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01, Rev 5 HU3

**RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY**

HG6

Initiating Condition:

Other conditions exist which in the judgment of the Emergency Director warrant declaration of a General Emergency.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EAL Threshold Value:

1. Other conditions exist which in the judgment of the Emergency Director indicate that events are in progress or have occurred which involve actual or imminent substantial core degradation or melting with potential for loss of containment integrity or HOSTILE ACTION that results in an actual loss of physical control of the facility. Releases can be reasonably expected to exceed EPA Protective Action Guideline exposure levels offsite for more than the immediate site area.

Basis:

Generic

This EAL addresses unanticipated conditions not addressed explicitly elsewhere but that warrant declaration of an emergency because conditions exist which are believed by the Emergency Director to fall under the emergency classification level description for General Emergency.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01, Rev 5 HG2
2. EPA-400, Manual of Protective Action Guides and Protective Actions for Nuclear Incidents.

**RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY**

HS6**Initiating Condition:**

Other conditions exist which in the judgment of the Emergency Director warrant declaration of a Site Area Emergency.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EAL Threshold Value:

1. Other conditions exist which in the judgment of the Emergency Director indicate that events are in progress or have occurred which involve an actual or likely major failures of plant functions needed for protection of the public or HOSTILE ACTION that results in intentional damage or malicious acts; 1) toward site personnel or equipment that could lead to the likely failure of or, 2) that prevent effective access to equipment needed for the protection of the public. Any releases are not expected to result in exposure levels which exceed EPA Protective Action Guideline exposure levels beyond the site boundary.

Basis:**Generic**

This EAL addresses unanticipated conditions not addressed explicitly elsewhere but that warrant declaration of an emergency because conditions exist which are believed by the Emergency Director to fall under the emergency classification level description for Site Area Emergency.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01, Rev 5 HS3
2. EPA-400, Manual of Protective Action Guides and Protective Actions for Nuclear Incidents.

**RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY**

HA6

Initiating Condition:

Other conditions exist which in the judgment of the Emergency Director warrant declaration of an Alert.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EAL Threshold Value:

1. Other conditions exist which in the judgment of the Emergency Director indicate that events are in progress or have occurred which involve an actual or potential substantial degradation of the level of safety of the plant or a security event that involves probable life threatening risk to site personnel or damage to site equipment because of HOSTILE ACTION. Any releases are expected to be limited to small fractions of the EPA Protective Action Guideline exposure levels.

Basis:

Generic

This EAL addresses unanticipated conditions not addressed explicitly elsewhere but that warrant declaration of an emergency because conditions exist which are believed by the Emergency Director to fall under the Alert emergency classification level.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01, Rev 5 HA6
2. EPA-400, Manual of Protective Action Guides and Protective Actions for Nuclear Incidents.

**RECOGNITION CATEGORY
HAZARDS AND OTHER CONDITIONS AFFECTING PLANT SAFETY**

HU6

Initiating Condition:

Other conditions exist which in the judgment of the Emergency Director warrant declaration of an Unusual Event.

Operating Mode Applicability:

1, 2, 3, 4, 5, 6, D

EAL Threshold Value:

1. Other conditions exist which in the judgment of the Emergency Director indicate that events are in progress or have occurred which indicate a potential degradation of the level of safety of the plant or indicate a security threat to facility protection has been initiated. No releases of radioactive material requiring offsite response or monitoring are expected unless further degradation of safety systems occurs.

Basis:

Generic

This EAL addresses unanticipated conditions not addressed explicitly elsewhere but that warrant declaration of an emergency because conditions exist which are believed by the Emergency Director to fall under the Unusual Event emergency classification level.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01, Rev 5 HU5

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - HOT****SG1****Initiating Condition:**

Prolonged loss of all offsite and all onsite AC power to emergency busses.

Operating Mode Applicability:

1, 2, 3, 4

EALs:

1. a. Loss of **ALL** offsite and **ALL** onsite AC power to 31, 32, 33 and 34 BDA busses.
AND
- b. **EITHER** of the following:
 - Restoration of at least one emergency bus within **2 hours** is not likely.
 - (Calculated Clad Temperature in **Region 4**).

Basis:**Generic**

Loss of all AC power to emergency busses compromises all plant safety systems requiring electric power including RHR, ECCS, Containment Heat Removal and the Ultimate Heat Sink. Prolonged loss of all AC power to emergency busses will lead to loss of fuel clad, RCS, and containment, thus warranting declaration of a General Emergency.

The hours to restore AC power can be based on a site blackout coping analysis performed in conformance with 10 CFR 50.63 and Regulatory Guide 1.155, "Station Blackout," as available. Appropriate allowance for off-site emergency response including evacuation of surrounding areas should be considered. Although this IC may be viewed as redundant to the Fission Product Barrier Degradation IC, its inclusion is necessary to better assure timely recognition and emergency response.

This IC is specified to assure that in the unlikely event of a prolonged station blackout, timely recognition of the seriousness of the event occurs and that declaration of a General Emergency occurs as early as is appropriate, based on a reasonable assessment of the event trajectory.

The likelihood of restoring at least one emergency bus should be based on a realistic appraisal of the situation since a delay in an upgrade decision based on only a chance of mitigating the event could result in a loss of valuable time in preparing and implementing public protective actions.

In addition, under these conditions, fission product barrier monitoring capability may be degraded.

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - HOT**

SG1 (continued)

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, SG1

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - HOT****SS1****Initiating Condition:**

Loss of all offsite and all onsite AC power to emergency busses for 15 minutes or longer.

Operating Mode Applicability:

1, 2, 3, 4

EALs:

1. Loss of **ALL** offsite and **ALL** onsite AC power to 31, 32, 33 and 34 BDA busses for **15 minutes** or longer.

Basis:**Generic**

Loss of all AC power to emergency busses compromises all plant safety systems requiring electric power including RHR, ECCS, Containment Heat Removal and the Ultimate Heat Sink. Prolonged loss of all AC power to emergency busses will lead to loss of Fuel Clad, RCS, and Containment, thus this event can escalate to a General Emergency.

Fifteen minutes was selected as a threshold to exclude transient or momentary losses of off-site power.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, SS1

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - HOT****SA1****Initiating Condition:**

AC power capability to emergency busses reduced to a single source for 15 minutes or longer.

Operating Mode Applicability:

1, 2, 3, 4

EALs:

1. AC power to 31, 32, 33 and 34 BDA busses is reduced to a single source for **15 minutes** or longer.

Basis:**Generic**

The condition indicated by this IC is the degradation of the off-site and on-site AC power systems such that any additional single failure would result in a station blackout. This condition could occur due to a loss of off-site power with a concurrent failure of all but one emergency generator to supply power to its emergency busses. Another related condition could be the loss of all off-site power and loss of on-site emergency generators with only one train of emergency busses being backfed from the unit main generator, or the loss of on-site emergency generators with only one train of emergency busses being backfed from off-site power.

The subsequent loss of this single power source would escalate the event to a Site Area Emergency in accordance with SS1.

Fifteen minutes was selected as a threshold to exclude transient or momentary losses of power.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, SA5

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - HOT****SU1****Initiating Condition:**

Loss of all offsite AC power to emergency busses for 15 minutes or longer.

Operating Mode Applicability:

1, 2, 3, 4

EALs:

1. Loss of **ALL** offsite AC power to 31, 32, 33 and 34 BDA busses for **15 minutes** or longer.

Basis:**Generic**

Prolonged loss of off-site AC power reduces required redundancy and potentially degrades the level of safety of the plant by rendering the plant more vulnerable to a complete loss of AC power to emergency busses.

Fifteen minutes was selected as a threshold to exclude transient or momentary losses of off-site power.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, SU1

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - HOT****SS2****Initiating Condition:**

Loss of vital DC power for 15 minutes or longer.

Operating Mode Applicability:

1, 2, 3, 4

EALs:

1. < **210 VDC** on the vital 31, 32, 33 and 34 BUC busses for **15 minutes** or longer.

Basis:**Generic**

Loss of all DC power compromises ability to monitor and control plant safety functions. Prolonged loss of all DC power will cause core uncovering and loss of containment integrity when there is significant decay heat and sensible heat in the reactor system.

Site specific bus voltage should be based on the minimum bus voltage necessary for the operation of safety related equipment. This voltage value should incorporate a margin of at least 15 minutes of operation before the onset of inability to operate those loads. This voltage is usually near the minimum voltage selected when battery sizing is performed. Typically the value for the entire battery set is approximately 105 VDC. For a 60 cell string of batteries the cell voltage is typically 1.75 Volts per cell. For a 58 string battery set the minimum voltage is typically 1.81 Volts per cell.

Fifteen minutes was selected as a threshold to exclude transient or momentary power losses.

Site (U.S. EPR) Specific

The U.S.EPR has a 250 VDC battery system, where the typical minimum voltage of 210 VDC (versus 105) is the appropriate threshold.

Basis Reference(s):

1. NEI 99-01 Rev 5, SS3
2. Technical Specification 3.8.4, DC Sources

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - HOT****SG3****Initiating Condition:**

Automatic trip and all manual actions failed to shutdown the reactor and indication of an extreme challenge to the ability to cool the core exists.

Operating Mode Applicability:

1, 2

EALs:

1. a. An automatic reactor trip failed to shutdown the reactor as indicated by reactor power > **5%**.
AND
- b. All manual actions failed to shutdown the reactor as indicated by reactor power > **5%**.
AND
- c. **EITHER** of the following have occurred:
 - (Calculated Clad Temperature in **Region 3 or higher**)
 - Loss of all four trains of Emergency Feedwater.

Basis:**Generic**

Under these conditions, the reactor is producing more heat than the maximum decay heat load for which the safety systems are designed and efforts to bring the reactor subcritical are unsuccessful.

The reactor should be considered shutdown when it producing less heat than the maximum decay heat load for which the safety systems are designed (typically 3 to 5% power).

This EAL considers all actions to trip the reactor at and away from the reactor control console.

For PWRs, the extreme challenge to the ability to cool the core is intended to mean that the core exit temperatures are at or approaching 1200° F or that the reactor vessel water level is below the top of active fuel.

Another consideration is the inability to initially remove heat during the early stages of this sequence. For PWRs, if emergency feedwater flow is insufficient to remove the amount of heat required by design from at least one steam generator, an extreme challenge should be considered to exist.

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - HOT****SG3 (continued)**

In the event either of these challenges exists at a time that the reactor has not been brought below the power associated with the safety system design a core melt sequence exists. In this situation, core degradation can occur rapidly. For this reason, the General Emergency declaration is intended to be anticipatory of the fission product barrier table declaration to permit maximum off-site intervention time.

Site (U.S. EPR) Specific

5% power is based on the combined capacity of all four trains of the Emergency Feedwater systems.

Basis Reference(s):

1. NEI 99-01 Rev 5, SG2
2. (TS, CALC, procedure or drawing references)

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - HOT****SS3****Initiating Condition:**

Automatic trip failed to shutdown the reactor and manual actions taken from the reactor control console failed to shutdown the reactor.

Operating Mode Applicability:

1, 2

EALs:

1. a. An automatic reactor trip failed to shutdown the reactor as indicated by reactor power > 5%.
AND
 - b. Manual actions taken at the reactor control console failed to shutdown the reactor as indicated by reactor power > 5%.

Basis:**Generic**

Under these conditions, the reactor is producing more heat than the maximum decay heat load for which the safety systems are designed and efforts to bring the reactor subcritical are unsuccessful. A Site Area Emergency is warranted because conditions exist that lead to IMMEDIATE loss or potential loss of both fuel clad and RCS.

The reactor should be considered shutdown when it producing less heat than the maximum decay heat load for which the safety systems are designed (typically 3 to 5% power).

Manual scram (trip) actions taken at the reactor control console are any set of actions by the reactor operator(s) at which causes or should cause control rods to be rapidly inserted into the core and shuts down the reactor.

Manual scram (trip) actions are not considered successful if action away from the reactor control console is required to scram (trip) the reactor. This EAL is still applicable even if actions taken away from the reactor control console are successful in shutting the reactor down because the design limits of the fuel may have been exceeded or because of the gross failure of the Reactor Protection System to shutdown the plant..

Site (U.S. EPR) Specific

5% power is based on the combined capacity of all four trains of the Emergency Feedwater systems.

Basis Reference(s):

1. NEI 99-01 Rev 5, SS2
2. (TS, CALC, procedure or drawing references)

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - HOT****SA3****Initiating Condition:**

Automatic trip failed to shutdown the reactor.

Operating Mode Applicability:

1, 2

EALs:

1. An automatic reactor trip failed to shutdown the reactor as indicated by reactor power > 5%.

Basis:**Generic**

The reactor should be considered shutdown when it producing less heat than the maximum decay heat load for which the safety systems are designed (typically 3 to 5% power).

Manual scram (trip) actions taken at the reactor control console are any set of actions by the reactor operator(s) which causes or should cause control rods to be rapidly inserted into the core and shuts down the reactor.

If the manual scram (trip) switches/pushbuttons on the control room console panels are considered an automatic input into the Reactor Protection System, a failure to scram (trip) without any other automatic input would make this threshold applicable.

This condition indicates failure of the automatic protection system to scram (trip) the reactor. This condition is more than a potential degradation of a safety system in that a front line automatic protection system did not function in response to a plant transient. Thus the plant safety has been compromised because design limits of the fuel may have been exceeded. An Alert is indicated because conditions may exist that lead to potential loss of fuel clad or RCS and because of the failure of the Reactor Protection System to automatically shutdown the plant.

Site (U.S. EPR) Specific

5% power is based on the combined capacity of all four trains of the Emergency Feedwater systems.

Basis Reference(s):

1. NEI 99-01 Rev 5, SA2
2. (TS, CALC, procedure or drawing references)

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - HOT****SU3****Initiating Condition:**

Inadvertent criticality.

Operating Mode Applicability:

3, 4

EALs:

1. An UNPLANNED sustained positive startup rate observed on nuclear instrumentation.

Basis:**Generic**

This IC addresses inadvertent criticality events. This IC indicates a potential degradation of the level of safety of the plant, warranting an Unusual Event emergency classification level. This IC excludes inadvertent criticalities that occur during planned reactivity changes associated with reactor startups (e.g., criticality earlier than estimated).

This condition can be identified using the startup rate monitor. The term “sustained” is used in order to allow exclusion of expected short term positive startup rates from planned control rod movements (such as shutdown bank withdrawal). These short term positive startup rates are the result of the increase in neutron population due to subcritical multiplication.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, SU8

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - HOT****SS4****Initiating Condition:**

Loss of all monitoring functions for 15 minutes or longer with a SIGNIFICANT TRANSIENT in progress.

Operating Mode Applicability:

1, 2, 3, 4

EALs:

1. a. Loss of SICS for **15 minutes** or longer.
AND
- b. Loss of PICS for **15 minutes** or longer.
AND
- c. **ANY** of the following SIGNIFICANT TRANSIENTS are in progress:
 - Automatic runback > **50%** thermal power
 - Electrical load rejection > **50%** full electrical load
 - Reactor trip
 - MHSI actuation

Basis:**Generic**

This IC is intended to recognize the threat to plant safety associated with the complete loss of capability of the control room staff to monitor plant response to a SIGNIFICANT TRANSIENT.

A Site Area Emergency is considered to exist if the control room staff cannot monitor safety functions needed for protection of the public while a significant transient is in progress.

Site specific indications needed to monitor safety functions necessary for protection of the public must include control room indications, computer generated indications and dedicated annunciation capability.

The specific indications should be those used to determine such functions as the ability to shut down the reactor, maintain the core cooled, to maintain the reactor coolant system intact, maintain the spent fuel cooled, and to maintain containment intact.

Fifteen minutes was selected as a threshold to exclude transient or momentary power losses.

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - HOT****SS4 (continued)****Site (U.S. EPR) Specific**

The U.S. EPR is designed to survive a full offsite load rejection and maintain onsite house loads. Although actions will automatically occur, the inability of the operators to verify proper response increases risk and justifies escalation of emergency classification. A 50% change in power/electrical load was chosen as a reasonable value (less than the design criteria, which will still be considered a substantial challenge to the systems) as the threshold criteria.

Basis Reference(s):

1. NEI 99-01 Rev 5, SS6

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - HOT****SA4****Initiating Condition:**

Loss of all monitoring functions for 15 minutes or longer.

Operating Mode Applicability:

1, 2, 3, 4

EALs:

1. a. Loss of SICS for **15 minutes** or longer.
AND
- b. Loss of PICS for **15 minutes** or longer.

Basis:**Generic**

This IC is intended to recognize the difficulty associated with monitoring changing plant conditions without the use of the annunciation or indication equipment.

Fifteen minutes was selected as a threshold to exclude transient or momentary power losses.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, SA4

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - HOT****SU4****Initiating Condition:**

Degradation of monitoring functions for 15 minutes or longer.

Operating Mode Applicability:

1, 2, 3, 4

EALs:

1. Loss of SICS for **15 minutes** or longer.

OR

2. Loss of PICS for **15 minutes** or longer.

Basis:**Generic**

This IC and its associated EAL are intended to recognize the difficulty associated with monitoring changing plant conditions without the use of a major portion of the annunciation or indication equipment.

Recognition of the availability of computer based indication equipment is considered (e.g., SPDS, plant computer, etc.).

Fifteen minutes was selected as a threshold to exclude transient or momentary power losses.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, SU3

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - HOT****SU5****Initiating Condition:**

Inability to reach required operating mode within Technical Specification limits.

Operating Mode Applicability:

1, 2, 3, 4

EALs:

1. Plant is not brought to required operating mode within Technical Specifications LCO action completion time.

Basis:**Generic**

Limiting Conditions of Operation (LCOs) require the plant to be brought to a required operating mode when the Technical Specification required configuration cannot be restored. Depending on the circumstances, this may or may not be an emergency or precursor to a more severe condition. In any case, the initiation of plant shutdown required by the site Technical Specifications requires a four hour report under 10 CFR 50.72 (b) Non-emergency events.

The plant is within its safety envelope when being shut down within the allowable action statement time in the Technical Specifications. An immediate Unusual Event is required when the plant is not brought to the required operating mode within the allowable action statement time in the Technical Specifications. Declaration of an Unusual Event is based on the time at which the LCO-specified action statement time period elapses under the site Technical Specifications and is not related to how long a condition may have existed.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, SS2

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - HOT****SU6****Initiating Condition:**

Loss of all onsite or offsite communications capabilities.

Operating Mode Applicability:

1, 2, 3, 4

EALs:

1. Loss of **ALL** of the following onsite communication methods affecting the ability to perform routine operations:
 - {Radios}
 - {Plant Page}
 - {Internal Telephone Systems}**OR**
2. Loss of **ALL** of the following offsite communications methods affecting the ability to perform offsite notifications:
 - {Dedicated Offsite Alerting System}
 - NRC Emergency Notification System - ENS
 - NRC Health Physics Network - HPN
 - {External Telephone Systems}

Basis:**Generic**

The purpose of this IC and its associated EALs is to recognize a loss of communications capability that either defeats the plant operations staff ability to perform routine tasks necessary for plant operations or the ability to communicate issues with off-site authorities.

The loss of off-site communications ability is expected to be significantly more comprehensive than the condition addressed by 10 CFR 50.72.

The availability of one method of ordinary off-site communications is sufficient to inform federal, state, and local authorities of plant problems. This EAL is intended to be used only when extraordinary means (e.g., relaying of information from non-routine radio transmissions, individuals being sent to off-site locations, etc.) are being used to make communications possible.

Site specific list for on-site communications loss must encompass the loss of all means of communications (e.g., commercial telephones, sound powered phone systems, page party system (Gaitronics) and radios / walkie talkies) routinely used for operations.

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - HOT****SU6 (continued)**

Site specific list for off-site communications loss must encompass the loss of all means of communications with off-site authorities. This should include the ENS, commercial telephone lines, telecopy transmissions, and dedicated phone systems that are routinely used for offsite emergency notifications.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, SU6

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - HOT****SU7****Initiating Condition:**

RCS leakage.

Operating Mode Applicability:

1, 2, 3, 4

EALs:1. Unidentified or pressure boundary leakage > **10 gpm.****OR**2. Identified leakage > **25 gpm.****Basis:****Generic**

This IC is included as an Unusual Event because it may be a precursor of more serious conditions and, as result, is considered to be a potential degradation of the level of safety of the plant. The 10 gpm value for the unidentified or pressure boundary leakage was selected as it is observable with normal control room indications. Lesser values must generally be determined through time-consuming surveillance tests (e.g., mass balances).

Relief valve normal operation should be excluded from this IC. However, a relief valve that operates and fails to close per design should be considered applicable to this IC if the relief valve cannot be isolated.

The EAL for identified leakage is set at a higher value due to the lesser significance of identified leakage in comparison to unidentified or pressure boundary leakage.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, SU5

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - HOT****SU9****Initiating Condition:**

Fuel clad degradation.

Operating Mode Applicability:

1, 2, 3, 4

EALs:

1. Gross Failed Fuel Monitor ({{KUA66 CR001}}) > **(SU9.1) cpm.**
OR
2. Coolant sample activity > **1.0 $\mu\text{Ci/gm}$** dose equivalent I-131.

Basis:**Generic**

This EAL is included because it is a precursor of more serious conditions and, as result, is considered to be a potential degradation of the level of safety of the plant.

EAL #1

This threshold addresses site-specific radiation monitor readings that provide indication of a degradation of fuel clad integrity.

EAL #2

This threshold addresses coolant samples exceeding coolant technical specifications for transient iodine spiking limits.

Site (U.S. EPR) Specific**EAL #1**

(To be added to support EAL value/wording)

Basis Reference(s):

1. NEI 99-01 Rev 5, SU4
2. Technical Specifications 3.4.15, RCS Specific Activity

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - COLD****CA1****Initiating Condition:**

Loss of all offsite and all onsite AC power to emergency busses for 15 minutes or longer.

Operating Mode Applicability:

5, 6, D

EALs:

1. Loss of all offsite and all onsite AC power to 31, 32, 33 and 34 BDA busses for **15 minutes** or longer.

Basis:**Generic**

Loss of all AC power compromises all plant safety systems requiring electric power including Residual Heat Removal, ECCS, Containment Heat Removal, Spent Fuel Heat Removal and the Ultimate Heat Sink.

The event can be classified as an Alert when in cold shutdown, refueling, or defueled mode because of the significantly reduced decay heat and lower temperature and pressure, increasing the time to restore one of the emergency busses, relative to that specified for the Site Area Emergency EAL.

Fifteen minutes was selected as a threshold to exclude transient or momentary power losses.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, CA3

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - COLD****CU1****Initiating Condition:**

AC power capability to emergency busses reduced to a single source for 15 minutes or longer.

Operating Mode Applicability:

5, 6

EALs:

1. AC power to 31, 32, 33 and 34 BDA busses is reduced to a single source for **15 minutes** or longer.

Basis:**Generic**

The condition indicated by this IC is the degradation of the off-site and on-site AC power systems such that any additional single failure would result in a station blackout. This condition could occur due to a loss of off-site power with a concurrent failure of all but one emergency generator to supply power to its emergency busses.

Fifteen minutes was selected as a threshold to exclude transient or momentary losses of off-site power.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, CU3

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - COLD****CU2****Initiating Condition:**

Loss of required DC power for 15 minutes or longer.

Operating Mode Applicability:

5, 6

EALs:

1. < **210 VDC** on the required 31, 32, 33 and 34 BUC busses for **15 minutes** or longer.

Basis:**Generic**

The purpose of this IC and its associated EAL is to recognize a loss of DC power compromising the ability to monitor and control the removal of decay heat during Cold Shutdown or Refueling operations.

Plants will routinely perform maintenance on a Train related basis during shutdown periods. It is intended that the loss of the operating (operable) train is to be considered.

Site specific bus voltage should be based on the minimum bus voltage necessary for the operation of safety related equipment. This voltage value should incorporate a margin of at least 15 minutes of operation before the onset of inability to operate those loads. This voltage is usually near the minimum voltage selected when battery sizing is performed. Typically the value for the entire battery set is approximately 105 VDC. For a 60 cell string of batteries the cell voltage is typically 1.75 Volts per cell. For a 58 string battery set the minimum voltage is typically 1.81 Volts per cell.

Fifteen minutes was selected as a threshold to exclude transient or momentary power losses.

Site (U.S. EPR) Specific

The U.S.EPR has a 250 VDC battery system, where the typical minimum voltage of 210 VDC (versus 105) is the appropriate threshold.

Basis Reference(s):

1. NEI 99-01 Rev 5, CU7
2. Technical Specification 3.8.4, DC Sources

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - COLD****CU3****Initiating Condition:**

Inadvertent criticality.

Operating Mode Applicability:

5, 6

EALs:

1. An UNPLANNED sustained positive startup rate observed on nuclear instrumentation.

Basis:**Generic**

This IC addresses criticality events that occur in Cold Shutdown or Refueling modes (NUREG 1449, Shutdown and Low-Power Operation at Commercial Nuclear Power Plants in the United States) such as fuel loading events and inadvertent dilution events. This IC indicates a potential degradation of the level of safety of the plant, warranting an Unusual Event emergency classification level.

This condition can be identified using the startup rate monitor. The term “sustained” is used in order to allow exclusion of expected short term positive startup rates from planned control rod movements (such as shutdown bank withdrawal). These short term positive startup rates are the result of the increase in neutron population due to subcritical multiplication.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, CU8

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - COLD****CU6****Initiating Condition:**

Loss of all onsite or offsite communications capabilities.

Operating Mode Applicability:

5, 6, D

EALs:

1. Loss of **ALL** of the following onsite communication methods affecting the ability to perform routine operations:
 - {Radios}
 - {Plant Page}
 - {Internal Telephone Systems}**OR**
2. Loss of **ALL** of the following offsite communications methods affecting the ability to perform offsite notifications:
 - {Dedicated Offsite Alerting System}
 - NRC Emergency Notification System - ENS
 - NRC Health Physics Network - HPN
 - {External Telephone Systems}

Basis:**Generic**

The purpose of this IC and its associated EALs is to recognize a loss of communications capability that either defeats the plant operations staff ability to perform routine tasks necessary for plant operations or the ability to communicate issues with off-site authorities.

The loss of off-site communications ability is expected to be significantly more comprehensive than the condition addressed by 10 CFR 50.72.

The availability of one method of ordinary off-site communications is sufficient to inform federal, state, and local authorities of plant problems. This EAL is intended to be used only when extraordinary means (e.g., relaying of information from non-routine radio transmissions, individuals being sent to off-site locations, etc.) are being used to make communications possible.

Site specific list for on-site communications loss must encompass the loss of all means of communications (e.g., commercial telephones, sound powered phone systems, page party system (Gaitronics) and radios / walkie talkies) routinely used for operations.

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - COLD****CU6 (continued)**

Site specific list for off-site communications loss must encompass the loss of all means of communications with off-site authorities. This should include the ENS, commercial telephone lines, telecopy transmissions, and dedicated phone systems that are routinely used for offsite emergency notifications.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, CU6

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - COLD**

CG7

Initiating Condition:

Loss of RPV inventory affecting fuel clad integrity with containment challenged.

Operating Mode Applicability:

5, 6

EALs:

1.
 - a. RPV level < **{96.0 feet (29.3 meters)}** (top of active fuel) for **30 minutes** or longer.
AND
 - b. **ANY Table C-1** containment challenge indications.
- OR**
2.
 - a. RPV level cannot be monitored with core uncover indicated by **ANY** of the following for **30 minutes** or longer:
 - Reactor Building Refueling Bridge Area Dose Rate Monitor ({JYK15 CR003}) > **(CG7.2.a(b1)) mR/hr.**
 - Erratic source range monitor indication.
 - UNPLANNED level rise in IRWST.**AND**
 - b. **ANY Table C-1** containment challenge indications.

Table C-1: Containment Challenge Indications

- | |
|---|
| <ul style="list-style-type: none"> • CONTAINMENT CLOSURE not established. • Hydrogen concentration > 4% inside containment. • UNPLANNED rise in containment pressure. |
|---|

Basis:

Generic

This IC represents the inability to restore and maintain RPV level to above the top of active fuel with containment challenged. Fuel damage is probable if RPV level cannot be restored, as available decay heat will cause boiling, further reducing the RPV level. With the CONTAINMENT breached or challenged then the potential for unmonitored fission product release to the environment is high. This represents a direct path for radioactive inventory to be released to the environment. This is consistent with the definition of a GE. The GE is declared on the occurrence of the loss or **IMMINENT** loss of function of all three barriers.

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - COLD****CG7 (continued)**

These EALs are based on concerns raised by Generic Letter 88-17, Loss of Decay Heat Removal, SECY 91-283, Evaluation of Shutdown and Low Power Risk Issues, NUREG-1449, Shutdown and Low-Power Operation at Commercial Nuclear Power Plants in the United States, and, NUMARC 91-06, Guidelines for Industry Actions to Assess Shutdown Management.

EAL #1

A number of variables can have a significant impact on heat removal capability challenging the fuel clad barrier. Examples include; mid-loop, reduced level/flange level, head in place, cavity flooded, RCS venting strategy, decay heat removal system design, and vortexing pre-disposition.

Analysis indicates that core damage may occur within an hour following continued core uncovering therefore, 30 minutes was conservatively chosen.

If CONTAINMENT CLOSURE is re-established prior to exceeding the 30 minute core uncovering time limit then escalation to GE would not occur.

Site shutdown contingency plans typically provide for re-establishing CONTAINMENT CLOSURE following a loss of heat removal or RCS inventory functions.

In the early stages of a core uncovering event, it is unlikely that hydrogen buildup due to a core uncovering could result in an explosive mixture of dissolved gasses in Containment. However, Containment monitoring and/or sampling should be performed to verify this assumption and a General Emergency declared if it is determined that an explosive mixture exists.

EAL #2

Sump and tank level increases must be evaluated against other potential sources of leakage such as cooling water sources inside the containment to ensure they are indicative of RCS leakage.

In the cold shutdown mode, normal RCS level and RPV level instrumentation systems will usually be available. In the refueling mode, normal means of RPV level indication may not be available. Redundant means of RPV level indication will usually be installed (including the ability to monitor level visually) to assure that the ability to monitor level will not be interrupted. However, if all level indication were to be lost during a loss of RCS inventory event, the operators would need to determine that RPV inventory loss was occurring by observing sump and tank level changes. Sump and tank level increases must be evaluated against other potential sources of leakage such as cooling water sources inside the containment to ensure they are indicative of RCS leakage.

As water level in the RPV lowers, the dose rate above the core will increase. The dose rate due to this core shine should result in site specific monitor indication and possible alarm.

This EAL should conservatively estimate a site specific dose rate setpoint indicative of core uncovering (i.e., level at TOAF).

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - COLD****CG7 (continued)**

Post-TMI studies indicated that the installed nuclear instrumentation will operate erratically when the core is uncovered and that this should be used as a tool for making such determinations.

Site (U.S. EPR) Specific**EAL #1**

Top of Active Fuel (TOAF) cannot be read by installed level instrumentation in cold modes. {TOAF corresponds to plant elevation 96.0 feet (29.3 meters)}

EAL #2

U.S. EPR design does not have a Containment Building Sump. The IRWST is the point of drainage.

(To be added to support EAL value/wording)

Basis Reference(s):

1. NEI 99-01 Rev 5, CG1
2. (TS, CALC, procedure or drawing references)

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - COLD**

CS7

Initiating Condition:

Loss of RPV inventory affecting core decay heat removal capability.

Operating Mode Applicability:

5, 6

EALs:

1. a. CONTAINMENT CLOSURE not established.
AND
 - b. Loss of RPV inventory as indicated by RCS level ({JEF10 CL081}) < **(CS7.1.b)**.

OR
2. a. CONTAINMENT CLOSURE established.
AND
 - b. RPV level < **{96.0 feet (29.3 meters)}** (top of active fuel).

OR
3. a. RCS level cannot be monitored for **30 minutes** or longer.
AND
 - b. Loss of RPV inventory as indicated by any of the following:
 - Reactor Building Refueling Bridge Area Dose Rate Monitor ({JYK15 CR003}) > **(CS7.3.b(b1)) mR/hr**.
 - Erratic source range monitor indication.
 - UNPLANNED level rise in IRWST.

Basis:

Generic

Under the conditions specified by this IC, continued decrease in RCS/RPV level is indicative of a loss of inventory control. Inventory loss may be due to an RCS breach, pressure boundary leakage, or continued boiling in the RPV. Thus, declaration of a Site Area Emergency is warranted.

EAL #1

6" below the bottom ID of the RCS Loop should be the level equal to 6" below the bottom of the RPV loop penetration (not the low point of the loop). PWRs unable to measure this level should choose the first observable point below the bottom ID of the loop as the EAL value. If a water level instrument is not available such that the PWR EAL value cannot be determined, then EAL 3 should be used to determine if the IC has been met.

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - COLD****CS7 (continued)**EAL #3

In the cold shutdown mode, normal RCS level and RPV level instrumentation systems will usually be available. In the refueling mode, normal means of RPV level indication may not be available. Redundant means of RPV level indication will usually be installed (including the ability to monitor level visually) to assure that the ability to monitor level will not be interrupted. However, if all level indication were to be lost during a loss of RCS inventory event, the operators would need to determine that RPV inventory loss was occurring by observing sump and tank level changes. Sump and tank level increases must be evaluated against other potential sources of leakage such as cooling water sources inside the containment to ensure they are indicative of RCS leakage.

The 30-minute duration allows sufficient time for actions to be performed to recover inventory control equipment.

As water level in the RPV lowers, the dose rate above the core will increase. The dose rate due to this core shine should result in site specific monitor indication and possible alarm.

This EAL should conservatively estimate a site specific dose rate setpoint indicative of core uncover (i.e., level at TOAF).

Post-TMI studies indicated that the installed nuclear instrumentation will operate erratically when the core is uncovered and that this should be used as a tool for making such determinations.

Site (U.S. EPR) SpecificEAL #1

The lowest indicated reactor water level is the bottom of the reactor coolant hot legs {(Plant Elevation +101.9 feet (31.1 meters))}. A location 6" below the reactor coolant system hot legs would be {101.4 feet (30.9 meters)}.

EAL #2

Top of Active Fuel (TOAF) cannot be read by installed level instrumentation in cold modes. {TOAF corresponds to plant elevation 96.0 feet (29.3 meters)}

EAL #3

U.S. EPR design does not have a Containment Building Sump. The IRWST is the point of drainage.

(To be added to support EAL value/wording)

Basis Reference(s):

1. NEI 99-01 Rev 5, CS1
2. 02-DCD-JAA-1200A0-001
3. 02-DCD-PPY-JE-4001-000

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - COLD****CA7****Initiating Condition:**

Loss of RPV inventory.

Operating Mode Applicability:

5, 6

EALs:

1. Loss of RPV inventory as indicated by RCS level ({JEF10 CL081}) < **(CA7.1)**.
OR
2.
 - a. RCS level cannot be monitored for **15 minutes** or longer.
AND
 - b. Loss of RPV inventory as indicated by UNPLANNED level rise in IRWST.

Basis:**Generic**

These EALs serve as precursors to a loss of ability to adequately cool the fuel. The magnitude of this loss of water indicates that makeup systems have not been effective and may not be capable of preventing further RPV level decrease and potential core uncover. This condition will result in a minimum emergency classification level of an Alert.

EAL #1

The PWR Bottom ID of the RCS Loop setpoint was chosen because at this level remote RCS level indication may be lost and loss of suction to decay heat removal systems has occurred. The Bottom ID of the RCS Loop Setpoint should be the level equal to the bottom of the RPV loop penetration (not the low point of the loop).

The inability to restore and maintain level after reaching this setpoint would be indicative of a failure of the RCS barrier.

EAL #2

In the cold shutdown mode, normal RCS level and RPV level instrumentation systems will usually be available. In the refueling mode, normal means of RPV level indication may not be available. Redundant means of RPV level indication will usually be installed (including the ability to monitor level visually) to assure that the ability to monitor level will not be interrupted. However, if all level indication were to be lost during a loss of RCS inventory event, the operators would need to determine that RPV inventory loss was occurring by observing sump and tank level changes. Sump and tank level increases must be evaluated against other potential sources of leakage such as cooling water sources inside the containment to ensure they are indicative of RCS leakage.

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - COLD****CA7 (continued)**

The 15-minute duration for the loss of level indication was chosen because it is half of the CS1 Site Area Emergency EAL duration. Significant fuel damage is not expected to occur until the core has been uncovered for greater than 1 hour per the analysis referenced in the CG1 basis. Therefore this EAL meets the definition for an Alert.

Site (U.S. EPR) Specific**EAL #1**

The lowest indicated reactor water level is the bottom of the reactor coolant hot legs {(Plant Elevation +101.9 feet (31.1 meters))}.

EAL #2

U.S. EPR design does not have a Containment Building Sump. The IRWST is the point of drainage.

Basis Reference(s):

1. NEI 99-01 Rev 5, CA1
2. 02-DCD-JAA-1200A0-001
3. 02-DCD-PPY-JE-4001-000

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - COLD****CU7****Initiating Condition:**

RCS leakage.

Operating Mode Applicability:

5

EALs:

1. RCS leakage results in the inability to maintain or restore RCS level > **Procedure Established Minimum Level** for **15 minutes** or longer.

Basis:**Generic**

This IC is considered to be a potential degradation of the level of safety of the plant. The inability to maintain or restore level is indicative of loss of RCS inventory.

Relief valve normal operation should be excluded from this IC. However, a relief valve that operates and fails to close per design should be considered applicable to this IC if the relief valve cannot be isolated.

The difference between CU7 and CU8 deals with the RCS conditions that exist between cold shutdown and refueling modes. In the refueling mode the RCS is not intact and RPV level and inventory are monitored by different means. In cold shutdown the RCS will normally be intact and standard RCS inventory and level monitoring means are available.

Site (U.S. EPR) Specific

RCS level in the Cold Shutdown mode is controlled within limits that are established by procedures in effect for the present conditions. There are Cold Shutdown mode evolutions that are directed by procedures that require precise control and monitoring of RCS levels that include establishment of low level limits. Examples of such evolutions include draining down to vessel flange level to prepare for reactor head flange bolt de-tensioning, and draining to mid-loop for equipment maintenance. During these evolutions it is appropriate to use the low level limit established by the procedure in effect to determine if RCS leakage is occurring and emergency declaration is required.

Basis Reference(s):

1. NEI 99-01, Rev. 5 CU1

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - COLD****CU8****Initiating Condition:**

Loss of RCS inventory.

Operating Mode Applicability:

6

EALs:

1. a. RCS level drop below the RPV flange for **15 minutes** or longer when the RCS level band is established above the RPV flange.
OR
 - b. RCS level drop < **Procedure Established Minimum Level for 15 minutes** or longer when the RCS level band is established below the RPV flange.
- OR**
2. a. RCS level cannot be monitored.
AND
 - b. Loss of RPV inventory as indicated by UNPLANNED rise in IRWST.

Basis:**Generic**

This IC is a precursor of more serious conditions and considered to be a potential degradation of the level of safety of the plant.

Refueling evolutions that decrease RCS water level below the RPV flange are carefully planned and procedurally controlled. An UNPLANNED event that results in water level decreasing below the RPV flange, or below the planned RCS water level for the given evolution (if the planned RCS water level is already below the RPV flange), warrants declaration of an Unusual Event due to the reduced RCS inventory that is available to keep the core covered.

The allowance of 15 minutes was chosen because it is reasonable to assume that level can be restored within this time frame using one or more of the redundant means of refill that should be available. If level cannot be restored in this time frame then it may indicate a more serious condition exists.

The difference between CU7 and CU8 deals with the RCS conditions that exist between cold shutdown and refueling modes. In cold shutdown the RCS will normally be intact and standard RCS inventory and level monitoring means are available. In the refueling mode the RCS is not intact and RPV level and inventory are monitored by different means.

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - COLD****CU8 (continued)****EAL #1**

This EAL involves a decrease in RCS level below the top of the RPV flange that continues for 15 minutes due to an UNPLANNED event. This EAL is not applicable to decreases in flooded reactor cavity level, which is addressed by RU2.1 until such time as the level decreases to the level of the vessel flange.

EAL #2

This EAL addresses conditions in the refueling mode when normal means of core temperature indication and RCS level indication may not be available. Redundant means of RPV level indication will normally be installed (including the ability to monitor level visually) to assure that the ability to monitor level will not be interrupted. However, if all level indication were to be lost during a loss of RCS inventory event, the operators would need to determine that RPV inventory loss was occurring by observing sump and tank level changes. Sump and tank level increases must be evaluated against other potential sources of leakage such as cooling water sources inside the containment to ensure they are indicative of RCS leakage.

Site (U.S. EPR) Specific

U.S. EPR design does not have a Containment Building Sump. The IRWST is the point of drainage.

Basis Reference(s):

1. NEI 99-01 Rev 5, CU2

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - COLD**

CA10

Initiating Condition:

Inability to maintain plant in cold shutdown.

Operating Mode Applicability:

5, 6

EALs:

1. RCS temperature > **200° F** for the specified duration on **Table C-2**.

Table C-2: RCS Reheat Duration Thresholds		
RCS	Containment Closure	Duration
Intact with Full Inventory	N/A	> 60 minutes*
Not Intact OR Reduced Inventory	Established	> 20 minutes*
	Not Established	0 minutes

* If an RCS heat removal system is in operation within this time frame and RCS temperature is being reduced, then this EAL is not applicable.

OR

2. RCS pressure rise > **10 psig** due to a loss of RCS cooling (this EAL does not apply in solid plant conditions).

Basis:**Generic**

For PWRs, this IC and its associated EALs are based on concerns raised by Generic Letter 88-17, "Loss of Decay Heat Removal." A number of phenomena such as pressurization, vortexing, RCS level differences when operating at a mid-loop condition, decay heat removal system design, and level instrumentation problems can lead to conditions where decay heat removal is lost and core uncovering can occur. NRC analyses show that there are sequences that can cause core uncovering in 15 to 20 minutes and severe core damage within an hour after decay heat removal is lost.

A loss of Technical Specification components alone is not intended to constitute an Alert. The same is true of a momentary UNPLANNED excursion above the Technical Specification cold shutdown temperature limit when the heat removal function is available.

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - COLD****CA10 (continued)**EAL #1

The RCS Reheat Duration Threshold table addresses complete loss of functions required for core cooling for greater than 60 minutes during refueling and cold shutdown modes when RCS integrity is established. RCS should be considered intact when the RCS pressure boundary is established (e.g., no freeze seals, nozzle dams installed or SG manways removed). The status of CONTAINMENT CLOSURE in this condition is immaterial given that the RCS is providing a high pressure barrier to fission product release to the environment. The 60 minute time frame should allow sufficient time to restore cooling without there being a substantial degradation in plant safety.

The RCS Reheat Duration Threshold table also addresses the complete loss of functions required for core cooling for greater than 20 minutes during refueling and cold shutdown modes when CONTAINMENT CLOSURE is established but RCS integrity is not established or RCS inventory is reduced (e.g. mid-loop operation). As discussed above, RCS should be assumed to be intact when the RCS pressure boundary is established (e.g., no freeze seals, nozzle dams installed or SG manways removed). The allowed 20 minute time frame was included to allow operator action to restore the heat removal function, if possible. The allowed time frame is consistent with the guidance provided by Generic Letter 88-17, "Loss of Decay Heat Removal" (discussed later in this basis) and is believed to be conservative given that a low pressure Containment barrier to fission product release is established.

Finally, complete loss of functions required for core cooling during refueling and cold shutdown modes when neither CONTAINMENT CLOSURE is established nor RCS is intact. RCS is intact when the RCS pressure boundary is in its normal condition for the cold shutdown mode of operation (e.g., no freeze seals or nozzle dams). No delay time is allowed because the evaporated reactor coolant that may be released into the Containment during this heatup condition could also be directly released to the environment.

The note (*) indicates that this EAL is not applicable if actions are successful in restoring an RCS heat removal system to operation and RCS temperature is being reduced within the specified time frame.

EAL #2

The 10 psi pressure increase addresses situations where, due to high decay heat loads, the time provided to restore temperature control, should be less than 60 minutes. The RCS pressure setpoint chosen should be 10 psi or the lowest pressure that the site can read on installed Control Board instrumentation that is equal to or greater than 10 psi.

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, CA4
2. Technical Specifications Section 1.0 Table 1.1-1, Modes

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - COLD****CU10****Initiating Condition:**

Loss of decay heat removal capability.

Operating Mode Applicability:

5, 6

EALs:

1. RCS temperature > **200°** F due to a loss of decay heat removal capability.
OR
2. Loss of **ALL** RCS temperature and RCS level indication for **15 minutes** or longer.

Basis:**Generic**

This IC is be a precursor of more serious conditions and, as a result, is considered to be a potential degradation of the level of safety of the plant. In cold shutdown the ability to remove decay heat relies primarily on forced cooling flow. Operation of the systems that provide this forced cooling may be jeopardized due to the unlikely loss of electrical power or RCS inventory. Since the RCS usually remains intact in the cold shutdown mode a large inventory of water is available to keep the core covered.

Entry into cold shutdown conditions may be attained within hours of operating at power. Entry into the refueling mode procedurally may not occur for typically 100 hours (site specific) or longer after the reactor has been shutdown. Thus the heatup threat and therefore the threat to damaging the fuel clad may be lower for events that occur in the refueling mode with irradiated fuel in the RPV (note that the heatup threat could be lower for cold shutdown conditions if the entry into cold shutdown was following a refueling). In addition, the operators should be able to monitor RCS temperature and RPV level so that escalation to the alert level will occur if required.

During refueling the level in the RPV will normally be maintained above the RPV flange. Refueling evolutions that decrease water level below the RPV flange are carefully planned and procedurally controlled. Loss of forced decay heat removal at reduced inventory may result in more rapid increases in RCS/RPV temperatures depending on the time since shutdown.

Unlike the cold shutdown mode normal means of core temperature indication and RCS level indication may not be available in the refueling mode. Redundant means of RPV level indication are therefore procedurally installed to assure that the ability to monitor level will not be interrupted. However, if all level and temperature indication were to be lost in either the cold shutdown or refueling modes, EAL 2 would result in declaration of an Unusual Event if both temperature and level indication cannot be restored within 15 minutes from the loss of both means of indication.

**RECOGNITION CATEGORY
SYSTEM MALFUNCTIONS - COLD**

CU10 (continued)

Site (U.S. EPR) Specific

None

Basis Reference(s):

1. NEI 99-01 Rev 5, CU4
2. Technical Specifications Section 1.0 Table 1.1-1, Modes

Enclosure D

{Calvert Cliffs Nuclear Power Plant

Unit 3}

State/Local Government

Agreement Documentation



**CALVERT COUNTY
DEPARTMENT OF PUBLIC SAFETY
EMERGENCY MANAGEMENT DIVISION**

175 Main Street
Courthouse
Prince Frederick, Maryland 20678
Phone: 410-535-1600, Ext. 2302 • 301-855-1243
FAX: 410-535-3997

Department Director
Robert C. Brady

Director
J.R. Fenwick

Board of Commissioners
**Gerald W. Clark
Linda L. Kelley
Wilson H. Parran
Susan Shaw
Barbara A. Stinnett**

December 27, 2007


Mr. Richard R. Woods
Emergency Preparedness
Calvert Cliffs Nuclear Power Plant
1650 Calvert Cliffs Parkway
Lusby, MD 20657-4702

Mr. Woods,

The Calvert County Emergency Management Agency agrees with the proposed emergency classification system, initiating conditions, and emergency action levels (EAL's) presented at the meeting on November 29, 2007.

It is my understanding that the specific EAL's in support of emergency preparedness for operation of the proposed new nuclear unit will be clearly established and discussed with Calvert County Emergency Management if and when UniStar Nuclear proceeds with construction and operation of the new unit.

John Robert Fenwick

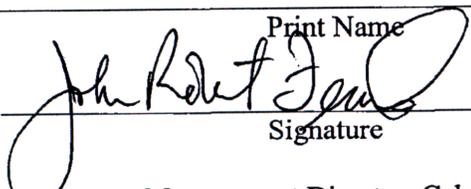Print Name


Signature
Emergency Management Director, Calvert County

Title

December 20, 2007

Date

cc:
Mr. David D. Zylak, St. Mary's County Public Safety
Mr. Wayne Robinson, Dorchester County Emergency Management
Mr. John Droneburg, Maryland Emergency Management Agency

Mailing Address: 175 Main Street, Prince Frederick, Maryland 20678

Maryland Relay for Impaired Hearing or Speech 1-800-735-2258

The St. Mary's County Emergency Management Agency agrees with the proposed emergency classification system, initiating conditions, and emergency action levels presented on November 29, 2007.

It is my understanding that the specific EALs in support of emergency preparedness for operation of the proposed new nuclear unit will be clearly established and discussed with St. Mary's County EMA if and when UniStar Nuclear proceeds with construction and operation of the new unit.

David D. Zylak _____

Print Name

 _____
Signature

12/21/07 _____

Date

Director _____

Title

cc:

Mr. J. Robert Fenwick
Director of Calvert County Emergency Management
Court House
175 Main Street
Prince Frederick, MD 20678

Mr. Wayne Robinson
Director, Dorchester County Emergency Management
829 Fieldcrest Road
Cambridge, MD 21613

Mr. John Droneburg
MEMA
5401 Rue Saint Lo Drive
Reisterstown, MD 21136

The Dorchester County Emergency Management Agency agrees with the proposed emergency classification system, initiating conditions, and emergency action levels presented on November 29, 2007.

It is my understanding that the specific EALs in support of emergency preparedness for operation of the proposed new nuclear unit will be clearly established and discussed with Dorchester County EMA if and when UniStar Nuclear proceeds with construction and operation of the new unit.

Wayne Robinson
Print Name

Wayne Robinson
Signature

2-19-08
Date

Director of Emergency Management
Title

cc:

Mr. J. Robert Fenwick
Director of Calvert County Emergency Management
Court House
175 Main Street
Prince Frederick, MD 20678

Mr. David D. Zylak
Director, St. Mary's County Public Safety
23090 Leonard Hall Drive
Leonardtown, MD 20650


Mr. John Droneburg
MEMA
5401 Rue Saint Lo Drive
Reisterstown, MD 21136

The Maryland Emergency Management Agency (MEMA) agrees with the proposed emergency classification system, initiating conditions, and emergency action levels presented on November 29, 2007.

It is my understanding that the specific EALs in support of emergency preparedness for operation of the proposed new nuclear unit will be clearly established and discussed with MEMA if and when UniStar Nuclear proceeds with construction and operation of the new unit.

John Droneburg

Print Name

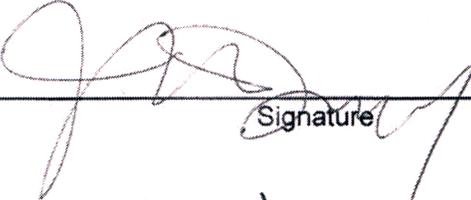

Signature

12/6/07

Date

Director

Title

cc:

Mr. J. Robert Fenwick
Director of Calvert County Emergency Management
Court House
175 Main Street
Prince Frederick, MD 20678

Mr. David D. Zylak
Director, St. Mary's County Public Safety
23090 Leonard Hall Drive
Leonardtown, MD 20650

Mr. Wayne Robinson
Director, Dorchester County Emergency Management
829 Fieldcrest Road
Cambridge, MD 21613