


- Notes:
1. Vs = shear wave velocity feet per second (fps), Vp = compressional wave velocity feet per second (fps)
  2. SPT field blows determined with a 140 lbs hammer, 30" drop. SPT is uncorrected
  3. RQD (Rock Quality Designation) - a percentage of solids core segments larger than 5 inches relative to core run length, excluding mechanical breaks
  4. Poisson's Ratio calculated.

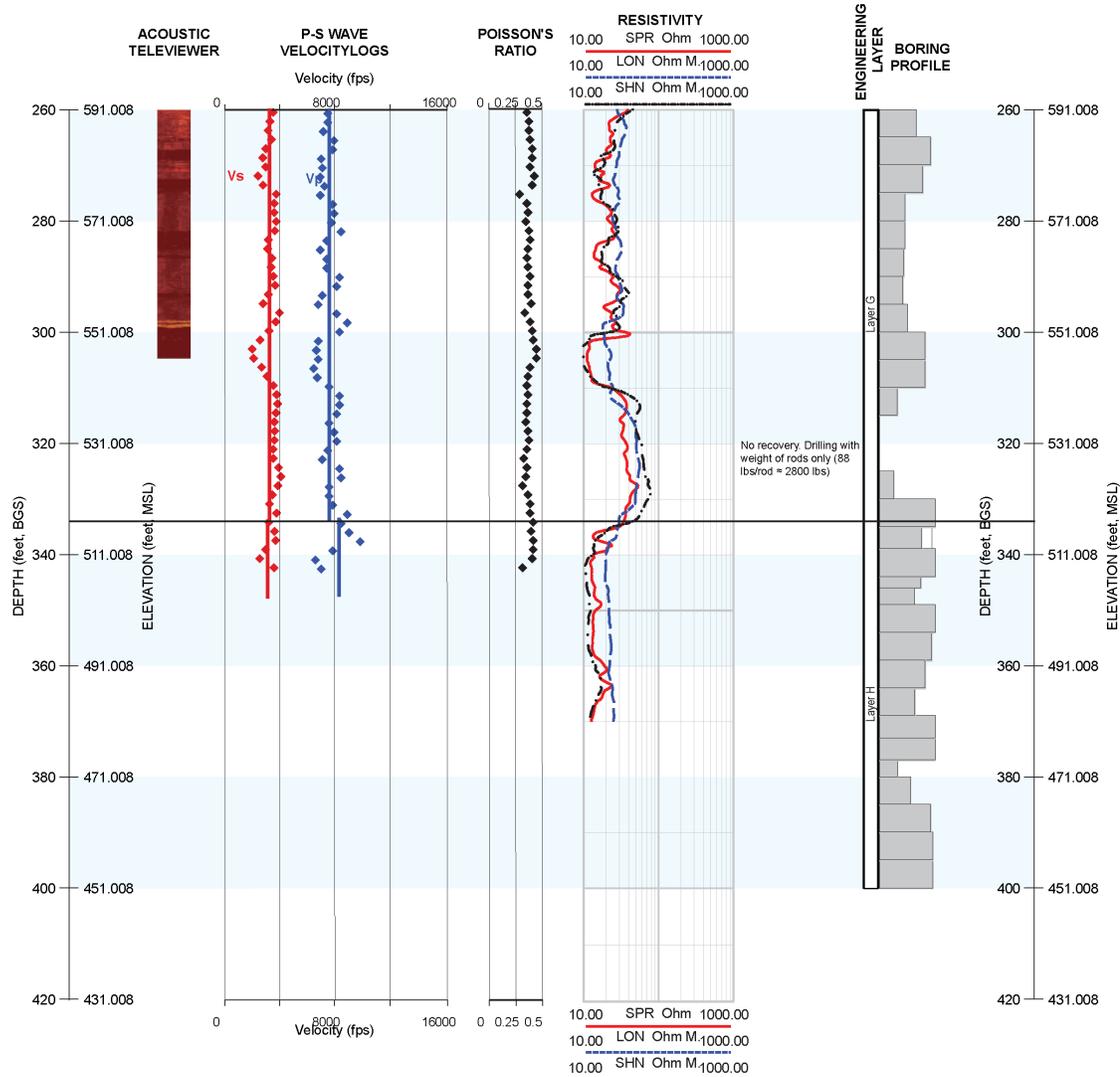

- Notes:
1. Vs = shear wave velocity feet per second (fps), Vp = compressional wave velocity feet per second (fps)
  2. SPT field blows determined with a 140 lbs hammer, 30" drop. SPT is uncorrected
  3. RQD (Rock Quality Designation) - a percentage of solid core segments larger than 5 inches relative to core run length, excluding mechanical breaks
  4. Poisson's Ratio calculated.