


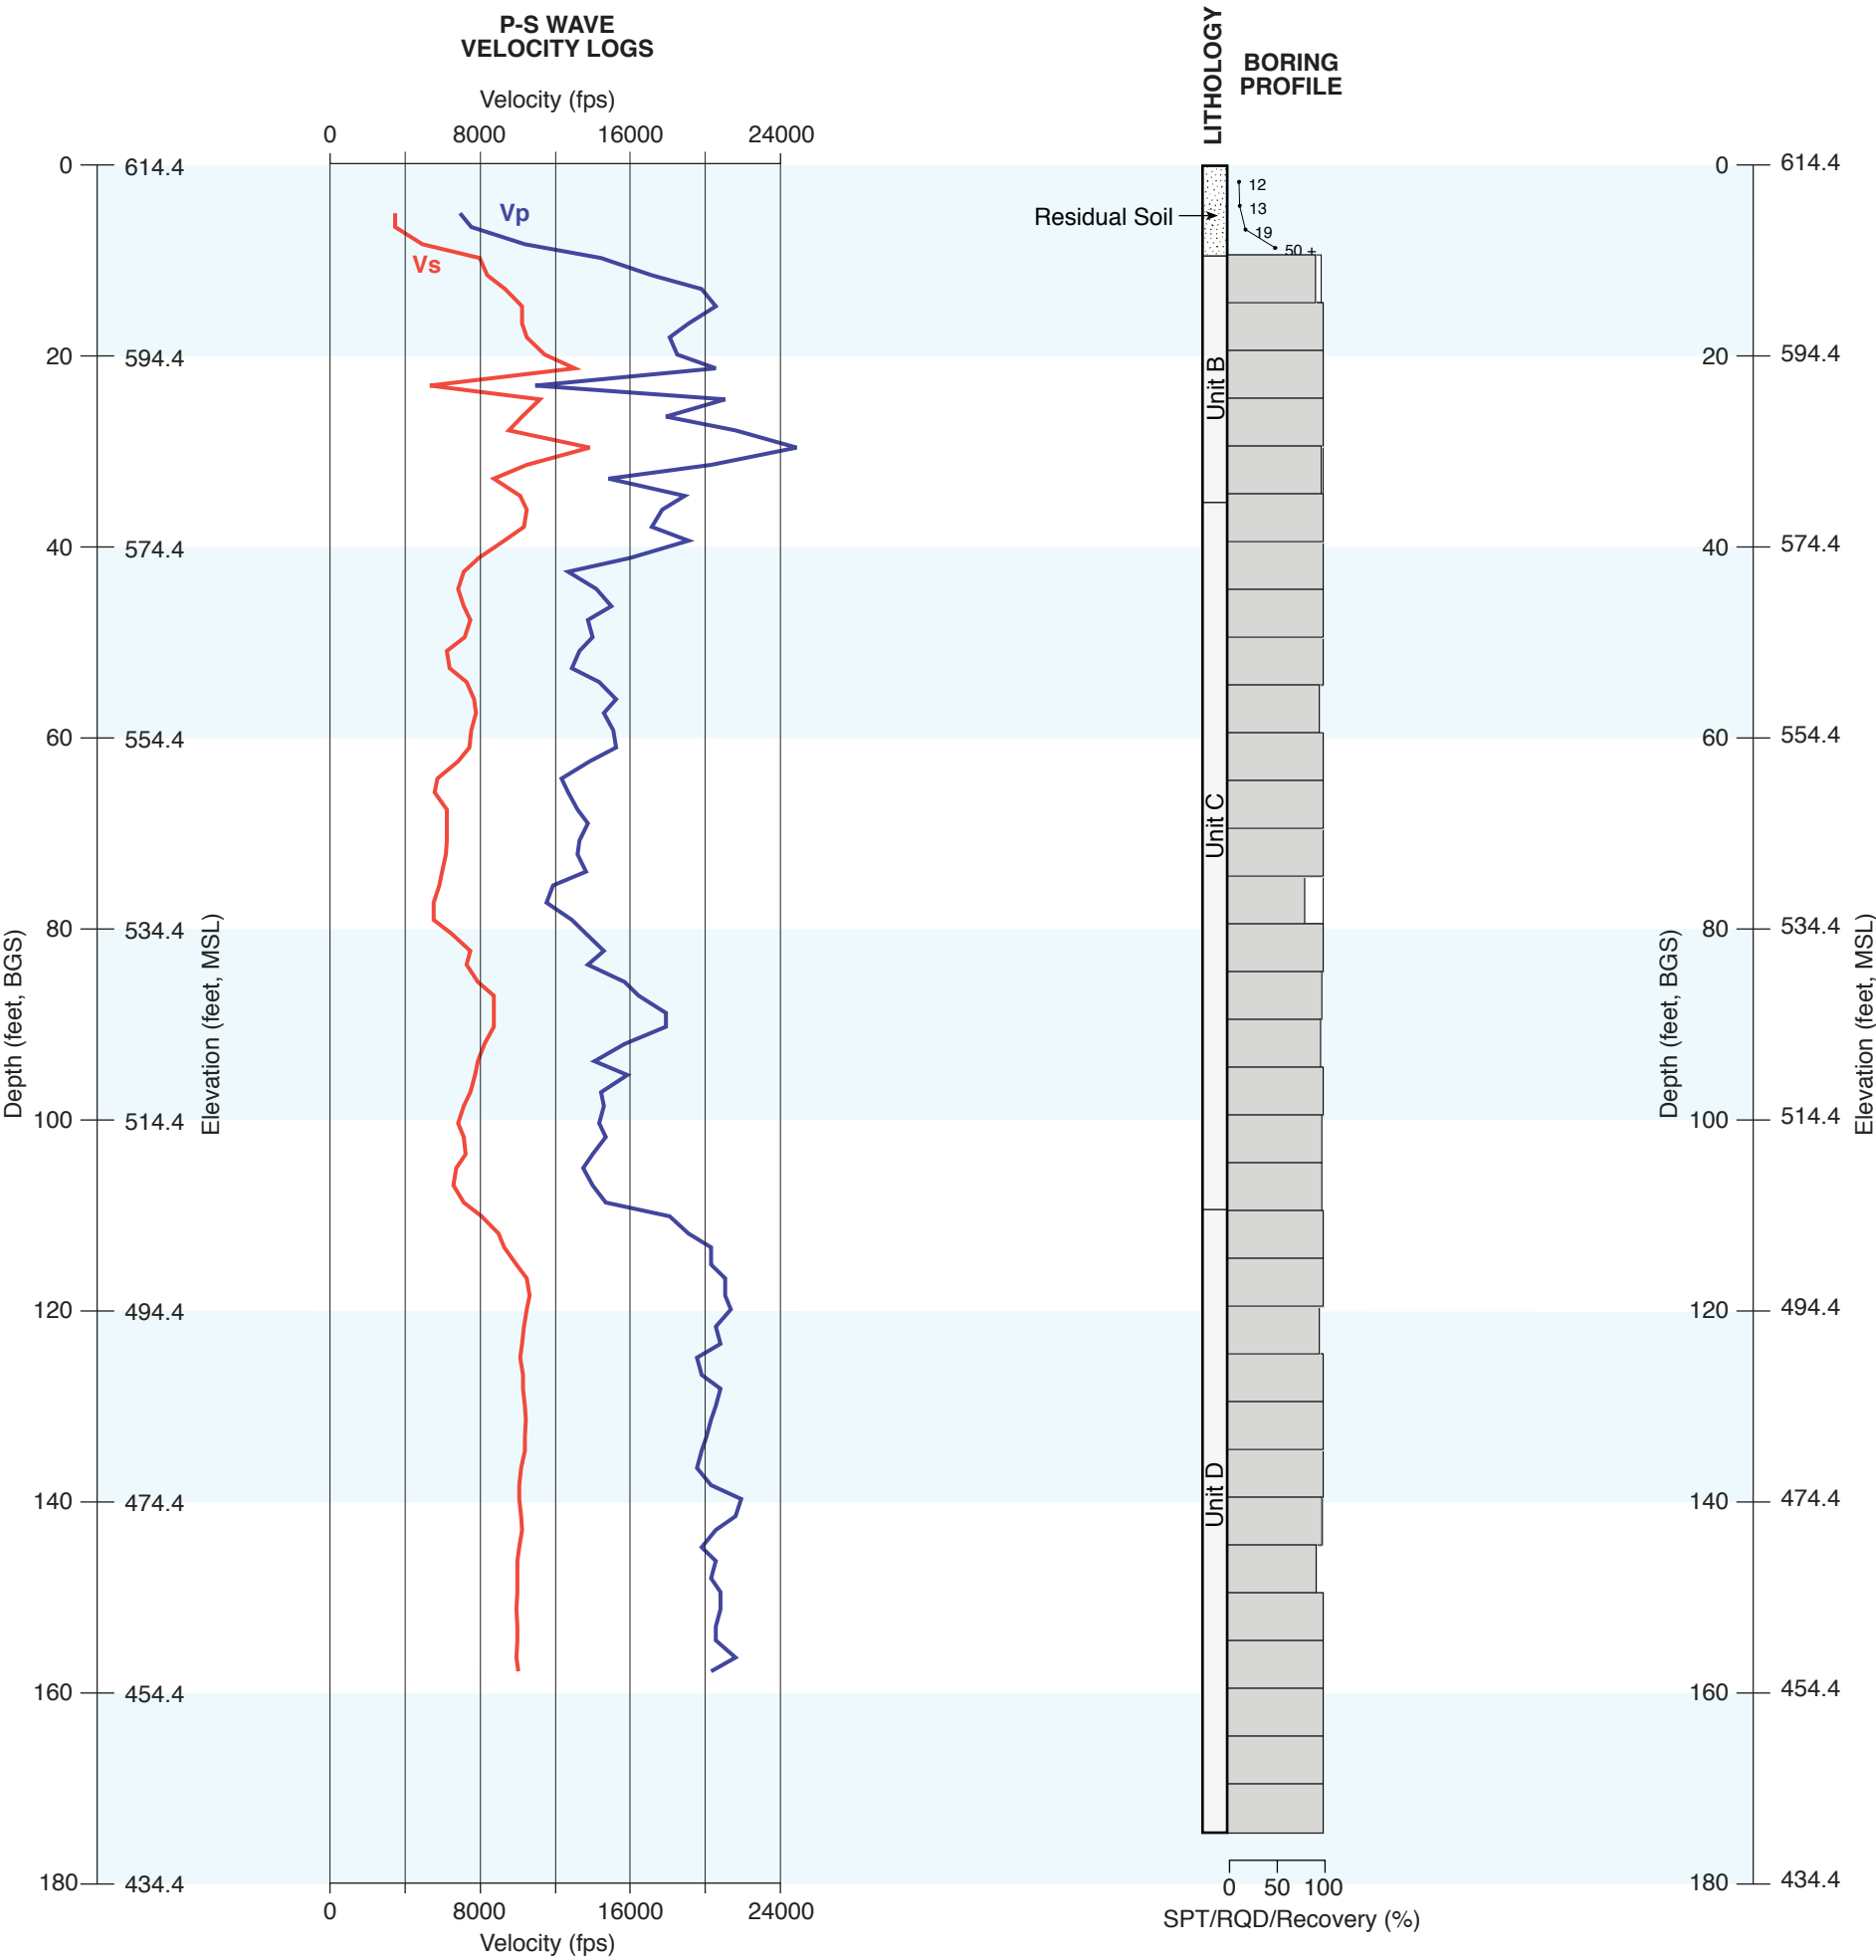

See Figure 2.5-329 for Explanation

- Notes:
1. Vs=shear wave velocity feet per second (fps), Vp=compressional wave velocity feet per second (fps)
 2. SPT field blows determined with a 140 lb. hammer, 30" drop. SPT is uncorrected.
 3. RQD (Rock Quality Designation) - a percentage of solid core segments larger than 0.33 feet relative to core run length, excluding mechanical breaks