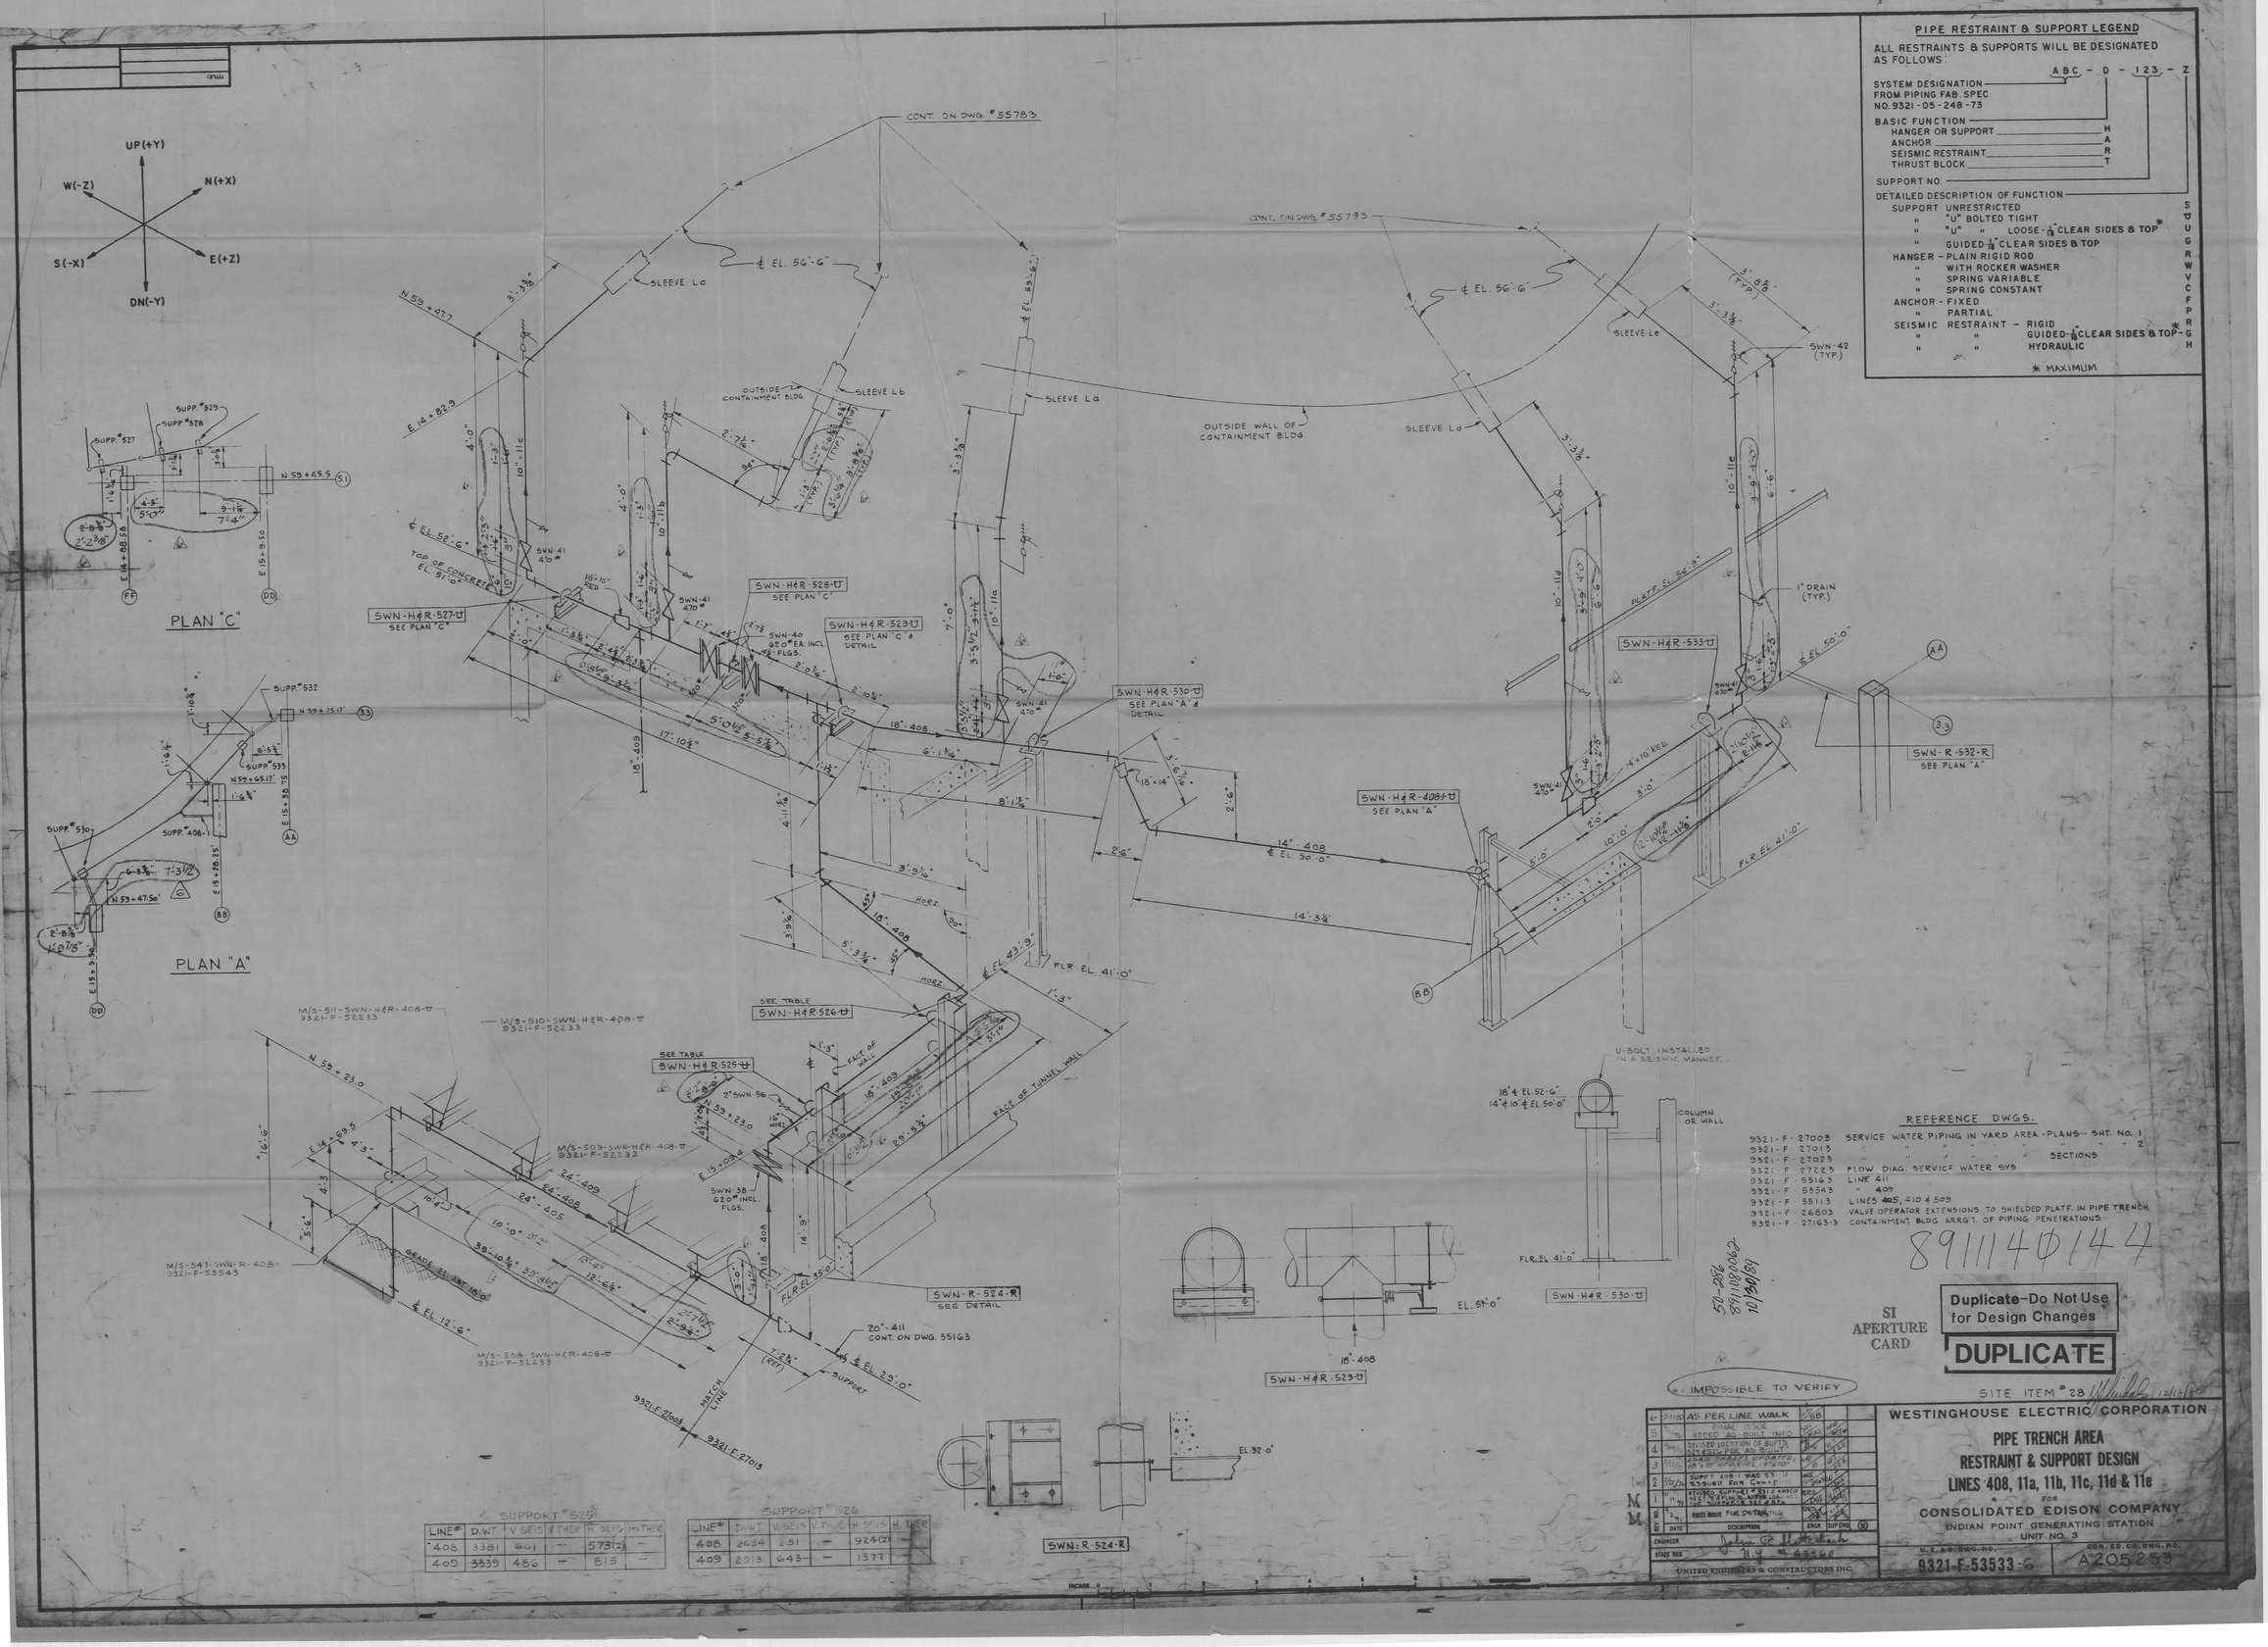

PIPE RESTRAINT & SUPPORT LEGEND

ALL RESTRAINTS & SUPPORTS WILL BE DESIGNATED AS FOLLOWS:

ABC - D - 123 - Z

- SYSTEM DESIGNATION FROM PIPING FAB. SPEC. NO. 9321-05-248-73
- BASIC FUNCTION
  - HANGER OR SUPPORT — H
  - ANCHOR — A
  - SEISMIC RESTRAINT — R
  - THRUST BLOCK — T
- SUPPORT NO.
- DETAILED DESCRIPTION OF FUNCTION
  - SUPPORT UNRESTRICTED — S
  - " "U" BOLTED TIGHT — U
  - " "U" " LOOSE-1/16" CLEAR SIDES & TOP* — U
  - " GUIDED-1/16" CLEAR SIDES & TOP — G
  - HANGER - PLAIN RIGID ROD — R
  - " WITH ROCKER WASHER — W
  - " SPRING VARIABLE — V
  - " SPRING CONSTANT — C
  - ANCHOR - FIXED — F
  - " PARTIAL — P
  - SEISMIC RESTRAINT - RIGID — R
  - " " GUIDED-1/16" CLEAR SIDES & TOP* — G
  - " " HYDRAULIC — H

* MAXIMUM

LINE#	D.WT	V.SEIS	V.THER	H.SEIS	H.THER
408	3381	601	—	573(2)	—
409	3339	486	—	815	—

SUPPORT #525

LINE#	D.WT	V.SEIS	V.THER	H.SEIS	H.THER
408	2634	251	—	924(2)	—
409	2013	643	—	1377	—

SUPPORT #526