

SECURE THE FINAL MAT LAYER WITH BANDING AT INTERVALS NOT TO EXCEED 12" (30.5cm);

OVERLAP MAY BE CONTIGUOUS WITH LAYER (SHOWN) OR MAY BE SEPARATE PIECE



APPLICATION MAY BE FOUR-PIECE (SHOWN) OR CIRCUMFERENCE WRAP METHOD

CORNER PIECE MIN. 2"; WHERE FINAL LAYER IS CIRCUMFERENCE WRAP METHOD CORNER PIECES ARE NOT REQUIRED

APPLY A NOMINAL 1/4" BEAD OF CAULK AT INTERFACE OF CONDUIT & BOX WRAP

TAPE ALL FINAL LAYER SEAMS & EXPOSED EDGES WITH FOIL TAPE

WRAP BOXES WITH 3 LAYERS OF INTERAM E 54 MAT

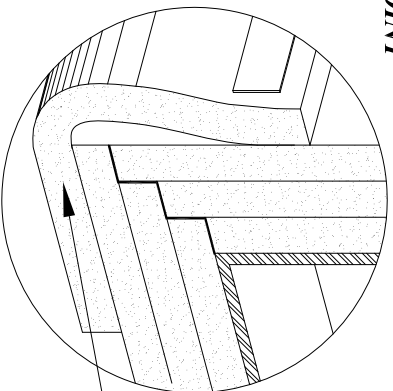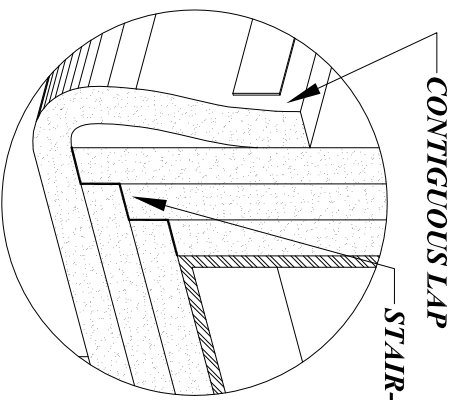

TYPICAL CORNER

ALTERNATE CORNER

