


APPLY A NOMINAL 1/4"
BEAD OF CAULK AT
INTERFACE OF CONDUIT
& BOX WRAP

SECURE THE FINAL
MAT LAYER WITH
BANDING AT
INTERVALS NOT TO
EXCEED 12" (30.5cm);


OVERLAP MAY BE
CONTIGUOUS WITH
LAYER (SHOWN) OR
MAY BE SEPARATE
PIECE

APPLICATION
MAY BE FOUR-
PIECE (SHOWN) OR
CIRCUMFERENCE
WRAP METHOD

CORNER PIECE MIN.
4"; (WHERE FINAL
LAYER IS CIRCUM-
FERENCE WRAP
METHOD CORNER
PIECES ARE NOT
REQUIRED)

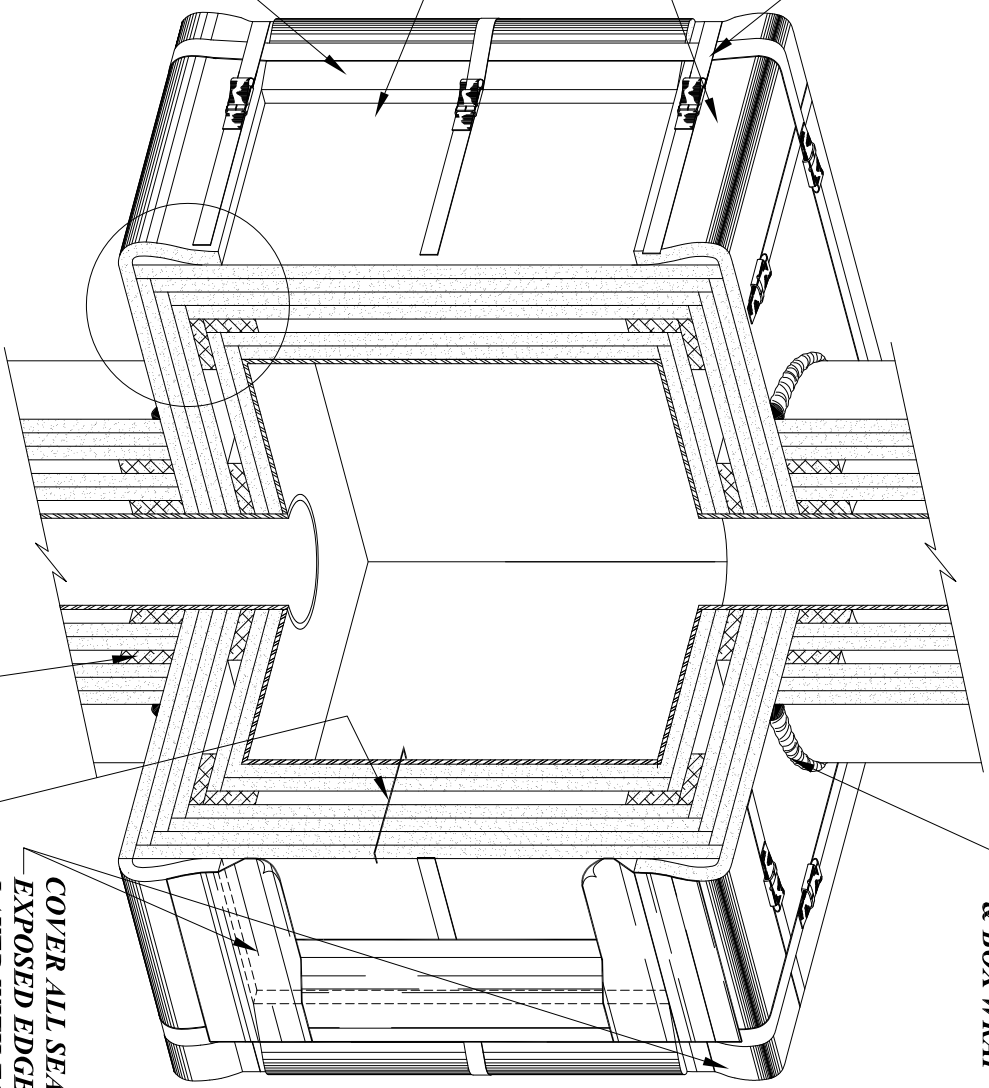


CONTIGUOUS LAP

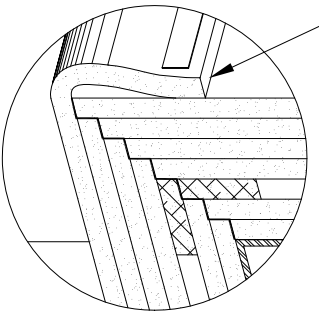

TYPICAL CORNER

STAIR-STEP JOINT

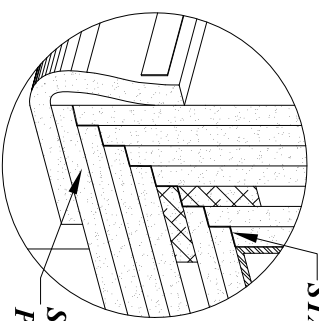

ALTERNATE CORNER

SEPARATE CORNER
PIECE

SPACER (TYP.); 1" TO 3"
WIDE E-54 MAT APPLY
AT INTERVALS NOT TO
EXCEED 15"

6 LAYERS OF
INTERAM E 54 MAT
WITH 1 SPACER

COVER ALL SEAMS AND
EXPOSED EDGES EACH
LAYER WITH FOIL TAPE

WRAP BOXES WITH