

10. EVACUATION ROUTES

Evacuation routes are composed of two distinct components:


- Routing from a Protective Action Zone being evacuated to the boundary of the Evacuation Region and thence out of the Emergency Planning Zone (EPZ).
- Routing of evacuees from the EPZ boundary to the Evacuation Assembly Centers (EACs).


Evacuees should be routed within the EPZ in such a way as to *minimize their exposure to risk*. This primary requirement is met by routing traffic to move *away* from the location of the North Anna Power Station, to the extent practicable, and by delineating evacuation routes that expedite the movement of evacuating vehicles. This latter objective is addressed by developing evacuation routes to achieve a balancing of traffic demand relative to the available highway capacity to the extent possible, subject to satisfying the primary requirement noted above. This is achieved by carefully specifying candidate destinations for all origin centroids where evacuation trips are generated, and applying the TRAD model effectively. See Appendices A-D for further discussion.

The routing of evacuees from the EPZ boundary to the EACs should be responsive to several considerations:

- Minimize the amount of travel outside the EPZ, from the points where these routes cross the EPZ boundary, to the EACs.
- Relate the anticipated volume of traffic destined to the EAC, to the capacity of the EAC facility.

Figure 10-1 presents a map showing the general population EACs. The major evacuation routes for the five counties within the EPZ are presented in Figures 10-2 through 10-4.

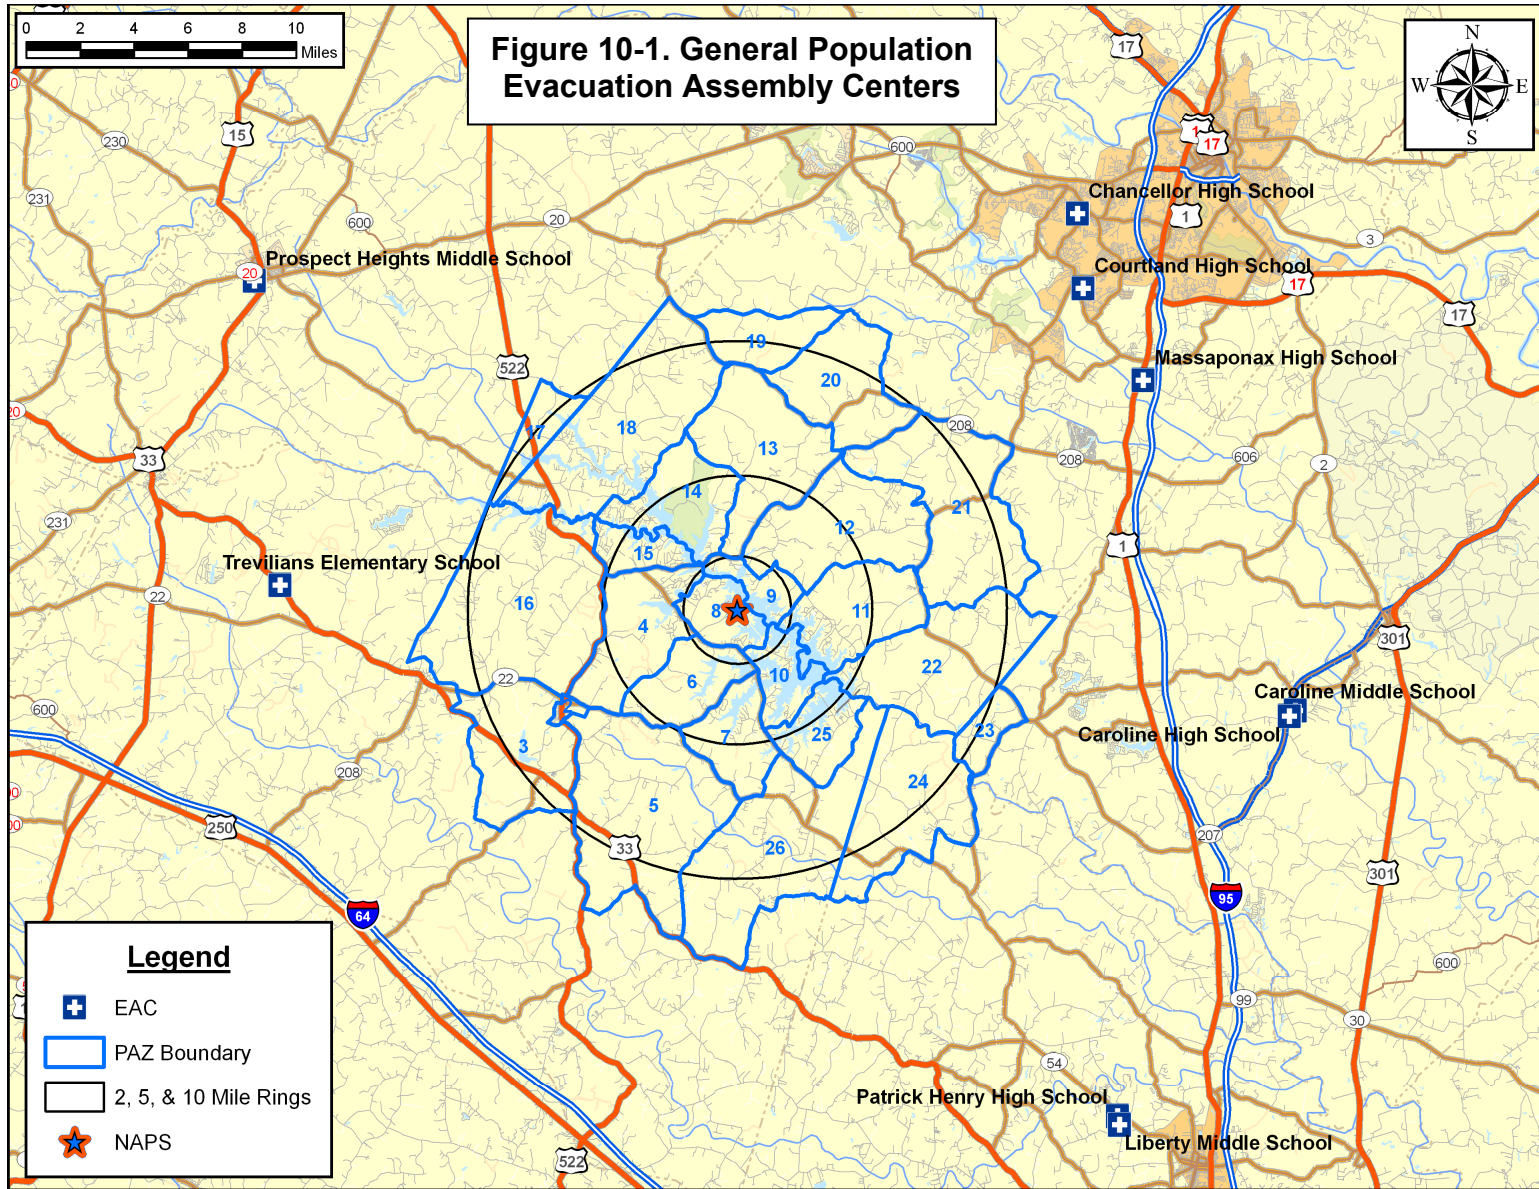

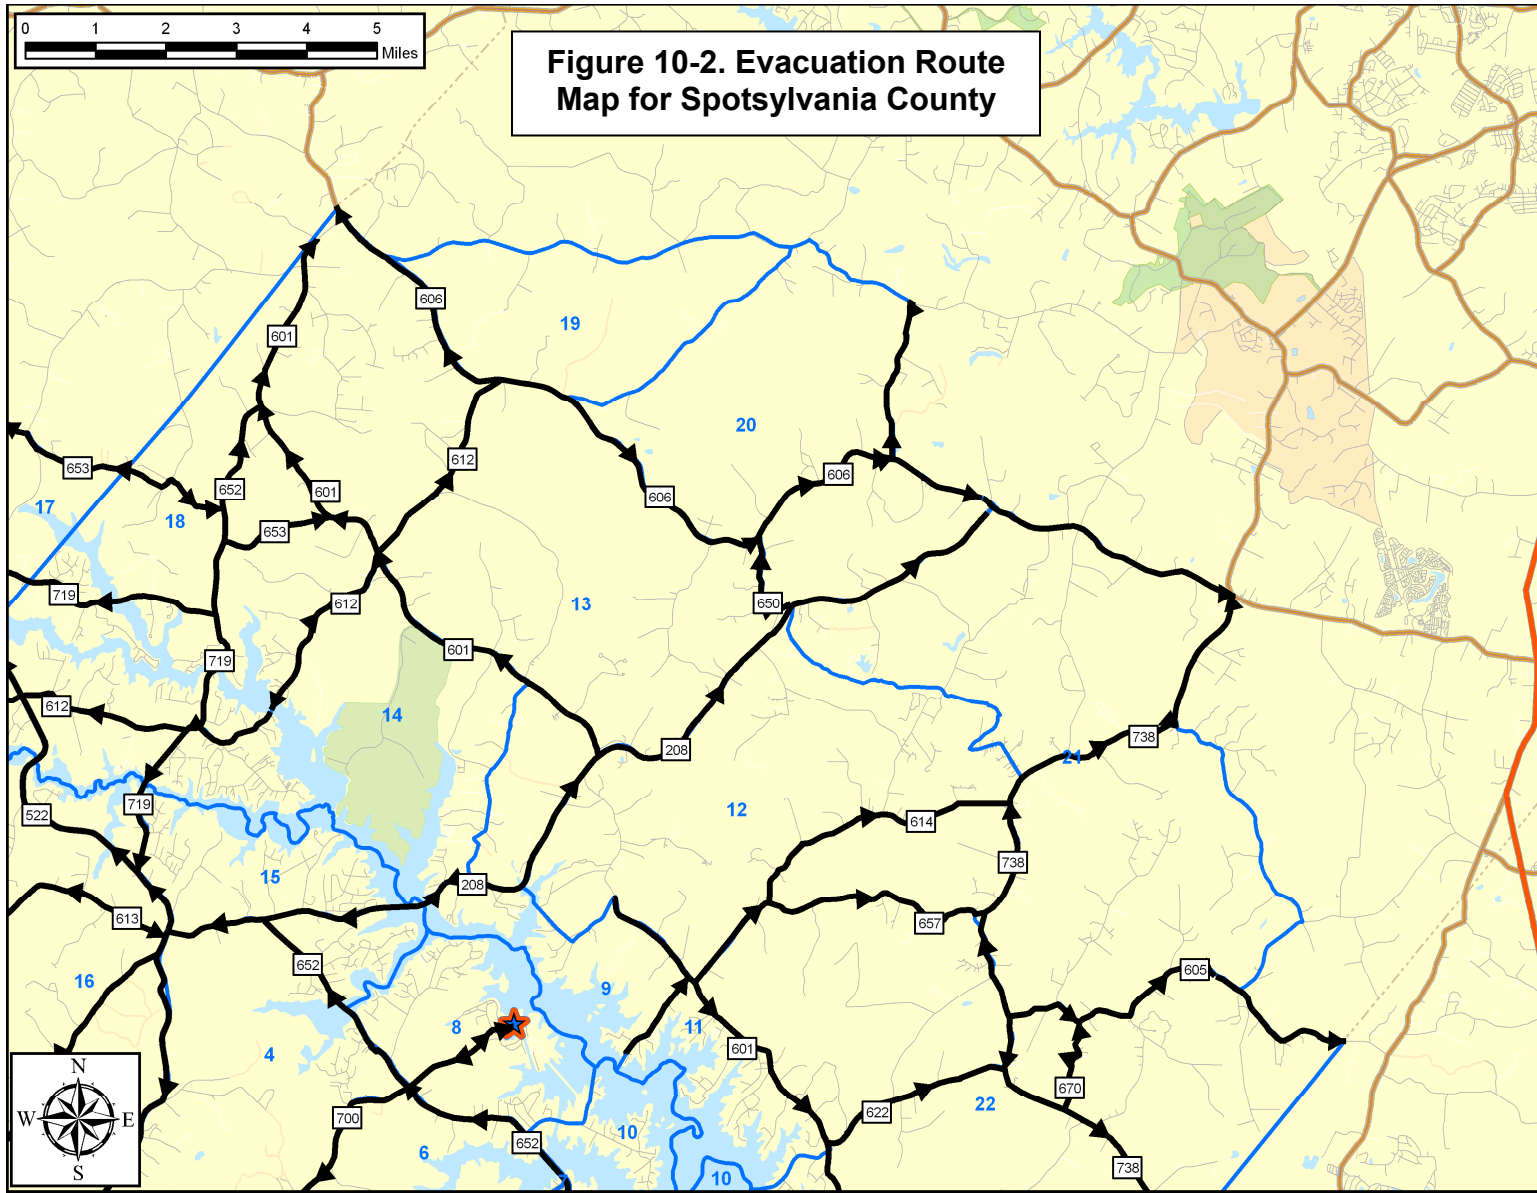

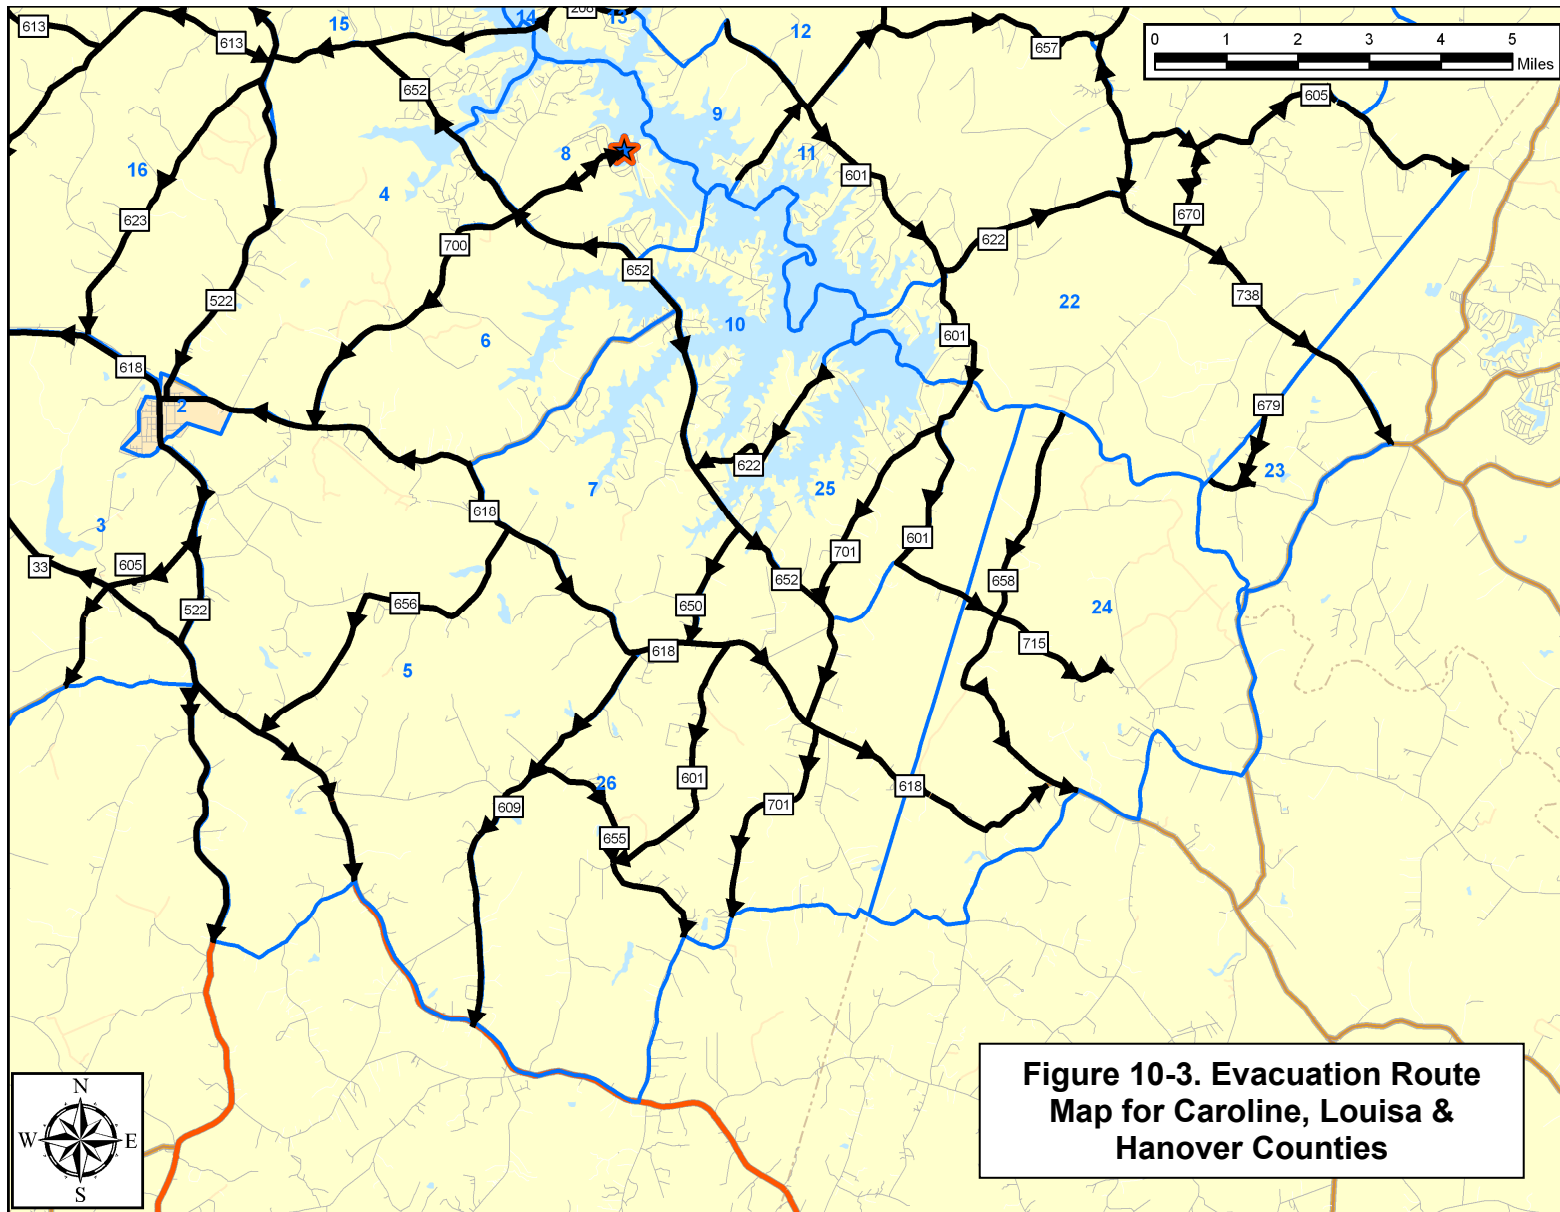


Figure 10-3. Evacuation Route Map for Caroline, Louisa & Hanover Counties

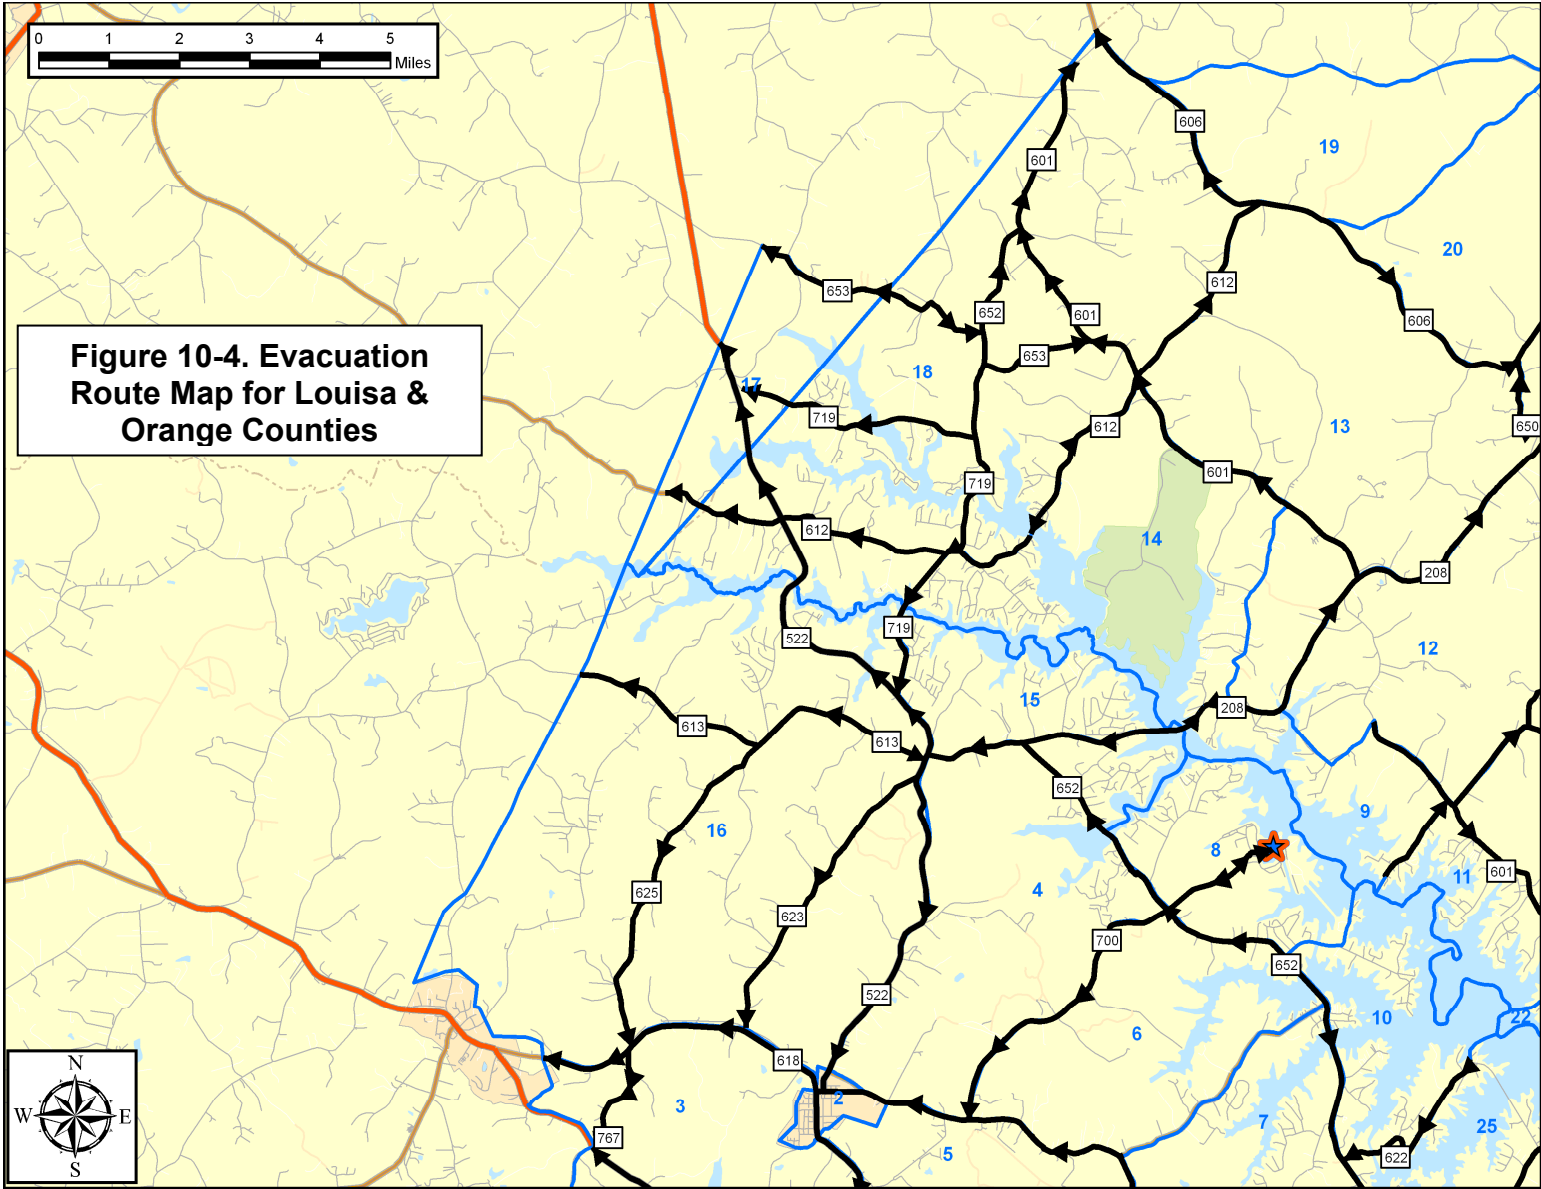


Figure 10-4. Evacuation Route Map for Louisa & Orange Counties

11. SURVEILLANCE OF EVACUATION OPERATIONS

There is a need for surveillance of traffic operations during the evacuation. There is also a need to clear any blockage of roadways arising from accidents or vehicle disablement. Surveillance can take several forms.

1. Traffic control personnel, located at Traffic Control and Access Control points, provide fixed-point surveillance.
2. Ground patrols may be undertaken along well-defined paths to ensure coverage of those highways that serve as major evacuation routes.
3. Aerial surveillance of evacuation operations may also be conducted using helicopter or fixed-wing aircraft.
4. Cellular phone calls (if cellular coverage exists) from motorists may also provide direct field reports of road blockages.

These concurrent surveillance procedures are designed to provide coverage of the entire EPZ as well as the area around its periphery. It is the responsibility of the Counties to support an emergency response system that can receive messages from the field and be in a position to respond to any reported problems in a timely manner. This coverage should quickly identify, and expedite the response to any blockage caused by a disabled vehicle.

Tow Vehicles

In a low-speed traffic environment, any vehicle disablement is likely to arise due to a low-speed collision, mechanical failure or exhausting its fuel supply. In any case, the disabled vehicle can be pushed onto the shoulder, thereby restoring traffic flow. Past experience in other emergencies indicates that evacuees who are leaving an area often perform activities such as pushing a disabled vehicle to the side of the road without prompting.

While the need for tow vehicles is expected to be low under the circumstances described above, it is still prudent to be prepared for such a need. Tow trucks with a supply of gasoline may be deployed at strategic locations within, or just outside, the EPZ. These locations should be selected so that:

- They permit access to key, heavily loaded, evacuation routes.
- Responding tow trucks would most likely travel counter-flow relative to evacuating traffic.

12. CONFIRMATION TIME

It is necessary to confirm that the evacuation process is effective in the sense that the public is complying with the advisory to evacuate. Although the counties within the EPZ may use their own procedures for confirmation, a suggested alternative or complementary approach is presented below.

This procedure employs a stratified random sample and a telephone survey. The size of the sample is dependent on the expected number of households that do not comply with the advisory to evacuate. It is reasonable to assume, for the purpose of estimating sample size that at least 80 percent of the population within the EPZ will comply with the advisory to evacuate. On this basis, an analysis could be undertaken (see Table 12-1) to yield an estimated sample size of approximately 300.

The confirmation process should start at about 3 hours after the Advisory to Evacuate, which is when 90 percent of evacuees have completed their mobilization activities. At this time, virtually all evacuees will have departed on their respective trips and the local telephone system will be largely free of traffic.

As indicated in Table 12-1, approximately 7-1/2 person hours are needed to complete the telephone survey. If six people are assigned to this task, each dialing a different set of telephone exchanges (e.g., each person can be assigned a different set of Protective Action Zones), then the confirmation process will extend over a time frame of about 75 minutes. Thus, the confirmation should be completed well before the evacuated area is cleared. Of course, fewer people would be needed for this survey if the Evacuation Region were only a portion of the EPZ. Use of modern automated computer controlled dialing equipment can significantly reduce the manpower requirements and the time required to undertake this type of confirmation survey. A list of telephone numbers (cellular and land lines) within the EPZ can be purchased for a modest amount from vendors and archived by PAZ for immediate retrieval. There is no conflict between this approach and any visual observation confirmation procedure.

Should the number of telephone responses (i.e., people still at home) exceed 20 percent, then the telephone survey should be repeated after an hour's interval until the confirmation process is completed.

TABLE 12-1
ESTIMATED NUMBER OF TELEPHONE CALLS REQUIRED
FOR CONFIRMATION OF EVACUATION

Problem Definition

Estimate number of phone calls, n, needed to ascertain the proportion, F of households that have not evacuated.

Reference: Burstein, H., Attribute Sampling, McGraw Hill, 1971

Given:

No. of households plus other facilities, N, within the EPZ (est.) = 13,000

Est. proportion, F, of households that have not evacuated = 0.20

Allowable error margin, e: 0.05

Confidence level, α: 0.95 (implies A = 1.96)

Applying Table 10 of cited reference,

$$p = F + e = 0.25; \quad q = 1 - p = 0.75$$

$$n = \frac{A^2 pq + e}{e^2} = 308$$

Finite population correction:

$$n_F = \frac{nN}{n + N - 1} = 301$$

Thus, some 300 telephone calls will confirm that approximately 20 percent of the population has not evacuated. If only 10 percent of the population does not comply with the advisory to evacuate, then the required sample size, $n_F = 212$.

Est. Person Hours to complete 300 telephone calls

Assume: Time to dial using touch-tone (random selection of listed numbers): 30 seconds

Time for 6 rings (no answer): 36 seconds

Time for 4 rings plus short conversation: 60 sec.

Interval between calls: 20 sec.

Person Hours: $300[30+20+0.8(36)+0.2(60)]/3600 = 7.6$

13. RECOMMENDATIONS

The following recommendations are offered:

1. The traffic management plan should be reviewed by state and county emergency planners with local and state law enforcement agencies (See Section 9 and Appendix G). Specifically...
 - The number and locations of Traffic Control Points (TCP) and Access Control Points (ACP) should be reviewed in detail.
 - The indicated resource requirements (personnel, traffic control devices) should be reconciled with current assets.
2. Intelligent Transportation Systems (ITS) such as Dynamic Message Signs (DMS), Highway Advisory Radio (HAR), Automated Traveler Information Systems (ATIS), etc. should be used to facilitate the evacuation process, if available (See Section 9). The placement of additional signage should consider evacuation needs.
3. Counties should implement procedures whereby schools are contacted prior to dispatch of buses from the depots to obtain an accurate count of students needing transportation and the number of buses required (See Section 8).
4. Counties should work with the Department of Transportation to have equipment needed for traffic control duties mobilized in a timely manner should an evacuation be ordered (See Section 9).
5. Counties should establish strategic locations to position tow trucks in the event of a disabled vehicle during the evacuation process (See Section 11) and should encourage gas stations to remain open during the evacuation.
6. Counties should establish a system to confirm that the Advisory to Evacuate is being adhered to (see the approach suggested by KLD in Section 12). Given the large transient presence on Lake Anna, one or more helicopters equipped with loudspeakers should fly over the Lake to alert all transients of the need to immediately evacuate. Police Boats equipped with flares and colored smoke should also be used to warn transients.
7. Examination of the ETE in Appendix J shows that the ETE for 100 percent of the population is significantly longer than for 95 percent of the population. Specifically, the additional time needed for the last 5 percent of the population to evacuate can be as much as 40 percent longer than the time needed to evacuate 95 percent of the population. This non-linearity reflects the fact that these relatively few stragglers require significantly more time to mobilize (i.e. prepare for the evacuation trip) than their neighbors. This leads to two recommendations:
 - The public outreach (information) program should emphasize the need for evacuees to minimize the time needed to prepare to evacuate (secure the home, assemble needed clothes, medicines, etc.).
 - **The decision makers should reference Table J-1C which lists the time needed to evacuate 95 percent of the population, when preparing recommended protective actions.**

APPENDIX A

Glossary of Traffic Engineering Terms

APPENDIX A: GLOSSARY OF TRAFFIC ENGINEERING TERMS

Term	Definition
Link	A network link represents a specific, one-directional section of roadway. A link has both physical (length, number of lanes, topology, etc.) and operational (turn movement percentages, service rate, free-flow speed) characteristics.
Measures of Effectiveness	Statistics describing traffic operations on a roadway network
Node	A network node generally represents an intersection of network links. A node has control characteristics, i.e., the allocation of service time to each approach link.
Origin	A location attached to a network link, within the EPZ or shadow area, where trips are generated at a specified rate in vehicles per hour (vph). These trips enter the roadway system to travel to their respective destinations.
Network	A graphical representation of the geometric topology of a physical roadway system, which is comprised of directional links and nodes.
Prevailing roadway and traffic conditions	Relates to the physical features of the roadway, the nature (e.g., composition) of traffic on the roadway and the ambient conditions (weather, visibility, pavement conditions, etc.)
Service Rate	Maximum rate at which vehicles, executing a specific turn maneuver, can be discharged from a section of roadway at the prevailing conditions, expressed in vehicles per second (vps) or vehicles per hour (vph).
Service Volume	Maximum number of vehicles which can pass over a section of roadway in one direction during a specified time period with operating conditions at a specified Level of Service (The Service Volume at the upper bound of Level of Service, E, equals Capacity). Service Volume is usually expressed as vehicles per hour (vph).
Signal Cycle Length	The total elapsed time to display all signal indications, in sequence. The cycle length is expressed in seconds.
Signal Interval	A single combination of signal indications. The interval duration is expressed in seconds. A signal phase is comprised of a sequence of signal intervals.
Signal Phase	A set of signal indications (and intervals) which services a particular combination of traffic movements on selected approaches to the intersection. The phase duration is expressed in seconds.

Term	Definition
Traffic (Trip) Assignment	A process of assigning traffic to paths of travel in such a way as to satisfy all trip objectives (i.e., the desire of each vehicle to travel from a specified origin in the network to a specified destination) and to optimize some stated objective or combination of objectives. In general, the objective is stated in terms of minimizing a generalized "cost". For example, "cost" may be expressed in terms of travel time.
Traffic Density	The number of vehicles that occupy one lane of a roadway section of specified length at a point in time, expressed as vehicles per mile (vpm).
Traffic (Trip) Distribution	A process for determining the destinations of all traffic generated at the origins. The result often takes the form of a Trip Table, which is a matrix of origin-destination traffic volumes.
Traffic Simulation	A computer model designed to replicate the real-world operation of vehicles on a roadway network, so as to provide statistics describing traffic performance. These statistics are called Measures of Effectiveness.
Traffic Volume	The number of vehicles that pass over a section of roadway in one direction, expressed in vehicles per hour (vph). Where applicable, traffic volume may be stratified by turn movement.
Travel Mode	Distinguishes between private auto, bus, rail, pedestrian and air travel modes.
Trip Table or Origin-Destination Matrix	A rectangular matrix or table, whose entries contain the number of trips generated at each specified origin, during a specified time period, that are attracted to (and travel toward) each of its specified destinations. These values are expressed in vehicles per hour (vph) or in vehicles.
Turning Capacity	The capacity associated with that component of the traffic stream which executes a specified turn maneuver from an approach at an intersection.

APPENDIX B

Traffic Assignment Model

APPENDIX B: TRAFFIC ASSIGNMENT MODEL

This section describes the integrated trip assignment and distribution model named TRAD that is expressly designed for use in analyzing evacuation scenarios. This model employs equilibrium traffic assignment principles and is one of the models of the IDYNEV System.

To apply TRAD, the analyst must specify the highway network, link capacity information, the volume of traffic generated at all origin centroids, a set of accessible candidate destination nodes on the periphery of the EPZ for each origin, and the capacity (i.e., "attraction") of each destination node. TRAD calculates the optimal trip distribution and the optimal trip assignment (i.e., routing) of the traffic generated at each origin node, traveling to the associated set of candidate destination nodes, so as to minimize evacuee travel times.

Overview of Integrated Distribution and Assignment Model

The underlying premise is that the selection of destinations and routes is intrinsically coupled in an evacuation scenario. That is, people in vehicles seek to travel out of an area of potential risk as rapidly as possible by selecting the "best" route. The model is designed to identify these "best" routes in a manner that distributes vehicles from origins to destinations and routes them over the highway network, in a consistent and optimal manner.

The approach we adopt is to extend the basic equilibrium assignment methodology to embrace the distribution process, as well. That is, the selection of destination nodes by travelers from each origin node, and the selection of the connecting paths of travel, are both determined by the integrated model. This determination is subject to specified capacity constraints, so as to satisfy the stated objective function. This objective function is the statement of the User Optimization Principle by Wardrop¹.

To accomplish this integration, we leave the equilibrium assignment model intact, changing only the form of the objective function. It will also be necessary to create a "fictional" augmentation of the highway network. This augmentation will consist of Pseudo-Links and Pseudo-Nodes, so configured as to embed an equilibrium Distribution Model within the fabric of the Assignment Model.

¹ Wardrop, J.G., 1952. Some Theoretical Aspects of Road Traffic Research, *Proceedings, Institute of Civil Engineers*, Part II, Vol. 1, pp. 325-378.

Specification of TRAD Model Inputs

The user must specify, for each origin node, the average hourly traffic volume generated, as well as a set of candidate accessible destinations. A destination is "accessible" to traffic originating at an origin node if there is at least one path connecting the origin to the destination node. There must be at least one destination node specified for each origin centroid. The number of trips generated at the origin node, which are distributed to each specified, accessible destination node within this set, is determined by the model in a way as to satisfy the network-wide objective function (Wardrop's Principle).

The user must also specify the total number of trips which can be accommodated by each destination node. This value reflects the capacities of the road(s) immediately servicing the destination node. We call this number of trips, the "attraction" of the destination node, consistent with conventional practice. Clearly, we require that the total number of trips traveling to a destination, j , from all origin nodes, i , cannot exceed the attraction of destination node, j . By summing over all destination nodes, this constraint also states that the total trips generated at all origin nodes must not exceed the total capacity to accommodate these trips at all of the specified destinations.

In summary, the user must specify the total trips generated at each of the origin nodes, the maximum number of trips that can be accommodated by each of the specified destination nodes and the highway network attributes which include the traffic control tactics. The TRAD model includes a function which expresses travel time on each network link in terms of traffic volume and link capacity. This function drives the underlying trip distribution and trip assignment decision-making process. Thus, the TRAD model satisfies the objectives of evacuees to select destination nodes and travel paths to minimize evacuation travel time. As such, this integrated model is classified as a behavioral model.

At the outset, it may appear that we have an intractable problem:

- If TRAD retains the basic assignment algorithm, it must be provided a Trip Table as input.
- On the other hand, if the distribution model is embedded within the assignment model, rather than preceding it, a Trip Table is not available as input.

The resolution of this problem is as follows:

1. We construct an "augmentation" network that allows the user to specify only the volume for each origin node. The allocation of trips from the origin node to each candidate destination node, is not specified and will be determined internally by the model.
2. We construct pseudo-links which enforce the specified values of attraction, A_j , for all destination nodes, j , by suitably calibrating the relationship of the travel time vs. volume and capacity.

This augmented network is comprised of three subnetworks:

1. The highway subnetwork, which consists of "Class I" Links and Nodes.
2. A subnetwork of "Class II" Pseudo-Links which acts as an interface between the highway subnetwork and the network augmentation.
3. The subnetwork of "Class III" Pseudo-Links and Nodes which comprises the network augmentation described above.

The need for these Class II links will become clear later. The classifications are described below:

Class I Links and Nodes

These links and nodes represent the physical highway network: sections of highway and intersections. Trips generated at each Origin [Centroid] Node are assigned to a specified Class I link via a "connector" link. These connector links are transparent to the user and offer no impedance to the traveler; they represent the aggregation of local streets which service the centroidal generated trips and feed them onto the highway network. The real-world destination nodes are part of this network. The immediate approaches to these destination nodes are Class I links.

Class II Links

These pseudo-links are constructed so as to connect each specified destination node with its Class III Pseudo-Node (P-N) counterpart on a one-to-one basis. The capacities of these Class II links are set equal to the capacities at their respective destination nodes.

Class III Links and Nodes

Class III links and nodes form the augmentation to the basic network. These Pseudo-Links provide paths from the Class II links servicing traffic traveling from the specified [real] destination nodes, to the Super-Nodes which represent the user-specified set of destination nodes associated with each origin node.

Each Class of links provides a different function:

- Class I links represent the physical highway network. As such, each link has a finite capacity, a finite length and an estimated travel time for free-flowing vehicles. The nodes generally represent intersections, interchanges and, possibly, changes in link geometry. The topology of the Class I network represents that of the physical highway system.
- The Class II links represent the interface between the real highway subnetwork and the augmentation subnetwork. These pseudo-links are needed to represent the specified "attractions" of each destination node, i.e.,

the maximum number of vehicles that can be accommodated by each destination node. Instead of explicitly assigning a capacity limitation to the destination nodes, we assign this capacity limitation of the Class II Pseudo-Links. This approach is much more suitable, computationally.

- The topology of the network augmentation (i.e., Class III Links and Nodes) is designed so that all traffic from an origin node can only travel to the single “Super-Node” by flowing through its set of real destination nodes, thence along the links of the augmented network.

The Class II Pseudo-Links and the network augmentation of Class III Pseudo-Nodes and Links represent logical constructs of fictitious links created internally by the model, that allows the user to specify the identity of all destination nodes in each origin-based set, without specifying the distribution of traffic volumes from the origin to each destination node in that set.

Calculation of Capacities and Impedances

Each class of links exhibits different properties. Specifically, the relationship between travel impedance (which is expressed in terms of travel time) and both volume and capacity will differ:

- For Class I links, the capacity represents the physical limitation of the highway sections. Travel impedance is functionally expressed by relating travel time with respect to the traffic volume-link capacity relationship.
- For Class II links, link capacity represents the maximum number of vehicles that can be accommodated at the [real] destination nodes that form the upstream nodes of each Class II link. Since Class II links are Pseudo-Links, there should be virtually no difference in impedance to traffic along Class II links when the assigned traffic volume on these links is below their respective capacities. That is, the assignment of traffic should not be influenced by differences in travel impedance on those Class II links where the assigned volumes do not exceed their respective capacities.
- For Class III links, both capacity and impedance have no meaning. Since the Class II links limit the number of vehicles entering the Class III subnetwork at all entry points (i.e., at the Class II Pseudo-Nodes) and since all these links are Pseudo-Links, it follows that the Class III network is, by definition, an uncapacitated network.

Specification of the Objective Function

It is computationally convenient to be able to specify a single impedance (or "cost") function relating the travel time on a link, to its capacity and assigned traffic volume, for all classes of links. To achieve this, we will adopt the following form based on the original "BPR Formula²":

$$T = T_o \{ \alpha [1 + a_1 (\frac{V}{C})^{b_1}] + \beta [1 + a_2 (\frac{V}{C})^{b_2}] \} + I$$

Where, as for the present traffic assignment model in TRAD,

T	=	Link travel time, sec.
T _o	=	Unimpeded link travel time, sec.
V	=	Traffic volume on the link, veh/hr
C	=	Link capacity, veh/hr
a _i , b _i	=	Calibration parameters
α, β	=	Coefficients defined below
I	=	Impedance term, expressed in seconds, which could represent turning penalties or any other factor which is justified in the user's opinion

The assignment of coefficients varies according to the Class in which a link belongs:

Class	α	β	T _o
I	1	0	L/U _f
II	0	1	W
III	0	0	1

Here, L is a highway link length and U_f is the free-flow speed of traffic on a highway link. The values of a₁ and b₁, which are applicable only for Class I links, are based on experimental data:

$$a_1 = 0.8 \qquad b_1 = 5.0$$

The values of a₂ and b₂, which are applicable for each Class II link, are based upon the absolute requirement that the upstream destination node can service no more traffic than the user-specified value of the maximum "attraction". In addition, these parameters must be chosen so that these Pseudo-Links all offer the same impedance to traffic when their assigned volumes are less than their respective specified maximum attractions.

The weighting factor, W, is computed internally by the software.

² Bureau of Public Roads (1964). Traffic Assignment Manual. U.S. Dept. of Commerce, Urban Planning Division, Washington D.C.

Of course, it is still possible for the assignment algorithm within TRAD to distribute more traffic to a destination node than that node can accommodate. For emergency planning purposes, this is a desirable model feature. Such a result will be flagged by the model to alert the user to the fact that some factor is strongly motivating travelers to move to that destination node, despite its capacity limitations. This factor can take many forms: inadequate highway capacity to other destinations, improper specification of candidate destinations for some of the origins, or some other design inadequacy. The planner can respond by modifying the control tactics, changing the origin-destination distribution pattern, providing more capacity at the overloaded destinations, etc.

APPENDIX C

Traffic Simulation Model: PC-DYNEV

APPENDIX C: TRAFFIC SIMULATION MODEL: PC-DYNEV

A model, named PC-DYNEV, is an adaptation of the TRAFLO Level II simulation model, developed by KLD for the Federal Highway Administration (FHWA). Extensions in scope were introduced to expand the model's domain of application to include all types of highway facilities, to represent the evacuation traffic environment and to increase its computational efficiency. This model produces the extensive set of output Measures of Effectiveness (MOE) shown in Table C-1.

The traffic stream is described internally in the form of statistical flow profiles. These profiles, expressed internally as statistical histograms, describe the platoon structure of the traffic stream on each network link. The simulation logic identifies five types of histograms:

- The ENTRY histogram which describes the platoon flow at the upstream end of the subject link. This histogram is simply an aggregation of the appropriate OUTPUT turn-movement-specific histograms of all feeder links.
- The INPUT histograms which describe the platoon flow pattern arriving at the stop line. These are obtained by first disaggregating the ENTRY histogram into turn-movement-specific component ENTRY histograms. Each such component is modified to account for the platoon dispersion which results as traffic traverses the link. The resulting INPUT histograms reflect the specified turn percentages for the subject link.
- The SERVICE histogram which describes the service rates for each turn movement. These service rates reflect the type of control device servicing traffic on this approach; if it is a signal, then this histogram reflects the specified movement-specific signal phasing. A separate model estimates service rates for each turn movement, given that the control is GO.

These data are provided for each network link and are also aggregated over the entire network.

- The QUEUE histograms that describe the time-varying ebb and growth of the queue formation at the stop line. These histograms are derived from the interaction of the respective IN histograms with the SERVICE histograms.
- The OUT histograms that describe the pattern of traffic discharging from the subject link. Each of the IN histograms is transformed into an OUT histogram by the control applied to the subject link. Each of these OUT histograms is added into the (aggregate) ENTRY histogram of its receiving link. This approach provides the model with the ability to identify the characteristics of each turn-movement-specific component of the traffic stream. Each component is serviced at a different saturation flow rate as is the case in the real world. The logic recognizes when one component of the traffic flow encounters saturation conditions even if the others do not.

Algorithms provide estimates of delay and stops reflecting the interaction of the IN histograms with the SERVICE histograms. The logic also provides for properly treating spillback conditions reflecting queues extending from its host link, into its upstream feeder links.

A valuable feature is the ability to internally generate functions that relate mean speed to density on each link, given user-specified estimates of free-flow speed and saturation service rates for each link. Such relationships are essential in order to simulate traffic operations on freeways and rural roads, where signal control does not exist or where its effect is not the dominant factor in impeding traffic flow.

All traffic simulation models are data-intensive. Table C-2 outlines the input data elements. This input describes:

- Topology of the roadway system
- Geometrics of each roadway component
- Channelization of traffic on each roadway component
- Motorist behavior that, in aggregate, determines the operational performance of vehicles in the system
- Specification of the traffic control devices and their operational characteristics
- Traffic volumes entering and leaving the roadway system
- Traffic composition.

To provide an efficient framework for defining these specifications, the physical environment is represented as a network. The unidirectional links of the network generally represent roadway components: either urban streets or freeway segments. The nodes of the network generally represent urban intersections or points along the freeway where a geometric property changes (e.g. a lane drop, change in grade or ramp).

Figure C-1 is an example of a small network representation. The freeway is defined by the sequence of links, (20,21), (21,22), and (22,23). Links (8001, 19) and (3, 8011) are Entry and Exit links, respectively. An arterial extends from node 3 to node 19 and is partially subsumed within a grid network. Note that links (21,22) and (17,19) are grade-separated.

Table C-1. Measures of Effectiveness Output by PC-DYNEV	
Measure	Units
Travel	Vehicle-Miles and Vehicle-Trips
Moving Time	Vehicle-Minutes
Delay Time	Vehicle-Minutes
Total Travel Time	Vehicle-Minutes
Efficiency: Moving Time/Total Travel Time	Percent
Mean Travel Time per Vehicle	Seconds
Mean Delay per Vehicle	Seconds
Mean Delay per Vehicle-Mile	Seconds/Mile
Mean Speed	Miles/Hour
Mean Occupancy	Vehicles
Mean Saturation	Percent
Vehicle Stops	Percent

Table C-2. Input Requirements for the PC-DYNEV Model

GEOMETRICS

- Links defined by upstream downstream node numbers
- Links lengths
- Number of lanes (up to 6)
- Turn pockets
- Grade
- Network topology defined in terms of target nodes for each receiving link

TRAFFIC VOLUMES

- On all entry links and sink/source nodes stratified by vehicle type: auto, car pool, bus, truck
- Link-specific turn movements

TRAFFIC CONTROL SPECIFICATIONS

- Traffic signals: link-specific, turn movement specific
- Signal control treated as fixed time
- Stop and Yield signs
- Right-turn-on-red (RTOR)
- Route diversion specifications
- Turn restrictions
- Lane control (e.g. lane closure, movement-specific)

DRIVER'S AND OPERATIONAL CHARACTERISTICS

- Drivers (vehicle-specific) response mechanisms: free-flow speed, aggressiveness, discharge headway
- Link-specific mean speed for free-flowing (unimpeded) traffic
- Vehicle-type operational characteristics: acceleration, deceleration
- Such factors as bus route designation, bus station location, dwell time, headway, etc.

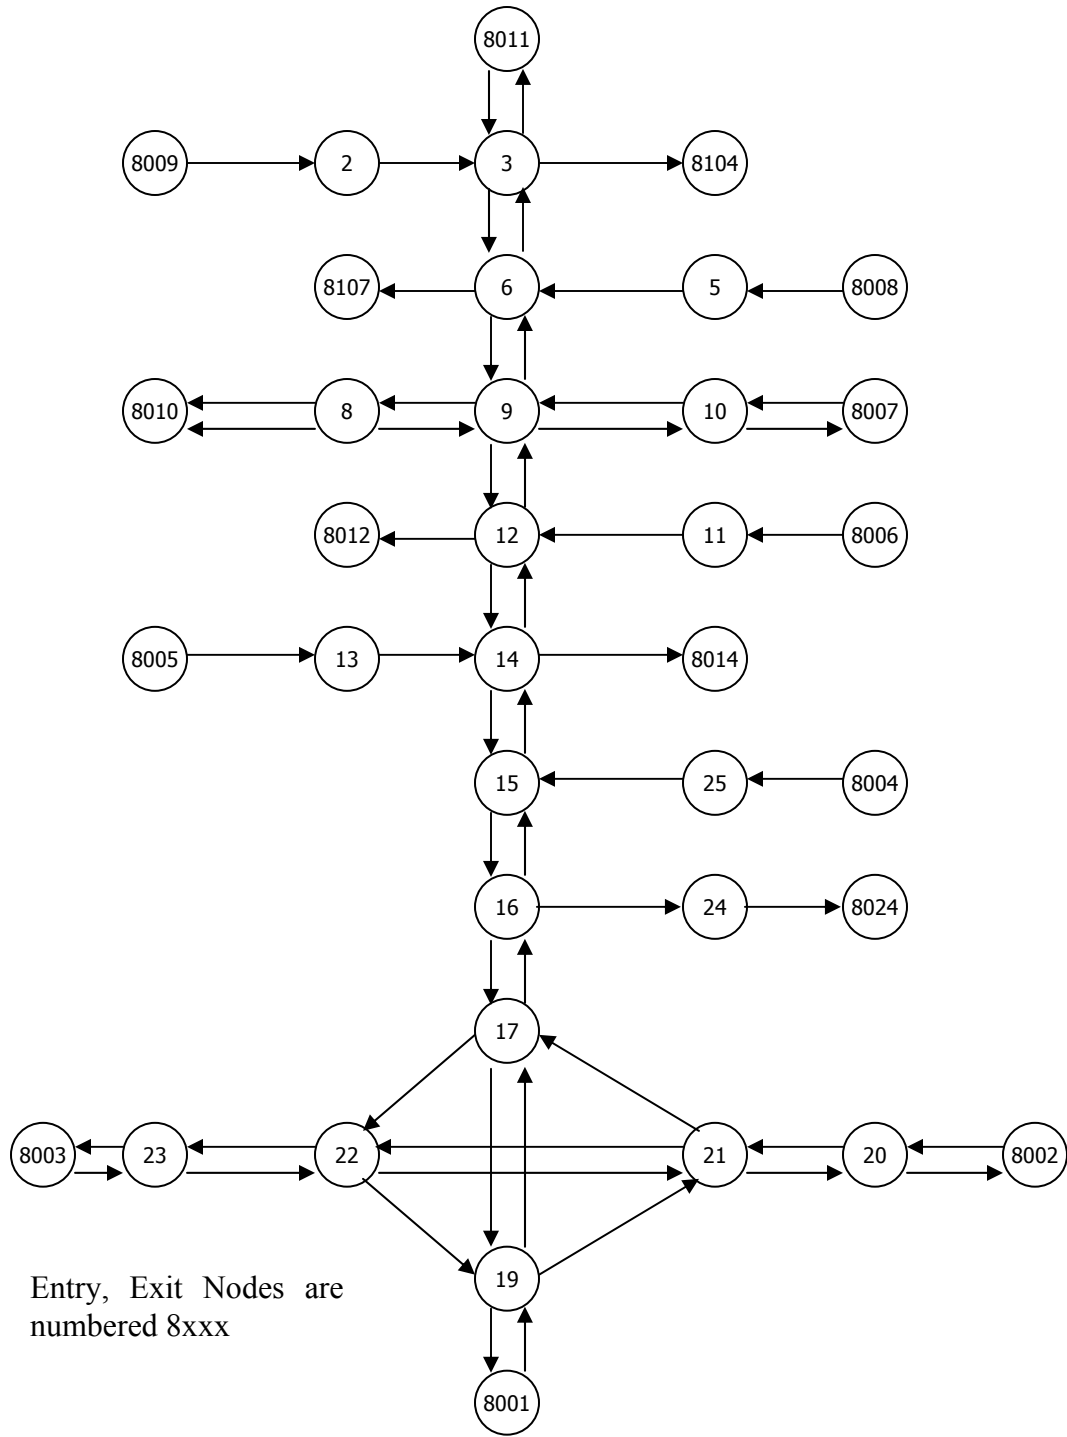


Figure C-1: Representative Analysis Network

APPENDIX D

Detailed Description of Study Procedure

APPENDIX D: DETAILED DESCRIPTION OF STUDY PROCEDURE

This appendix describes the activities that were performed to compute accurate Evacuation Time Estimates (ETE). The individual steps of this effort are represented as a flow diagram in Figure D-1. Each numbered step in the description that follows corresponds to the numbered element in this flow diagram.

Step 1.

The first activity is to obtain data defining the spatial distribution and demographic characteristics of the population within the Emergency Planning Zone (EPZ). These data were obtained from Geographical Information Systems (GIS) shapefiles of county address points provided by the Virginia Department of Emergency Management and from the results of a telephone survey conducted within the EPZ. Transient population data and employment data were obtained from local sources of information and County Emergency Management Offices.

Step 2.

The next activity is to examine large-scale maps of the EPZ in both hard-copy form and using GIS software. These maps were used to identify the analysis highway network and the access roads from each residential and employment development to the adjoining elements of this network. This information is used to plan a field survey of the highway system and later, to assign generated evacuation trips to the correct destinations at the periphery of the EPZ.

Step 3.

The next step is to conduct a physical survey of the roadway system. The purpose of this survey is to determine the geometric properties of the highway elements, the channelization of lanes on each section of roadway, whether there are any turn restrictions or special treatment of traffic at intersections, the type and functioning of traffic control devices and to make the necessary observations needed to estimate realistic values of roadway capacity.

Step 4.

With this information, develop the evacuation network representation of the physical roadway system.

Step 5.

With the network drawn, proceed to estimate the capacities of each link and to locate the origin centroids where trips would be generated during the evacuation process.

Step 6.

With this information at hand, the data were entered into the computer to create the input stream for the TRaffic Assignment and Distribution (TRAD) model. This model was designed to be compatible with the PC-DYNEV traffic simulation model used later in the

project; the input stream required for one model is entirely compatible with the input stream required by the other. Using a software system developed by KLD named UNITES, the data entry activity is performed interactively directly on the computer.

Step 7.

The TRAD model contains software that performs diagnostic testing of the input stream. These assist the user in identifying and correcting errors in the input stream.

Step 8.

After creating the input stream, execute the TRAD model to compute evacuating traffic routing patterns consistent with the guidelines of NUREG 0654, Appendix 4. The TRAD model also provides estimates of traffic loading on each highway link as well as rough estimates of operational performance.

Step 9.

Critically examine the statistics produced by the TRAD model. This is a labor-intensive activity, requiring the direct participation of skilled engineers who possess the necessary practical experience to interpret the results and to determine the causes of any problems reflected in the results.

Essentially, the approach is to identify those "hot spots" in the network that represent locations where congested conditions are pronounced and to identify the cause of this congestion. This cause can take many forms, either as excess demand due to improper routing, as a shortfall of capacity, or as a quantitative error in the way the physical system was represented in the input stream. This examination leads to one of two conclusions:

- The results are as satisfactory as could be expected at this stage of the analysis process; or
- The input stream must be modified accordingly.

This decision requires, of course, the application of the user's judgment based upon the results obtained in previous applications of the TRAD model and a comparison of the results of this last case with the previous ones. If the results are satisfactory in the opinion of the user, then the process continues with Step 12. Otherwise, proceed to Step 10.

Step 10.

There are many "treatments" available to the user in resolving such problems. These treatments range from decisions to reroute the traffic by imposing turn restrictions where they can produce significant improvements in capacity, changing the control treatment at critical intersections so as to provide improved service for one or more movements, or in prescribing specific treatments for channelizing the flow so as to expedite the movement of traffic along major roadway systems or changing the trip table. Such "treatments" take the form of modifications to the original input stream.

Step 11.

As noted above, the changes to the input stream must be implemented to reflect the modifications undertaken in Step 10. At the completion of this activity, the process returns to Step 8 where the TRAD model is again executed.

Step 12.

The output of the TRAD model includes the computed turn movements for each link. These data are required – and – accessed by the PC-DYNEV simulation model. This step completes the specification of the PC-DYNEV input stream.

Step 13.

After the PC-DYNEV input stream has been debugged, the simulation model is executed to provide detailed estimates, expressed as statistical Measures of Effectiveness (MOE), which describe the detailed performance of traffic operations on each link of the network.

Step 14.

In this step, the detailed output of the simulation model is examined to identify whether problems exist on the network. The results of the simulation model are extremely detailed and far more accurately describe traffic operations than those provided by the TRAD model. Thus, it is possible to identify the cause of any problems by carefully studying the output.

Again, one can implement corrective treatments designed to expedite the flow of traffic on the network in the event that the results are considered to be less efficient than is possible to achieve. If input changes are needed, the analysis process proceeds to Step 15. On the other hand, if the results are satisfactory, then one can decide whether to return to Step 8 to again execute the TRAD model and repeat the whole process, or to accept the simulation results. If there were no changes indicated by the activities of Step 14, because the results were satisfactory, we can then proceed to document them in Step 17. Otherwise, return to Step 8 to determine the effects of the changes implemented in Step 14 on the optimal routing patterns over the network. This determination can be ascertained by executing the TRAD model.

Step 15.

This activity implements the changes in control treatments or in the assignment of destinations associated with one or more origins in order to improve the representation of traffic flow over the network. These treatments can also include the consideration of adding roadway segments to the existing analysis network to improve the representation of the physical system.

Step 16.

Once the treatments have been identified, it is necessary to modify the simulation model input stream accordingly. At the completion of this effort, the procedure returns to Step 13 to execute the simulation model again.

Step 17.

The simulation results are analyzed, tabulated and graphed. The results are then documented, as required.

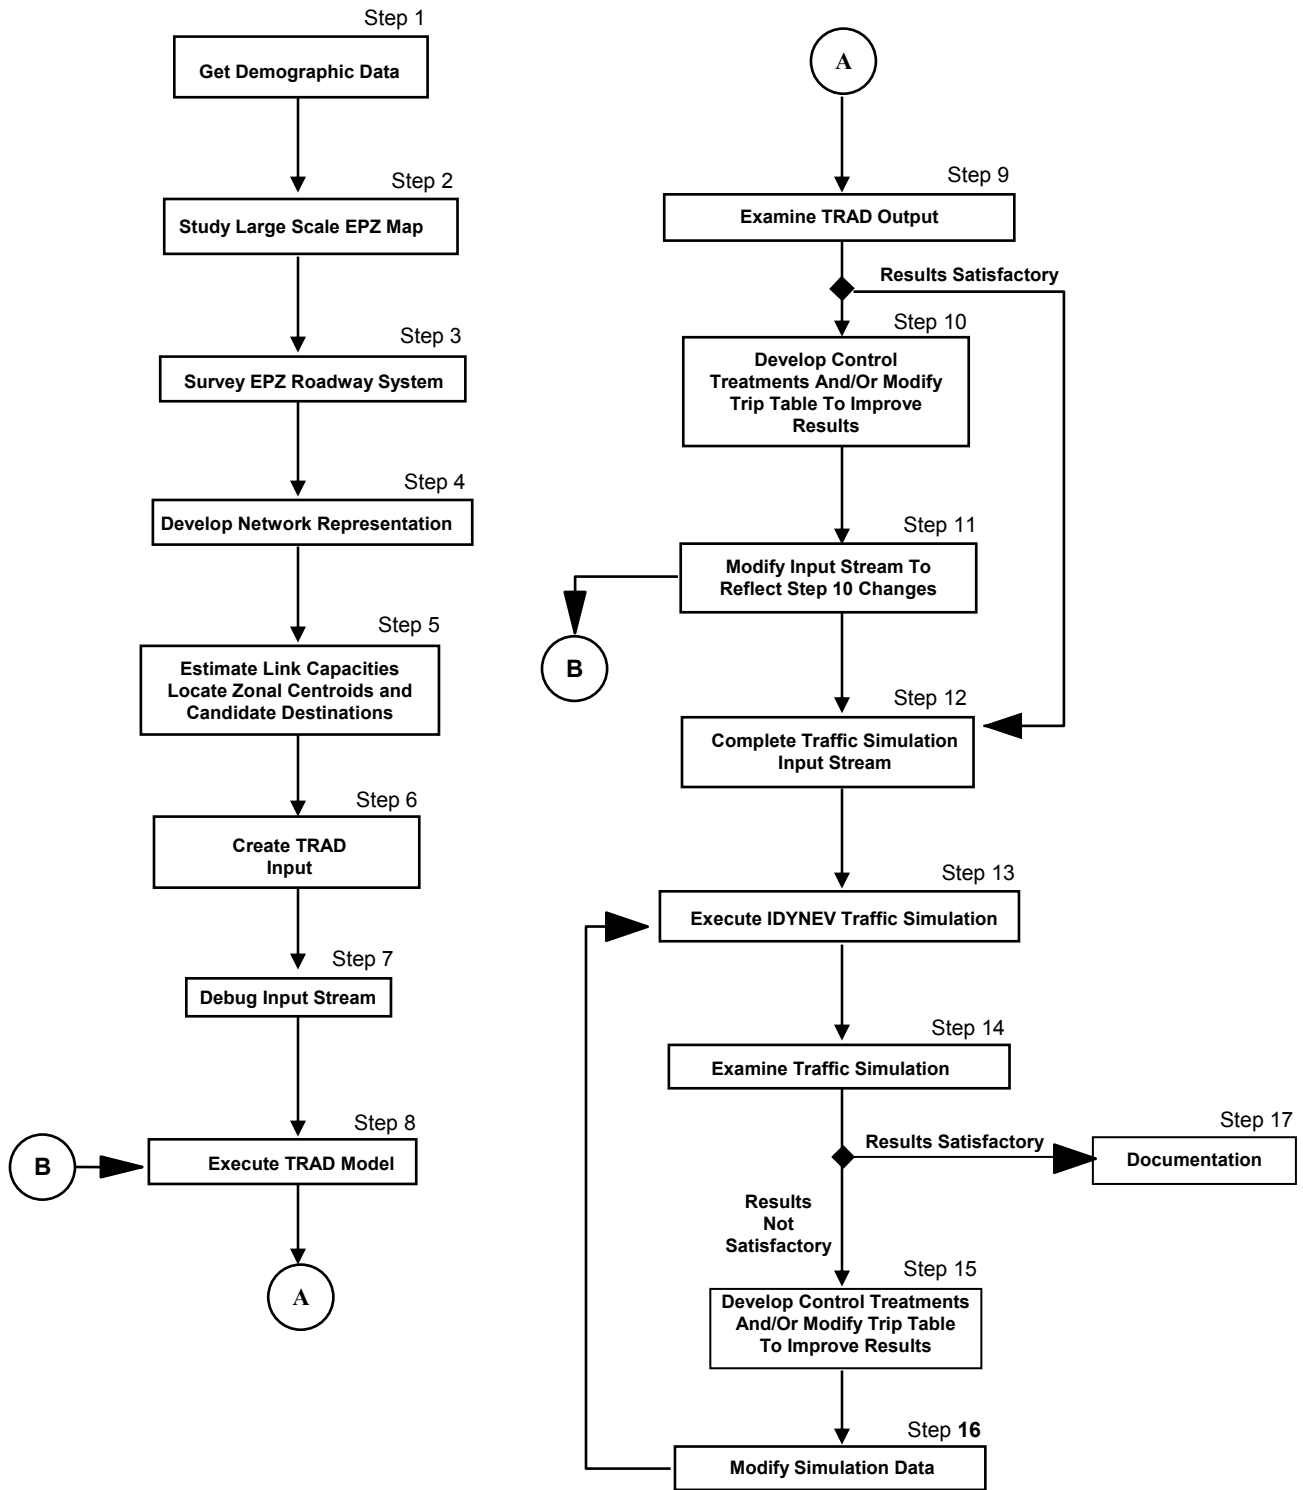


Figure D-1. Flow Diagram of Activities

APPENDIX E

Special Facility Data

APPENDIX E: SPECIAL FACILITY DATA

The following tables list population information for special facilities that are contained within the North Anna Power Station EPZ. The data was provided from the Offices of Emergency Management for the counties within the EPZ and through phone calls to the facilities. Special facilities are defined as schools, day care centers, hospitals and other medical care facilities, correctional institutions, and major employers. Transient population data is included in the tables for state parks, county parks, hotels and motels, and other recreational areas. Each table is grouped by county. The location of the facility is defined by its straight-line distance (miles) and direction (magnetic bearing) from the North Anna Power Station.

North Anna EPZ: Schools								
PAZ	Distance (miles)	Direction	School Name	Street Address	Municipality	Phone	Enrollment	Staff
LOUISA COUNTY								
3	10.6	WSW	Thomas Jefferson Elementary School	1782 Jefferson Hwy	Louisa	(540) 967-0492	796	124
3	7.8	WSW	Louisa County High School	757 Davis Hwy	Mineral	(540) 894-5436	1,493	170
3	7.9	WSW	Louisa County Middle School	1009 Davis Hwy	Mineral	(540) 894-5457	1,080	119
5	11.8	SSW	Jouett Elementary School	315 Jouett School Rd	Mineral	(540) 872-3931	644	102
SPOTSYLVANIA COUNTY								
12	5.3	NNE	Livingston Elementary School	6057 Courthouse Rd	Spotsylvania	(540) 895-5101	500	65
21	10.3	ENE	Berkeley Elementary School	5979 Partlow Rd	Spotsylvania	(540) 582-5141	350	75
21	9.8	NE	Post Oak Middle School	6959 Courthouse Rd	Spotsylvania	(540) 582-7517	786	125
21	10.1	NE	Spotsylvania High School	6975 Courthouse Rd	Spotsylvania	(540) 582-3882	1,150	165
Total:							6,799	945

North Anna EPZ: Day Care Facilities								
PAZ	Distance (miles)	Direction	Name	Street Address	Municipality	Phone	Enrollment	Employees
LOUISA COUNTY								
2	7.2	WSW	Mineral Christian Preschool	51 Louisa Ave	Mineral	(540) 894-8210	60	9
Total:							60	9

North Anna EPZ: Medical Facilities and Assisted Living Facilities

There are no medical facilities within the North Anna EPZ.

North Anna EPZ: Correctional Facilities

There are no correctional facilities within the North Anna EPZ

North Anna EPZ: Major Employers										
PAZ	Distance (miles)	Dir- ection	Facility Name	Street Address	Municipality	Phone	Total Employees	Max Shift	% Non-EPZ	Non-EPZ Employees
LOUISA COUNTY										
3	10.7	WSW	Impac Klearfold	675 Industrial Drive	Louisa	(540) 967-3653	156	80	40%	32
3	10.1	WSW	Tri-Dim Filters	93 Industrial Drive	Louisa	(540) 967-2600	210	170	15%	26
8	0.0	-	North Anna Power Station	State Hwy 700 & State Hwy 652	Mineral	(804) 273-2883	900	800	90%	720
Total:							1266	1050		778

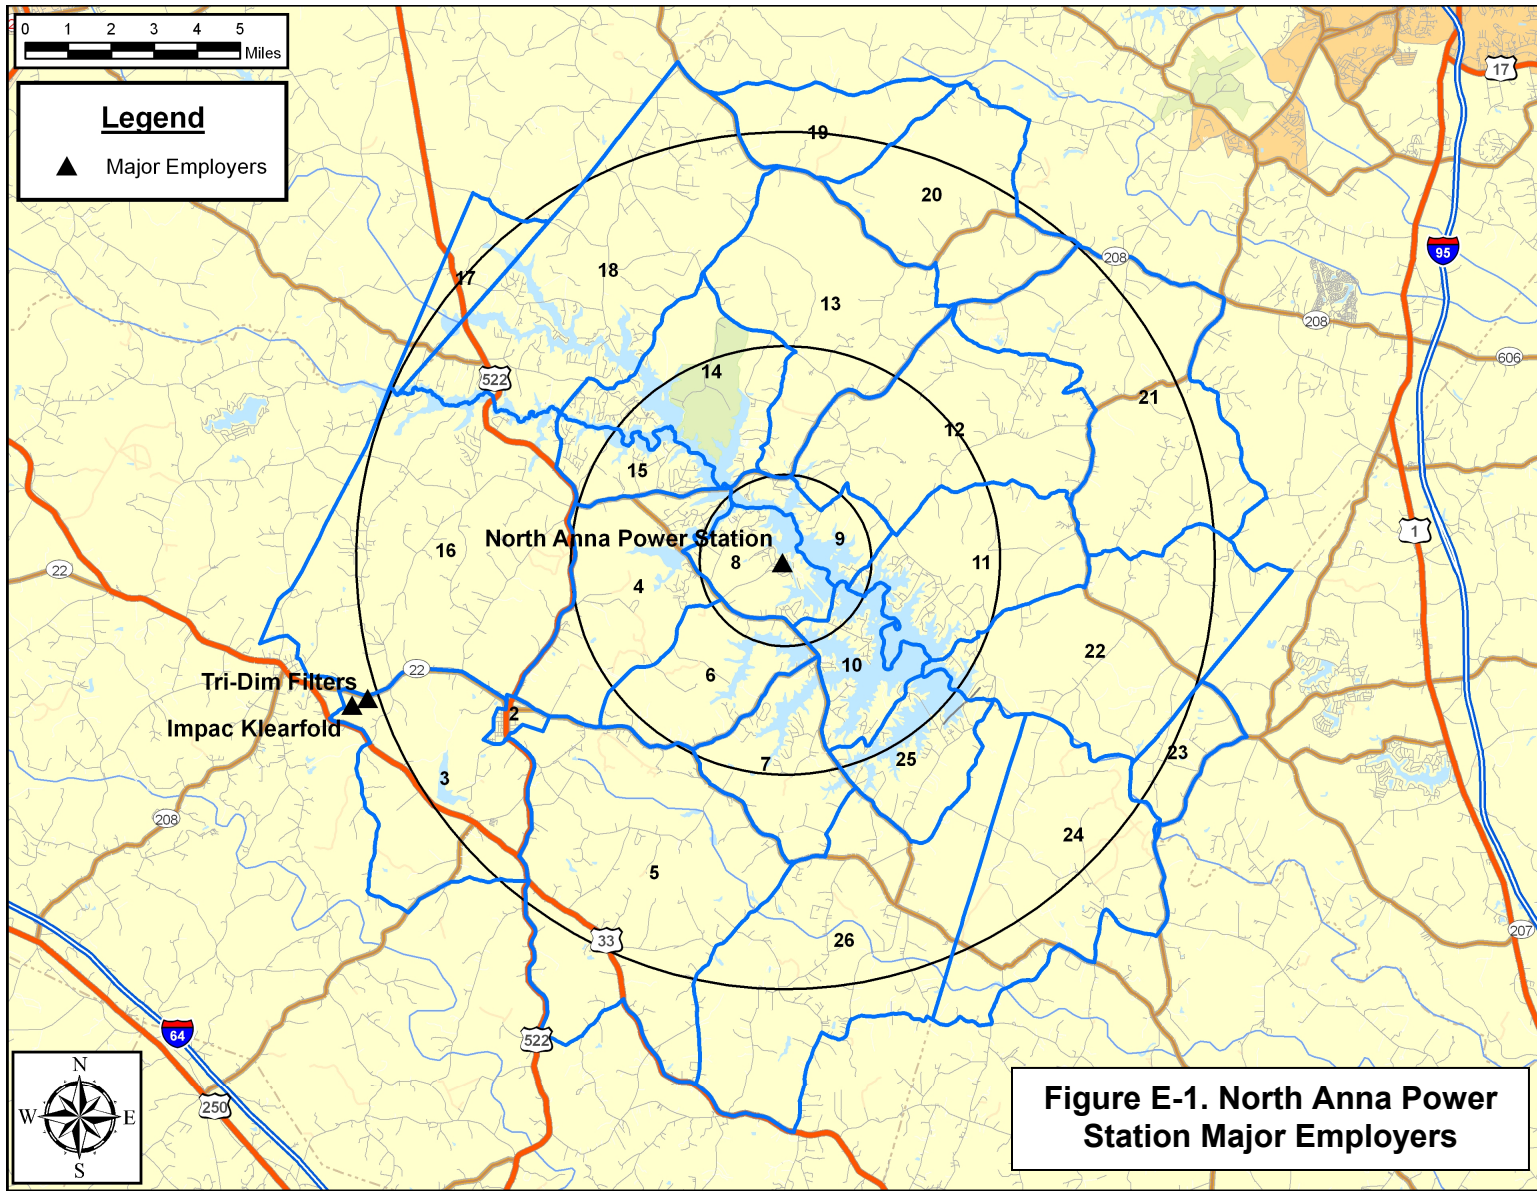


Figure E-1. North Anna Power Station Major Employers

North Anna EPZ: Recreational Areas								
PAZ	Distance (miles)	Direction	Facility Name	Street Address	Municipality	Phone	Persons	Total Vehicles
LOUISA COUNTY								
16	7.0	WNW	Christopher Run Campground	7149 Zachory Taylor Hwy	Mineral	(540) 894-4744	2,000	800
SPOTSYLVANIA COUNTY								
14	5.4	N	Lake Anna State Park	6800 Lawyers Rd	Spotsylvania	(540) 854-5503	4,370	1748
Total:							6,370	2,548


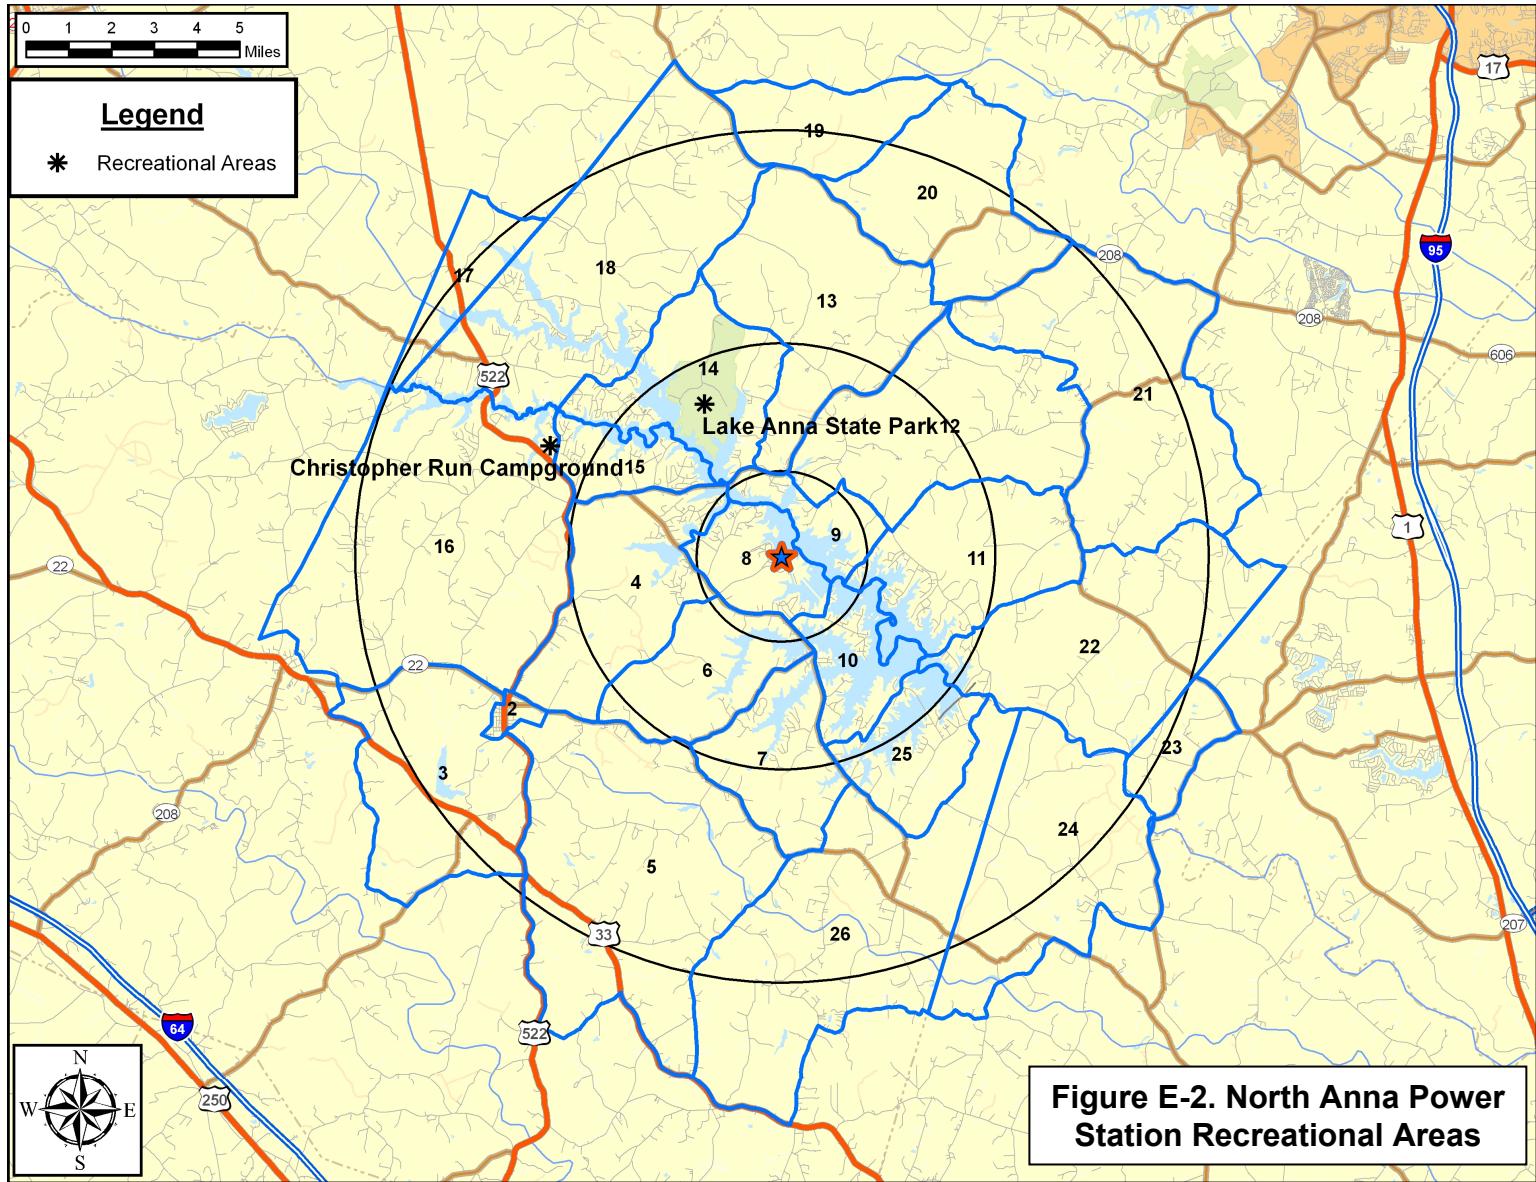


Figure E-2. North Anna Power Station Recreational Areas

North Anna EPZ: Lodging								
PAZ	Distance (miles)	Dir- ection	Facility Name	Street Address	Municipality	Phone	Per- sons	Veh- icles
SPOTSYLVANIA COUNTY								
11	3.2	E	Rockland Farm Retreat	3609 Lewiston Rd	Bumpass	(540) 895-5098	12	6
13	2	N	Lake Anna Lodge	5152 Courthouse Rd	Spotsylvania	(540) 895-5844	54	27
14	2.3	NNW	Anna Point Inn	13701 Anna Point Ln	Mineral	(540) 895-5454	60	30
14	2.1	NNW	The Lighthouse Inn	4634 Courthouse Rd	Mineral	(540) 895-5249	32	16
18	7.6	NW	Littlepage Bed & Breakfast	15701 Monrovia Rd	Mineral	(540) 854-9861	10	5
Total:							168	84

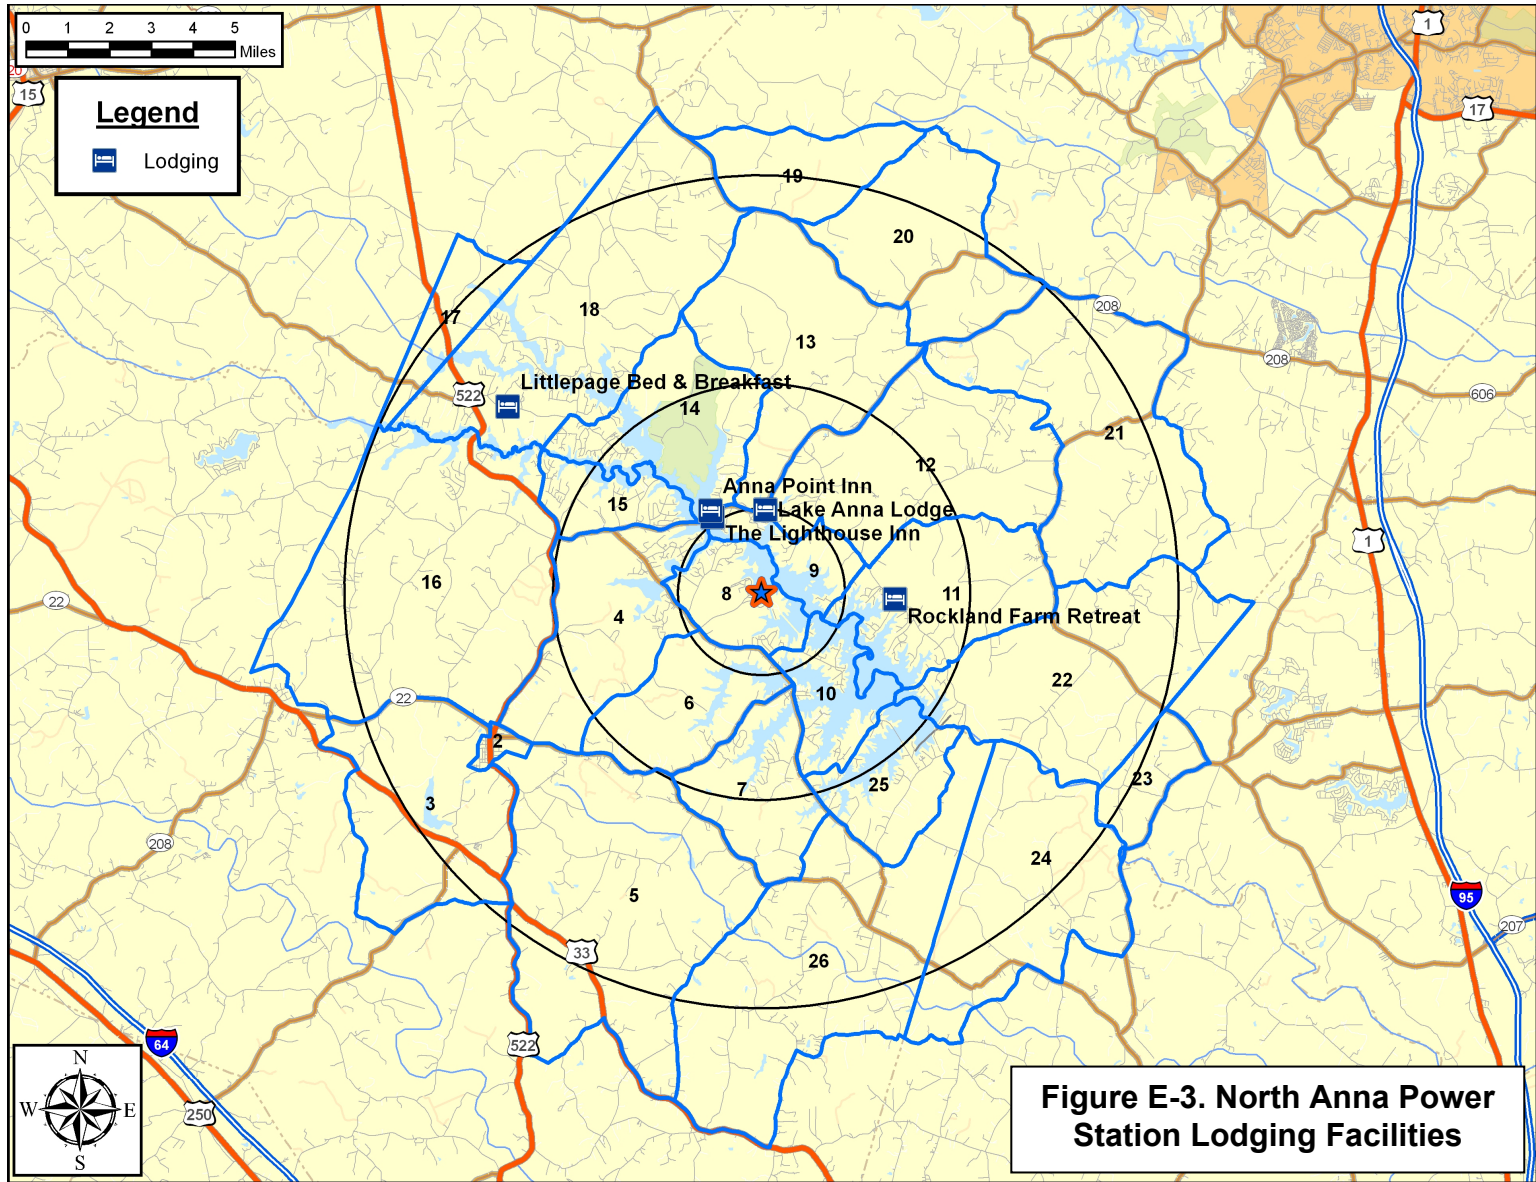

North Anna EPZ: Marinas & Boat Ramps*									
PAZ	Distance (miles)	Direction	Facility Name	Street Address	Municipality	Phone	Persons	Total Vehicles	
LOUISIA COUNTY									
25	5.5	SE	Lake Anna Beach Marina	349 Pleasant Landing Rd	Bumpass	(540) 872-0611	390	195	
SPOTSYLVANIA COUNTY									
9	1.4	NNE	Lake Anna Marina	4303 Boggs Dr	Bumpass	(540) 895-5555	390	195	
11	3.3	ESE	Brent's Landing	Brents Landing Rd	Bumpass	N/A	390	195	
11	2.1	E	Duke's Creek Marina	3831 Breaknock Rd	Bumpass	(540) 895-5065	390	195	
12	2.2	N	Rocky Branch Marina & Campground	5153 Courthouse Rd	Spotsylvania	(540) 895-5475	390	195	
12	2.0	N	Sturgeon Creek Marina, Inc.	5107 Courthouse Rd	Spotsylvania	(540) 895-5095	390	195	
14	2.3	NNW	Anna Point Marina	13701 Anna Point Ln	Mineral	(540) 895-5454	390	195	
14	2.2	NNW	Highpoint Marina	4634 Courthouse Rd	Mineral	(540) 895-5249	390	195	
18	6.7	NW	Hunter's Landing	6320 Belmont Rd. (Route 719)	Mineral	(540) 854-5756	390	195	
18	8.2	NW	Sullivan's Grocery Marina	Days Bridge Rd (Route 719)	Mineral	N/A	390	195	
Total:							3,900	1,950	

* We assumed: 390 people per marina/boat ramp; 2 people per vehicle

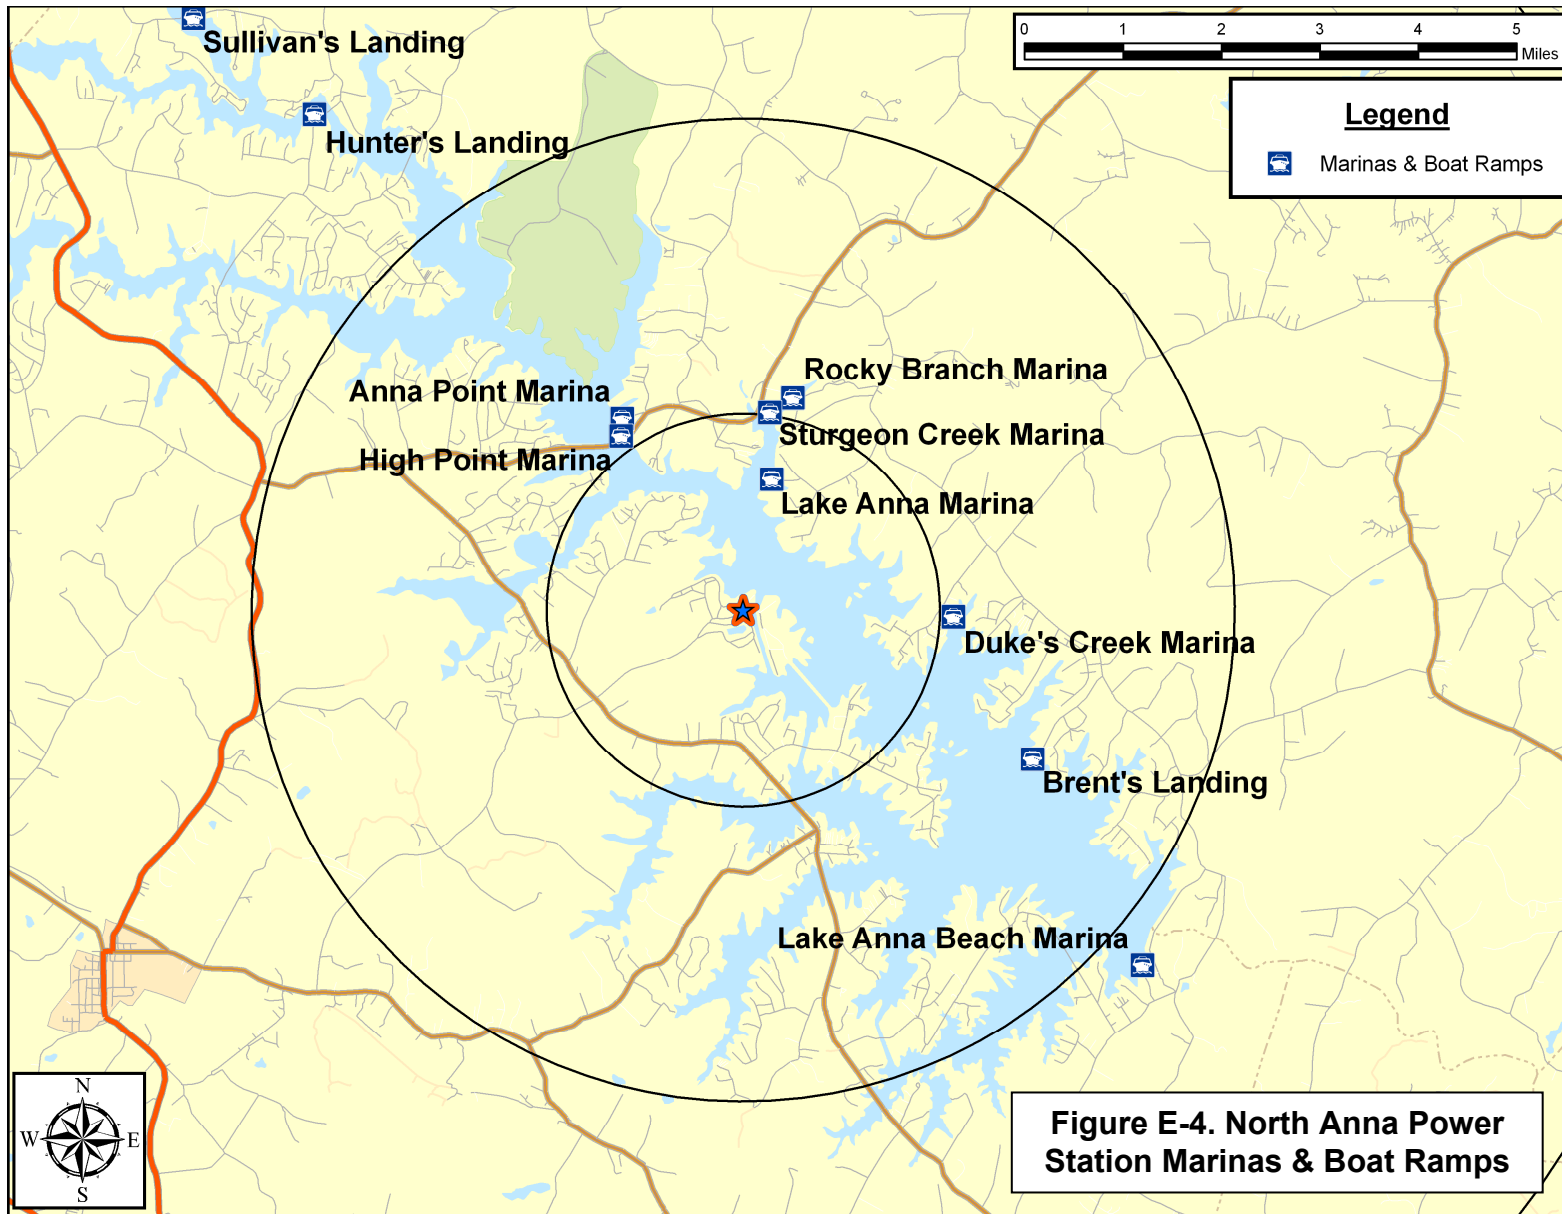


Figure E-4. North Anna Power Station Marinas & Boat Ramps

APPENDIX F

Telephone Survey

APPENDIX F: TELEPHONE SURVEY

1. INTRODUCTION

The development of evacuation time estimates for the Emergency Planning Zone (EPZ) of the North Anna Power Station requires the identification of travel patterns, car ownership and household size of the population within the EPZ. Demographic information is obtained from Census data. The use of this data has several limitations when applied to emergency planning. First, the census data do not encompass the range of information needed to identify the time required for preliminary activities that must be undertaken prior to evacuating the area. Secondly, the census data do not contain attitudinal responses needed from the population of the EPZ and consequently may not accurately represent the anticipated behavioral characteristics of the evacuating populace.

These concerns are addressed by a telephone survey. The survey is designed to elicit information from the public concerning family demographics and estimates of response times to well defined events. The design of the survey includes a limited number of questions of the form "What would you do if ...?" and other questions regarding activities with which the respondent is familiar ("How long does it take you to ...?")

2. SURVEY INSTRUMENT AND SAMPLING PLAN

Attachment A presents the final survey instrument. A draft of the instrument was submitted for comment. Comments were received and the survey instrument was modified appropriately.

Following the completion of the instrument, a sampling plan was developed. A sample size of approximately 550 completed survey forms yields results with an acceptable sampling error. The sample must be drawn from the EPZ population. Consequently, a list of EPZ zip codes was developed. This list is shown in Table F-1. Along with each zip code, an estimate of the population in each area was determined, based on average household size provided by Census data. The proportional number of the desired completed survey interviews for each area was identified, as shown in Table F-1. The completed survey adhered to the sampling plan.

Table F-1. North Anna Telephone Survey Sampling Plan				
ZIP	Zip Code Population 2000	EPZ POP IN ZIP FOR 2000	Households in EPZ	Required Sample
22534	2,061	2,061	696	52
22546	9,843	4	1	0
22553	26,161	4,894	1,731	131
22567	2,447	45	18	1
22960	3,497	308	122	9
23015	3,787	1,446	499	38
23024	6,480	3,674	1,447	109
23093	9,785	1,448	563	42
23117	7,134	5,621	2,222	168
Total	71,195	19,501	7,299	550
Avg HH Size:			2.67	

3. SURVEY RESULTS

The results of the survey fall into two categories. First, the household demographics of the area can be identified. Demographic information includes such factors as household size, automobile ownership, and automobile availability. The distributions of the time to perform certain pre-evacuation activities are the second category of survey results. These data are processed to develop the trip generation distributions used in the evacuation modeling effort.

Household Demographic Results

Household Size

Figure F-1 presents the distribution of household size within the EPZ. The average household contains 2.57 people. The estimated household size (2.67 persons) used to determine the survey sample (Table F-1) was drawn from Census data. The close agreement between the average household size obtained from the survey and the Census value is an indication of the reliability of the survey.

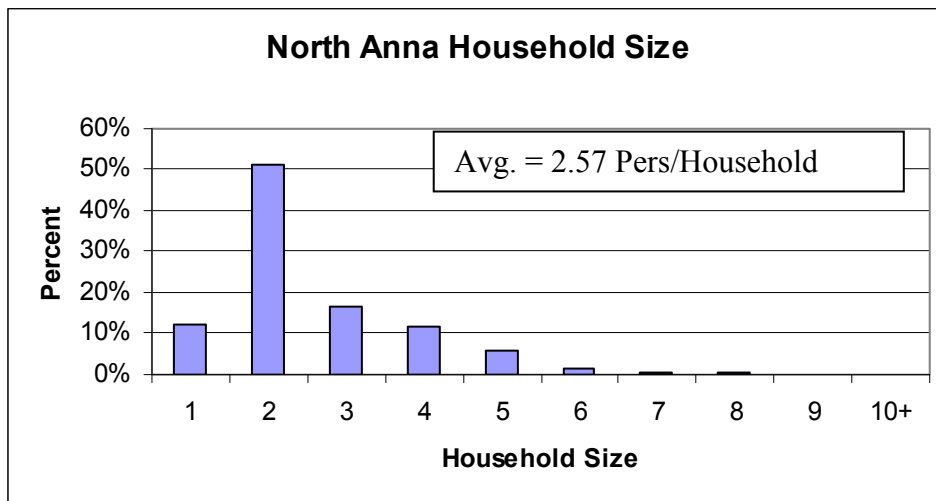


Figure F-1. Household Size in the EPZ

Automobile Ownership

The average number of automobiles per household in the EPZ is 2.48. The distribution of automobile ownership is presented in Figure F-2. Figures F-3 and F-4 present the automobile availability by household size; approximately 2.2 percent of households do not have access to an automobile. The majority of households without access to a car are single person households; nearly all households of 2 or more people have access to at least one vehicle.

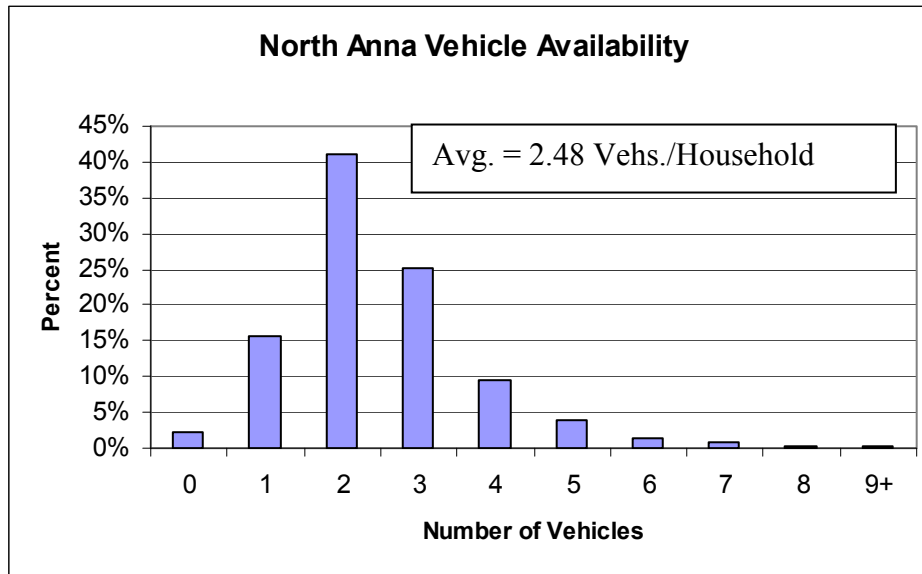


Figure F-2. Household Vehicle Availability

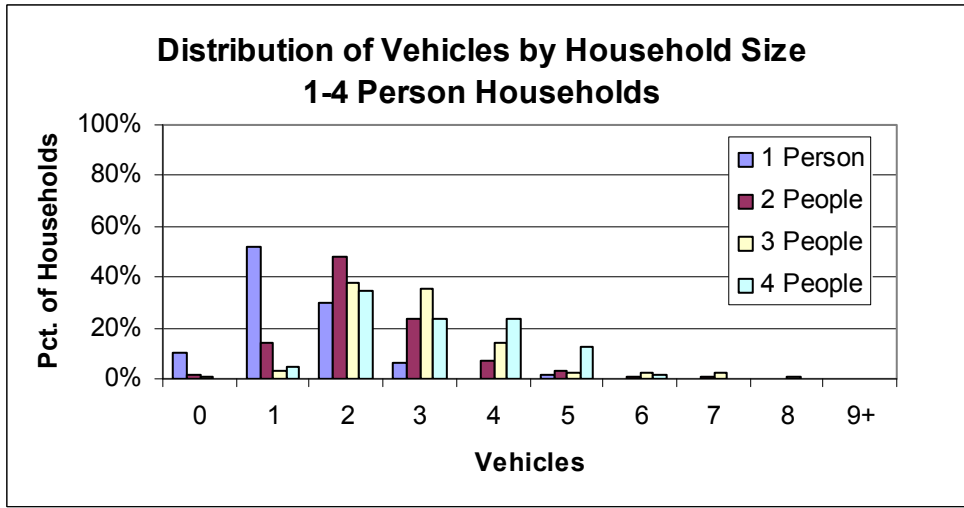


Figure F-3. Vehicle Availability – 1 to 4 Person Households

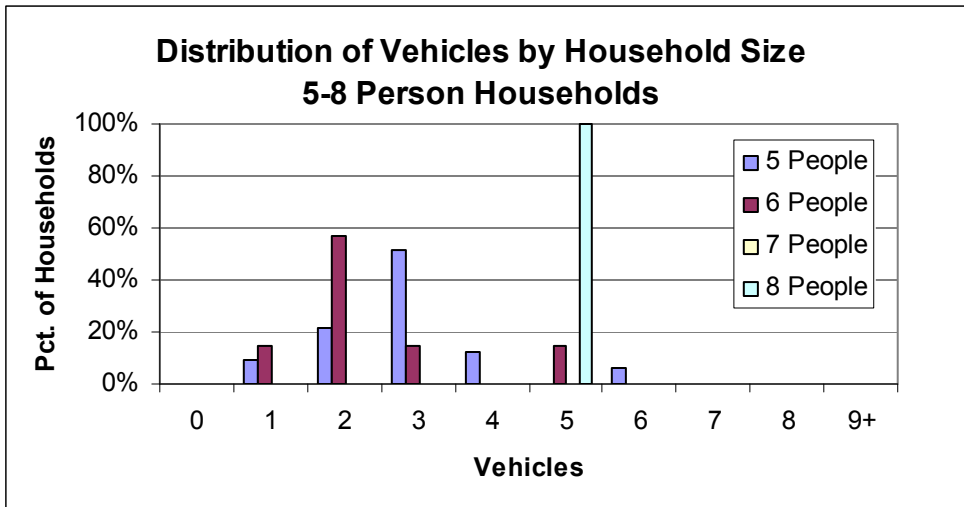


Figure F-4. Vehicle Availability – 5 to 8 Person Households

School Children

The average number of school children per household identified by the survey is 0.51. Figure F-5 presents the distribution of school children.

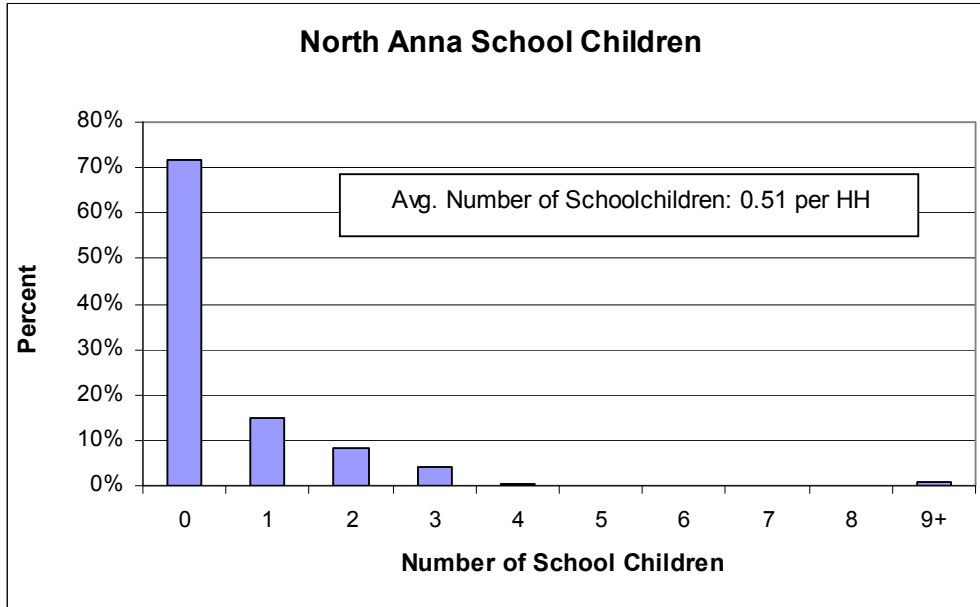


Figure F-5. School Children in Households

Commuters

Figure F-6 presents the distribution of the number of commuters in each household. The data shows an average of 0.94 commuters in each household in the EPZ.

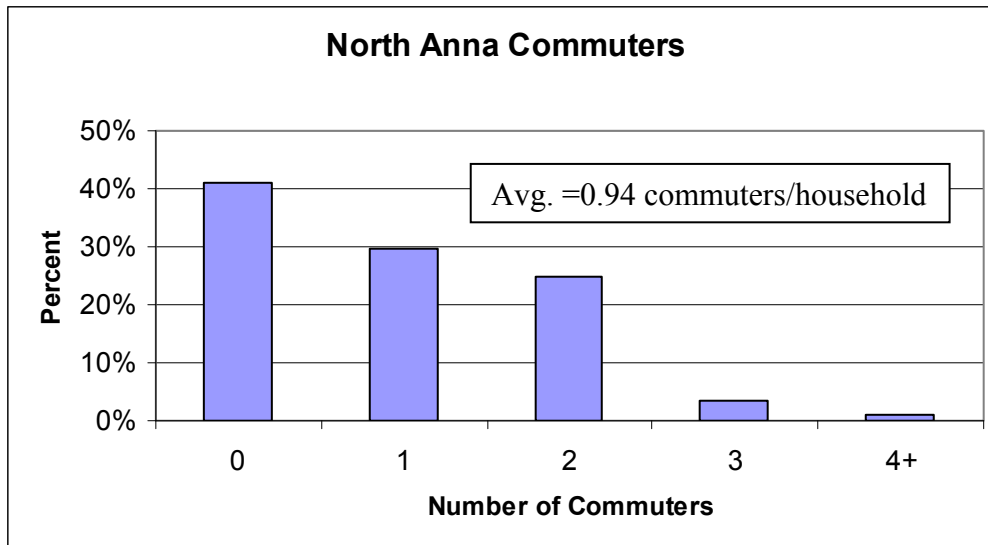


Figure F-6. Commuters in Households in the EPZ

Commuter Travel Modes

Figure F-7 presents the mode of travel that commuters use on a daily basis. The vast majority of commuters use their private automobiles to travel to work or school.

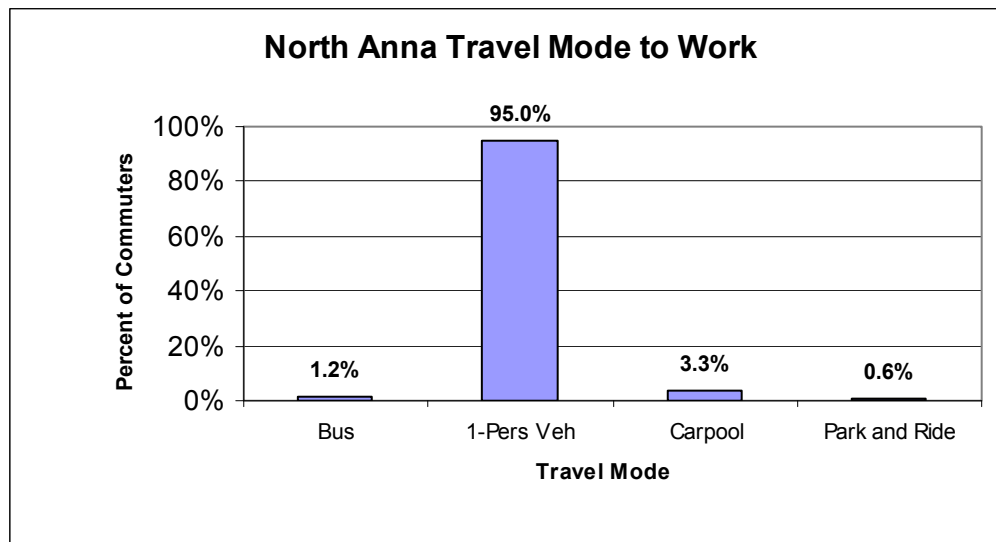


Figure F-7. Modes of Travel to Work by EPZ Residents

Evacuation Response

Several questions were asked which are used to gauge the population's response to an emergency. The first of these asked "How many of the vehicles that are usually available to the household would your family use during an evacuation?" The response is shown in Figure F-8. On average, 1.42 vehicles per household would be used for evacuation purposes.

The second evacuation response question asked was "When the commuters are away from home, is there a vehicle at home that is available for evacuation during any emergency?" Of the survey participants who responded, 76 percent said that there was another vehicle available to evacuate, while 24 percent answered that there would be no vehicle available for evacuation.

The third evacuation response question was "Would your family await the return of other family members prior to evacuating the area?" Of the survey participants who responded, 61 percent said they would await the return of other family members before evacuating and 39 percent indicated that they would not await the return of other family members.

The fourth evacuation response question was "Would you take household pets with you if you were asked to evacuate the area?" As shown in Figure F-9, 65 percent of respondents said they would take their pets; 14 percent would not. The remaining 21 percent either did not have a pet, or did not give a definitive answer.


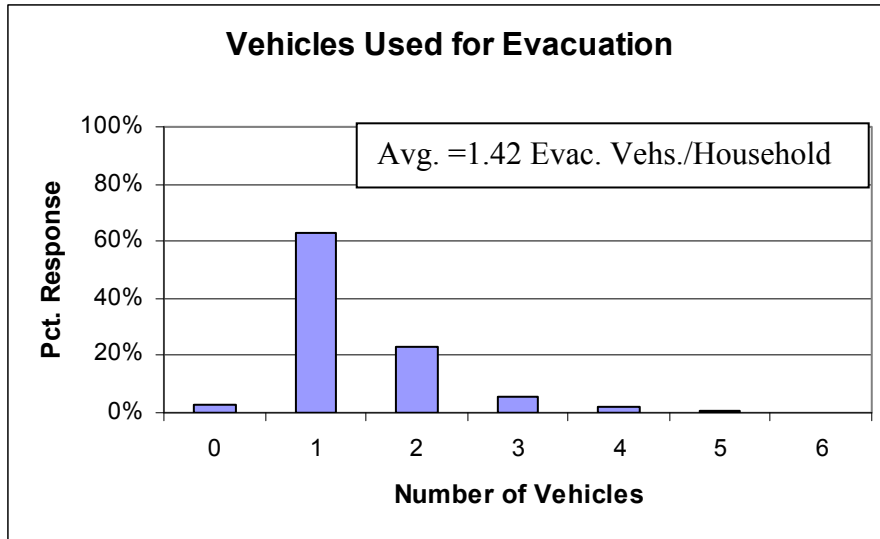


Figure F-8. Number of Vehicles Used for Evacuation

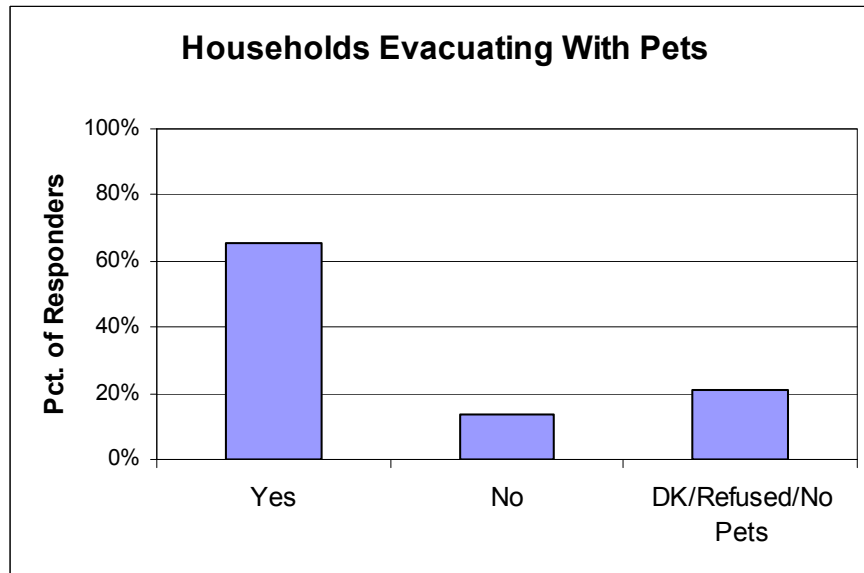

DK = Does Not Know

Figure F-9. Households Evacuating With Pets

Time Distribution Results

The survey asked several questions about the amount of time it takes to perform certain pre-evacuation activities. These activities involve actions taken by residents during the course of their day-to-day lives. Thus, the answers fall within the realm of the responder's experience.

How long does it take the commuter to complete preparation for leaving work?
Figure F-10 presents the cumulative distribution; the activity is completed by about 120 minutes. Fifty percent can leave within 15 minutes.

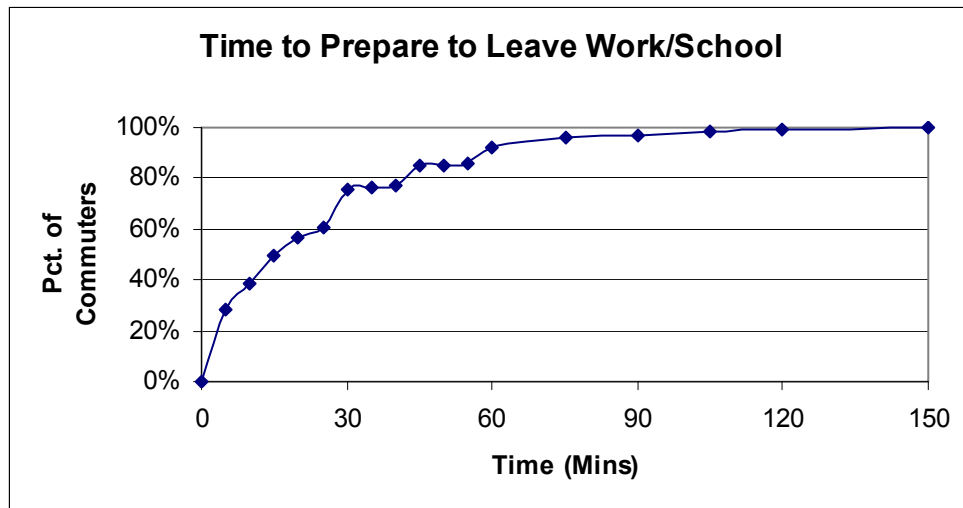


Figure F-10. Time Required to Prepare to Leave Work/School

How long would it take the commuter to travel home?

Figure F-11 presents the work to home travel time. In all cases, over 80 percent of commuters can arrive home within about 1 hour from leaving work; nearly all within 2 hours.

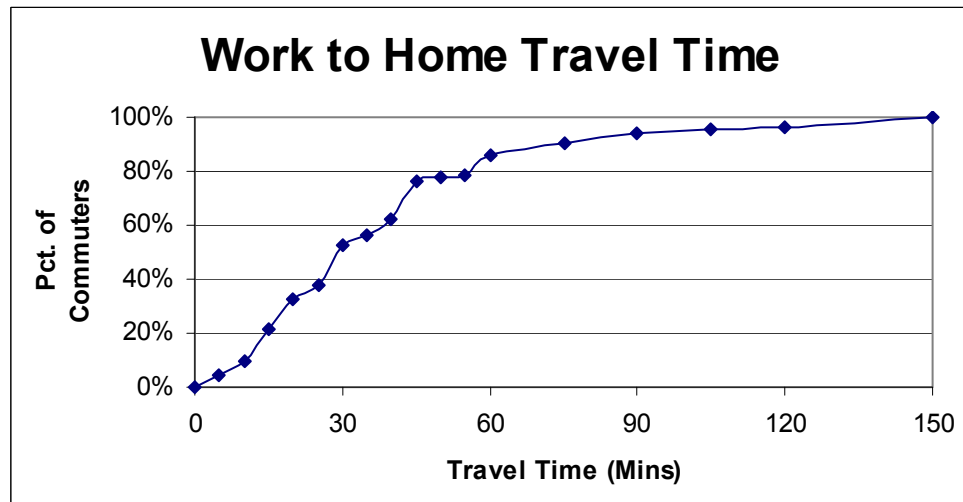


Figure F-11. Work to Home Travel Time

How long would it take the family to pack clothing, secure the house, and load the car?

Figure F-12 presents the time required to prepare for leaving on an evacuation trip. In many ways this activity mimics a family’s preparation for a short holiday or weekend away from home. Hence, the responses represent the experience of the responder in performing similar activities.

The distribution shown in Figure F-12 has a long “tail.” Nearly 95 percent of households can be ready to leave home within two hours and fifteen minutes; the remaining 5 percent of households can be ready to leave within 4 hours.

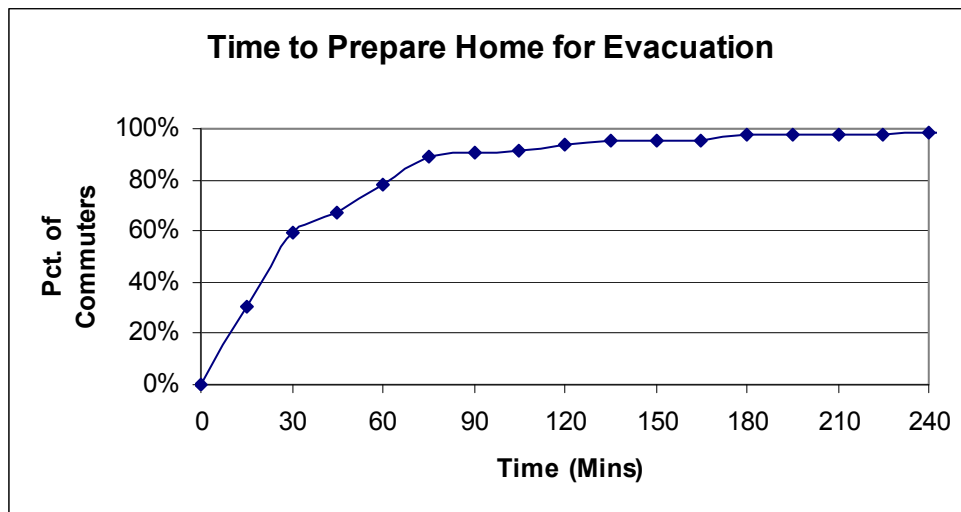


Figure F-12. Time to Prepare Home for Evacuation

How long would it take you to clear 6 to 8 inches of snow?

These data are provided by a telephone survey conducted at a northern site.

During adverse, snowy weather conditions an additional activity must be performed before residents can depart on the evacuation trip. Although snow scenarios assume that the roads and highways have been plowed and are passable (albeit at lower speeds and capacities), it would be necessary to clear a private driveway prior to leaving the home so that the vehicle can access the street. Figure F-13 presents these results. The time distribution for clearing the driveway has a long tail; about 90 percent of driveways are passable within 1 hour. However, the last driveway is cleared 3 hours after the start of this activity.

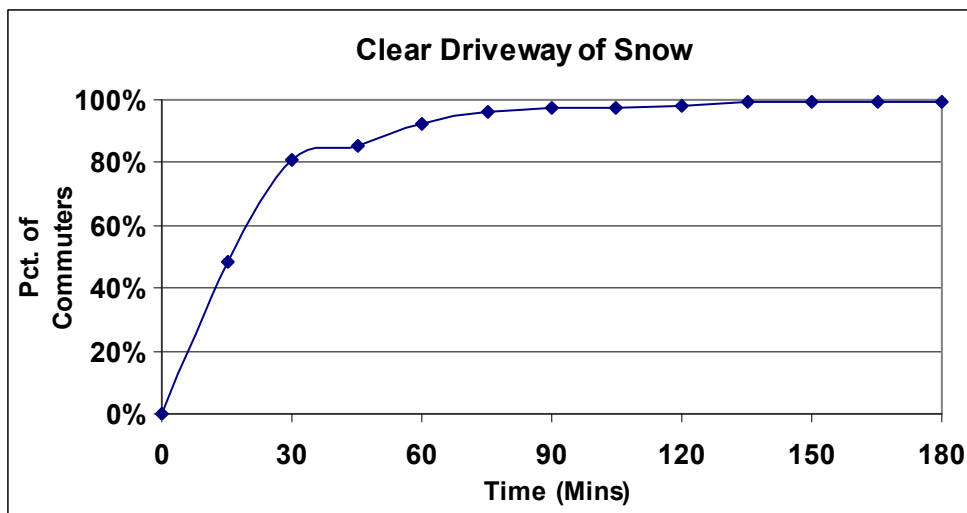


Figure F-13. Time to Clear Driveways of Snow

4. CONCLUSIONS

The telephone survey provides valuable, relevant data that have been used to quantify “mobilization time” which can influence evacuation time estimates.

ATTACHMENT A

Telephone Survey Instrument

Survey Instrument

Hello, my name is _____ and I'm working on a survey being made for [insert marketing firm name] designed to identify local travel patterns in your area. The information obtained will be used in a traffic engineering study and in connection with an update of the county's emergency response plans. Your participation in this survey will greatly enhance the county's emergency preparedness program.

COL.1 Unused
 COL.2 Unused
 COL.3 Unused
 COL.4 Unused
 COL.5 Unused

Sex COL. 8
 1 Male
 2 Female

INTERVIEWER: ASK TO SPEAK TO THE HEAD OF HOUSEHOLD OR THE SPOUSE OF THE HEAD OF HOUSEHOLD.
 (Terminate call if not a residence)
IF ASKED FOR MORE INFORMATION ABOUT THE SURVEY, REFERENCE THE POSTCARD MAILED FROM KLD ASSOCIATES.

DO NOT ASK:

1. Record exchange number. To Be Determined
 COL. 9-11

2. In total, how many cars, or other vehicles are usually available to the household? (DO NOT READ ANSWERS.)

COL. 12
 1 ONE
 2 TWO
 3 THREE
 4 FOUR
 5 FIVE
 6 SIX
 7 SEVEN
 8 EIGHT
 9 NINE OR MORE
 0 ZERO (NONE)
 X REFUSED

3. How many people usually live in this household? (DO NOT READ ANSWERS.)

COL. <u>13</u>	COL. <u>14</u>
1 ONE	0 TEN
2 TWO	1 ELEVEN
3 THREE	2 TWELVE
4 FOUR	3 THIRTEEN
5 FIVE	4 FOURTEEN
6 SIX	5 FIFTEEN
7 SEVEN	6 SIXTEEN
8 EIGHT	7 SEVENTEEN
9 NINE	8 EIGHTEEN
	9 NINETEEN OR MORE
	X REFUSED

4. How many children living in this household go to local public, private, or parochial schools? (DO NOT READ ANSWERS.)

COL. 15
 0 ZERO
 1 ONE
 2 TWO
 3 THREE
 4 FOUR
 5 FIVE
 6 SIX
 7 SEVEN
 8 EIGHT
 9 NINE OR MORE
 X REFUSED

5.	How many people in the household commute to a job, or to college, at least 4 times a week?	COL.16	SKIP TO
		0 ZERO	Q. 11
		1 ONE	Q. 6
		2 TWO	Q. 6
		3 THREE	Q. 6
		4 FOUR OR MORE	Q. 6
		5 DON'T KNOW/REFUSED	Q. 11

INTERVIEWER: For each person identified in Question 5, ask Questions 6, 7, 8, and 9.

6. Thinking about commuter #1, how does that person usually travel to work or college? (REPEAT QUESTION FOR EACH COMMUTER.)

	Commuter #1 COL.17	Commuter #2 COL.18	Commuter #3 COL.19	Commuter #4 COL.20
Rail	1	1	1	1
Bus	2	2	2	2
Walk/Bicycle	3	3	3	3
Driver Car/Van	4	4	4	4
Park & Ride (Car/Rail, Xpress_bus)	5	5	5	5
Driver Carpool-2 or more people	6	6	6	6
Passenger Carpool-2 or more people	7	7	7	7
Taxi	8	8	8	8
Refused	9	9	9	9

7. What is the name of the city, town or community in which Commuter #1 works or attends school? (REPEAT QUESTION FOR EACH COMMUTER.) (FILL IN ANSWER.)

COMMUTER #1			COMMUTER #2			COMMUTER #3			COMMUTER #4		
City/Town	State		City/Town	State		City/Town	State		City/Town	State	
COL.21	COL.22	COL.23	COL.24	COL.25	COL.26	COL.27	COL.28	COL.29	COL.30	COL.31	COL.32
0	0	0	0	0	0	0	0	0	0	0	0
1	1	1	1	1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5	5	5	5	5
6	6	6	6	6	6	6	6	6	6	6	6
7	7	7	7	7	7	7	7	7	7	7	7
8	8	8	8	8	8	8	8	8	8	8	8
9	9	9	9	9	9	9	9	9	9	9	9

8. How long would it take Commuter #1 to travel home from work or college?
 (REPEAT QUESTION FOR EACH COMMUTER.) (DO NOT READ ANSWERS.)

<u>COMMUTER #1</u>	
<u>COL.33</u>	<u>COL.34</u>
1	5 MINUTES OR LESS
2	6-10 MINUTES
3	11-15 MINUTES
4	16-20 MINUTES
5	21-25 MINUTES
6	26-30 MINUTES
7	31-35 MINUTES
8	36-40 MINUTES
9	41-45 MINUTES
	1 46-50 MINUTES
	2 51-55 MINUTES
	3 56 - 1 HOUR
	4 OVER 1 HOUR, BUT LESS THAN 1 HOUR
	5 15 MINUTES
	6 BETWEEN 1 HOUR 16 MINUTES AND 1 HOUR 30 MINUTES
	7 BETWEEN 1 HOUR 31 MINUTES AND 1 HOUR 45 MINUTES
	8 BETWEEN 1 HOUR 46 MINUTES AND 2 HOURS
	9 OVER 2 HOURS (SPECIFY _____)
	0
	X DON'T KNOW/REFUSED

<u>COMMUTER #2</u>	
<u>COL.35</u>	<u>COL.36</u>
1	5 MINUTES OR LESS
2	6-10 MINUTES
3	11-15 MINUTES
4	16-20 MINUTES
5	21-25 MINUTES
6	26-30 MINUTES
7	31-35 MINUTES
8	36-40 MINUTES
9	41-45 MINUTES
	1 46-50 MINUTES
	2 51-55 MINUTES
	3 56 - 1 HOUR
	4 OVER 1 HOUR, BUT LESS THAN 1 HOUR
	5 15 MINUTES
	6 BETWEEN 1 HOUR 16 MINUTES AND 1 HOUR 30 MINUTES
	7 BETWEEN 1 HOUR 31 MINUTES AND 1 HOUR 45 MINUTES
	8 BETWEEN 1 HOUR 46 MINUTES AND 2 HOURS
	9 OVER 2 HOURS (SPECIFY _____)
	0
	X DON'T KNOW/REFUSED

<u>COMMUTER #3</u>	
<u>COL.37</u>	<u>COL.38</u>
1	5 MINUTES OR LESS
2	6-10 MINUTES
3	11-15 MINUTES
4	16-20 MINUTES
5	21-25 MINUTES
6	26-30 MINUTES
7	31-35 MINUTES
8	36-40 MINUTES
9	41-45 MINUTES
	1 46-50 MINUTES
	2 51-55 MINUTES
	3 56 - 1 HOUR
	4 OVER 1 HOUR, BUT LESS THAN 1 HOUR
	5 15 MINUTES
	6 BETWEEN 1 HOUR 16 MINUTES AND 1 HOUR 30 MINUTES
	7 BETWEEN 1 HOUR 31 MINUTES AND 1 HOUR 45 MINUTES
	8 BETWEEN 1 HOUR 46 MINUTES AND 2 HOURS
	9 OVER 2 HOURS (SPECIFY _____)
	0
	X DON'T KNOW/REFUSED

<u>COMMUTER #4</u>	
<u>COL.39</u>	<u>COL.40</u>
1	5 MINUTES OR LESS
2	6-10 MINUTES
3	11-15 MINUTES
4	16-20 MINUTES
5	21-25 MINUTES
6	26-30 MINUTES
7	31-35 MINUTES
8	36-40 MINUTES
9	41-45 MINUTES
	1 46-50 MINUTES
	2 51-55 MINUTES
	3 56 - 1 HOUR
	4 OVER 1 HOUR, BUT LESS THAN 1 HOUR
	5 15 MINUTES
	6 BETWEEN 1 HOUR 16 MINUTES AND 1 HOUR 30 MINUTES
	7 BETWEEN 1 HOUR 31 MINUTES AND 1 HOUR 45 MINUTES
	8 BETWEEN 1 HOUR 46 MINUTES AND 2 HOURS
	9 OVER 2 HOURS (SPECIFY _____)
	0
	X DON'T KNOW/REFUSED

9. Approximately how long does it take Commuter #1 to complete preparation for leaving work or college prior to starting the trip home? (REPEAT QUESTION FOR EACH COMMUTER.)
(DO NOT READ ANSWERS.)

<u>COMMUTER #1</u>		<u>COMMUTER #2</u>	
<u>COL. 41</u>	<u>COL. 42</u>	<u>COL. 43</u>	<u>COL. 44</u>
1 5 MINUTES OR LESS	1 46-50 MINUTES	1 5 MINUTES OR LESS	1 46-50 MINUTES
2 6-10 MINUTES	2 51-55 MINUTES	2 6-10 MINUTES	2 51-55 MINUTES
3 11-15 MINUTES	3 56 - 1 HOUR	3 11-15 MINUTES	3 56 - 1 HOUR
4 16-20 MINUTES	4 OVER 1 HOUR, BUT	4 16-20 MINUTES	4 OVER 1 HOUR, BUT
5 21-25 MINUTES	LESS THAN 1 HOUR	5 21-25 MINUTES	LESS THAN 1 HOUR
6 26-30 MINUTES	15 MINUTES	6 26-30 MINUTES	15 MINUTES
7 31-35 MINUTES	5 BETWEEN 1 HOUR	7 31-35 MINUTES	5 BETWEEN 1 HOUR
8 36-40 MINUTES	16 MINUTES AND 1	8 36-40 MINUTES	16 MINUTES AND 1
9 41-45 MINUTES	HOUR 30 MINUTES	9 41-45 MINUTES	HOUR 30 MINUTES
	6 BETWEEN 1 HOUR		6 BETWEEN 1 HOUR
	31 MINUTES AND 1		31 MINUTES AND 1
	HOUR 45 MINUTES		HOUR 45 MINUTES
	7 BETWEEN 1 HOUR		7 BETWEEN 1 HOUR
	46 MINUTES AND		46 MINUTES AND
	2 HOURS		2 HOURS
	8 OVER 2 HOURS		8 OVER 2 HOURS
	(SPECIFY _____)		(SPECIFY _____)
	9		9
	0		0
	X DON'T KNOW/REFUSED		X DON'T KNOW/REFUSED

<u>COMMUTER #3</u>		<u>COMMUTER #4</u>	
<u>COL. 45</u>	<u>COL. 46</u>	<u>COL. 47</u>	<u>COL. 48</u>
1 5 MINUTES OR LESS	1 46-50 MINUTES	1 5 MINUTES OR LESS	1 46-50 MINUTES
2 6-10 MINUTES	2 51-55 MINUTES	2 6-10 MINUTES	2 51-55 MINUTES
3 11-15 MINUTES	3 56 - 1 HOUR	3 11-15 MINUTES	3 56 - 1 HOUR
4 16-20 MINUTES	4 OVER 1 HOUR, BUT	4 16-20 MINUTES	4 OVER 1 HOUR, BUT
5 21-25 MINUTES	LESS THAN 1 HOUR	5 21-25 MINUTES	LESS THAN 1 HOUR
6 26-30 MINUTES	15 MINUTES	6 26-30 MINUTES	15 MINUTES
7 31-35 MINUTES	5 BETWEEN 1 HOUR	7 31-35 MINUTES	5 BETWEEN 1 HOUR
8 36-40 MINUTES	16 MINUTES AND 1	8 36-40 MINUTES	16 MINUTES AND 1
9 41-45 MINUTES	HOUR 30 MINUTES	9 41-45 MINUTES	HOUR 30 MINUTES
	6 BETWEEN 1 HOUR		6 BETWEEN 1 HOUR
	31 MINUTES AND 1		31 MINUTES AND 1
	HOUR 45 MINUTES		HOUR 45 MINUTES
	7 BETWEEN 1 HOUR		7 BETWEEN 1 HOUR
	46 MINUTES AND		46 MINUTES AND
	2 HOURS		2 HOURS
	8 OVER 2 HOURS		8 OVER 2 HOURS
	(SPECIFY _____)		(SPECIFY _____)
	9		9
	0		0
	X DON'T KNOW/REFUSED		X DON'T KNOW/REFUSED

10. When the commuters are away from home, is there a vehicle at home that is available for evacuation during any emergency?

Col. 49
1 Yes
2 No
3 Don't Know/Refused

11. Would you await the return of family members prior to evacuating the area?

Col. 50
1 Yes
2 No
3 Don't Know/Refused

12. How many of the vehicles that are usually available to the household would your family use during an evacuation? (DO NOT READ ANSWERS.)

COL. 51
1 ONE
2 TWO
3 THREE
4 FOUR
5 FIVE
6 SIX
7 SEVEN
8 EIGHT
9 NINE OR MORE
0 ZERO (NONE)
X REFUSED

13. How long would it take the family to pack clothing, secure the house, load the car, and complete preparations prior to evacuating the area? (DO NOT READ ANSWERS.)

COL. 52

1 LESS THAN 15 MINUTES
2 15-30 MINUTES
3 31-45 MINUTES
4 46 MINUTES - 1 HOUR
5 1 HOUR TO 1 HOUR 15 MINUTES
6 1 HOUR 16 MINUTES TO 1 HOUR 30 MINUTES
7 1 HOUR 31 MINUTES TO 1 HOUR 45 MINUTES
8 1 HOUR 46 MINUTES TO 2 HOURS
9 2 HOURS TO 2 HOURS 15 MINUTES
0 2 HOURS 16 MINUTES TO 2 HOURS 30 MINUTES
X 2 HOURS 31 MINUTES TO 2 HOURS 45 MINUTES
Y 2 HOURS 46 MINUTES TO 3 HOURS

COL. 53

1 3 HOURS TO 3 HOURS 15 MINUTES
2 3 HOURS 16 MINUTES TO 3 HOURS 30 MINUTES
3 3 HOURS 31 MINUTES TO 3 HOURS 45 MINUTES
4 3 HOURS 46 MINUTES TO 4 HOURS
5 4 HOURS TO 4 HOURS 15 MINUTES
6 4 HOURS 16 MINUTES TO 4 HOURS 30 MINUTES
7 4 HOURS 31 MINUTES TO 4 HOURS 45 MINUTES
8 4 HOURS 46 MINUTES TO 5 HOURS
9 5 HOURS TO 5 HOURS 15 MINUTES
0 5 HOURS 16 MINUTES TO 5 HOURS 30 MINUTES
X 5 HOURS 31 MINUTES TO 5 HOURS 45 MINUTES
Y 5 HOURS 46 MINUTES TO 6 HOURS

COL. 54

1 DON'T KNOW

14. Would you take household pets with you if you were asked to evacuate the area?

Col. 58

- 1 Yes
- 2 No
- 3 Don't Know/Refused

Thank you very much. _____
(TELEPHONE NUMBER CALLED)

For Additional information: If requested, **ask what county they reside in** and provide the appropriate number from the list below:

Contact your County Emergency Management Office:

COUNTY	PHONE NUMBER
Caroline	(804) 633-4357
Hanover	(804) 365-6140
Louisa	(540) 967-1234
Orange	(540) 672-1235
Spotsylvania	(540) 582-7115

ANNEX B
Code of Data Collection Standards With Notes Section
Market Research Association

P.O. Box 230 • Rocky Hill, CT 06067-0230 • 860-257-4008 • Fax: 860-257-3990

Code Approved May 1997

Notes Added September 1999

RESPONSIBILITIES TO RESPONDENTS

Data Collection Companies ...

1. will make factually correct statements to secure cooperation and will honor promises to respondents, whether verbal or written;
2. will not use information to identify respondents without the permission of the respondent, except to those who check the data or are involved in processing the data. If such permission is given, it must be recorded by the interviewer at the time the permission is secured;
3. will respect the respondent's right to withdraw or to refuse to cooperate at any stage of the study and not use any procedure or technique to coerce or imply that cooperation is obligatory;
4. will obtain and document respondent consent when it is known that the name and address or identity of the respondent may be passed to a third party for legal or other purposes, such as audio or video recordings;
5. will obtain permission and document consent of a parent, legal guardian or responsible guardian before interviewing children 12 years old or younger;
6. will give respondents the opportunity to refuse to participate in the research when there is a possibility they may be identifiable even without the use of their name or address (e.g., because of the size of the population being sampled).

Interviewers ...

1. will treat the respondent with respect and not influence him or her through direct or indirect attempts, including the framing of questions and/or a respondent's opinion or attitudes on any issue;
2. will obtain and document permission from a parent, legal guardian or responsible guardian before interviewing children 12 years old or younger. Prior to obtaining permission, the interviewer should divulge the subject matter, length of the interview and other special tasks that will be required.

RESPONSIBILITIES TO CLIENTS

Data Collection Companies ...

1. will ensure that each study is conducted according to the client's exact specifications;
2. will observe confidentiality with all research techniques or methodologies and with information considered confidential or proprietary. Information will not be revealed that could be used to identify clients or respondents without proper authorization;
3. will ensure that companies, their employees and subcontractors involved in data collection take all reasonable precautions so that more than one survey is not conducted in one interview without explicit permission from the Client
4. will report research results accurately and honestly;
5. will not misrepresent themselves as having qualifications, experience, skills or facilities that they do not possess;
6. will refrain from referring to membership in the Marketing Research Association as proof of competence, since the Association does not certify any person's or organization's competency or skill level.

RESPONSIBILITIES TO DATA COLLECTORS

Clients ...

1. will be responsible for providing products and services that are safe and fit or their intended use and disclose/label all product contents;
2. will provide verbal or written instructions;
3. will not ask our members who subcontract research to engage in any activity that is not acceptable as defined in this Code or that is prohibited under any applicable federal, state, local laws, regulations and/or ordinances.

RESPONSIBILITIES TO THE GENERAL PUBLIC AND BUSINESS COMMUNITY

Data Collection Companies ...

1. will not intentionally abuse public confidence in marketing and opinion research;
2. will not represent a non-research activity to be marketing and opinion research, such as:
 - questions whose sole objective is to obtain personal information about respondents, whether for legal, political, private or other purposes,
 - the compilation of lists, registers or data banks of names and addresses for any non-research purposes (e.g., canvassing or fundraising),
 - industrial, commercial or any other form of espionage,
 - the acquisition of information for use by credit rating services or similar organizations,
 - sales or promotional approaches to the respondent,
 - the collection of debts;
3. will make interviewers aware of any special conditions that may be applicable to any minor (18 years old or younger).

These notes are intended to help users of the Code to interpret and apply it in practice. Any questions about how to apply the Code in a specific situation should be addressed to MRA Headquarters.

RESPONSIBILITIES TO RESPONDENTS

Data Collection Companies ...

1. will make factually correct statements to secure cooperation and honor promises to respondents, whether oral or written; *Interviewers will not knowingly provide respondents with information that misrepresents any portion of the interviewing process, such as; length of the interview, scope of task involved, compensation, or intended use of the information collected.*
2. will not use information to identify respondents without the permission of the respondent, except to those who check the data or are involved in processing the data. If such permission is given, it must be recorded by the interviewer at the time the permission is secured; *Respondent information will be linked to data collected only for research purposes such as validation, evaluating data in aggregate based on demographic information, modeling. Providing respondent information is not permissible for any purpose other than legitimate research purposes as mentioned above. If anyone requests respondent identifiable information it will only be provided upon receipt of written declaration of and agreement of some intended use. Such use shall be determined by the provider to qualify as legitimate research use. (i.e. validation, planned recalls, modeling, demographic analysis.) No other use of this information falls within the boundaries of the Code. This applies to all types of respondent sample sources including client supplied lists.*
3. will respect the respondent's right to withdraw or to refuse to cooperate at any stage of the study and not use any procedure or technique to coerce or imply that cooperation is obligatory. *Respondent cooperation is strictly on a voluntary basis. Respondents are entitled to withdraw from an interview at any stage or to refuse to cooperate in a research project. Interviewers should never lead respondents to believe they have no choice in their participation.*
4. will obtain and record respondent consent when it is known that the name and addresses or identity of the respondent may be passed to a third party for legal or other purposes, such as audio or video recordings; *By documenting the respondent's consent for a defined specific use of his/ her name and address we are confirming the respondent realizes we are asking something new of them, i.e., possible participation in another research project.*
5. will obtain permission and document consent of a parent, legal guardian or responsible guardian before interviewing children 12 years old or younger; *Interviewers must take special care when interviewing children or young people. The informed consent of the parent or responsible adult must first be obtained for interviews with children.*
6. will give respondents the opportunity to refuse to participate in the research when there is a possibility they may be identifiable even without the use of their name or address (e.g., because of the size of the population being sampled.) *Respondent cooperation is strictly on a voluntary basis. Respondents are entitled to withdraw from a research project. Company policies and/or interviewer instructions should state the interviewer must give respondents the opportunity to not participate for any reason.*

Interviewers ...

1. will treat the respondent with respect and not influence him or her through direct or indirect attempts, including the framing of questions, a respondent's opinion or attitudes on any issue. *Interviewers cannot ask questions in a way that leads or influences respondents' answers, nor can they provide their own opinions, thoughts or feelings that might bias a respondent and therefore impact the answers they give.*
2. will obtain and document permission of a parent, legal guardian or responsible guardian before interviewing children 12 years old or younger. Prior to obtaining permission, the interviewer should divulge the subject matter, length of interview and other special tasks that will be required. *Interviewers must take special care when interviewing children and young people. The informed consent of the parent or responsible adult must first be obtained for interviews with children. Parents or responsible adults must be told some specifics about the interview process and special tasks, such as audio or video recording, taste testing, respondent fees and special tasks, before permission is obtained.*

RESPONSIBILITIES TO CLIENTS

Data Collection Companies ...

1. will ensure that each study is conducted according to the client's specifications; *Procedures are implemented to conform or verify that client specifications are being followed.*
2. will observe confidentiality with all research techniques or methodologies and with information considered confidential or proprietary. Information will not be revealed that could be used to identify clients or respondents without proper authorization; *Respondent information will be linked to data collected only for research purposes and will not be used for any purpose other than legitimate research. Protect the confidentiality of anything learned about the respondent and/or his or her business.*
3. will ensure that companies, their employees and subcontractors involved in data collection take all reasonable precautions so that no more than one survey is conducted in one interview without explicit permission from the sponsorship company or companies; *Company policies or procedures indicate the practice of conducting more than one survey within an interview is not done without specific permission from the relevant clients.*
4. will report research results accurately and honestly; *Describe how the research was done in enough detail that a skilled researcher could repeat the study; provide data representative of a defined population or activity and enough data to yield projectable results; present the results understandably and fairly, including any results that may seem contradictory or unfavorable.*
5. will not misrepresent themselves as having qualifications, experience, skills or facilities that they do not possess; *If regularly subcontracting data collection, should not infer to clients and prospective clients that they possess this capability "in house"; claim only legitimate academic degrees, clients and other qualifications.*
6. will refrain from referring to membership in the Marketing Research Association as proof of competence, since the Association does not certify any person's or organization's competency or skill level. *MRA does not currently have a certification program for marketing research competency, therefore while members can state their membership in the Association, they cannot claim that this automatically conveys a message of their competency to carry out the marketing research process.*

RESPONSIBILITIES TO DATA COLLECTORS

Clients ...

1. will be responsible for providing products and services that are safe and fit for their intended use and disclose/label all product contents; *It is the client's responsibility to ensure that all test products are in compliance with all safety standards and that all product contents information is provided to the data collectors. Data Collectors should request in writing all pertinent information as well as emergency numbers for respondents and themselves.*
2. will provide oral or written instructions; *To ensure the success of the research, detailed instructions are to be provided prior to the start of any project. These instructions must be written and then confirmed orally for: understanding, ability of the agency to implement and agreement to comply.*
3. will not ask our members who subcontract research to engage in any activity that is not acceptable as defined in this Code or that is prohibited under any applicable federal, state and local laws, regulations and ordinances. *All MRA Members have agreed to comply with the Code as written and thus will not agree to, or ask anyone else to, knowingly violate any of the points of the Code.*

RESPONSIBILITIES TO THE GENERAL PUBLIC AND BUSINESS COMMUNITY

Data Collection Companies ...

1. will not intentionally abuse public confidence in marketing and opinion research; *Marketing research shall be conducted and reported for the sole purpose of providing factual information upon which decisions will be made. At no time is marketing research information to be used to intentionally mislead public opinion. Instances of abuse of public confidence undermine the credibility of our Industry.*
2. will not represent a non-research activity to be marketing and opinion research, such as:
 - questions whose sole objective is to obtain personal information about respondents, whether for legal, political, private or other purposes,
 - the compilation of lists, registers or data banks of names and addresses for any non-research purposes (e.g., canvassing or fundraising),
 - industrial, commercial or any other form of espionage,
 - the acquisition of information for use by credit rating services or similar organizations,
 - sales or promotional approaches to the respondent,

APPENDIX G

Traffic Management

APPENDIX G: TRAFFIC MANAGEMENT

This appendix presents suggested traffic control measures to facilitate the evacuation of the North Anna Power Station EPZ. Pages G-2 through G-24 detail Traffic Control Points (TCP), which are typically intersections within the EPZ; these points are established to facilitate the flow of evacuee traffic from within the EPZ. Table G-1 summarizes the TCP and the manpower and equipment needs. Figure G-1 provides detailed mapping of the location of each traffic control point.

Pages G-25 through G-45 detail the Access Control Points (ACP), which are typically on the periphery of the EPZ; these points are established to divert vehicles from entering the EPZ. Doing so provides all of the available roadway capacity within the EPZ to the evacuees. Table G-2 summarizes the ACP and the manpower and equipment needs to establish access control, while Figure G-2 provides a detailed map of the location of each ACP.

Manpower and equipment shortages are likely to arise; as such, prioritization of TCP and ACP was established to make the most efficient use of manpower and equipment in the event of an emergency. The use of ITS technologies, as outlined in Section 9, will also aid in overcoming manpower shortages.


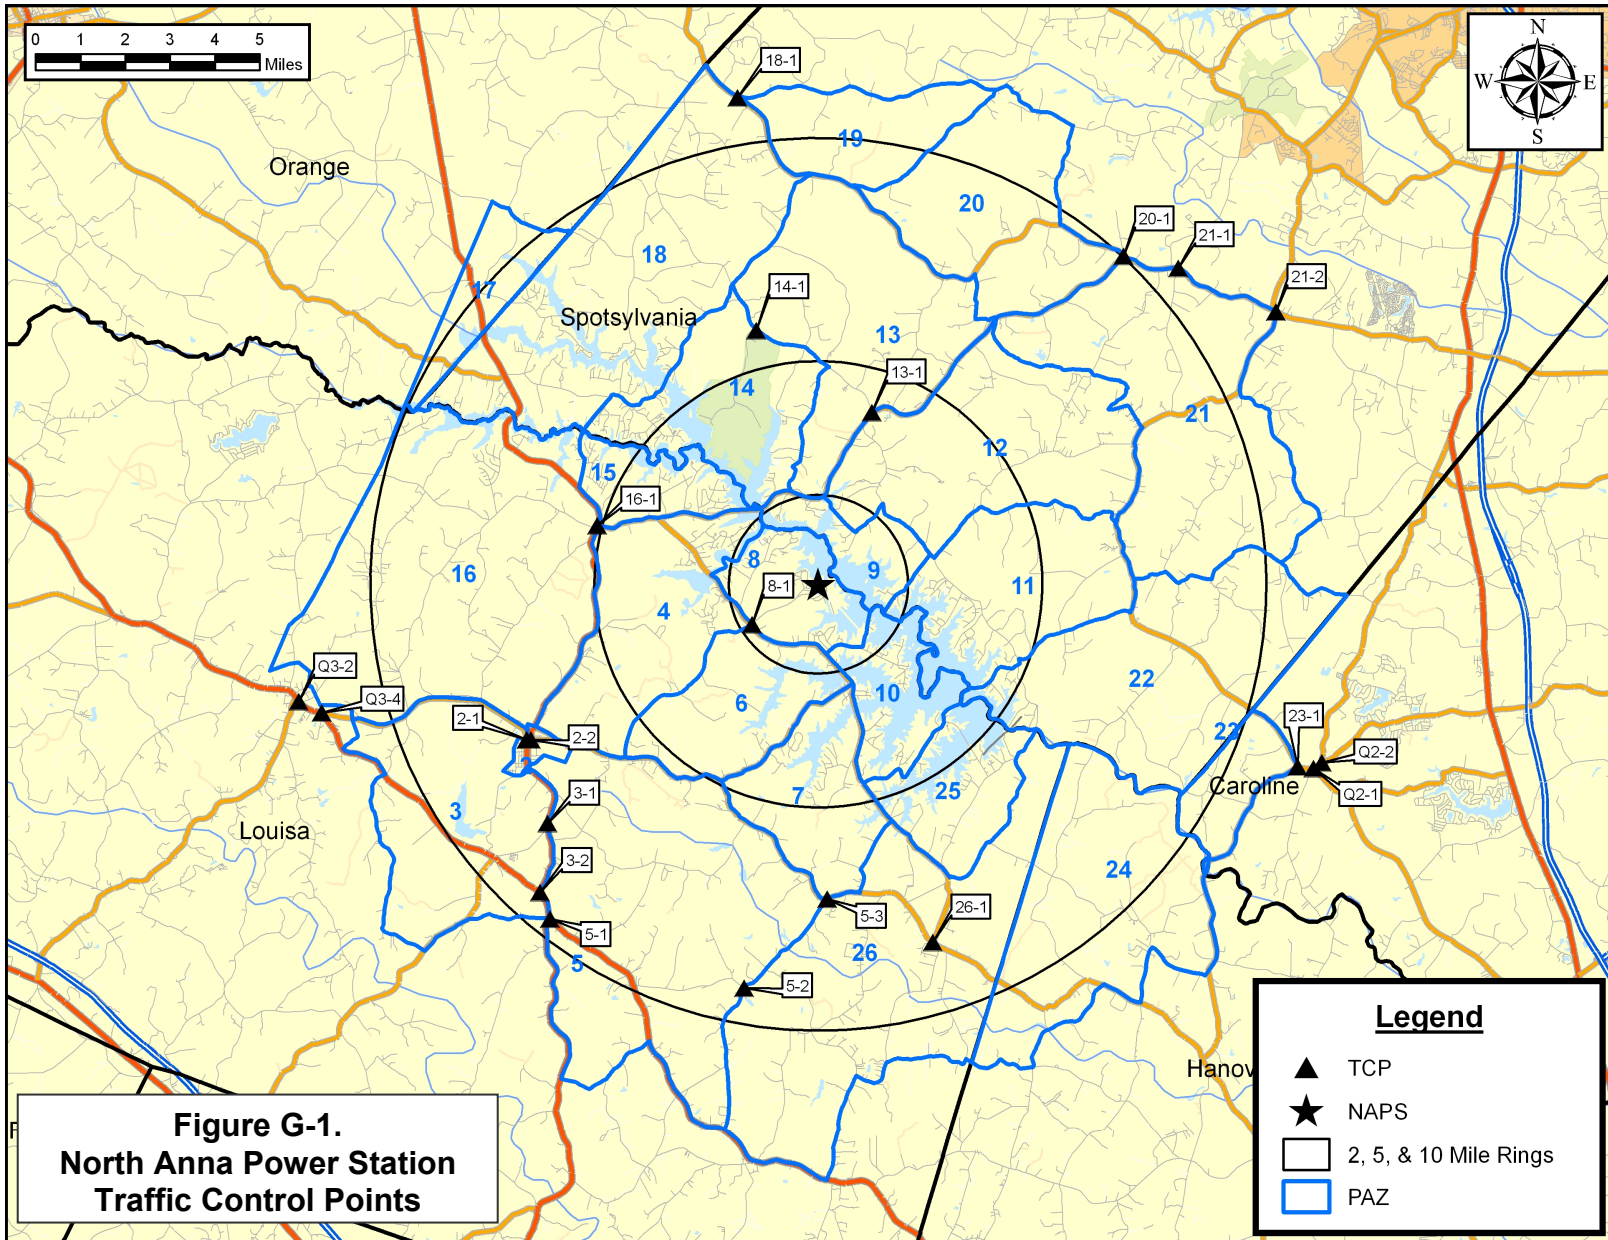


Table G-1. Traffic Control Points					
Priority	ID#	Town	Intersection Location	# of Guides	# of Cones
CAROLINE COUNTY					
3	23-1	Ruther Glen	State Hwy 738 & State Hwy 639	1	6
3	Q2-1	Ruther Glen	State Hwy 639 & Jericho Rd	1	3
3	Q2-2	Ruther Glen	Country Line Church Rd & Ladysmith Rd	1	3
Total Manpower & Equipment for Caroline County				3	12
LOUISA COUNTY					
1	2-1	Mineral	US Hwy 522 & State Hwy 22/208	1	3
1	2-2	Mineral	US Hwy 522 & 1st St	1	6
1	8-1	Mineral	State Hwy 652 & Hayley Rd	1	3
1	16-1	Spotsylvania	US Hwy 522 & State Hwy 208	2	9
1	Q3-4	Louisa	US Hwy 33 & State Hwy 22/208	2	6
2	3-2	Mineral	US Hwy 522 & US Hwy 33	2	6
2	5-1	Mineral	US Hwy 522 & US Hwy 33	2	3
2	Q3-2	Louisa	US Hwy 33 & Rose Wood Ave	1	6
3	3-1	Mineral	US Hwy 522 & State Hwy 605	1	3
3	5-2	Mineral	State Hwy 609 & Halls Store Rd	1	3
3	5-3	Mineral	State Hwy 609 & State Highway 618	1	3
3	26-1	Bumpass	State Hwy 618 & State Highway 701	1	6
Total Manpower & Equipment for Louisa County				16	57
SPOTSYLVANIA COUNTY					
1*	14-1	Spotsylvania	Lawyers Rd & State Park Ln	1	3
1	21-1	Spotsylvania	State Hwy 208 & State Highway 648	2	9
1	21-2	Spotsylvania	Partlow Rd & State Hwy 208	2	9
2	20-1	Spotsylvania	State Hwy 208 & State Highway 606	1	3
3	18-1	Spotsylvania	Post Oak Rd & W. Catharpin Rd	1	3
3	13-1	Spotsylvania	State Hwy 208 & State Highway 601	1	3
Total Manpower & Equipment for Spotsylvania County				8	30
Total Manpower & Equipment for EPZ				27	99

* 1 (if summer peak)
3 (if non-summer peak)

TCP

TOWN: MINERAL
 LOCATION: U.S. Highway 522 & State Highway 22/208
 TCP ID: 2-1
 PAZ: 2

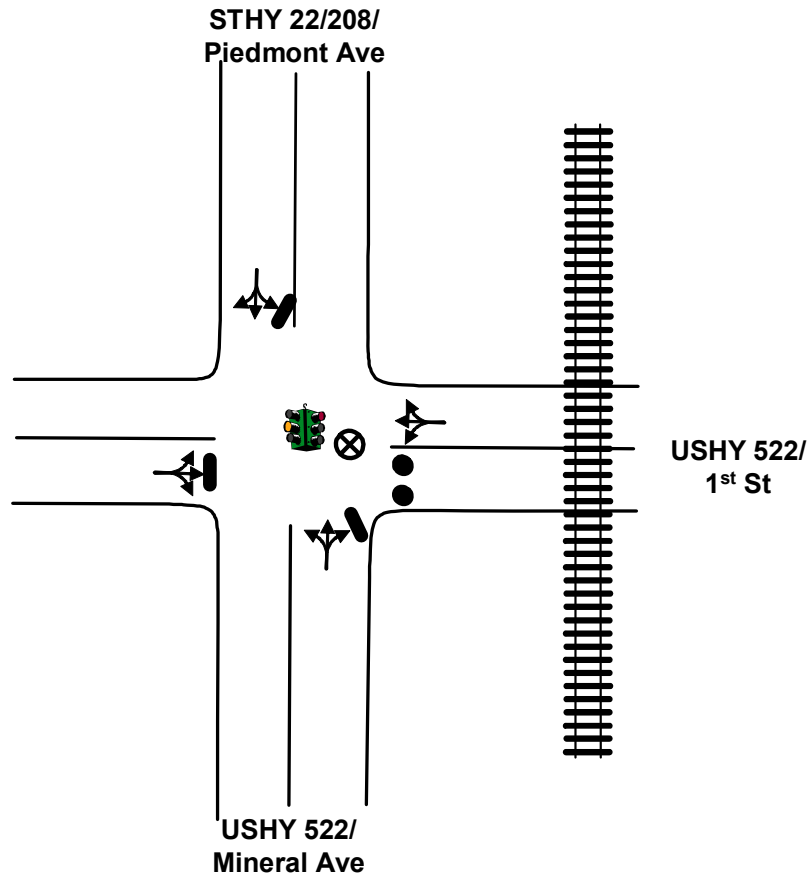

****Traffic Guide should position himself safely**

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft

ACTIONS TO BE TAKEN

1. Discourage northbound movement along U.S. Highway 522

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 3 Traffic Cones

LOCATION PRIORITY


1

TCP

TOWN: MINERAL
 LOCATION: U.S. Highway 522 & 1st St
 TCP ID: 2-2
 PAZ: 2

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● 8 ft ●

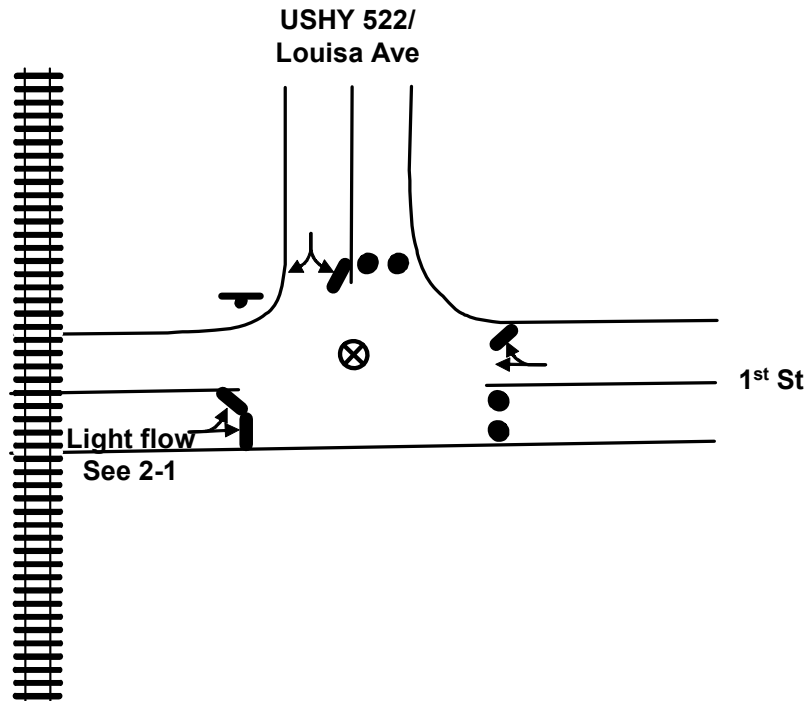

ACTIONS TO BE TAKEN

1. Discourage eastbound movement along 1st St
2. Discourage northbound movement along U.S. Highway 522

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 6 Traffic Barricades

LOCATION PRIORITY


1



****Traffic Guide should position himself safely**

TCP

TOWN: MINERAL
LOCATION: U.S. Highway 522 & State Highway 605
TCP ID: 3-1
PAZ: 3

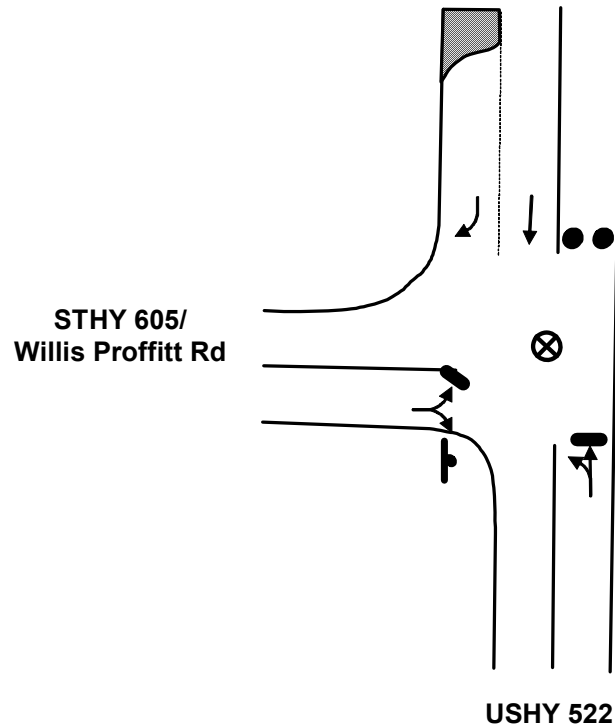

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊥ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft

ACTIONS TO BE TAKEN

1. Discourage northbound movement along U.S. Highway 522

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 3 Traffic Cones

LOCATION PRIORITY

3


****Traffic Guide should position himself safely**

TCP

TOWN: MINERAL
LOCATION: U.S. Highway 522 & U.S. Highway 33
TCP ID: 3-2
PAZ: 3

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft

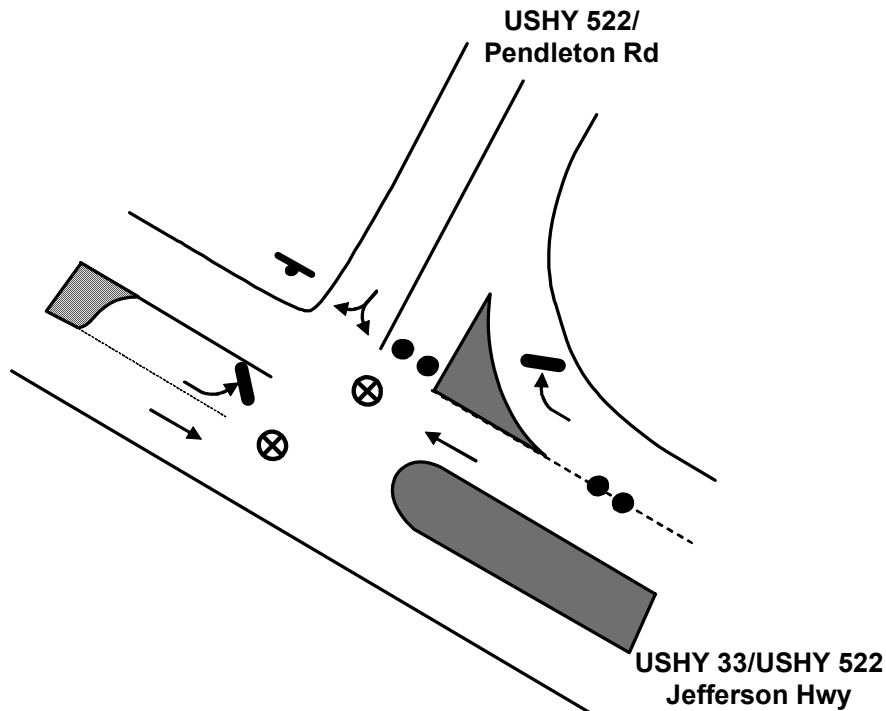

ACTIONS TO BE TAKEN

1. Discourage westbound movement along U.S. Highway 522

MANPOWER/EQUIPMENT ESTIMATE

- 2 Traffic Guide(s)
- 6 Traffic Barricades

LOCATION PRIORITY

2


****Traffic Guide should position himself safely**





TCP


TOWN: MINERAL
LOCATION: U.S. Highway 522 & U.S. Highway 33
TCP ID: 5-1
PAZ: 5

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 

2 PER LANE (LOCAL ROADS AND RAMPS)
 4 PER LANE (FREEWAY AND RAMPS)
-  TRAFFIC SIGNAL
- 

TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE):

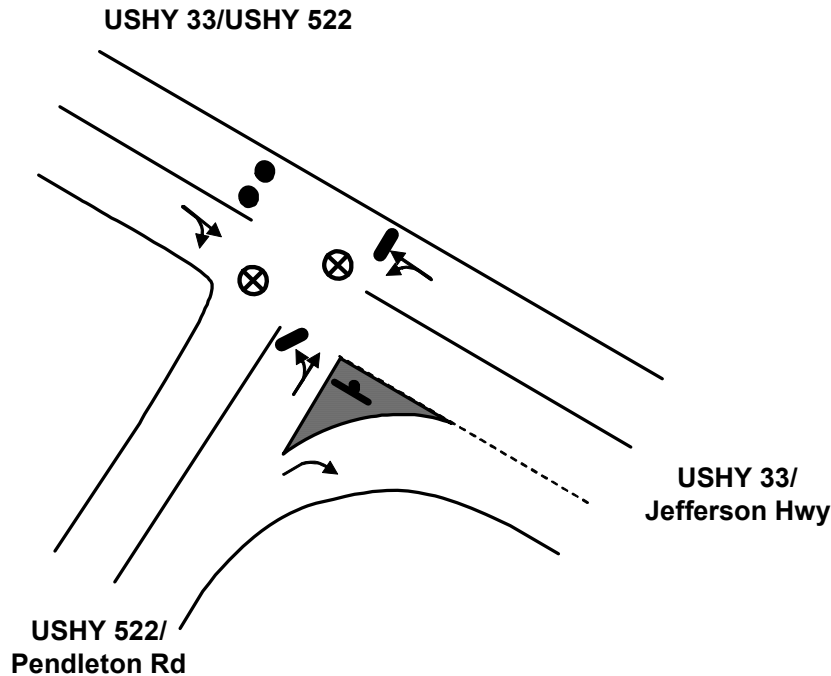

ACTIONS TO BE TAKEN

1. Discourage northbound movement along U.S. Highway 33/522

MANPOWER/EQUIPMENT ESTIMATE

- 2 Traffic Guide(s)
- 3 Traffic Cones

LOCATION PRIORITY


2



****Traffic Guide should position himself safely**



TCP

TOWN: MINERAL
LOCATION: State Highway 609 & Halls Store Rd
TCP ID: 5-2
PAZ: 5

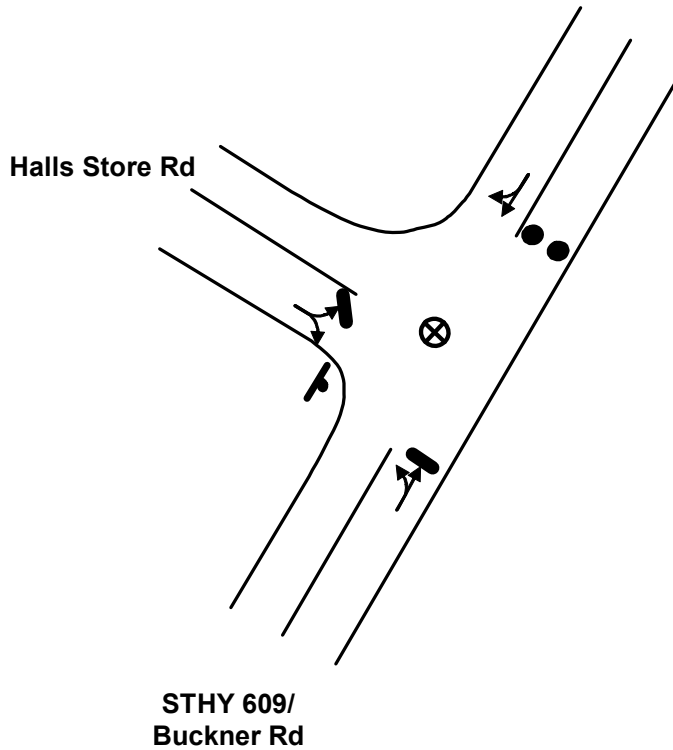

****Traffic Guide should position himself safely**

Key

- MOVEMENT FACILITATED
 - | MOVEMENT DISCOURAGED/DIVERTED
 - ⊗ TRAFFIC GUIDE
 - ⊥ STOP SIGN
 - ⊗ TRAFFIC BARRICADE
 - 2 PER LANE (LOCAL ROADS AND RAMPS)
 - 4 PER LANE (FREEWAY AND RAMPS)
 - 🚦 TRAFFIC SIGNAL
 - ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ●
- 
- 

ACTIONS TO BE TAKEN

1. Discourage northbound movement along State Highway 609

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 3 Traffic Cones


LOCATION PRIORITY


3

TCP

TOWN: MINERAL
LOCATION: State Highway 609 & State Highway 618
TCP ID: 5-3
PAZ: 5

Key

- MOVEMENT FACILITATED
 - | MOVEMENT DISCOURAGED/DIVERTED
 - ⊗ TRAFFIC GUIDE
 - ⊥ STOP SIGN
 - ⊗ TRAFFIC BARRICADE
 - 2 PER LANE (LOCAL ROADS AND RAMPS)
 - 4 PER LANE (FREEWAY AND RAMPS)
 - 🚦 TRAFFIC SIGNAL
 - ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft
- 

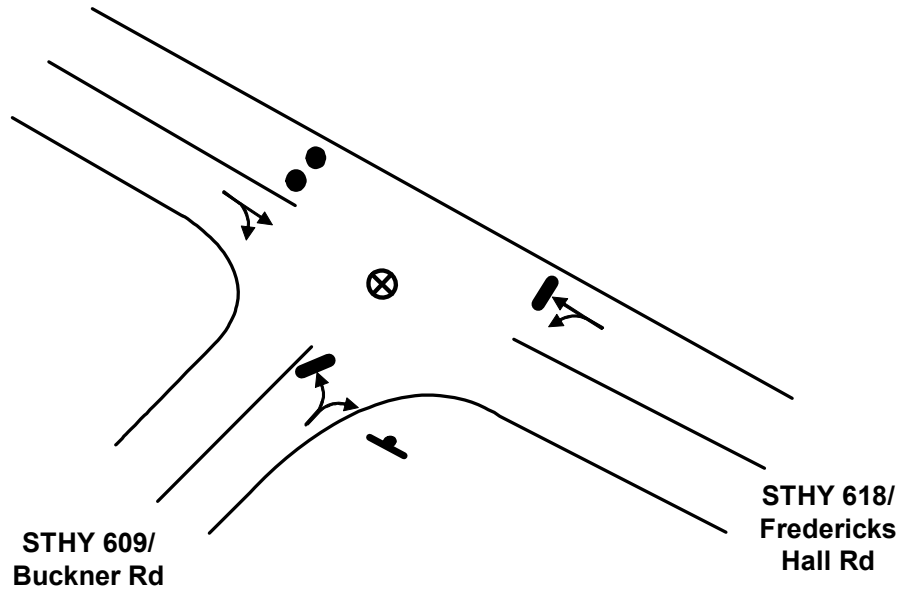

ACTIONS TO BE TAKEN

1. Discourage westbound movement along State Highway 618

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 3 Traffic Cones

LOCATION PRIORITY


3



****Traffic Guide should position himself safely**

TCP

TOWN: MINERAL
LOCATION: State Highway 652 & Hayley Rd
TCP ID: 8-1
PAZ: 8

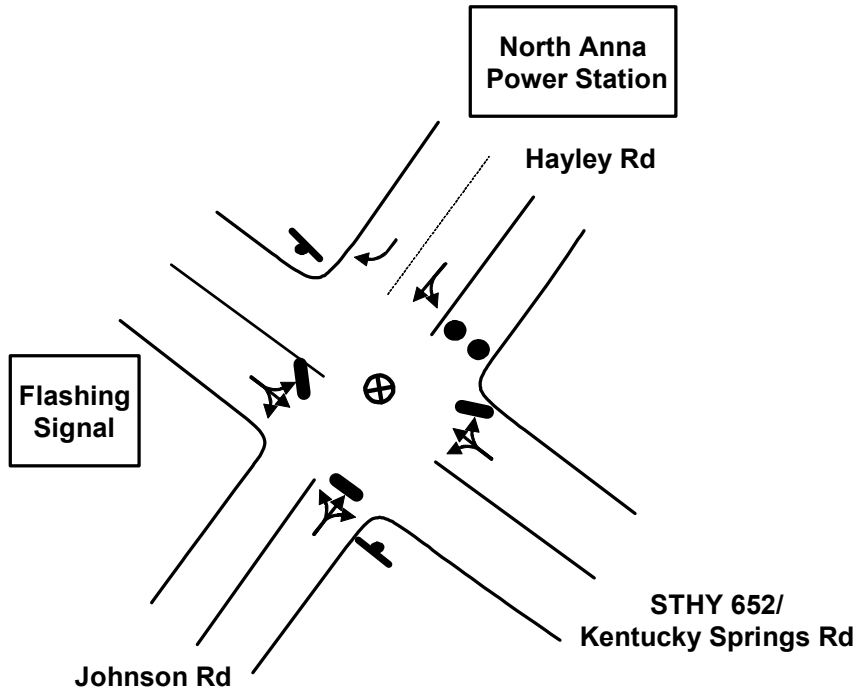

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft

ACTIONS TO BE TAKEN

1. Discourage access to Hayley Rd

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 3 Traffic Cones

LOCATION PRIORITY

1




****Traffic Guide should position himself safely**

TCP

TOWN: SPOTSYLVANIA
LOCATION: State Highway 208 & State Highway 601
TCP ID: 13-1
PAZ: 13

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft

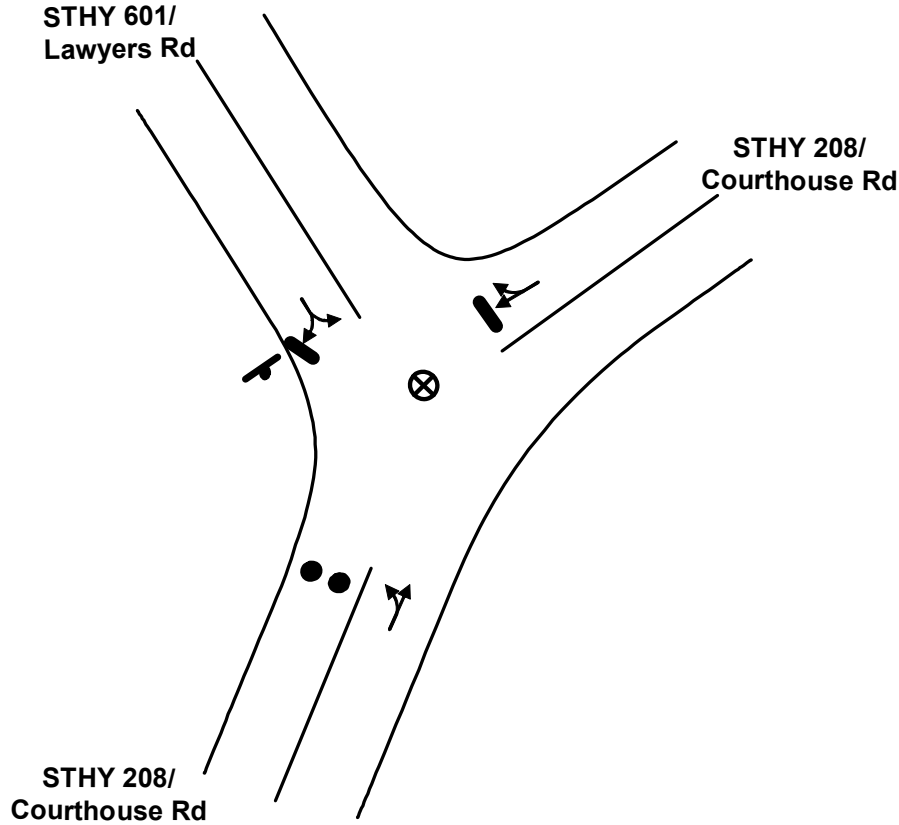

****Traffic Guide should position himself safely**

ACTIONS TO BE TAKEN

1. Discourage westbound movement along State Highway 208

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 3 Traffic Cones

LOCATION PRIORITY


3




TCP

TOWN: SPOTSYLVANIA
LOCATION: Lawyers Rd & State Park Ln
TCP ID: 14-1
PAZ: 14

Key

- MOVEMENT FACILITATED
 - | MOVEMENT DISCOURAGED/DIVERTED
 - ⊗ TRAFFIC GUIDE
 - ⊥ STOP SIGN
 - ⊗ TRAFFIC BARRICADE
 - 2 PER LANE (LOCAL ROADS AND RAMPS)
 - 4 PER LANE (FREEWAY AND RAMPS)
 - 🚦 TRAFFIC SIGNAL
 - ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft
- 

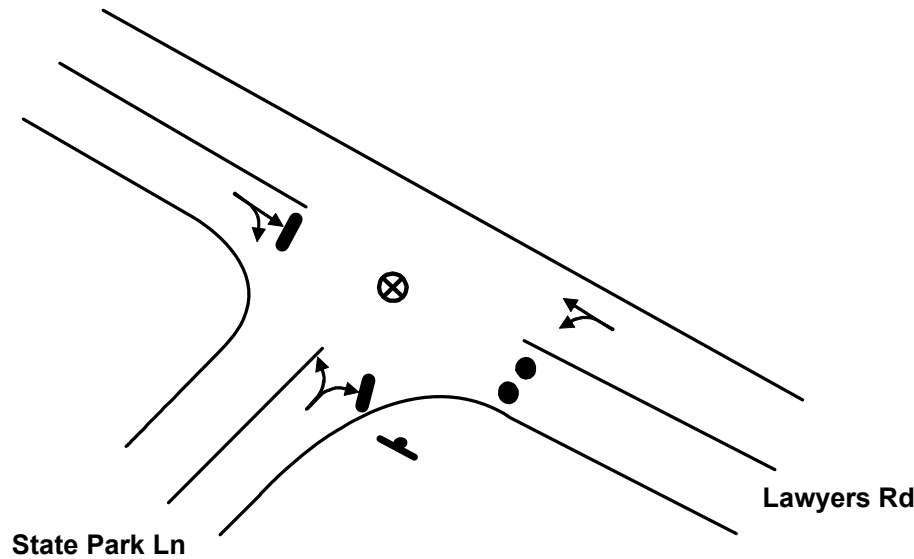

ACTIONS TO BE TAKEN

1. Discourage eastbound movement along Lawyers Rd

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 3 Traffic Cones


LOCATION PRIORITY

- 1 (if summer peak)
- 3 (non-summer peak)

****Traffic Guide should position himself safely**

TCP

TOWN: SPOTSYLVANIA
 LOCATION: U.S. Highway 522 & State Highway 208
 TCP ID: 16-1
 PAZ: 16

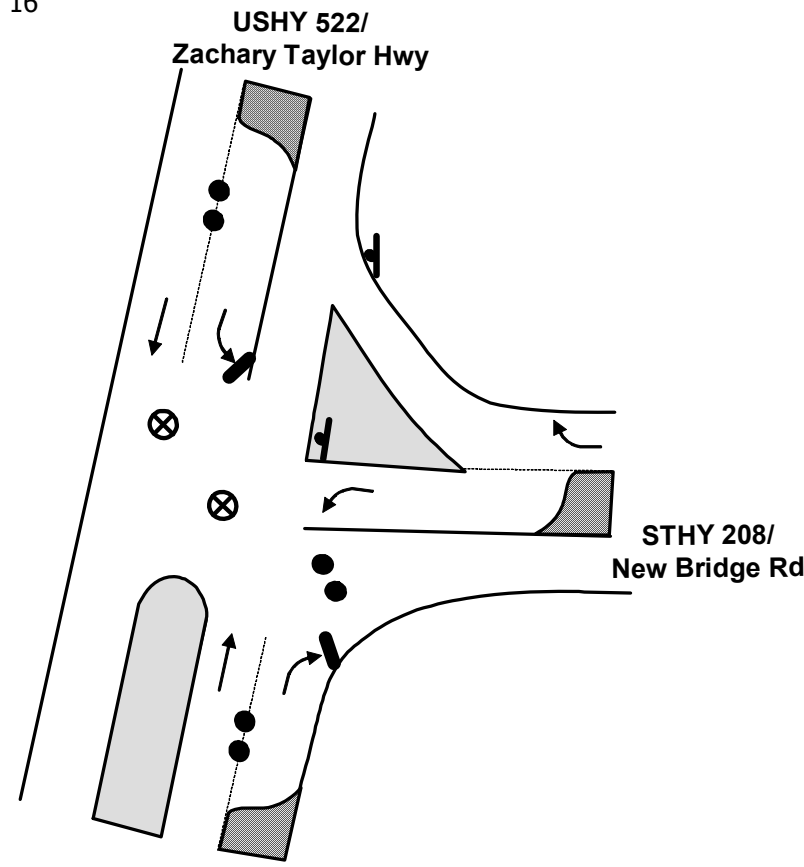

****Traffic Guide should position himself safely**

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft

ACTIONS TO BE TAKEN

1. Discourage eastbound movement along State Highway 208

MANPOWER/EQUIPMENT

- 2 Traffic Guide(s)
- 9 Traffic Cones

LOCATION PRIORITY


1

TCP

TOWN: SPOTSYLVANIA
LOCATION: Post Oak Rd & W. Catharpin Rd
TCP ID: 18-1
PAZ: 18

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft

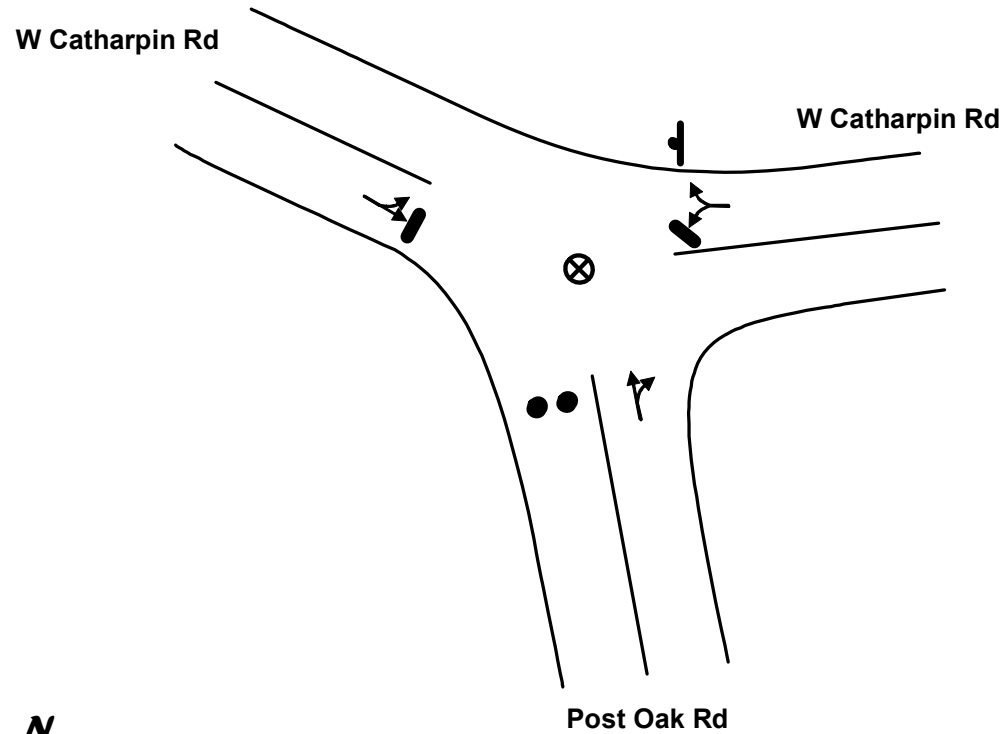

ACTIONS TO BE TAKEN

1. Discourage southbound movement along Post Oak Rd

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 3 Traffic Cones

LOCATION PRIORITY

3




****Traffic Guide should position himself safely**

TCP

TOWN: SPOTSYLVANIA
LOCATION: State Highway 208 & State Highway 606
TCP ID: 20-1
PAZ: 20

Key

- MOVEMENT FACILITATED
 - | MOVEMENT DISCOURAGED/DIVERTED
 - ⊗ TRAFFIC GUIDE
 - ⊥ STOP SIGN
 - ⊗ TRAFFIC BARRICADE
 - 2 PER LANE (LOCAL ROADS AND RAMPS)
 - 4 PER LANE (FREEWAY AND RAMPS)
 - 🚦 TRAFFIC SIGNAL
 - ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft
- 

ACTIONS TO BE TAKEN


- Discourage westbound movement along State Highway 208

MANPOWER/EQUIPMENT ESTIMATE

- Traffic Guide(s)
- Traffic Cones

LOCATION PRIORITY


2

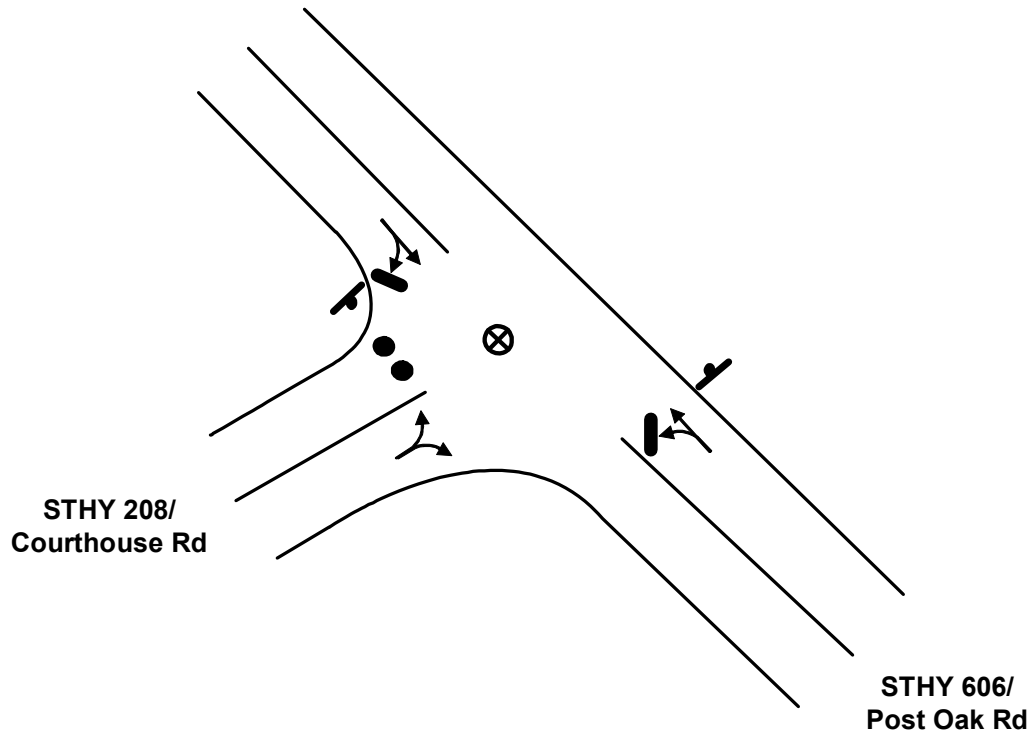

****Traffic Guide should position himself safely**

TCP

TOWN: SPOTSYLVANIA
 LOCATION: State Highway 208 & State Highway 648
 TCP ID: 21-1
 PAZ: 21

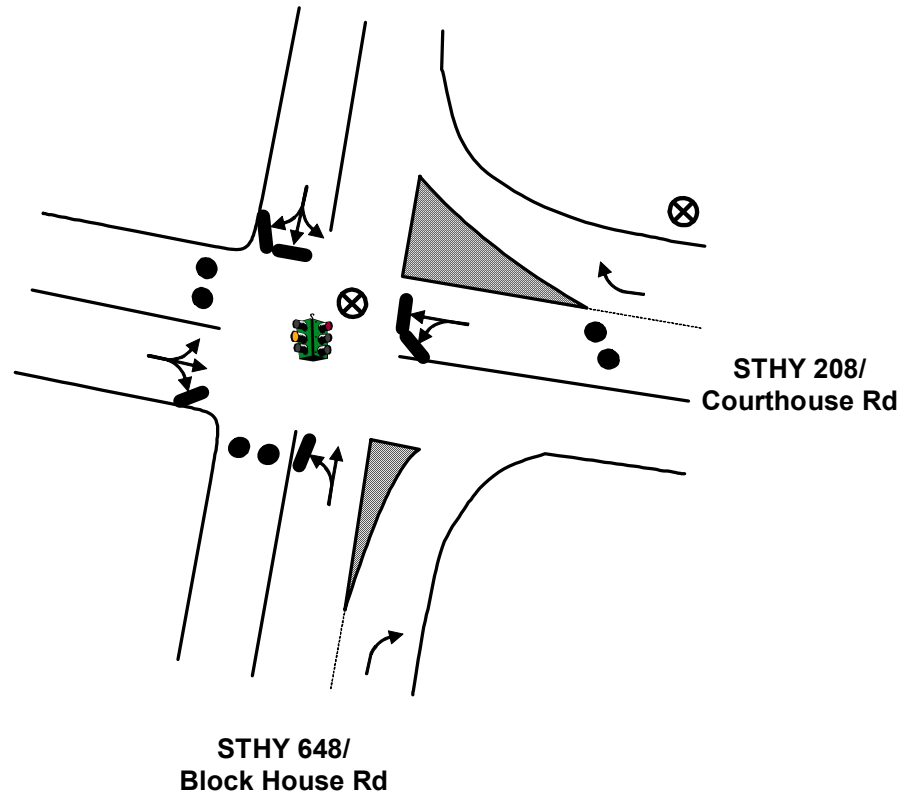

****Traffic Guide should position himself safely**

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊥ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft

ACTIONS TO BE TAKEN

1. Discourage westbound movement along State Highway 208
2. Discourage southbound movement along State Highway 648

MANPOWER/EQUIPMENT ESTIMATE

- 2 Traffic Guide(s)
- 9 Traffic Cones


LOCATION PRIORITY


1

TCP

TOWN: SPOTSYLVANIA
LOCATION: Partlow Rd & State Highway 208
TCP ID: 21-2
PAZ: 21

Key

- MOVEMENT FACILITATED
 - | MOVEMENT DISCOURAGED/DIVERTED
 - ⊗ TRAFFIC GUIDE
 - ⊘ STOP SIGN
 - ⊗ TRAFFIC BARRICADE
 - 2 PER LANE (LOCAL ROADS AND RAMPS)
 - 4 PER LANE (FREEWAY AND RAMPS)
 - 🚦 TRAFFIC SIGNAL
 - ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft
- 

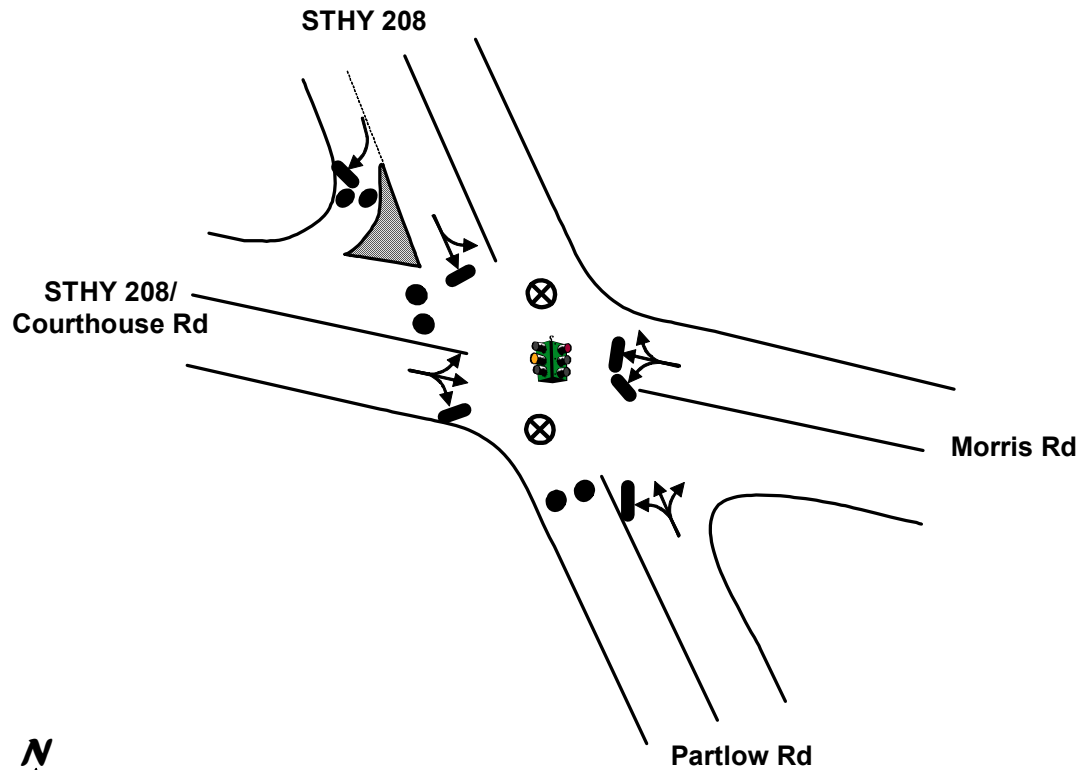

ACTIONS TO BE TAKEN

1. Discourage southbound movement along Partlow Rd
2. Discourage westbound movement along State Highway 208

MANPOWER/EQUIPMENT

- 2 Traffic Guide(s)
- 9 Traffic Cones

LOCATION PRIORITY


1

****Traffic Guide should position himself safely**

TCP

TOWN: RUTHER GLEN
LOCATION: State Highway 738 & State Highway 639
TCP ID: 23-1
PAZ: 23

Key

- MOVEMENT FACILITATED
 - | MOVEMENT DISCOURAGED/DIVERTED
 - ⊗ TRAFFIC GUIDE
 - ⊥ STOP SIGN
 - ⊗ TRAFFIC BARRICADE
 - 2 PER LANE (LOCAL ROADS AND RAMP)
 - 4 PER LANE (FREEWAY AND RAMP)
 - 🚦 TRAFFIC SIGNAL
 - ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft
- 

ACTIONS TO BE TAKEN

1. Discourage northbound movement along Partlow Rd
2. Discourage westbound movement along Anderson Mill Rd


MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 6 Traffic Cones

LOCATION PRIORITY

3

STHY 738/
Partlow Rd

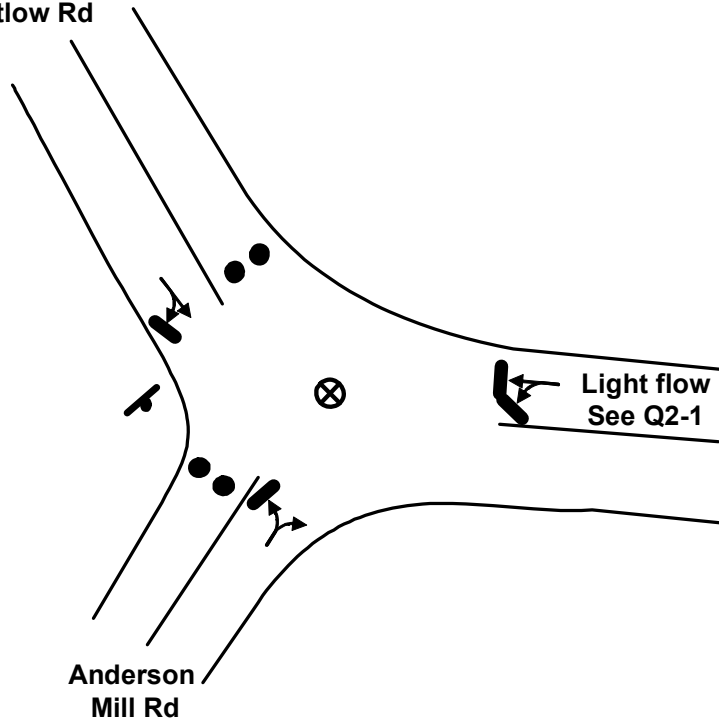

Light flow
See Q2-1

STHY 639/
Ladysmith Rd


Anderson
Mill Rd


****Traffic Guide should position himself safely**

TCP

TOWN: BUMPASS
LOCATION: State Highway 618 & State Highway 701
TCP ID: 26-1
PAZ: 26

Key

- MOVEMENT FACILITATED
 - | MOVEMENT DISCOURAGED/DIVERTED
 - ⊗ TRAFFIC GUIDE
 - ⊘ STOP SIGN
 - ⊗ TRAFFIC BARRICADE
 - 2 PER LANE (LOCAL ROADS AND RAMPS)
 - 4 PER LANE (FREEWAY AND RAMPS)
 - 🚦 TRAFFIC SIGNAL
 - ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● 8 ft ●
- 

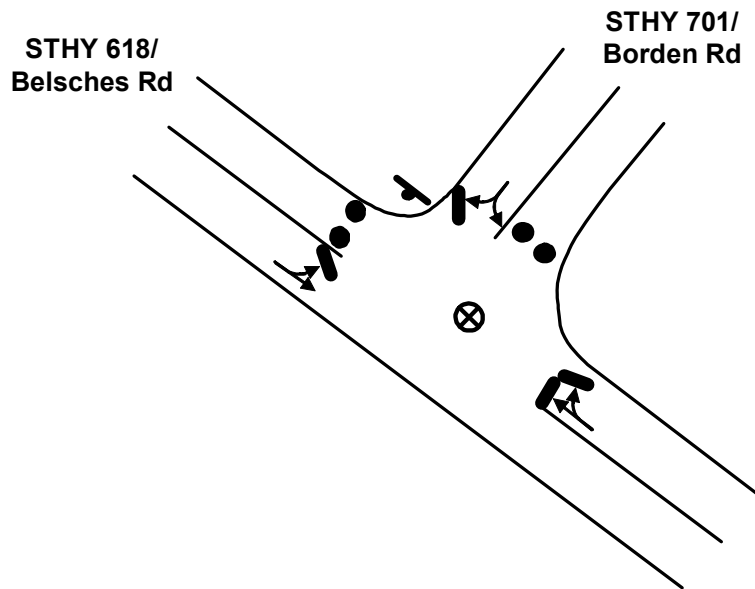

ACTIONS TO BE TAKEN

1. Discourage westbound movement along State Highway 618
2. Discourage northbound movement along State Highway 701

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 6 Traffic Cones

LOCATION PRIORITY

3




****Traffic Guide should position himself safely**

TCP

TOWN: RUTHER GLEN
LOCATION: State Highway 639 & Jericho Rd
TCP ID: Q2-1
PAZ: Shadow

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft

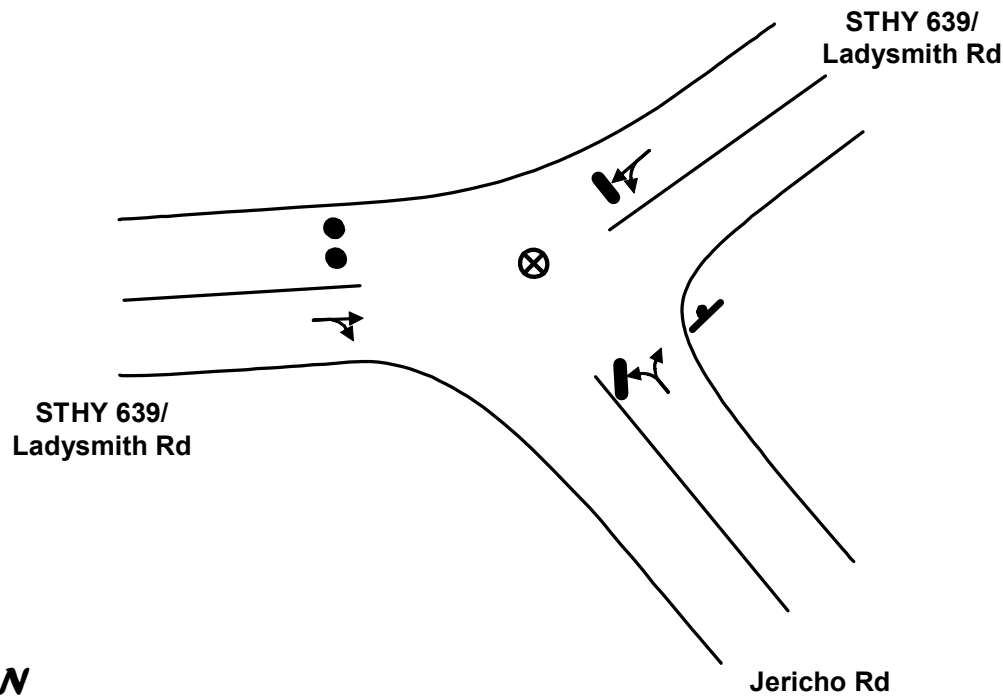

ACTIONS TO BE TAKEN

1. Discourage westbound movement along Ladysmith Rd

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 3 Traffic Cones

LOCATION PRIORITY

3

****Traffic Guide should position himself safely**




TCP

TOWN: RUTHER GLEN
LOCATION: Country Line Church Rd & Ladysmith Rd
TCP ID: Q2-2
PAZ: Shadow

Key

- MOVEMENT FACILITATED
 - | MOVEMENT DISCOURAGED/DIVERTED
 - ⊗ TRAFFIC GUIDE
 - ⊘ STOP SIGN
 - ⊗ TRAFFIC BARRICADE
 - 2 PER LANE (LOCAL ROADS AND RAMPS)
 - 4 PER LANE (FREEWAY AND RAMPS)
 - 🚦 TRAFFIC SIGNAL
 - ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft
-

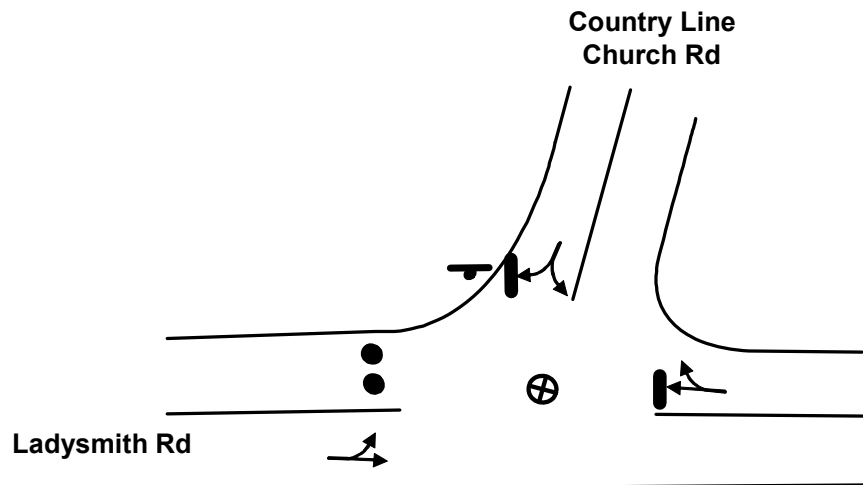

ACTIONS TO BE TAKEN

1. Discourage westbound movement along Ladysmith Rd

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 3 Traffic Cones

LOCATION PRIORITY

3




****Traffic Guide should position himself safely**

TCP

TOWN: LOUISA
LOCATION: U.S. Highway 33 & Rose Wood Ave
TCP ID: Q3-2
PAZ: Shadow

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ●● 8 ft ●●

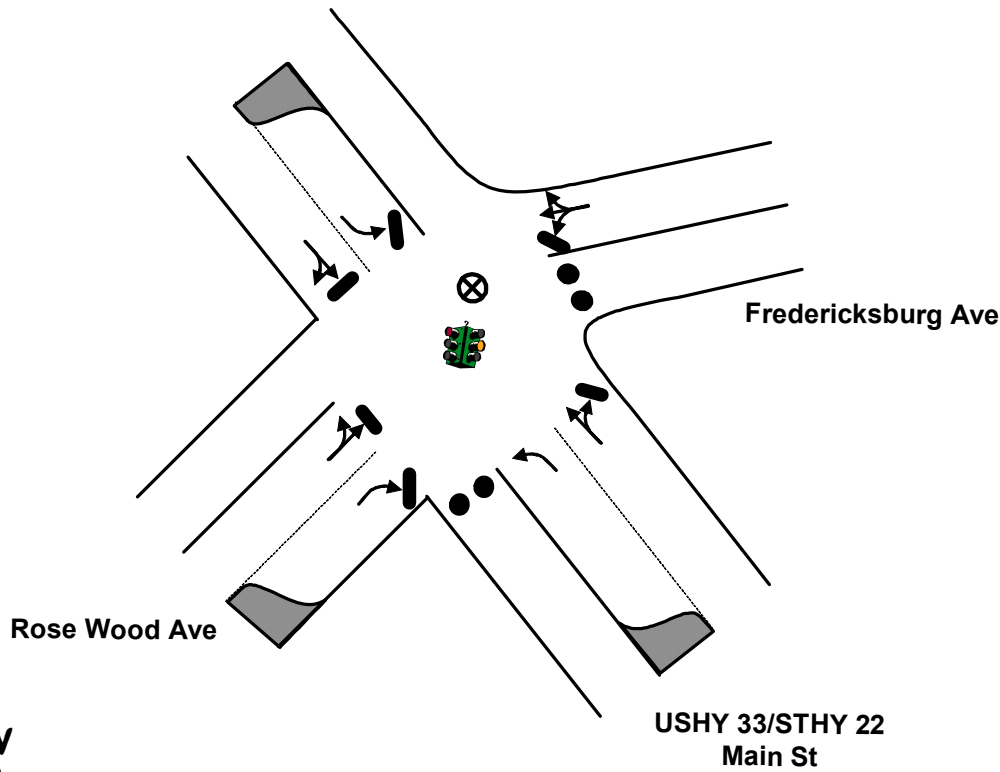

ACTIONS TO BE TAKEN

1. Discourage eastbound movement along U.S. Highway 33/State Highway 22
2. Discourage northbound movement along Fredericksburg Ave

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 6 Traffic Cones


LOCATION PRIORITY

2

****Traffic Guide should position himself safely**

TCP

TOWN: LOUISA
LOCATION: U.S. Highway 33 & State Highway 22/208
TCP ID: Q3-4
PAZ: Shadow

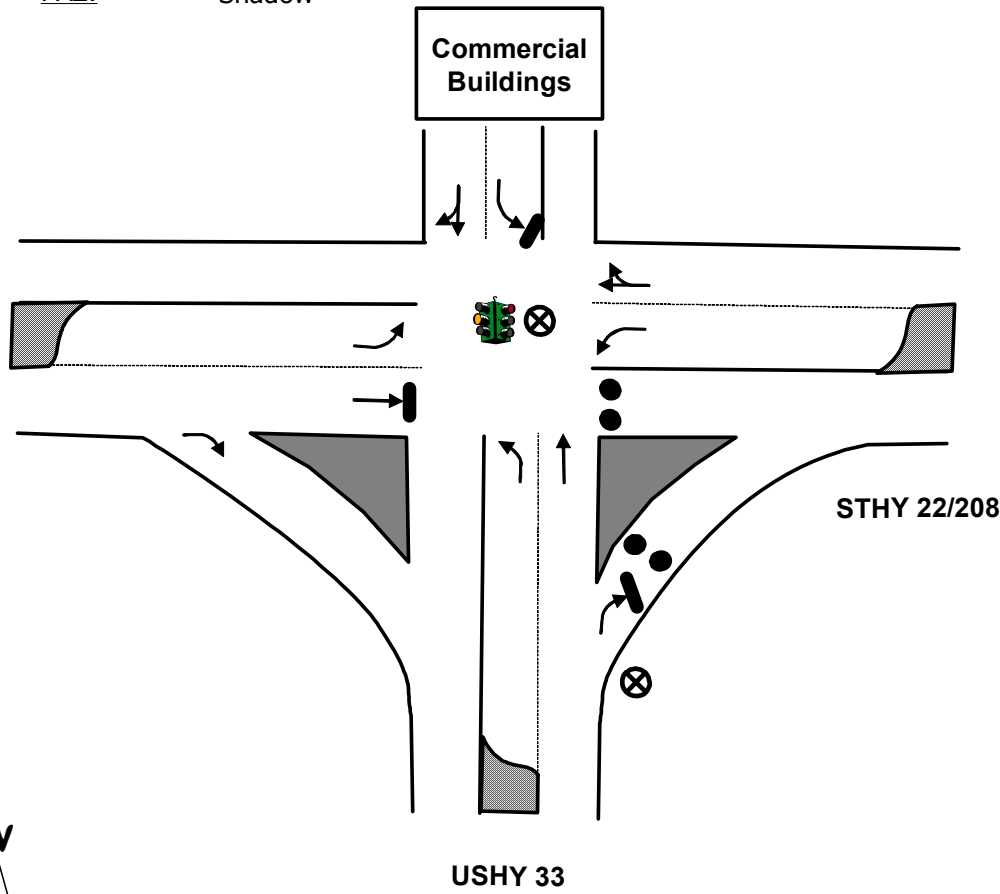

****Traffic Guide should position himself safely**

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊥ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft

ACTIONS TO BE TAKEN

1. Discourage eastbound movement along State Highway 22/208

MANPOWER/EQUIPMENT ESTIMATE

- 2 Traffic Guide(s)
- 6 Traffic Cones

LOCATION PRIORITY

1

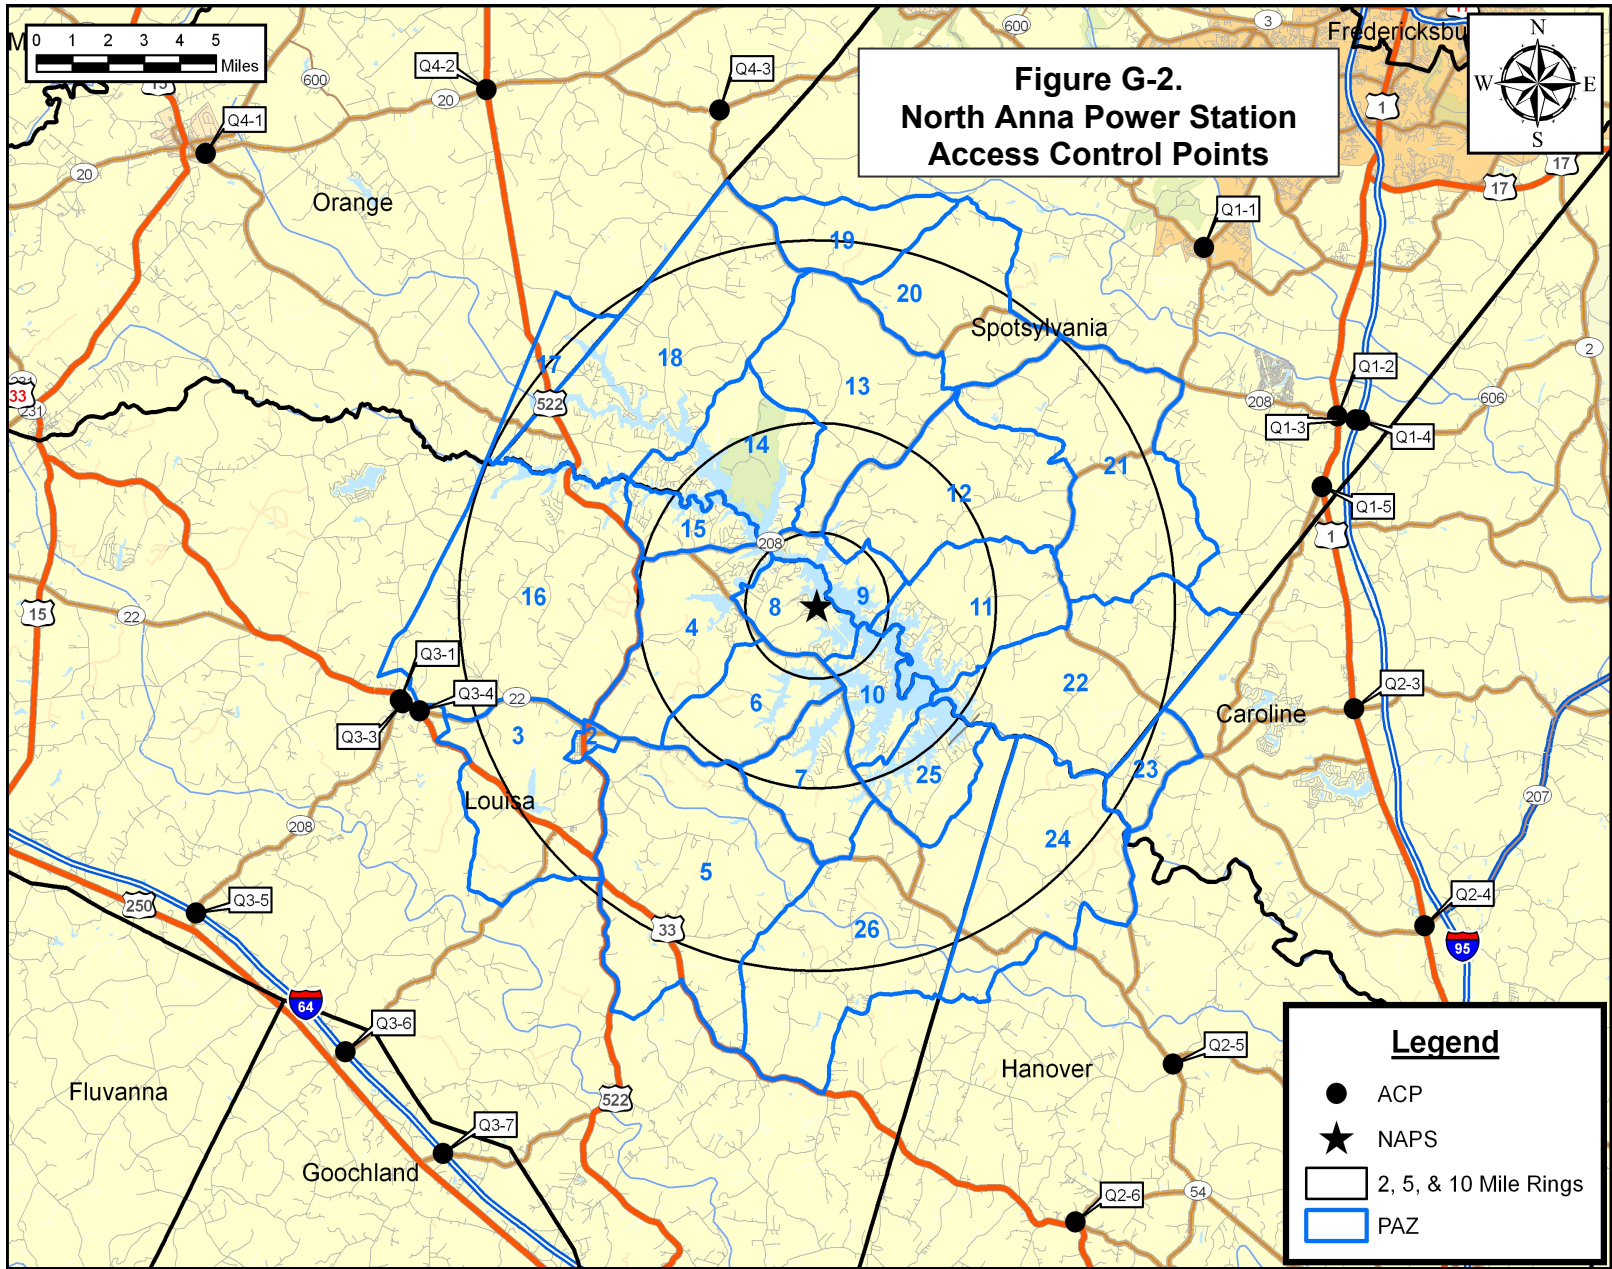


Table G-2. Access Control Points

Priority	ID#	Town	Intersection Location	# of Guides	# of Barricades
CAROLINE COUNTY					
2	Q2-3	Ruther Glen	US Hwy 1 & Ladysmith Rd	2	6
2	Q2-4	Ruther Glen	US Hwy 1 & Jericho Rd	2	6
Total Manpower & Equipment for Caroline County				4	12
GOOCHLAND COUNTY					
2	Q3-6	Louisa	US Hwy 64 & Shannon Hill Rd	1	2
2	Q3-7	Louisa	US Hwy 64 & Old Fredericksburg Rd	1	2
Total Manpower & Equipment for Goochland County				2	4
HANOVER COUNTY					
2	Q2-6	Montpelier	US Hwy 33 & State Hwy 54	1	2
3	Q2-5	Beaverdam	Old Ridge Rd & Coatesville Rd	1	3
Total Manpower & Equipment for Hanover County				2	5
LOUISA COUNTY					
1	Q3-4	Louisa	US Hwy 33 & State Hwy 22/208	2	6
1	Q3-8	Mineral	US Hwy 522 & Interstate 64 (WB) Off-ramp	1	2
2	Q3-1	Louisa	US Hwy 33 & State Hwy 208	1	2
2	Q3-3	Louisa	US Hwy 33 & State Hwy 208	2	2
2	Q3-5	Louisa	US Hwy 64 & State Hwy 208	1	2
Total Manpower & Equipment for Louisa County				7	14
ORANGE COUNTY					
1	Q4-2	Unionville	US Hwy 522 & State Hwy 20	2	2
3	Q4-1	Orange	State Hwy 20 & Monrovia Rd	1	4
3	Q4-3	Locust Grove	State Hwy 621 & State Hwy 606	1	2
Total Manpower & Equipment for Orange County				4	8
SPOTSYLVANIA COUNTY					
2	Q1-1	Spotsylvania	State Hwy 208 & State Hwy 613	1	4
2	Q1-2	Spotsylvania	US Hwy 1 & State Hwy 606	2	2
2	Q1-3	Spotsylvania	I-95 South & State Hwy 606	1	2
2	Q1-4	Spotsylvania	I-95 North & State Hwy 606	1	2
3	Q1-5	Ruther Glen	US Hwy 1 & State Hwy 603	1	4
Total Manpower & Equipment for Spotsylvania County				6	14
Total Manpower & Equipment for EPZ				25	57

ACP

TOWN: SPOTSYLVANIA
LOCATION: State Highway 208 & State Highway 613
ACP ID: Q1-1
PAZ: Shadow

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft

STHY 613/
Brock Rd

STHY 208/
Courthouse Rd

STHY 208/
Courthouse Rd

ACTIONS TO BE TAKEN

1. Discourage southbound movement along State Highway 208

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 4 Traffic Barricades

LOCATION PRIORITY


2



****Traffic Guide should position himself safely**

ACP

TOWN: SPOTSYLVANIA
LOCATION: U.S. Highway 1 & State Highway 606
ACP ID: Q1-2
PAZ: Shadow

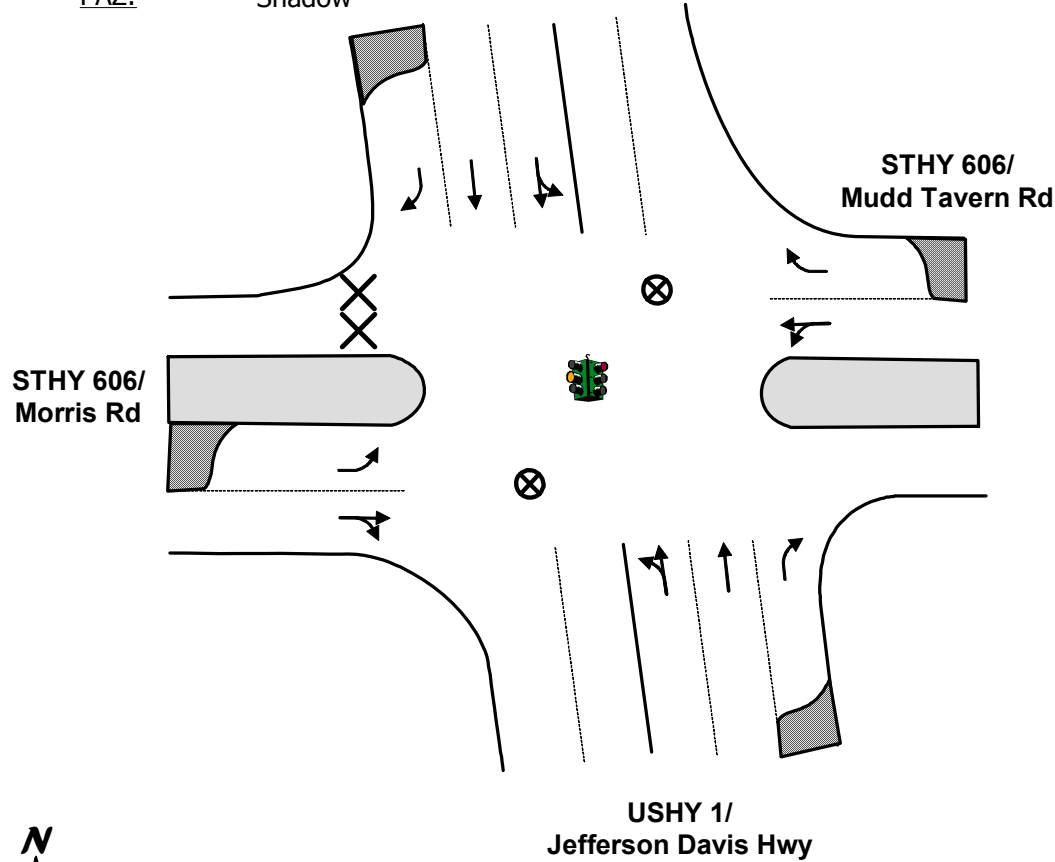

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft

ACTIONS TO BE TAKEN

1. Interdict and divert westbound movement on State Highway 606

MANPOWER/EQUIPMENT ESTIMATE

- 2 Traffic Guide(s)
- 2 Traffic Barricades

LOCATION PRIORITY

2


****Traffic Guide should position himself safely**

ACP

TOWN: SPOTSYLVANIA
LOCATION: I-95 South-Exit Ramp & State Highway 606
ACP ID: Q1-3
PAZ: Shadow

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ●● 8 ft ●●

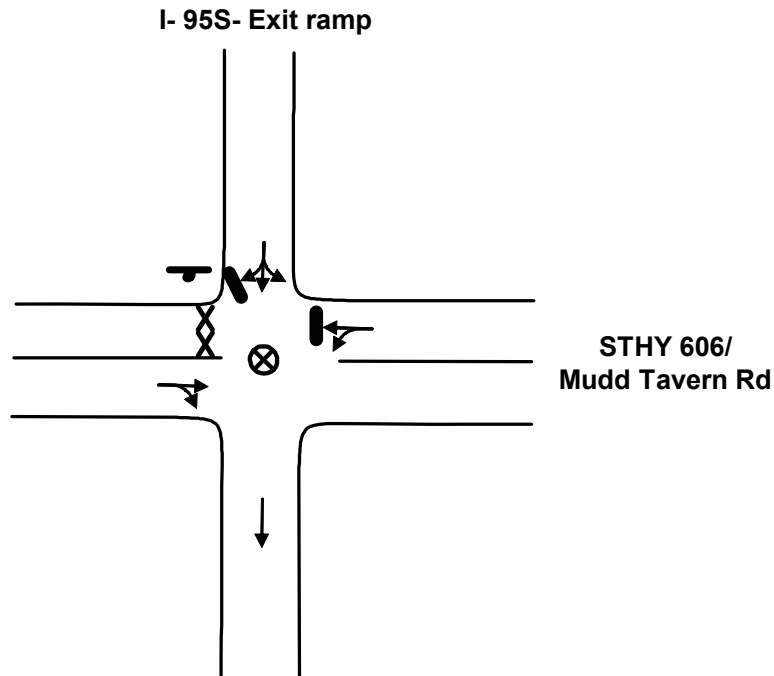

ACTIONS TO BE TAKEN

1. Interdict and divert southbound movement on I-95 Exit ramp
2. Interdict and divert westbound movement on State Highway 606

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 2 Traffic Barricades

LOCATION PRIORITY

2




****Traffic Guide should position himself safely**

ACP

TOWN: SPOTSYLVANIA
LOCATION: I-95 North-Exit Ramp & State Highway 606
ACP ID: Q1-4
PAZ: Shadow

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft

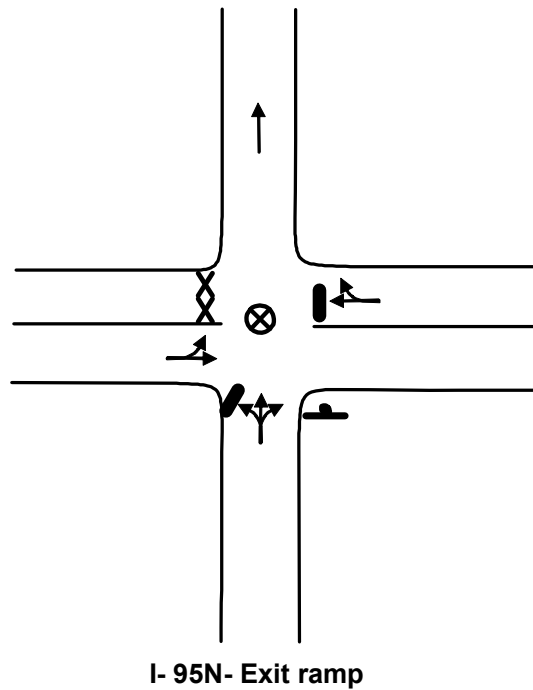

**STHY 606/
Mudd Tavern Rd**

I- 95N- Exit ramp

ACTIONS TO BE TAKEN

1. Interdict and divert westbound movement on State Highway 606

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 2 Traffic Barricades

LOCATION PRIORITY

2

****Traffic Guide should position himself safely**




ACP

TOWN: RUTHER GLEN
LOCATION: U.S. Highway 1 & State Highway 603
ACP ID: Q1-5
PAZ: Shadow

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft

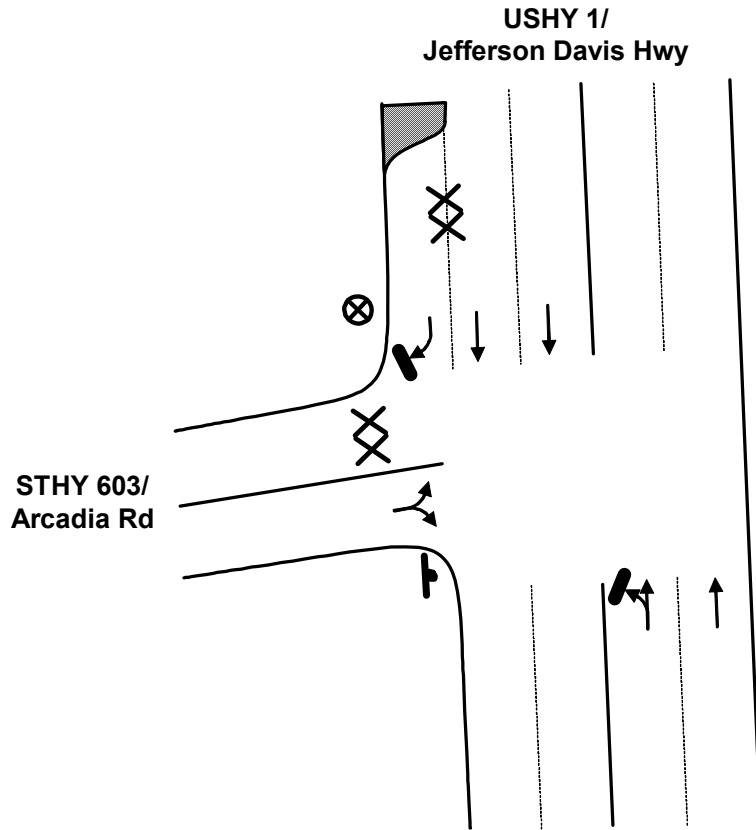

ACTIONS TO BE TAKEN

1. Interdict and divert westbound movement on State Highway 603

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 4 Traffic Barricades

LOCATION PRIORITY

3


****Traffic Guide should position himself safely**

ACP

TOWN: RUTHER GLEN
LOCATION: U.S. Highway 1 & Ladysmith Rd
ACP ID: Q2-3
PAZ: Shadow

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft

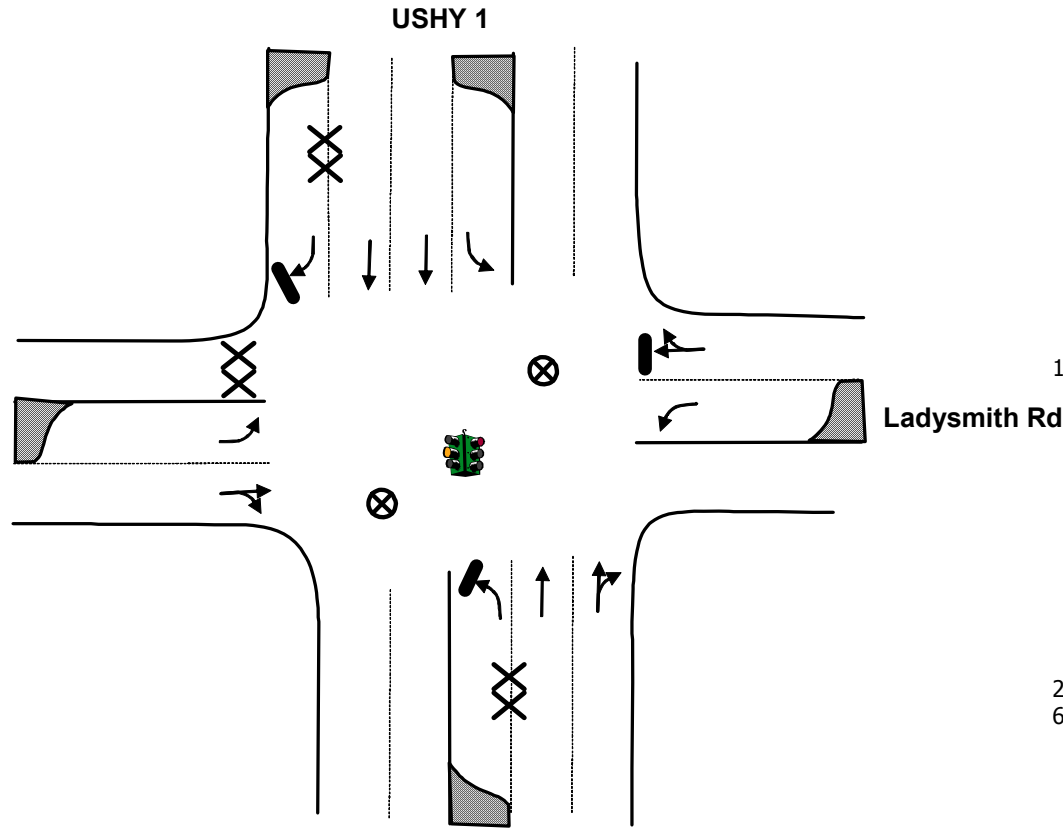

ACTIONS TO BE TAKEN

1. Interdict and divert westbound movement on Ladysmith Rd

MANPOWER/EQUIPMENT ESTIMATE

- 2 Traffic Guide(s)
- 6 Traffic Barricades

LOCATION PRIORITY

2


****Traffic Guide should position himself safely**

ACP

TOWN: RUTHER GLEN
LOCATION: U.S. Highway 1 & Jericho Rd
ACP ID: Q2-4
PAZ: Shadow

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ●● 8 ft ●●

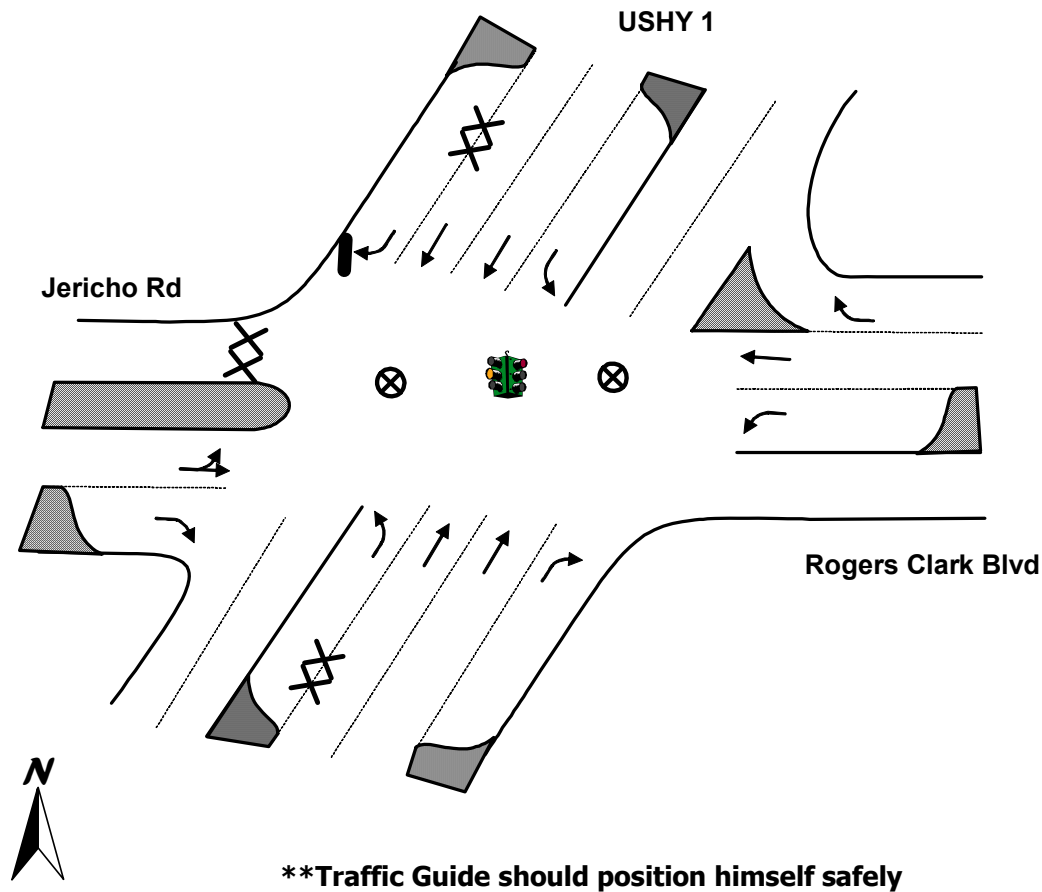

ACTIONS TO BE TAKEN

1. Interdict and divert westbound movement on Jericho Rd

MANPOWER/EQUIPMENT ESTIMATE

- 2 Traffic Guide(s)
- 6 Traffic Barricades

LOCATION PRIORITY

2


****Traffic Guide should position himself safely**

ACP

TOWN: BEAVERDAM
LOCATION: Old Ridge Rd & Coatesville Rd
ACP ID: Q2-5
PAZ: Shadow

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft

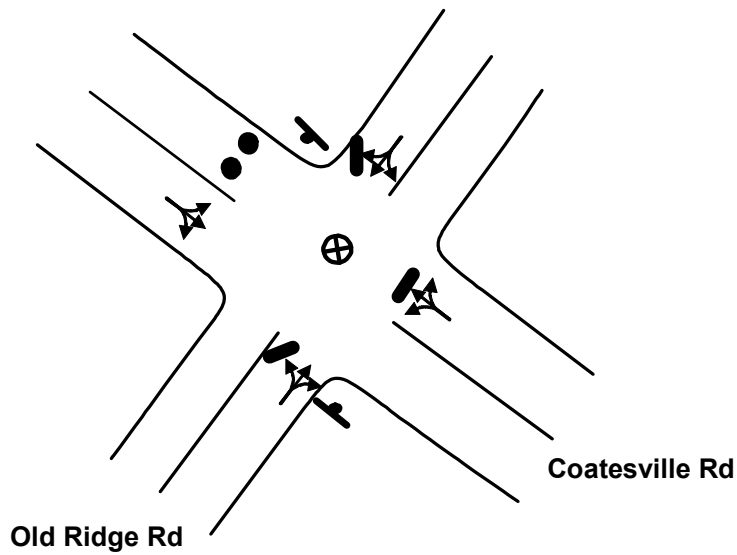

ACTIONS TO BE TAKEN

1. Interdict and divert westbound movement on Coatesville Rd

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 3 Traffic Cones

LOCATION PRIORITY


3


****Traffic Guide should position himself safely**

ACP

TOWN: MONTPELIER
LOCATION: U.S. Highway 33 & State Highway 54
ACP ID: Q2-6
PAZ: Shadow

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
-  TRAFFIC SIGNAL
- ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft

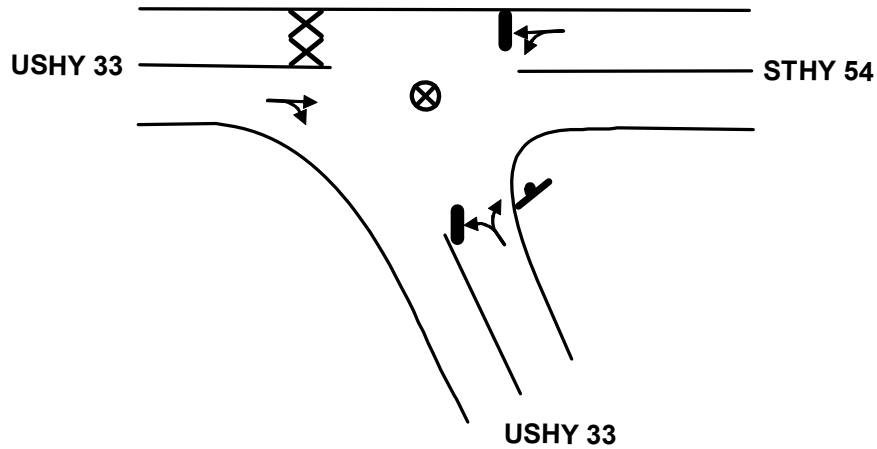

ACTIONS TO BE TAKEN

1. Interdict and divert westbound movement on U.S. Highway 33

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 2 Traffic Barricades

LOCATION PRIORITY

2




****Traffic Guide should position himself safely**

ACP

TOWN: LOUISA
LOCATION: U.S. Highway 33 & State Highway 208
ACP ID: Q3-1
PAZ: Shadow

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ●● 8 ft ●●

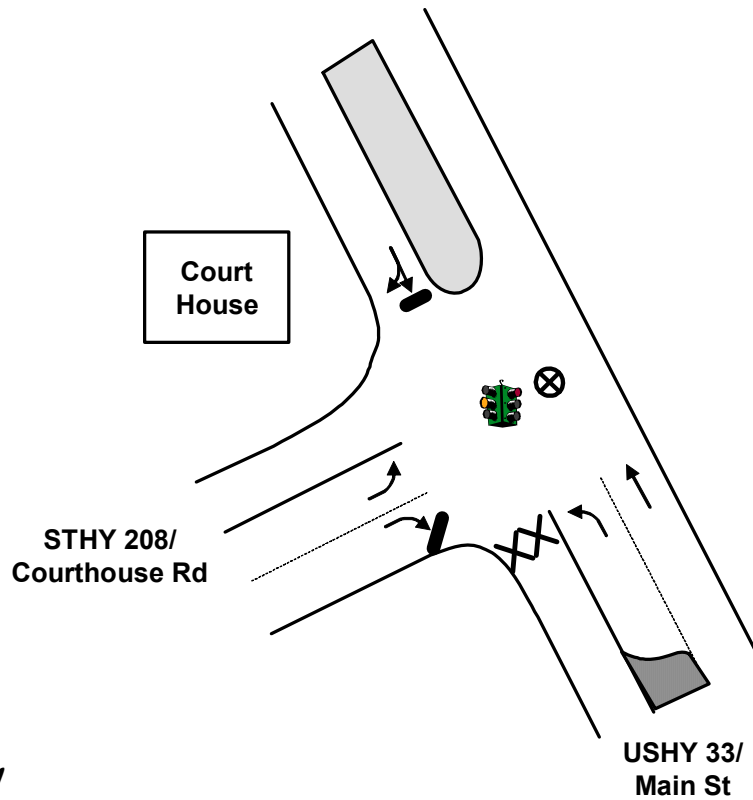

ACTIONS TO BE TAKEN

1. Interdict and divert eastbound movement along U.S. Highway 33

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 2 Traffic Barricades

LOCATION PRIORITY

2


****Traffic Guide should position himself safely**

ACP

TOWN: LOUISA
LOCATION: U.S.Highway 33 & State Highway 208
ACP ID: Q3-3
PAZ: Shadow

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft

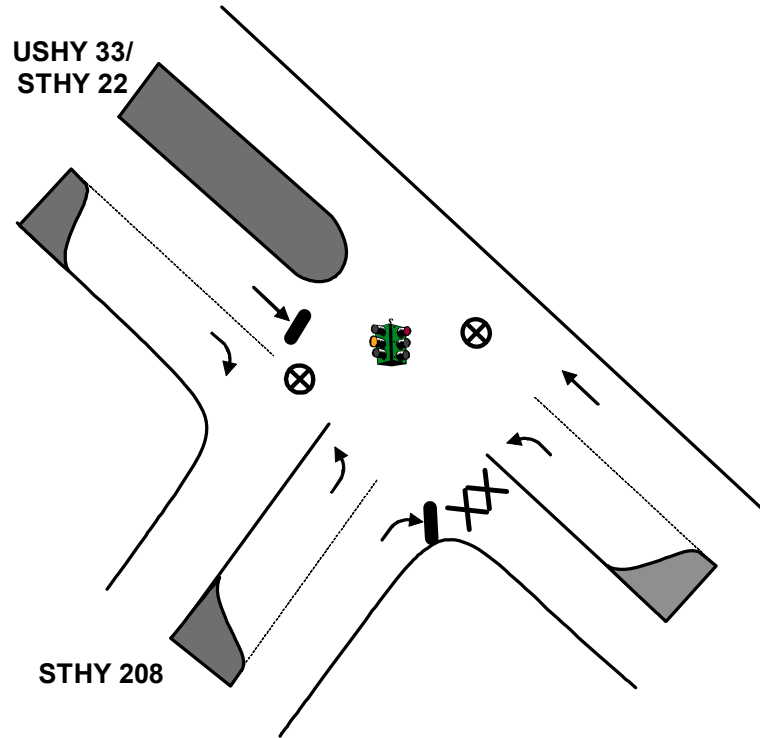

ACTIONS TO BE TAKEN

1. Interdict and divert eastbound movement on U.S. Highway 33/ State Highway 22

MANPOWER/EQUIPMENT ESTIMATE

- 2 Traffic Guide(s)
- 2 Traffic Barricades

LOCATION PRIORITY


2

****Traffic Guide should position himself safely**



ACP

TOWN: LOUISA
LOCATION: U.S. Highway 33 & State Highway 22/208
ACP ID: Q3-4
PAZ: Shadow

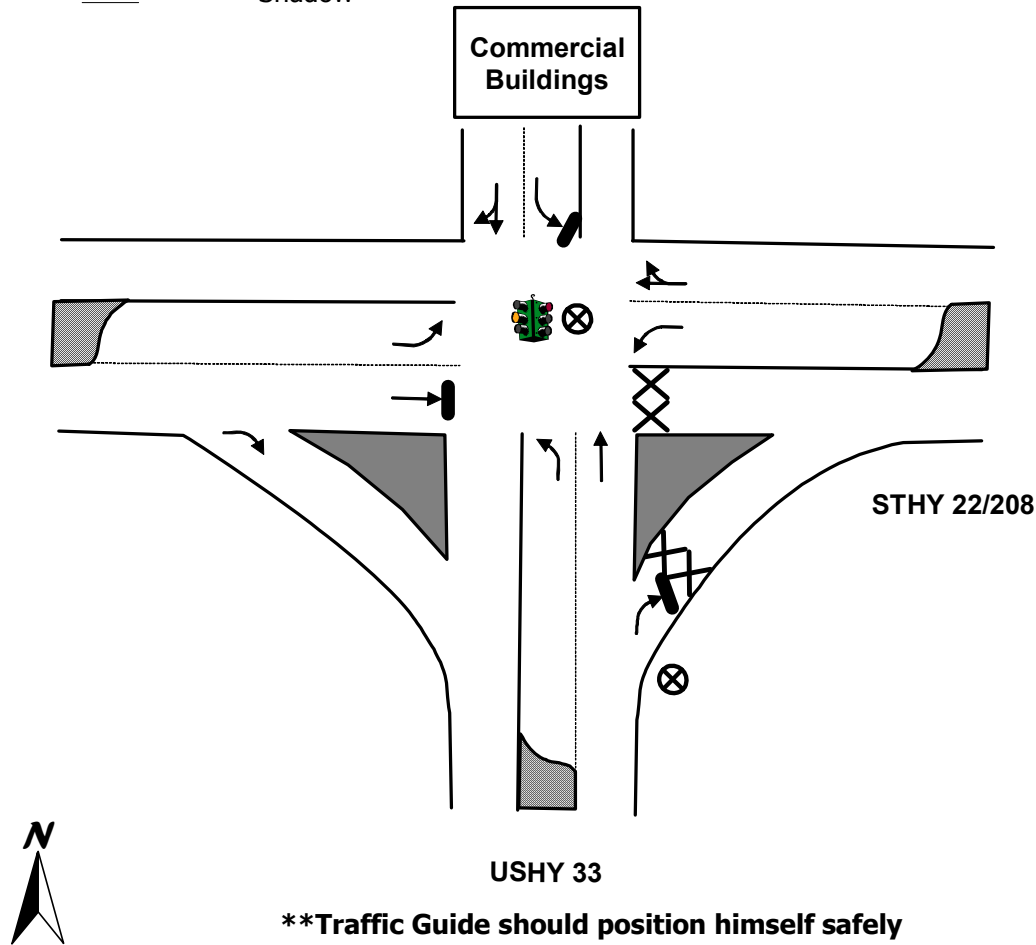

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft

ACTIONS TO BE TAKEN

1. Interdict and divert westbound movement on State Highway 22/208

MANPOWER/EQUIPMENT ESTIMATE

- 2 Traffic Guide(s)
- 4 Traffic Barricades

LOCATION PRIORITY


1

ACP

TOWN: LOUISA
LOCATION: U.S. Highway 64 & State Highway 208
ACP ID: Q3-5
PAZ: Shadow

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ●●● 8 ft

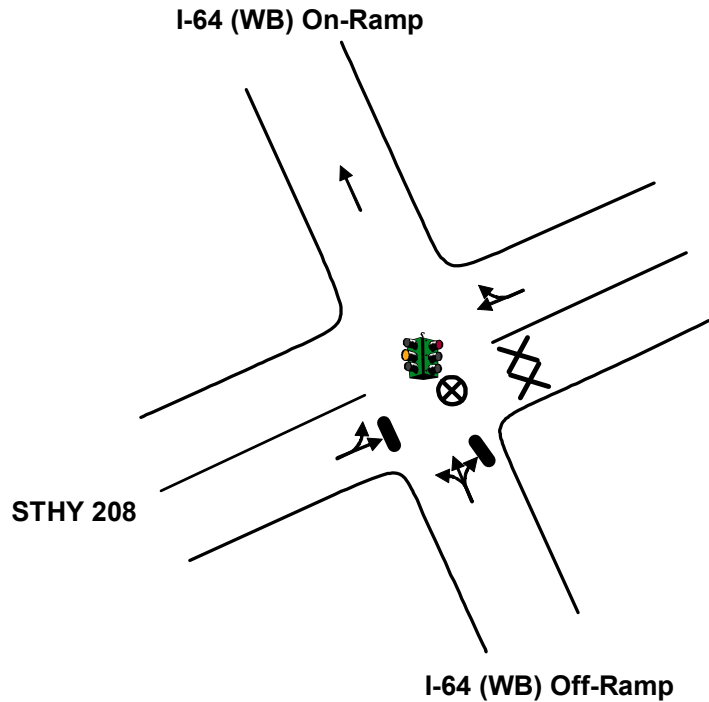

ACTIONS TO BE TAKEN

1. Interdict and divert eastbound movement on State Highway 208

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 2 Traffic Barricades

LOCATION PRIORITY

2




****Traffic Guide should position himself safely**

ACP

TOWN: LOUISA
LOCATION: U.S. Highway 64 & Shannon Hill Rd
ACP ID: Q3-6
PAZ: Shadow

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ●● 8 ft ●●

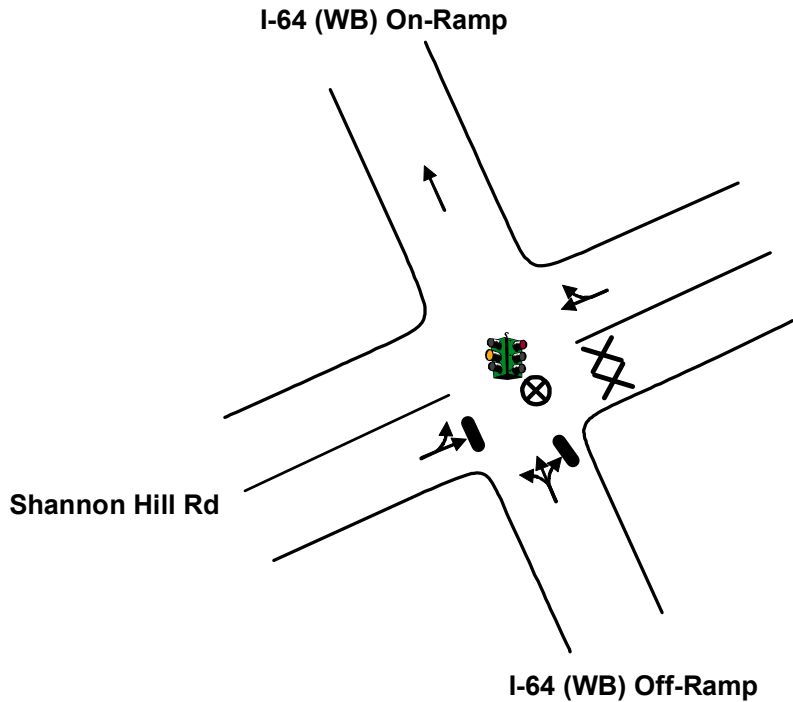

ACTIONS TO BE TAKEN

1. Interdict and divert eastbound movement on Shannon Hill Rd

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 2 Traffic Barricades

LOCATION PRIORITY

2




****Traffic Guide should position himself safely**

ACP

TOWN: LOUISA
LOCATION: U.S. Highway 64 & Old Fredericksburg Rd
ACP ID: Q3-7
PAZ: Shadow

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft

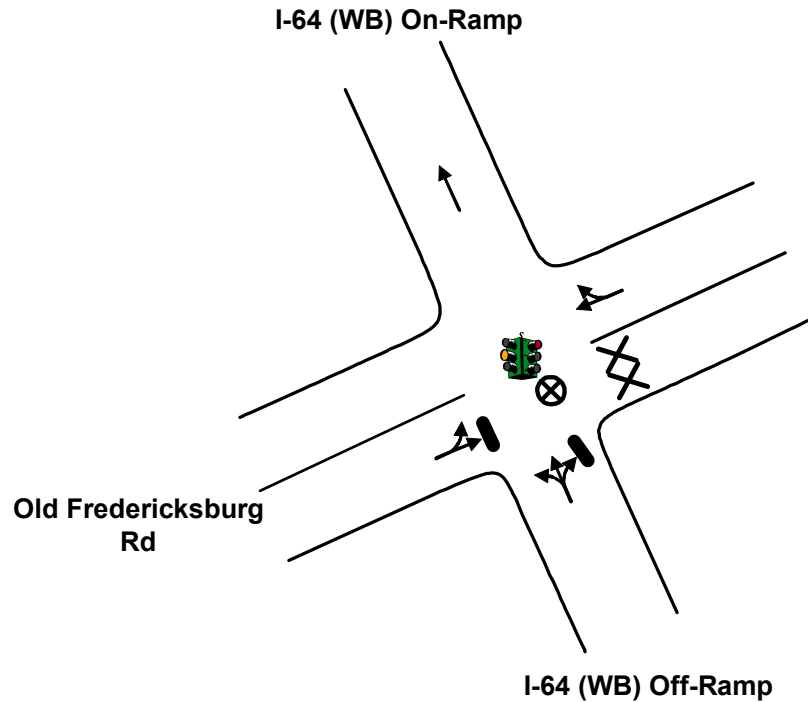

ACTIONS TO BE TAKEN

1. Interdict and divert eastbound movement on Old Fredericksburg Rd

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 2 Traffic Barricades

LOCATION PRIORITY

2




****Traffic Guide should position himself safely**

ACP

TOWN: MINERAL
LOCATION: U.S Highway 522 & Interstate 64 (WB) Off Ramp
ACP ID: Q3-8
PAZ: Shadow

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ●● 8 ft ●●

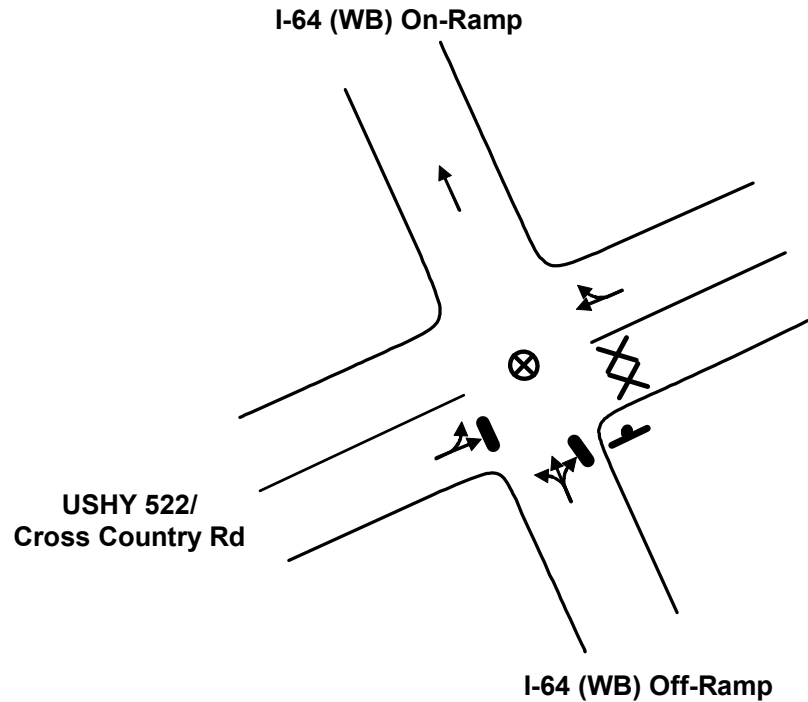

ACTIONS TO BE TAKEN

1. Interdict and divert northbound movement on U.S. Highway 522

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 2 Traffic Barricades

LOCATION PRIORITY

1


****Traffic Guide should position himself safely**

ACP

TOWN: ORANGE
 LOCATION: State Highway 20 & Monrovia Rd
 ACP ID: Q4-1
 PAZ: Shadow

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ●● 8 ft ●●

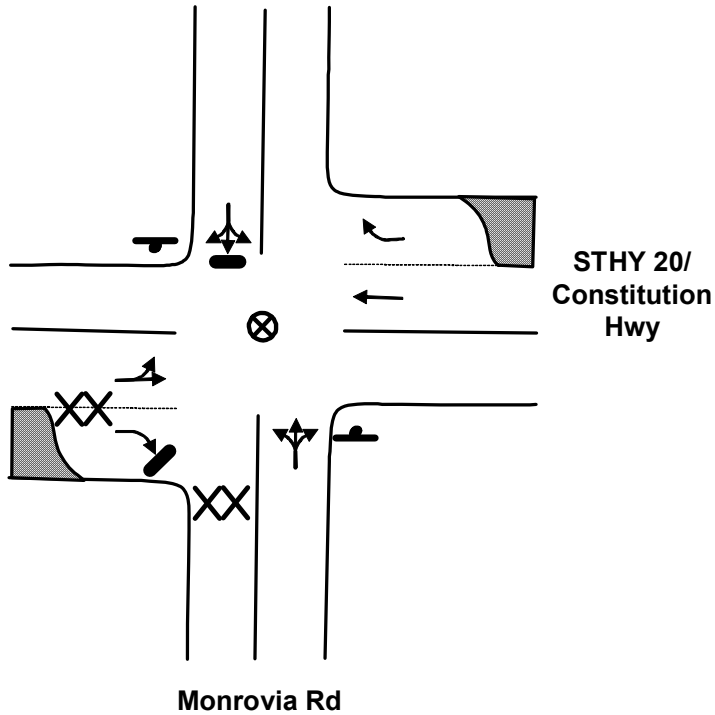

ACTIONS TO BE TAKEN

1. Interdict and divert southbound movement on Monrovia Rd

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 4 Traffic Barricades

LOCATION PRIORITY


3



****Traffic Guide should position himself safely**

ACP

TOWN: UNIONVILLE
 LOCATION: U.S. Highway 522 & State Highway 20
 ACP ID: Q4-2
 PAZ: Shadow

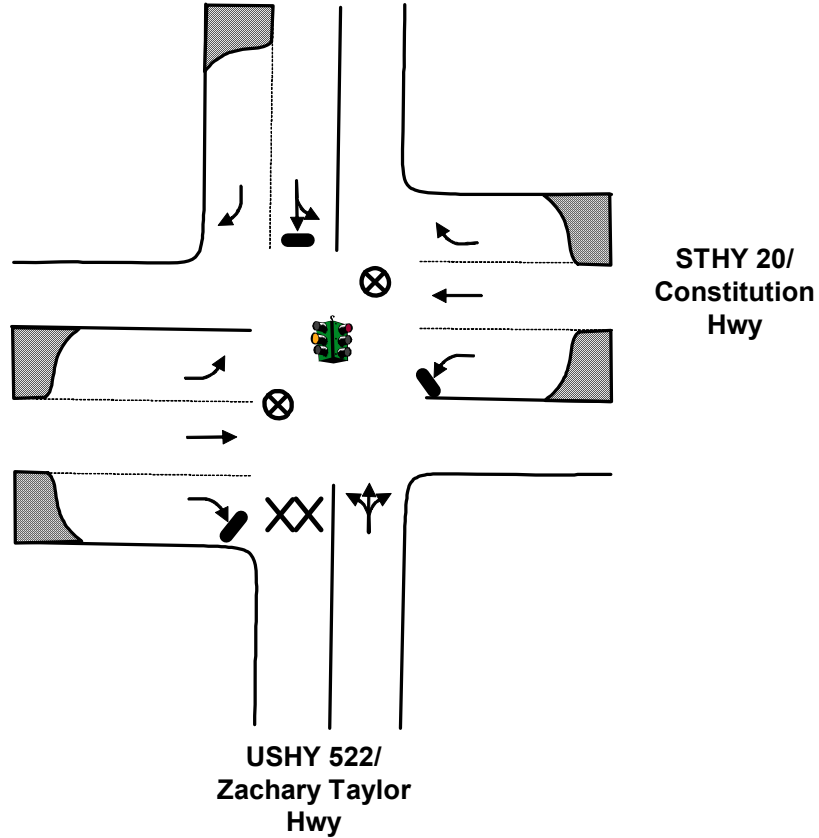

****Traffic Guide should position himself safely**

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- ● TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ● ● ● 8 ft

ACTIONS TO BE TAKEN

1. Discourage southbound movement along U.S. Highway 522

MANPOWER/EQUIPMENT ESTIMATE

- 2 Traffic Guide(s)
- 2 Traffic Barricades

LOCATION PRIORITY


1

ACP

TOWN: LOCUST GROVE
LOCATION: State Highway 621 & State Highway 606
ACP ID: Q4-3
PAZ: Shadow

Key

- MOVEMENT FACILITATED
- | MOVEMENT DISCOURAGED/DIVERTED
- ⊗ TRAFFIC GUIDE
- ⊘ STOP SIGN
- ⊗ TRAFFIC BARRICADE
- 2 PER LANE (LOCAL ROADS AND RAMPS)
- 4 PER LANE (FREEWAY AND RAMPS)
- 🚦 TRAFFIC SIGNAL
- TRAFFIC CONES SPACED TO DISCOURAGE TRAFFIC BUT ALLOW PASSAGE (3 PER LANE): ●●● 8 ft

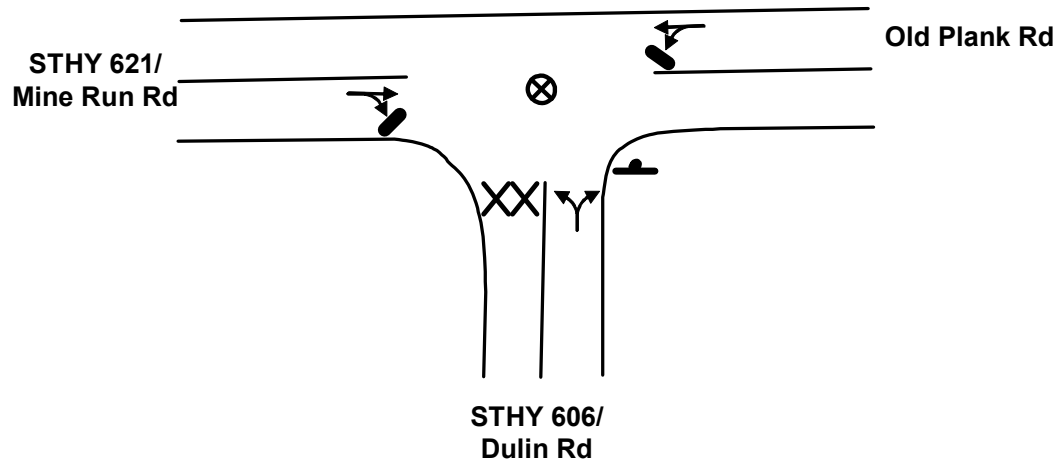

ACTIONS TO BE TAKEN

1. Interdict and divert southbound movement on Dulin Rd

MANPOWER/EQUIPMENT ESTIMATE

- 1 Traffic Guide(s)
- 2 Traffic Barricades

LOCATION PRIORITY

3



****Traffic Guide should position himself safely**