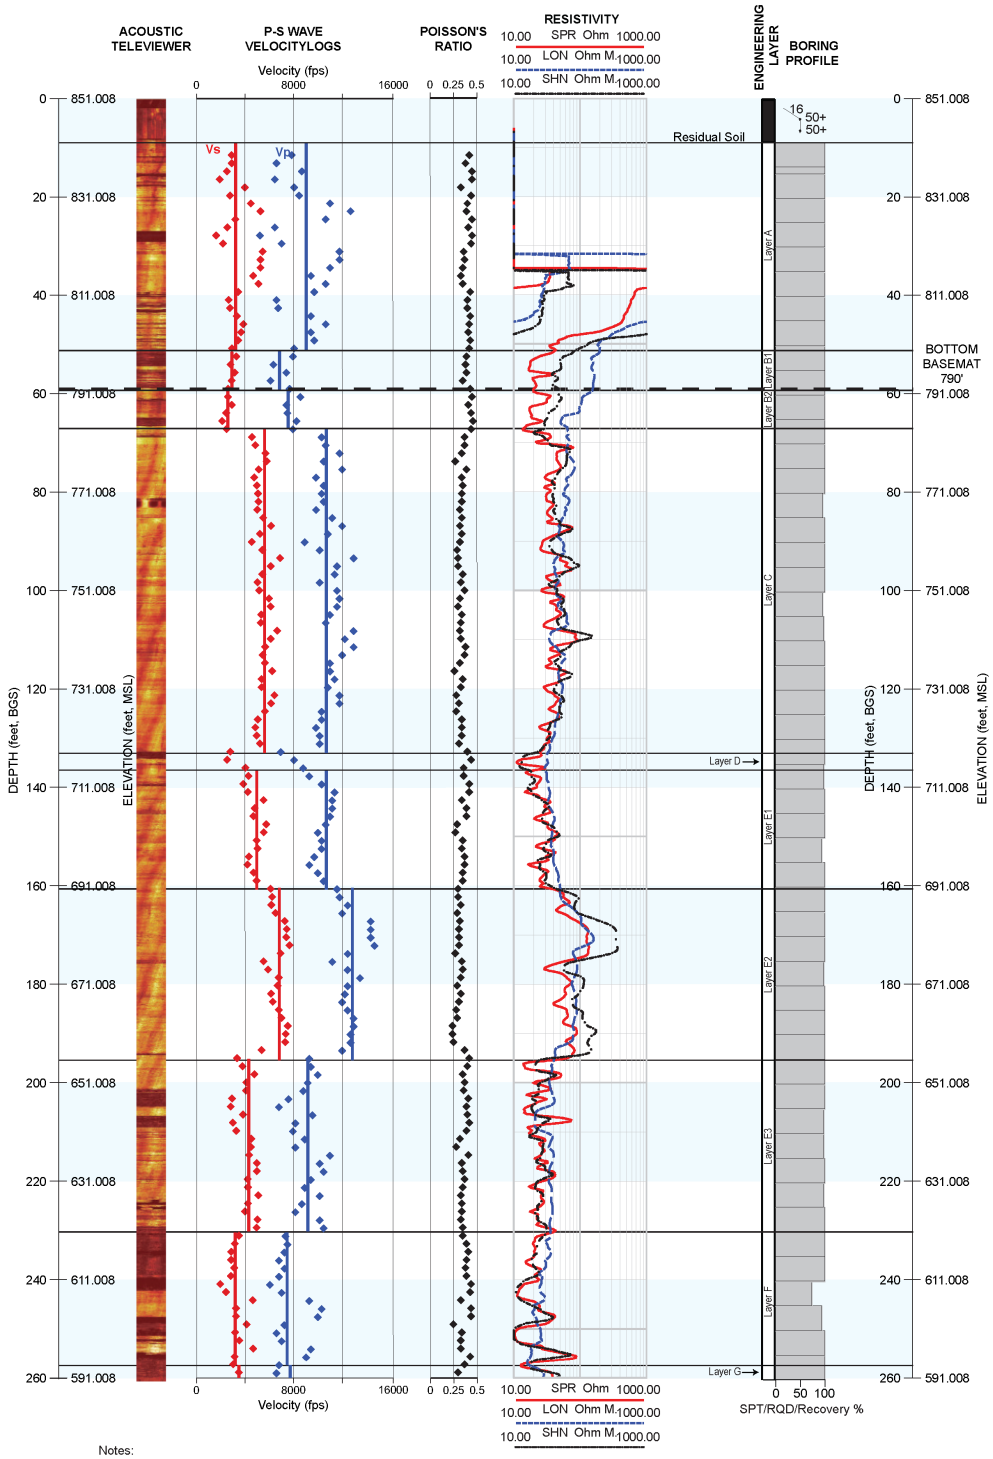

Notes:
1. Vs = shear wave velocity feet per second (fps), Vp = compressional wave veocity feet per second (fps)
2. SPT field blows determined with a 140 lbs hammer, 30" drop. SPT is uncorrected
3. RQD (Rock Quality Designation) - a percentage of solde core segments larger than 5 inches relative to core run length, excluding mechanical breaks
4. Poisson's Ratio calculated.

Figure 2.5.4-206 Boring In Situ Test Summary Log, B-1000 (Sheet 1 of 2)

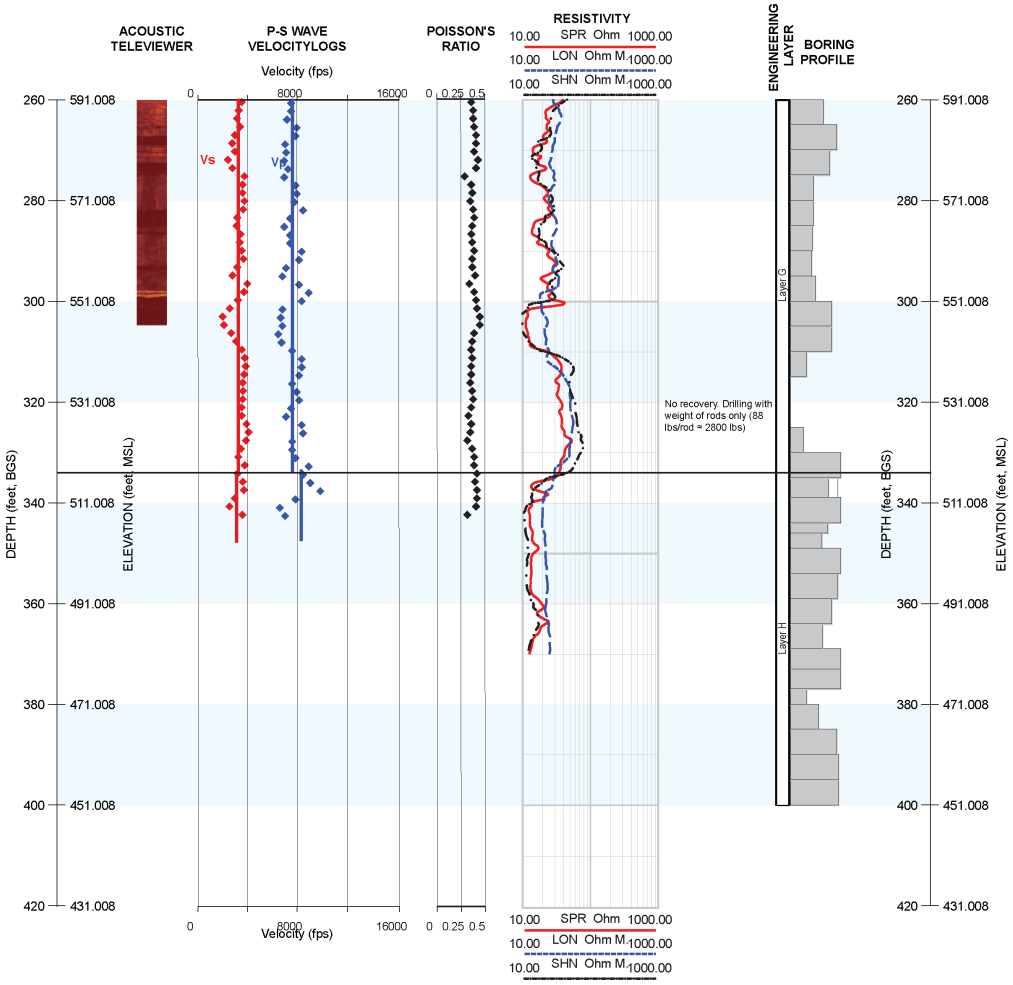

Notes:
1. Vs = shear wave velocity feet per second (fps), Vp = compressional wave veocity feet per second (fps)
2. SPT field blows determined with a 140 lbs hammer, 30" drop. SPT is uncorrected
3. RQD (Rock Quality Designation) - a percentage of solde core segments larger than 5 inches relative to core run length, excluding mechanical breaks
4. Poisson's Ratio calculated.

Figure 2.5.4-206 Boring In Situ Test Summary Log, B-1000 (Sheet 2 of 2)