



UNITED STATES
NUCLEAR REGULATORY COMMISSION
WASHINGTON, D. C. 20555

November 23, 1976

Docket Nos. 50-282, 50-306,
50-263

Northern States Power Company
ATTN: Mr. L. O. Mayer, Manager
Nuclear Support Services
414 Nicollet Mail - 8th Floor
Minneapolis, Minnesota 55401

Gentlemen:

RE: MONTICELLO NUCLEAR GENERATING PLANT
PRAIRIE ISLAND NUCLEAR GENERATING PLANT UNIT NOS. 1 AND 2

The NRC staff has recently obtained information which indicates that fission gas releases from fuel pellets with high burnup may be under-predicted by the current industry models for fission gas release. As a result, actual end-of-life fuel rod pressure may be higher than that which was considered in the safety analysis for your facilities. Although this situation does not lead us to suspect that fuel design limits have been or are currently being exceeded at your facilities, the potential may exist for such an occurrence in the future as higher fuel burnups are reached. Consequently, you are requested to evaluate the effects of increased fission gas releases on the safety analysis for your facilities in accordance with the schedule specified below.

If the estimated date on which any fuel rod in your facilities will reach a local exposure (burnup) of 20,000 Megawatt-days per metric ton of Uranium (MWD/tU) is sooner than June 1, 1977, provide the following information within 30 days of receipt of this letter. (If this estimated date is later than June 1, 1977, your response may be submitted within 90 days of receipt of this letter).

- a. The estimated date on which any fuel rod in your facilities will reach a local exposure (burnup) of 20,000 Megawatt-days per metric ton of Uranium (MWD/tU).
 - b. Using the correction technique described in the attached enclosure, modify the fission gas release model in the thermal performance code for the fuel in your facilities and calculate the fission gas release, fuel rod pressure, fuel temperature, etc. for burnups up to and including the
- 9

NOV 23 1976

target peak-rod burnup. Provide a comparison of the results of your calculations with those obtained using the uncorrected fission gas release model.

- c. Describe the impact (if any) of larger fission gas releases on the LOCA analysis and other safety analyses for your facilities.
- d. If internal fuel rod pressures, as calculated using the above-mentioned fission gas release correction, are predicted to exceed the nominal system pressure for your facilities, provide the date that this is anticipated to occur and discuss the implications of operating under both normal and accident conditions with fuel cladding tensile stresses.

We have advised all U. S. fuel manufacturers by separate correspondence that this information request is being sent to licensees of operating power reactors. In our letter to the fuel manufacturers, we have indicated that bounding calculations for appropriate plant groupings would be acceptable.

This request for generic information was approved by GAO under a blanket clearance number B-180225 (R0072); this clearance expires July 31, 1977. Three signed originals and 40 copies of your response will be required.

Sincerely,

Original signed by
Dennis L. Ziemann

Dennis L. Ziemann, Chief
Operating Reactors Branch #2
Division of Operating Reactors

Enclosure:
Burnup-Dependent Correction
for Fission Gas Release
Models

cc w/enclosure:
See next page

DISTRIBUTION

- Dockets (3) EReeves
- NRC PDRs (3) PO'Connor
- Local PDRs (2) JGuibert
- ORB #2 Reading OELD
- VStello OI&E (3)
- TJCarter DEisenhut
- DLZiemann TBABernthy
- RMDiggs JRBuchanan
- MGrotenhuis ACRS (16)
- RPSnaider

OFFICE	DOR:ORB #2	DOR:ORB #2	DOR:ORB #3	DOR:ORB #2		
SURNAME	MGrotenhuis	RPSnaider	JGuibert	DLZiemann		
DATE	11/23/76	11/23/76	11/23/76	11/23/76		

cc w/enclosures:
Gerald Charnoff, Esquire
Shaw, Pittman, Potts and
Trowbridge
1800 M Street, N. W.
Washington, D. C. 20036

Arthur Renquist, Esquire
Vice President - Law
Northern States Power Company
414 Nicollet Mall
Minneapolis, Minnesota 55401

Howard J. Vogel, Esquire
Legal Counsel
2750 Dean Parkway
Minneapolis, Minnesota 55416

Mr. Steve J. Gadler
2120 Carter Avenue
St. Paul, Minnesota 55108

Mr. Kenneth Dzugan
Environmental Planning Consultant
Office of City Planner
Grace Building
421 Wabasha Street
St. Paul, Minnesota 55102

Sandra S. Gardebring, Esquire
Special Assistant Attorney General
Minnesota Pollution Control Agency
1935 W. County Road B2
Roseville, Minnesota 55113

Anthony Z. Roisman, Esquire
Roisman, Kessler and Cashdan
1025 15th Street, N. W., 5th Floor
Washington, D. C. 20005

The Environmental Conservation Library
Minneapolis Public Library
300 Nicollet Mall
Minneapolis, Minnesota 55401

Enclosure 1

Recent ANS standards activities (1-3) lead us to believe that high burnup gas releases are underpredicted by current LWR industry models. We have previously (4) looked for a burnup dependence and found none for LWRs in the burnup range from 400 to 18,300 MWd/tU. Thus, we incorrectly presumed that the strong burnup dependence exhibited by LMFBR data (5) was not representative of LWR fuels during their shorter burnup lifetimes.

New high burnup UO₂ data mentioned by Westinghouse to the ANS group (2) and discussed with the NRC (6) show, however, that the sharp release increase seen in LMFBR data occurs also in LWR fuels. Therefore, in the absence of a complete analysis of high burnup LWR UO₂ data, we will assume that the burnup dependence is the same in LWR and LMFBR oxide fuels. This assumption, however, will be applied only in the high burnup region above 20,000 MWd/tU since the current industry models have been checked with the data base (4) ranging to 18,300 MWd/tU.

The following correction has been derived to give an increased release fraction $F^*(Bu, T)$ as a function of burnup and the uncorrected release prediction $F(T)$. Burnup Bu is the local burnup in megawatt-days per metric ton of uranium (MWd/tU), and T , which is not an explicit variable in the correction, is temperature.

$$F^*(Bu, T) = F(T) + [1 - F(T)] \frac{(1 - \exp[-0.436 \times 10^{-4}(Bu - 20000)])}{(1 + [0.665/F(T)] \exp[-1.107 \times 10^{-4}(Bu - 20000)])} \quad (1)$$

Figure 1 shows schematically how this correction would be applied to the GAPCON gas release model, which is independent of burnup. In the event an existing model contains a burnup dependence, $F(T)$ would be the predicted release fraction under the temperature conditions of interest, but with the burnup variable set equal to 20,000 MWd/tU.

Equation 1 is a replication of the Dutt and Baker (7) LMFBR correlation, which is an updated version of the correlation in Ref. 5. Equation 1 was derived by assuming a convenient functional form depending on $F(T)$ and Bu and fitting it to the Dutt and Baker curves using a non-linear regression procedure. No conservatism has been intentionally added. Figure 2 shows how closely Eq. 1 reproduces the Dutt and Baker curves.

References

1. R. O. Meyer (NRC), memorandum to P. S. Check, "Summary of Meeting of ANS-5.4 Working Group on Fuel Plenum Gas Activity," February 25, 1976.
2. R. O. Meyer (NRC), memorandum to P. S. Check, "Summary of ANS-5.1 (Decay Heat) and ANS-5.4 (Fission Gas Release) Activities," June 22, 1976.
3. R. O. Meyer (NRC), memorandum to P. S. Check, "Summary of ANS-5.4 Meeting on Fission Gas Release," October 6, 1976.
4. C. E. Beyer and C. R. Hann, "Prediction of Fission Gas Release from UO Fuel," Battelle report, BNWL-1875, November 1974.
5. D. S. Dutt, D. C. Bullington, R. B. Baker, and L. A. Pember, "A Correlated Fission Gas Release Model for Fast Reactor Fuels," Trans. Am. Nucl. Soc. 15, 198 (1972).
6. R. O. Meyer (NRC), memorandum to P. S. Check, "Summary of Meeting with Westinghouse on Fuel Rod Pressures," September 22, 1976.
7. D. S. Dutt and R. B. Baker, "Siex: A Correlated Code for the Prediction of Liquid Metal Fast Breeder Reactor (LMFBR) Fuel Thermal Performance," Westinghouse Hanford report, HEDL-TME 74-55, June 1975.

FIGURE 1

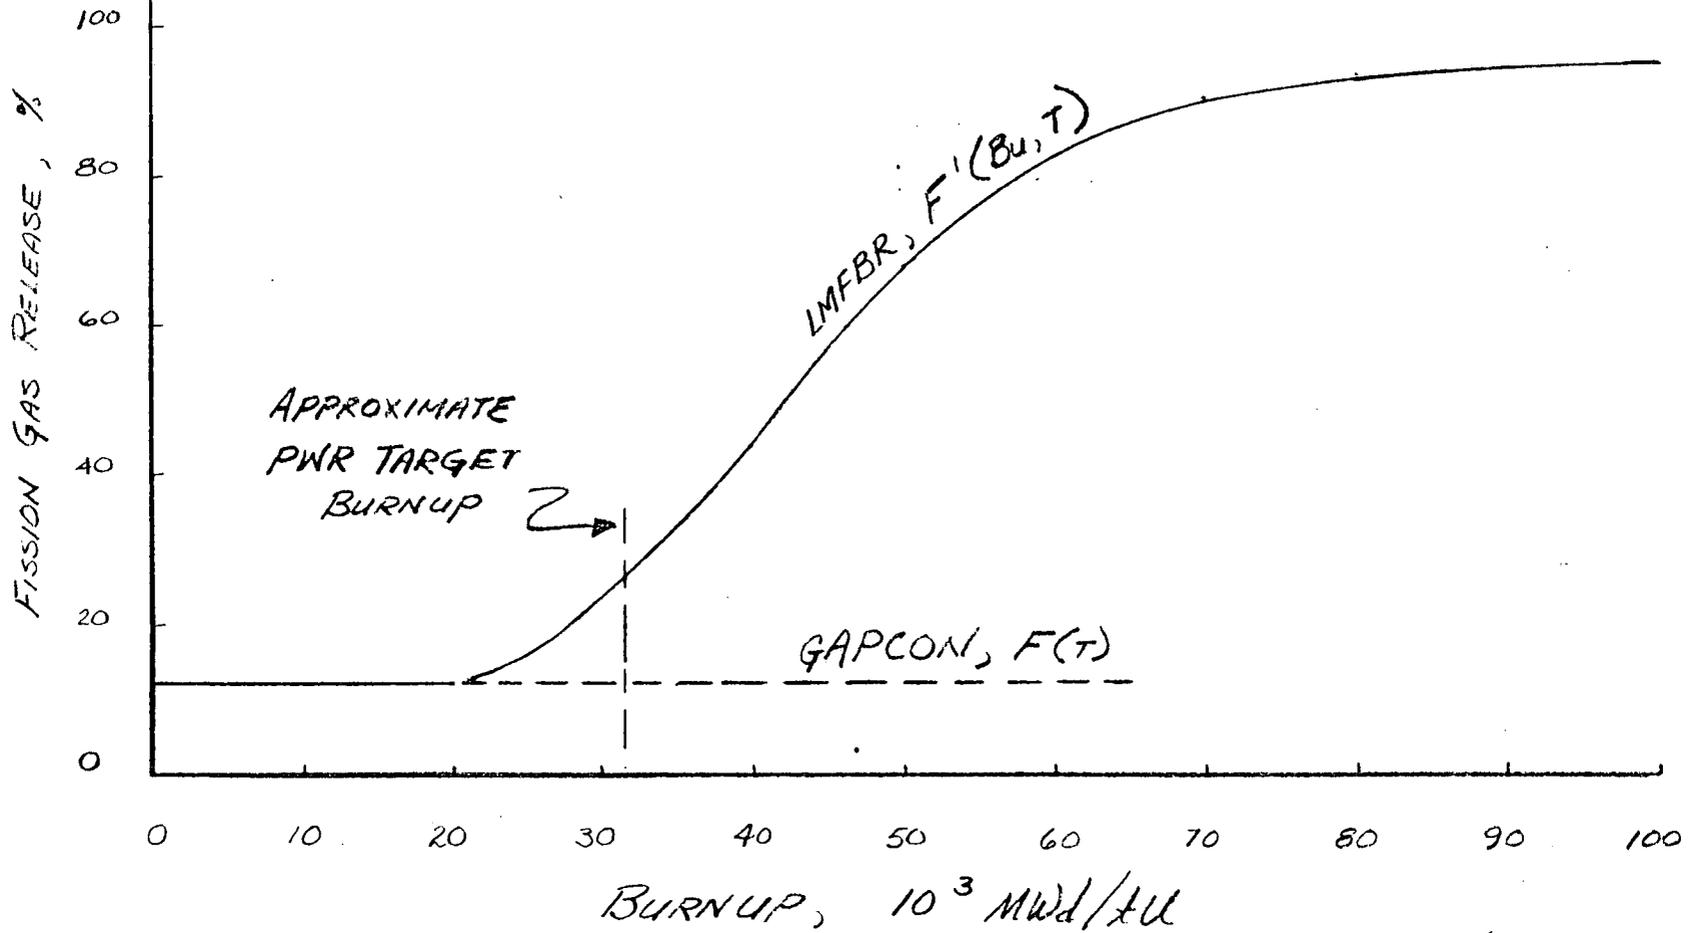


FIGURE 2

