

**APPENDIX B**

**APPROVED CONTENTS  
FOR THE MAGNASTOR SYSTEM**

**AMENDMENT 2**

**Appendix B  
Table of Contents**

1.0	FUEL SPECIFICATIONS AND LOADING CONDITIONS.....	B1-1
2.0	FUEL TO BE STORED IN THE MAGNASTOR SYSTEM .....	B2-1

**List of Figures**

Figure B2-1	Schematic of PWR Fuel Preferential Loading Pattern.....	B2-9
Figure B2-2	82-Assembly BWR Basket Pattern .....	B2-15
Figure B2-3	BWR Partial Length Fuel Rod Location Sketches.....	B2-16

**List of Tables**

Table B2-1	PWR Fuel Assembly Limits .....	B2-2
Table B2-2	PWR Fuel Assembly Characteristics .....	B2-4
Table B2-3	Bounding PWR Fuel Assembly Loading Criteria.....	B2-5
Table B2-4	Bounding PWR Fuel Assembly Loading Criteria – Enrichment/Soluble Boron Limits .....	B2-6
Table B2-5	Additional Fuel Assembly Cool Time Required to Load PWR Nonfuel Hardware.....	B2-7
Table B2-6	Allowed BPRA Burnup and Cool Time Combinations .....	B2-8
Table B2-7	Allowed Thimble Plug Burnup and Cool Time Combinations .....	B2-8
Table B2-8	PWR Fuel Preferential Loading Pattern Definition .....	B2-8
Table B2-9	BWR Fuel Assembly Limits .....	B2-10
Table B2-10	BWR Fuel Assembly Characteristics .....	B2-12
Table B2-11	BWR Fuel Assembly Loading Criteria.....	B2-13
Table B2-12	BWR Fuel Assembly Loading Criteria – Enrichment Limits for 87-Assembly and 82-Assembly Configurations.....	B2-14
Table B2-13	PWR Loading Table – Low Assembly Average Burnup Enrichment Limits.....	B2-17
Table B2-14	BWR Loading Table – Low Assembly Average Burnup Enrichment Limits.....	B2-17
Table B2-15	Loading Table for PWR Fuel – 959 W/Assembly .....	B2-18
Table B2-16	Loading Table for PWR Fuel – 911 W/Assembly .....	B2-23
Table B2-17	Loading Table for PWR Fuel – 1,200 W/Assembly .....	B2-31
Table B2-18	Loading Table for PWR Fuel – 1,140 W/Assembly .....	B2-36
Table B2-19	Loading Table for PWR Fuel – 922 W/Assembly .....	B2-44
Table B2-20	Loading Table for PWR Fuel – 876 W/Assembly .....	B2-49
Table B2-21	Loading Table for PWR Fuel – 800 W/Assembly .....	B2-57
Table B2-22	Loading Table for PWR Fuel – 760 W/Assembly .....	B2-62
Table B2-23	Loading Table for BWR Fuel – 379 W/Assembly .....	B2-70
Table B2-24	Loading Table for BWR Fuel – 360 W/Assembly .....	B2-75

1.0 **FUEL SPECIFICATIONS AND LOADING CONDITIONS**

---

MAGNASTOR is designed to provide passive dry storage of canistered PWR and BWR fuel. The system requires few operating controls. The principal controls and limits for MAGNASTOR are satisfied by the selection of fuel for storage that meets the Approved Contents presented in this section and in the tables for MAGNASTOR design basis spent fuels.

If any Fuel Specification or Loading Condition of this section is violated, the following actions shall be completed:

- The affected fuel assemblies shall be placed in a safe condition.
- Within 24 hours, notify the NRC Operations Center.
- Within 60 days, submit a special report that describes the cause of the violation and actions taken to restore or demonstrate compliance and prevent reoccurrence.



2.0 FUEL TO BE STORED IN THE MAGNASTOR SYSTEM

UNDAMAGED FUEL ASSEMBLIES meeting the limits specified in Tables B2-1 through B2-24 may be stored in the MAGNASTOR SYSTEM.

**Table B2-1 PWR Fuel Assembly Limits**

---

I.	PWR Fuel	
	A. Allowable Contents	
	1. Uranium PWR UNDAMAGED FUEL ASSEMBLIES listed in Tables B2-2 and B2-3 and meeting the following specifications:	
	a. Cladding Type:	Zirconium-based alloy.
	b. Enrichment, Post-irradiation Cooling Time and Average Assembly Burnup:	Generic maximum enrichment limits are shown in Table B2-2. The physical characteristics of the different PWR fuel assemblies are defined in Table B2-3. The fuel type specific maximum enrichments as a function of neutron absorber sheet areal density at various minimum soluble boron levels are defined in Table B2-4. For variable enrichment fuel assemblies, maximum enrichments represent peak rod enrichments. Combined minimum enrichment, maximum assembly average burnup and minimum cool time limits are shown in Tables B2-15 through B2-22. For assembly average burnup levels below those shown in Tables B2-15 through B2-22, an assembly minimum cool time is specified in Table B2-13, provided that the minimum initial assembly average enrichment limits are applied.
	c. Decay Heat Per Assembly (Preferential Loading):	$\leq 1,200$ watts
	d. Nominal Fresh Fuel Assembly Length (in.):	$\leq 178.3$
	e. Nominal Fresh Fuel Assembly Width (in.):	$\leq 8.54$
	f. Fuel Assembly Weight (lbs.):	$\leq 1,680$ , including nonfuel-bearing components
	B. Quantity per TSC: Up to 37 PWR UNDAMAGED FUEL ASSEMBLIES. Fuel storage locations not containing a fuel assembly shall have an empty fuel cell insert installed.	
	C. PWR UNDAMAGED FUEL ASSEMBLIES may contain a flow mixer (thimble plug), instrument thimble, a burnable poison rod assembly, or a control element assembly consistent with Table B2-2. Nonfuel hardware may be located within the active fuel elevation of either the guide tubes or the instrument tube. Nonfuel hardware must not be located in the active fuel elevation of the guide tubes and the instrument tube simultaneously. Assembly lattices not containing the nominal number of fuel rods specified in Table B2-3 must contain solid filler rods that displace a volume equal to, or greater than, that of the fuel rod that the filler rod replaces. Assemblies may have stainless steel rods inserted to displace guide tube "dashpot" water. Loading activated nonfuel hardware requires extended fuel assembly cool times, and Table B2-5 presents the additional fuel assembly cool times required. Minimum BPRA	

---

(continued)

**Table B2-1 PWR Fuel Assembly Limits (continued)**

- 
- and thimble plug cool times as a function of burnup (exposure) are shown in Tables B2-6 and B2-7. Alternatively, the  $^{60}\text{Co}$  curie limits in Tables B2-6 and B2-7 may be used to establish site-specific nonfuel hardware constraints.
- D. Spacers may be used in a TSC to axially position fuel assemblies to facilitate handling.
  - E. Unenriched fuel assemblies are not authorized for loading. Unenriched axial blankets are permitted, provided that the nominal length of the blanket is not greater than six (6) inches.
  - F. Fuel may be loaded uniformly at a maximum heat load of 959 watts/assembly. Alternatively, a preferential loading pattern may be applied as described in Table B2-8 and Figure B2-1.
  - G. CEAs are restricted to the center 9 basket locations. Minimum CEA cool time is 10 years with a maximum equivalent exposure of 180,000 MWd/MTU.

**Table B2-2 PWR Fuel Assembly Characteristics**

<b>Characteristic</b>	<b>14×14</b>	<b>14×14</b>	<b>15×15</b>	<b>15×15</b>	<b>16×16</b>	<b>17×17</b>
<b>Max Initial Enrichment (wt % <sup>235</sup>U)</b>	5.0	5.0	5.0	5.0	5.0	5.0
<b>Min Initial Enrichment (wt % <sup>235</sup>U)</b>	1.3	1.3	1.3	1.3	1.3	1.3
<b>Number of Fuel Rods</b>	176	179	204	208	236	264
<b>Max Assembly Average Burnup (MWd/MTU)</b>	60,000	60,000	60,000	60,000	60,000	60,000
<b>Peak Average Rod Burnup (MWd/MTU)</b>	62,500	62,500	62,500	62,500	62,500	62,500
<b>Min Cool Time (years)</b>	4	4	4	4	4	4
<b>Max Weight (lb) per Storage Location</b>	1,680	1,680	1,680	1,680	1,680	1,680
<b>Max Decay Heat (Watts) per Preferential Storage Location</b>	1,200	1,200	1,200	1,200	1,200	1,200

- All reported enrichment values are nominal preirradiation fabrication values.
- Maximum initial enrichment is based on a minimum soluble boron concentration in the spent fuel pool water. Required soluble boron content is fuel type and enrichment specific. Minimum soluble boron content varies between 1,500 and 2,500 ppm. Maximum initial enrichment represents the peak fuel rod enrichment for variably-enriched fuel assemblies.
- Maximum uniform heat load is 959 watts per storage location.



**Table B2-3 Bounding PWR Fuel Assembly Loading Criteria**

Assembly Type	No. of Fuel Rods	No. of Guide Tubes <sup>1</sup>	Geometry <sup>2</sup>					Max Load (MTU)
			Max Pitch (inch)	Min Clad OD (inch)	Min Clad Thick. (inch)	Max Pellet OD (inch)	Max Active Length (inch)	
BW15H1	208	17	0.568	0.43	0.0265	0.3686	144.0	0.4858
BW15H2	208	17	0.568	0.43	0.025	0.3735	144.0	0.4988
BW15H3	208	17	0.568	0.428	0.023	0.3742	144.0	0.5006
BW15H4	208	17	0.568	0.414	0.022	0.3622	144.0	0.4690
BW17H1	264	25	0.502	0.377	0.022	0.3252	144.0	0.4799
CE14H1	176	5	0.58	0.44	0.026	0.3805	137.0	0.4167
CE16H1	236	5	0.5063	0.382	0.025	0.325	150.0	0.4463
WE14H1	179	17	0.556	0.40	0.0162	0.3674	145.2	0.4188
WE15H1	204	21	0.563	0.422	0.0242	0.3669	144.0	0.4720
WE15H2	204	21	0.563	0.417	0.0265	0.357	144.0	0.4469
WE17H1	264	25	0.496	0.372	0.0205	0.3232	144.0	0.4740
WE17H2	264	25	0.496	0.36	0.0225	0.3088	144.0	0.4327

<sup>1</sup> Combined number of guide and instrument tubes.

<sup>2</sup> Assembly characteristics represent cold, unirradiated, nominal configurations.

**Table B2-4 Bounding PWR Fuel Assembly Loading Criteria –  
Enrichment/Soluble Boron Limits**

Soluble Boron	Max. Initial Enrichment ( wt % <sup>235</sup> U)														
	Absorber <sup>a</sup> 0.036 <sup>10</sup> B g/cm <sup>2</sup>					Absorber <sup>a</sup> 0.030 <sup>10</sup> B g/cm <sup>2</sup>					Absorber <sup>a</sup> 0.027 <sup>10</sup> B g/cm <sup>2</sup>				
	1500 (ppm)	1750 (ppm)	2000 (ppm)	2250 (ppm)	2500 (ppm)	1500 (ppm)	1750 (ppm)	2000 (ppm)	2250 (ppm)	2500 (ppm)	1500 (ppm)	1750 (ppm)	2000 (ppm)	2250 (ppm)	2500 (ppm)
BW15H1	3.7%	4.1%	4.0%	4.7%	5.0%	3.6%	4.0%	4.2%	4.5%	4.8%	3.6%	3.9%	4.2%	4.5%	4.8%
BW15H2	3.7%	4.0%	4.0%	4.6%	4.9%	3.6%	3.9%	4.2%	4.5%	4.8%	3.6%	3.8%	4.1%	4.4%	4.7%
BW15H3	3.7%	4.0%	4.0%	4.6%	4.9%	3.6%	3.9%	4.2%	4.4%	4.7%	3.5%	3.8%	4.1%	4.4%	4.7%
BW15H4	3.8%	4.2%	4.0%	4.8%	5.0%	3.7%	4.1%	4.4%	4.7%	5.0%	3.7%	4.0%	4.3%	4.6%	5.0%
BW17H1	3.7%	4.0%	4.0%	4.6%	4.9%	3.6%	3.9%	4.2%	4.5%	4.8%	3.6%	3.9%	4.1%	4.5%	4.7%
CE14H1	4.5%	4.8%	5.0%	5.0%	5.0%	4.3%	4.7%	5.0%	5.0%	5.0%	4.3%	4.6%	5.0%	5.0%	5.0%
CE16H1	4.4%	4.8%	5.0%	5.0%	5.0%	4.3%	4.6%	5.0%	5.0%	5.0%	4.2%	4.6%	4.9%	5.0%	5.0%
WE14H1	4.7%	5.0%	5.0%	5.0%	5.0%	4.6%	5.0%	5.0%	5.0%	5.0%	4.5%	5.0%	5.0%	5.0%	5.0%
WE15H1	3.8%	4.2%	4.5%	4.8%	5.0%	3.7%	4.1%	4.4%	4.7%	5.0%	3.7%	4.0%	4.3%	4.6%	4.9%
WE15H2	4.0%	4.4%	4.7%	5.0%	5.0%	3.9%	4.2%	4.6%	4.9%	5.0%	3.8%	4.2%	4.5%	4.8%	5.0%
WE17H1	3.7%	4.1%	4.4%	4.7%	5.0%	3.7%	4.0%	4.3%	4.6%	4.9%	3.6%	3.9%	4.2%	4.5%	4.9%
WE17H2	4.0%	4.3%	4.7%	5.0%	5.0%	3.9%	4.3%	4.6%	4.9%	5.0%	3.8%	4.2%	4.5%	4.9%	5.0%

- Specified soluble boron concentrations are independent of whether an assembly contains a nonfuel insert.

<sup>a</sup> Borated aluminum neutron absorber sheet effective areal <sup>10</sup>B density.

**Table B2-5 Additional Fuel Assembly Cool Time Required to Load PWR Nonfuel Hardware**

Core (Assembly)	Cool Time (years)		
	BPRA	TP	CEA
CE 14×14	--	--	0.1
WE 14×14	0.5	0.1	0.5
WE 15×15	0.5	0.1	0.7
B&W 15×15	0.1	0.1	0.1
CE 16×16	--	--	0.1
WE 17×17	0.5	0.1	0.7
B&W 17×17	0.1	0.1	0.1

Note: Additional fuel assembly cooling time to be added to the minimum fuel assembly cool time based on assembly initial enrichment and assembly average burnup listed in Table B2-15 through B2-22.

**Table B2-6 Allowed BPRAs Burnup and Cool Time Combinations**

Maximum Burnup (GWd/MTU)	Minimum Cool Time (yrs)				
	WE 14×14	WE 15×15	B&W 15×15	WE 17×17	B&W 17×17
10	0.5	0.5	0.5	0.5	0.5
15	0.5	0.5	0.5	0.5	0.5
20	0.5	1.0	2.0	2.0	0.5
25	1.0	2.5	3.5	3.5	1.0
30	2.5	4.0	5.0	5.0	2.5
32.5	3.0	4.5	6.0	6.0	3.0
35	3.5	5.0	6.0	6.0	3.5
37.5	4.0	6.0	7.0	7.0	4.0
40	4.5	6.0	7.0	7.0	4.5
45	5.0	7.0	8.0	8.0	6.0
50	6.0	8.0	9.0	9.0	7.0
55	7.0	8.0	10.0	9.0	7.0
60	7.0	9.0	10.0	10.0	8.0
65	8.0	10.0	12.0	12.0	8.0
70	8.0	10.0	12.0	12.0	9.0
Max <sup>60</sup> Co Activity (Ci)	718	733	19	637	26

Note: Specified minimum cool times for BPRAs are independent of the required minimum cool times for the fuel assembly containing the BPRAs.

**Table B2-7 Allowed Thimble Plug Burnup and Cool Time Combinations**


Maximum Burnup (GWd/MTU)	Minimum Cool Time (yrs)				
	WE 14×14	WE 15×15	B&W 15×15	WE 17×17	B&W 17×17
45	2.0	3.5	7.0	5.0	6.0
90	6.0	7.0	10.0	9.0	10.0
135	7.0	9.0	12.0	10.0	12.0
180	8.0	9.0	14.0	12.0	12.0
<sup>60</sup> Co Activity (Ci)	63.5	64.1	56.9	64.0	63.6

Note: Specified minimum cool times for thimble plugs are independent of the required minimum cool times for the fuel assembly containing the thimble plug.

**Table B2-8 PWR Fuel Preferential Loading Pattern Definition**

Zone Description (see Figure B2-1)	Designator	Maximum Heat Load (W/assy)	# Assemblies
Inner Zone	A	922	9
Middle Zone	B	1,200	12
Outer Zone	C	800	16

Figure B2-1 Schematic of PWR Fuel Preferential Loading Pattern

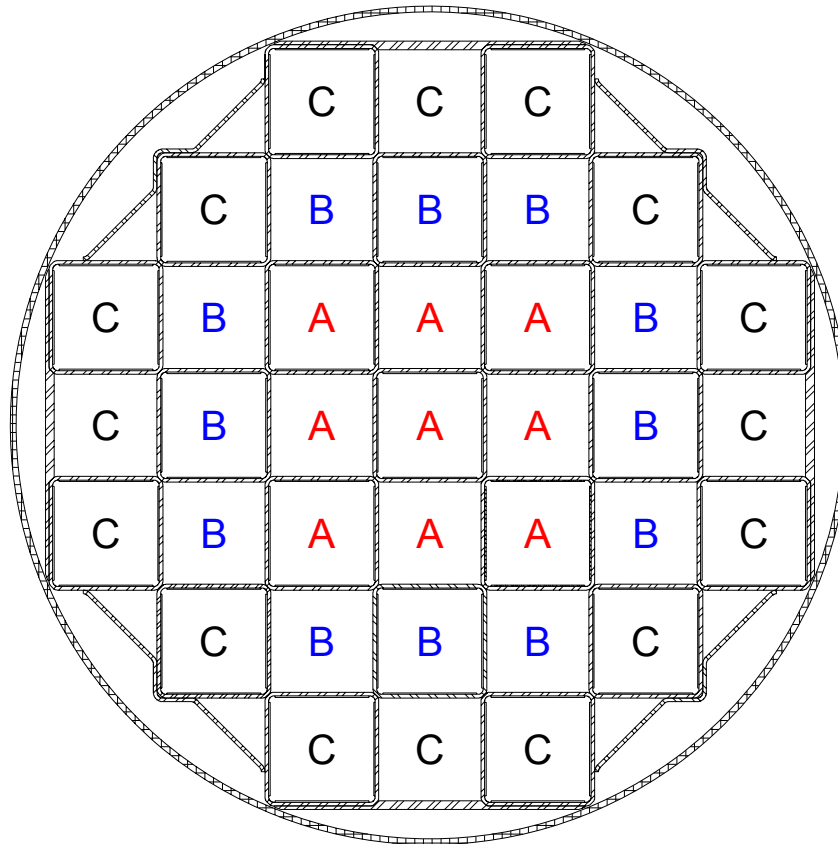

**Table B2-9 BWR Fuel Assembly Limits**

- 
- I. BWR FUEL
- A. Allowable Contents
1. Uranium BWR UNDAMAGED FUEL ASSEMBLIES listed in Tables B2-10 and B2-11 and meeting the following specifications:
    - a. Cladding Type: Zirconium-based alloy.
    - b. Enrichment: Post-irradiation Cooling Time and Assembly Average Burnup  
Generic maximum INITIAL PEAK PLANAR-AVERAGE ENRICHMENTS are shown in Table B2-10. The physical characteristics of the different BWR fuel assemblies are defined in Table B2-11. Fuel type specific enrichment limits for the 87-assembly and 82-assembly BWR fuel basket configurations are defined in Table B2-12 as a function of neutron absorber areal density. Combined minimum enrichment, maximum assembly average burnup and minimum cool time limits are shown in Table B2-23 and Table B2-24. For assembly average burnup levels below those shown in Table B2-23 and Table B2-24, an assembly minimum cool time is specified in Table B2-14, provided that the minimum initial assembly average enrichment limits are applied.
    - c. Decay Heat per Assembly:  $\leq 379$  watts
    - d. Nominal Fresh Fuel Design Assembly Length (in.):  $\leq 176.2$
    - e. Nominal Fresh Fuel Design Assembly Width (in.):  $\leq 5.52$
    - f. Fuel Assembly Weight (lb):  $\leq 704$ , including channels
  - B. Quantity per TSC: Up to 87 BWR UNDAMAGED FUEL ASSEMBLIES. With the exception of the designated nonfuel locations in the 82-assembly basket configuration, fuel storage locations not containing a fuel assembly shall have an empty fuel cell insert installed. Prior to use of the 82-assembly configuration, the center cell weldment and upper weldments with blocking strap must be in place to physically block the designated nonfuel locations.
  - C. BWR fuel assemblies may be unchanneled, or channeled with zirconium-based alloy channels.
  - D. BWR fuel assemblies with stainless steel channels are not authorized.

(continued)

**Table B2-9 BWR Fuel Assembly Limits (continued)**

- 
- E. Assembly lattices not containing the assembly type-specific nominal number of fuel rods (see Table B2-11) must contain solid filler rods that displace a volume equal to, or greater than, that of the fuel rod that the filler rod replaces.
  - F. Spacers may be used in a TSC to axially position BWR fuel assemblies to facilitate handling.
  - G. Unenriched fuel assemblies are not authorized for loading. Unenriched axial blankets are permitted, provided that the nominal length of the blanket is not greater than six (6) inches.
  - H. Allowable fuel assembly locations for the 82-assembly fuel basket configuration are shown in Figure B2-2.

**Table B2-10 BWR Fuel Assembly Characteristics**

Characteristic	Fuel Class			
	7×7	8×8	9×9	10×10
<b>Max Initial Enrichment (wt % <sup>235</sup>U)</b>	4.5	4.5	4.5	4.5
<b>Number of Fuel Rods</b>	48/49	59/60/61/ 62/63/64	72/74 <sup>a</sup> /76/ 79/80	91 <sup>a</sup> /92 <sup>a</sup> / 96 <sup>a</sup> /100
<b>Max Assembly Average Burnup (MWd/MTU)</b>	60,000	60,000	60,000	60,000
<b>Peak Average Rod Burnup (MWd/MTU)</b>	62,500	62,500	62,500	62,500
<b>Min Cool Time (years)</b>	4	4	4	4
<b>Min Average Enrichment (wt % <sup>235</sup>U)</b>	1.3	1.3	1.3	1.3
<b>Max Weight (lb) per Storage Location</b>	704	704	704	704
<b>Max Decay Heat (Watts) per Storage Location</b>	379	379	379	379

- Each BWR fuel assembly may include a zirconium-based alloy channel.
- Assembly weight includes the weight of the channel.
- Maximum initial enrichment is the peak planar-average enrichment.
- Water rods may occupy more than one fuel lattice location. Fuel assembly to contain nominal number of water rods for the specific assembly design.
- All enrichment values are nominal preirradiation fabrication values.
- Spacers may be used to axially position fuel assemblies to facilitate handling.

<sup>a</sup> Assemblies may contain partial-length fuel rods.



**Table B2-11 BWR Fuel Assembly Loading Criteria**

Assembly Type	Number of Fuel Rods	Number of Partial Length Rods <sup>1</sup>	Geometry <sup>3,4</sup>					Max Loading (MTU)
			Max Pitch (inch)	Min Clad OD (inch)	Min Clad Thick. (inch)	Max Pellet OD (inch)	Max Active Length (inch)	
B7_48A	48	N/A	0.7380	0.5700	0.03600	0.4900	144.0	0.1981
B7_49A	49	N/A	0.7380	0.5630	0.03200	0.4880	146.0	0.2034
B7_49B	49	N/A	0.7380	0.5630	0.03200	0.4910	150.0	0.2115
B8_59A	59	N/A	0.6400	0.4930	0.03400	0.4160	150.0	0.1828
B8_60A	60	N/A	0.6417	0.4840	0.03150	0.4110	150.0	0.1815
B8_60B	60	N/A	0.6400	0.4830	0.03000	0.4140	150.0	0.1841
B8_61B	61	N/A	0.6400	0.4830	0.03000	0.4140	150.0	0.1872
B8_62A	62	N/A	0.6417	0.4830	0.02900	0.4160	150.0	0.1921
B8_63A	63	N/A	0.6420	0.4840	0.02725	0.4195	150.0	0.1985
B8_64A	64	N/A	0.6420	0.4840	0.02725	0.4195	150.0	0.2017
B8_64B <sup>5</sup>	64	N/A	0.6090	0.4576	0.02900	0.3913	150.0	0.1755
B9_72A	72	N/A	0.5720	0.4330	0.02600	0.3740	150.0	0.1803
B9_74A	74 <sup>2</sup>	8	0.5720	0.4240	0.02390	0.3760	150.0	0.1873
B9_76A	76	N/A	0.5720	0.4170	0.02090	0.3750	150.0	0.1914
B9_79A	79	N/A	0.5720	0.4240	0.02390	0.3760	150.0	0.2000
B9_80A	80	N/A	0.5720	0.4230	0.02950	0.3565	150.0	0.1821
B10_91A	91 <sup>2</sup>	8	0.5100	0.3957	0.02385	0.3420	150.0	0.1906
B10_92A	92 <sup>2</sup>	14	0.5100	0.4040	0.02600	0.3455	150.0	0.1966
B10_96A <sup>5</sup>	96 <sup>2</sup>	12	0.4880	0.3780	0.02430	0.3224	150.0	0.1787
B10_100A <sup>5</sup>	100	N/A	0.4880	0.3780	0.02430	0.3224	150.0	0.1861

- <sup>1</sup> Location of the partial length rods is illustrated in Figure B2-3.
- <sup>2</sup> Assemblies may contain partial-length fuel rods.
- <sup>3</sup> Assembly characteristics represent cold, unirradiated, nominal configurations.
- <sup>4</sup> Maximum channel thickness allowed is 120 mils (nominal).
- <sup>5</sup> Composed of four subchannel clusters.


**Table B2-12 BWR Fuel Assembly Loading Criteria – Enrichment Limits for 87-Assembly and 82-Assembly Configurations**

	Max. Initial Enrichment <sup>a</sup> ( wt % <sup>235</sup> U)					
	Absorber <sup>b</sup> 0.027 <sup>10</sup> B g/cm <sup>2</sup>		Absorber 0.0225 <sup>10</sup> B g/cm <sup>2</sup>		Absorber 0.02 <sup>10</sup> B g/cm <sup>2</sup>	
	87-Assy Basket	82-Assy Basket	87-Assy Basket	82-Assy Basket	87-Assy Basket	82-Assy Basket
B7_48A	4.0%	4.5%	3.7%	4.5%	3.6%	4.4%
B7_49A	3.8%	4.5%	3.6%	4.4%	3.5%	4.3%
B7_49B	3.8%	4.5%	3.6%	4.4%	3.5%	4.2%
B8_59A	3.9%	4.5%	3.7%	4.5%	3.6%	4.3%
B8_60A	3.8%	4.5%	3.7%	4.4%	3.5%	4.2%
B8_60B	3.8%	4.5%	3.6%	4.3%	3.5%	4.2%
B8_61B	3.8%	4.5%	3.6%	4.3%	3.5%	4.2%
B8_62A	3.8%	4.5%	3.6%	4.3%	3.5%	4.1%
B8_63A	3.8%	4.5%	3.6%	4.3%	3.4%	4.2%
B8_64A	3.8%	4.5%	3.6%	4.3%	3.5%	4.2%
B8_64B	3.6%	4.3%	3.4%	4.1%	3.3%	4.0%
B9_72A	3.8%	4.5%	3.6%	4.3%	3.4%	4.1%
B9_74A	3.7%	4.3%	3.4%	4.1%	3.4%	4.0%
B9_76A	3.5%	4.2%	3.4%	4.0%	3.3%	3.9%
B9_79A	3.7%	4.4%	3.4%	4.2%	3.3%	4.0%
B9_80A	3.8%	4.5%	3.6%	4.3%	3.5%	4.2%
B10_91A	3.7%	4.5%	3.6%	4.3%	3.5%	4.1%
B10_92A	3.8%	4.5%	3.6%	4.3%	3.5%	4.1%
B10_96A	3.7%	4.3%	3.5%	4.1%	3.4%	4.0%
B10_100A	3.6%	4.4%	3.5%	4.1%	3.4%	4.0%

<sup>a</sup> Maximum planar average.

<sup>b</sup> Borated aluminum neutron absorber sheet effective areal <sup>10</sup>B density.

Figure B2-2 82-Assembly BWR Basket Pattern

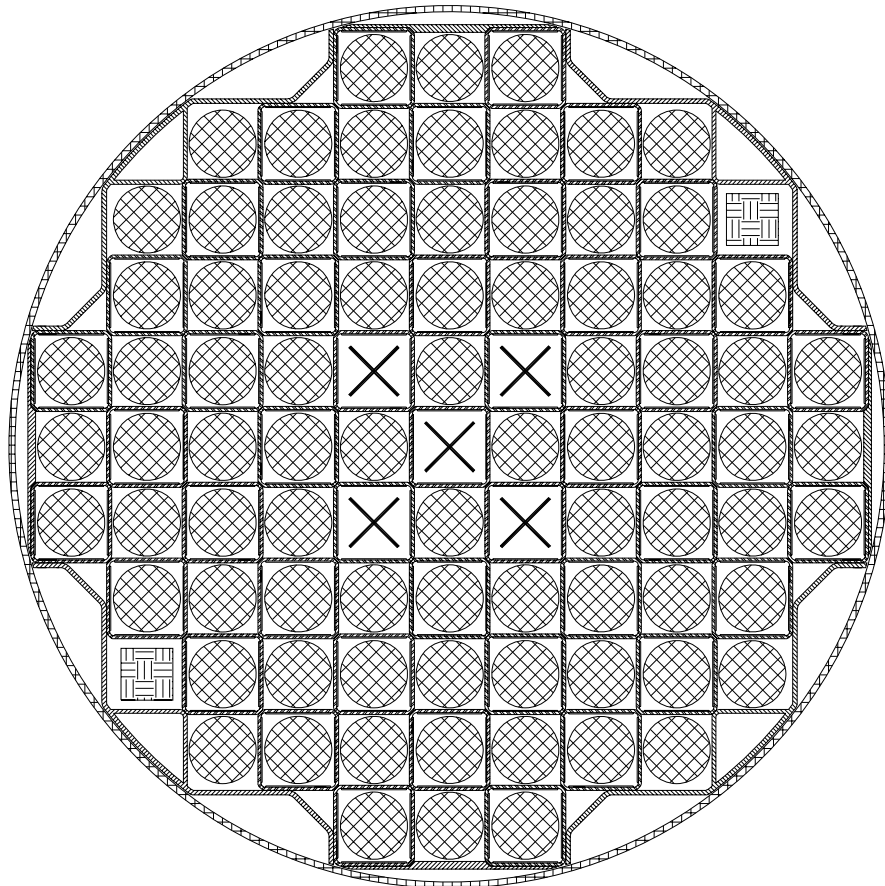


 = Fuel Assembly Locations

 = Vent/Drain Port Locations


 = Designated Nonfuel Locations

**Figure B2-3 BWR Partial Length Fuel Rod Location Sketches**

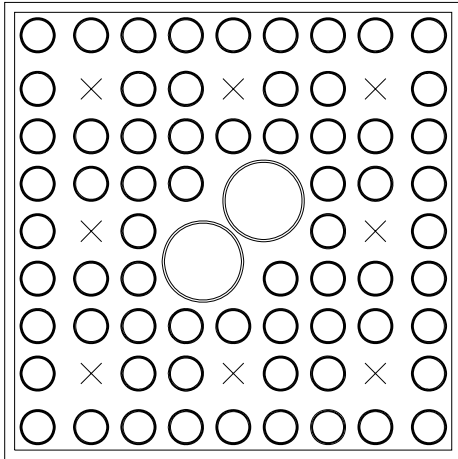


○ = Fuel Rod Location  
× = Partial Rod Location

*B9\_74A 8 Partial Length Rods*

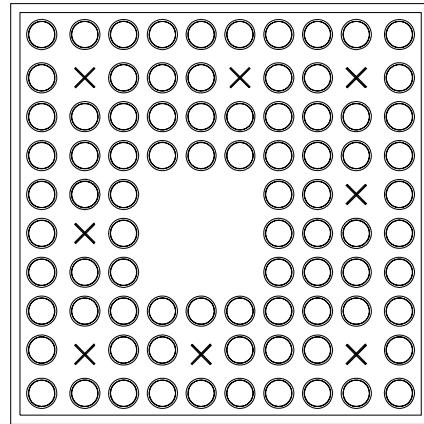


○ = Fuel Rod Location  
× = Partial Rod Location

*B10\_91A 8 Partial Length Rods*

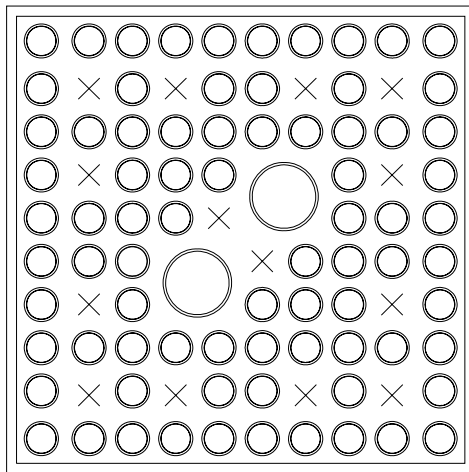

○ = Fuel Rod Location  
× = Partial Rod Location

*B10\_92A 14 Partial Length Rods*

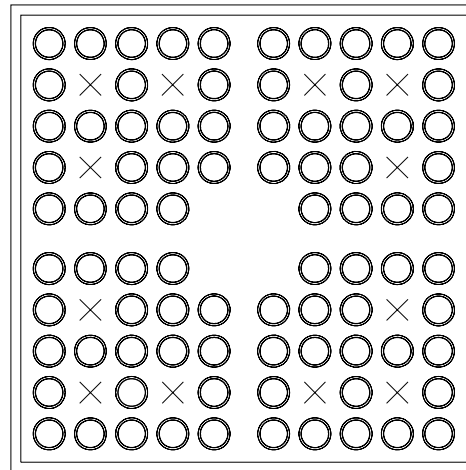

○ = Fuel Rod Location  
× = Partial Rod Location

*B10\_96A 12 Partial Length Rods*

**Table B2-13 PWR Loading Table – Low Assembly Average Burnup Enrichment Limits**

Max. Assembly Avg. Burnup (MWd/MTU)	Min. Assembly Avg. Initial Enrichment (wt% <sup>235</sup> U)	Minimum Cool Time (yrs)			
		959 W	800 W	922 W	1,200 W
Heat Load per Assy	--				
10,000	1.3	4.0	4.0	4.0	4.0
15,000	1.5	4.0	4.0	4.0	4.0
20,000	1.7	4.0	4.0	4.0	4.0
25,000	1.9	4.0	4.3	4.0	4.0
30,000	2.1	4.4	5.2	4.5	4.0

**Table B2-14 BWR Loading Table – Low Assembly Average Burnup Enrichment Limits**

Max. Assembly Avg. Burnup (MWd/MTU)	Min. Assembly Avg. Initial Enrichment (wt% <sup>235</sup> U)	Minimum Cool Time (yrs)
15,000	1.5	4.0
20,000	1.7	4.0
25,000	1.9	4.0
30,000	2.1	4.3

**Table B2-15 Loading Table for PWR Fuel – 959 W/Assembly**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	30 < Assembly Average Burnup ≤ 32.5 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	4.1	4.1	4.6	4.7	4.4	4.7	4.7
2.3 ≤ E < 2.5	4.0	4.1	4.5	4.7	4.4	4.6	4.6
2.5 ≤ E < 2.7	4.0	4.0	4.5	4.6	4.3	4.6	4.6
2.7 ≤ E < 2.9	4.0	4.0	4.5	4.5	4.3	4.5	4.5
2.9 ≤ E < 3.1	4.0	4.0	4.4	4.5	4.2	4.5	4.5
3.1 ≤ E < 3.3	4.0	4.0	4.4	4.5	4.2	4.5	4.5
3.3 ≤ E < 3.5	4.0	4.0	4.3	4.4	4.2	4.4	4.4
3.5 ≤ E < 3.7	4.0	4.0	4.3	4.4	4.1	4.4	4.4
3.7 ≤ E < 3.9	4.0	4.0	4.3	4.4	4.1	4.4	4.4
3.9 ≤ E < 4.1	4.0	4.0	4.2	4.3	4.0	4.3	4.3
4.1 ≤ E < 4.3	4.0	4.0	4.2	4.3	4.0	4.3	4.3
4.3 ≤ E < 4.5	4.0	4.0	4.2	4.3	4.0	4.3	4.3
4.5 ≤ E < 4.7	4.0	4.0	4.1	4.2	4.0	4.2	4.2
4.7 ≤ E < 4.9	4.0	4.0	4.1	4.2	4.0	4.2	4.2
E ≥ 4.9	4.0	4.0	4.1	4.2	4.0	4.2	4.2
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	32.5 < Assembly Average Burnup ≤ 35 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	4.3	4.4	5.0	5.1	4.7	5.0	5.0
2.5 ≤ E < 2.7	4.3	4.4	4.9	5.0	4.7	5.0	5.0
2.7 ≤ E < 2.9	4.2	4.3	4.8	5.0	4.6	4.9	4.9
2.9 ≤ E < 3.1	4.2	4.3	4.8	4.9	4.6	4.9	4.9
3.1 ≤ E < 3.3	4.1	4.2	4.7	4.9	4.5	4.8	4.8
3.3 ≤ E < 3.5	4.1	4.2	4.7	4.8	4.5	4.8	4.8
3.5 ≤ E < 3.7	4.1	4.1	4.6	4.8	4.4	4.7	4.7
3.7 ≤ E < 3.9	4.0	4.1	4.6	4.7	4.4	4.7	4.7
3.9 ≤ E < 4.1	4.0	4.1	4.6	4.7	4.4	4.7	4.7
4.1 ≤ E < 4.3	4.0	4.0	4.5	4.7	4.3	4.6	4.6
4.3 ≤ E < 4.5	4.0	4.0	4.5	4.6	4.3	4.6	4.6
4.5 ≤ E < 4.7	4.0	4.0	4.5	4.6	4.3	4.6	4.6
4.7 ≤ E < 4.9	4.0	4.0	4.4	4.6	4.3	4.5	4.5
E ≥ 4.9	4.0	4.0	4.4	4.5	4.2	4.5	4.5

**Table B2-15 Loading Table for PWR Fuel – 959 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	35 < Assembly Average Burnup ≤ 37.5 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	4.7	4.8	5.5	5.7	5.2	5.6	5.6
2.5 ≤ E < 2.7	4.6	4.7	5.4	5.6	5.1	5.5	5.5
2.7 ≤ E < 2.9	4.6	4.7	5.3	5.5	5.0	5.4	5.4
2.9 ≤ E < 3.1	4.5	4.6	5.3	5.4	5.0	5.4	5.4
3.1 ≤ E < 3.3	4.5	4.5	5.2	5.4	4.9	5.3	5.3
3.3 ≤ E < 3.5	4.4	4.5	5.1	5.3	4.9	5.2	5.2
3.5 ≤ E < 3.7	4.4	4.5	5.0	5.2	4.8	5.2	5.2
3.7 ≤ E < 3.9	4.3	4.4	5.0	5.2	4.8	5.1	5.1
3.9 ≤ E < 4.1	4.3	4.4	5.0	5.1	4.7	5.1	5.1
4.1 ≤ E < 4.3	4.3	4.4	4.9	5.1	4.7	5.0	5.0
4.3 ≤ E < 4.5	4.2	4.3	4.9	5.0	4.7	5.0	5.0
4.5 ≤ E < 4.7	4.2	4.3	4.9	5.0	4.6	5.0	5.0
4.7 ≤ E < 4.9	4.2	4.3	4.8	5.0	4.6	4.9	4.9
E ≥ 4.9	4.1	4.2	4.8	4.9	4.5	4.9	4.9
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	37.5 < Assembly Average Burnup ≤ 40 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	5.0	5.2	5.9	6.1	5.6	6.0	6.0
2.7 ≤ E < 2.9	5.0	5.1	5.9	6.0	5.5	5.9	5.9
2.9 ≤ E < 3.1	4.9	5.0	5.8	6.0	5.5	5.9	5.9
3.1 ≤ E < 3.3	4.9	4.9	5.7	5.9	5.4	5.8	5.8
3.3 ≤ E < 3.5	4.8	4.9	5.7	5.8	5.3	5.7	5.7
3.5 ≤ E < 3.7	4.7	4.8	5.6	5.8	5.2	5.7	5.7
3.7 ≤ E < 3.9	4.7	4.8	5.5	5.7	5.2	5.6	5.6
3.9 ≤ E < 4.1	4.6	4.8	5.5	5.7	5.1	5.6	5.6
4.1 ≤ E < 4.3	4.6	4.7	5.4	5.6	5.1	5.5	5.5
4.3 ≤ E < 4.5	4.5	4.7	5.4	5.6	5.0	5.5	5.5
4.5 ≤ E < 4.7	4.5	4.6	5.3	5.5	5.0	5.4	5.4
4.7 ≤ E < 4.9	4.5	4.6	5.3	5.5	5.0	5.4	5.4
E ≥ 4.9	4.5	4.5	5.2	5.4	4.9	5.4	5.4

**Table B2-15 Loading Table for PWR Fuel – 959 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	40 < Assembly Average Burnup ≤ 41 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	5.3	5.4	6.2	6.4	5.8	6.3	6.3
2.7 ≤ E < 2.9	5.2	5.3	6.1	6.3	5.7	6.2	6.2
2.9 ≤ E < 3.1	5.1	5.2	6.0	6.2	5.7	6.1	6.1
3.1 ≤ E < 3.3	5.0	5.1	5.9	6.1	5.6	6.0	6.0
3.3 ≤ E < 3.5	4.9	5.1	5.9	6.0	5.5	5.9	5.9
3.5 ≤ E < 3.7	4.9	5.0	5.8	6.0	5.5	5.9	5.9
3.7 ≤ E < 3.9	4.8	4.9	5.7	5.9	5.4	5.8	5.8
3.9 ≤ E < 4.1	4.8	4.9	5.7	5.9	5.3	5.8	5.8
4.1 ≤ E < 4.3	4.7	4.9	5.6	5.8	5.3	5.7	5.7
4.3 ≤ E < 4.5	4.7	4.8	5.6	5.8	5.2	5.7	5.7
4.5 ≤ E < 4.7	4.7	4.8	5.5	5.7	5.2	5.6	5.6
4.7 ≤ E < 4.9	4.6	4.7	5.5	5.7	5.1	5.6	5.6
E ≥ 4.9	4.6	4.7	5.5	5.6	5.1	5.6	5.6
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	41 < Assembly Average Burnup ≤ 42 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	5.5	5.6	6.5	6.7	6.0	6.6	6.6
2.7 ≤ E < 2.9	5.4	5.5	6.4	6.6	5.9	6.5	6.5
2.9 ≤ E < 3.1	5.3	5.4	6.3	6.5	5.9	6.4	6.4
3.1 ≤ E < 3.3	5.2	5.3	6.2	6.4	5.8	6.3	6.3
3.3 ≤ E < 3.5	5.1	5.3	6.1	6.3	5.7	6.2	6.2
3.5 ≤ E < 3.7	5.0	5.2	6.0	6.2	5.7	6.1	6.1
3.7 ≤ E < 3.9	5.0	5.1	5.9	6.2	5.6	6.0	6.0
3.9 ≤ E < 4.1	4.9	5.1	5.9	6.1	5.5	6.0	6.0
4.1 ≤ E < 4.3	4.9	5.0	5.8	6.0	5.5	5.9	5.9
4.3 ≤ E < 4.5	4.9	5.0	5.8	6.0	5.4	5.9	5.9
4.5 ≤ E < 4.7	4.8	4.9	5.7	5.9	5.4	5.8	5.8
4.7 ≤ E < 4.9	4.8	4.9	5.7	5.9	5.3	5.8	5.8
E ≥ 4.9	4.7	4.9	5.7	5.9	5.3	5.8	5.8



**Table B2-15 Loading Table for PWR Fuel – 959 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	42 < Assembly Average Burnup ≤ 43 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	5.7	5.8	6.8	7.0	6.3	6.9	6.9
2.7 ≤ E < 2.9	5.6	5.7	6.7	6.9	6.2	6.8	6.8
2.9 ≤ E < 3.1	5.5	5.6	6.6	6.8	6.0	6.7	6.7
3.1 ≤ E < 3.3	5.4	5.6	6.5	6.7	6.0	6.6	6.6
3.3 ≤ E < 3.5	5.3	5.5	6.4	6.6	5.9	6.5	6.5
3.5 ≤ E < 3.7	5.3	5.4	6.3	6.5	5.9	6.4	6.4
3.7 ≤ E < 3.9	5.2	5.3	6.2	6.5	5.8	6.3	6.3
3.9 ≤ E < 4.1	5.1	5.3	6.1	6.4	5.7	6.2	6.2
4.1 ≤ E < 4.3	5.0	5.2	6.0	6.3	5.7	6.2	6.1
4.3 ≤ E < 4.5	5.0	5.2	6.0	6.2	5.6	6.1	6.1
4.5 ≤ E < 4.7	5.0	5.1	5.9	6.2	5.6	6.0	6.0
4.7 ≤ E < 4.9	4.9	5.0	5.9	6.1	5.5	6.0	6.0
E ≥ 4.9	4.9	5.0	5.8	6.0	5.5	6.0	5.9
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	43 < Assembly Average Burnup ≤ 44 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	5.9	6.0	7.1	7.4	6.6	7.2	7.2
2.7 ≤ E < 2.9	5.8	5.9	7.0	7.3	6.5	7.0	7.0
2.9 ≤ E < 3.1	5.7	5.8	6.9	7.1	6.4	6.9	6.9
3.1 ≤ E < 3.3	5.6	5.8	6.8	7.0	6.2	6.8	6.8
3.3 ≤ E < 3.5	5.5	5.7	6.7	6.9	6.1	6.8	6.7
3.5 ≤ E < 3.7	5.5	5.6	6.6	6.8	6.0	6.7	6.7
3.7 ≤ E < 3.9	5.4	5.6	6.5	6.8	6.0	6.6	6.6
3.9 ≤ E < 4.1	5.3	5.5	6.4	6.7	5.9	6.5	6.5
4.1 ≤ E < 4.3	5.3	5.4	6.3	6.6	5.9	6.4	6.4
4.3 ≤ E < 4.5	5.2	5.4	6.2	6.5	5.8	6.4	6.4
4.5 ≤ E < 4.7	5.1	5.3	6.2	6.5	5.8	6.3	6.3
4.7 ≤ E < 4.9	5.1	5.3	6.1	6.4	5.7	6.2	6.2
E ≥ 4.9	5.0	5.2	6.0	6.3	5.7	6.2	6.2

**Table B2-15 Loading Table for PWR Fuel – 959 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	44 < Assembly Average Burnup ≤ 45 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	6.0	6.2	7.3	7.7	6.7	7.4	7.4
2.9 ≤ E < 3.1	5.9	6.0	7.2	7.6	6.6	7.3	7.3
3.1 ≤ E < 3.3	5.8	6.0	7.0	7.4	6.5	7.2	7.1
3.3 ≤ E < 3.5	5.7	5.9	6.9	7.3	6.4	7.0	7.0
3.5 ≤ E < 3.7	5.7	5.8	6.8	7.2	6.3	6.9	6.9
3.7 ≤ E < 3.9	5.6	5.8	6.8	7.0	6.2	6.9	6.9
3.9 ≤ E < 4.1	5.5	5.7	6.7	7.0	6.2	6.8	6.8
4.1 ≤ E < 4.3	5.5	5.6	6.6	6.9	6.1	6.7	6.7
4.3 ≤ E < 4.5	5.4	5.6	6.5	6.8	6.0	6.7	6.6
4.5 ≤ E < 4.7	5.3	5.5	6.5	6.7	6.0	6.6	6.6
4.7 ≤ E < 4.9	5.3	5.5	6.4	6.7	5.9	6.5	6.5
E ≥ 4.9	5.2	5.4	6.3	6.6	5.9	6.5	6.5

**Note:** For fuel assembly average burnup greater than 45 GWd/MTU, cool time tables have been revised to account for a 5% margin in heat load.

**Table B2-16 Loading Table for PWR Fuel – 911 W/Assembly**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	45 < Assembly Average Burnup ≤ 46 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	6.7	6.9	8.5	9.0	7.7	8.6	8.6
2.9 ≤ E < 3.1	6.6	6.8	8.3	8.8	7.5	8.4	8.4
3.1 ≤ E < 3.3	6.5	6.7	8.1	8.6	7.4	8.2	8.2
3.3 ≤ E < 3.5	6.4	6.6	8.0	8.5	7.3	8.1	8.1
3.5 ≤ E < 3.7	6.3	6.5	7.8	8.3	7.1	8.0	7.9
3.7 ≤ E < 3.9	6.2	6.4	7.7	8.2	7.0	7.8	7.8
3.9 ≤ E < 4.1	6.1	6.3	7.6	8.0	6.9	7.7	7.7
4.1 ≤ E < 4.3	6.0	6.2	7.5	7.9	6.9	7.7	7.6
4.3 ≤ E < 4.5	6.0	6.2	7.4	7.8	6.8	7.6	7.6
4.5 ≤ E < 4.7	5.9	6.1	7.3	7.8	6.7	7.5	7.5
4.7 ≤ E < 4.9	5.9	6.0	7.2	7.7	6.7	7.4	7.4
E ≥ 4.9	5.8	6.0	7.2	7.6	6.6	7.3	7.3

**Table B2-16 Loading Table for PWR Fuel – 911 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	46 < Assembly Average Burnup ≤ 47 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	7.0	7.3	9.0	9.6	8.0	9.1	9.1
2.9 ≤ E < 3.1	6.9	7.1	8.8	9.4	7.9	8.9	8.9
3.1 ≤ E < 3.3	6.8	7.0	8.6	9.2	7.8	8.7	8.7
3.3 ≤ E < 3.5	6.7	6.9	8.4	9.0	7.6	8.6	8.6
3.5 ≤ E < 3.7	6.6	6.8	8.3	8.8	7.5	8.4	8.4
3.7 ≤ E < 3.9	6.5	6.7	8.1	8.7	7.4	8.3	8.3
3.9 ≤ E < 4.1	6.4	6.6	8.0	8.5	7.3	8.1	8.1
4.1 ≤ E < 4.3	6.3	6.5	7.9	8.4	7.2	8.0	8.0
4.3 ≤ E < 4.5	6.2	6.5	7.8	8.3	7.1	7.9	7.9
4.5 ≤ E < 4.7	6.1	6.4	7.7	8.2	7.0	7.9	7.8
4.7 ≤ E < 4.9	6.0	6.3	7.6	8.1	6.9	7.8	7.8
E ≥ 4.9	6.0	6.2	7.6	8.0	6.9	7.7	7.7
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	47 < Assembly Average Burnup ≤ 48 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	7.4	7.7	9.6	10.3	8.6	9.7	9.7
2.9 ≤ E < 3.1	7.2	7.6	9.4	10.0	8.4	9.5	9.5
3.1 ≤ E < 3.3	7.1	7.4	9.1	9.8	8.2	9.3	9.3
3.3 ≤ E < 3.5	7.0	7.2	8.9	9.6	8.0	9.1	9.0
3.5 ≤ E < 3.7	6.9	7.1	8.8	9.4	7.9	8.9	8.9
3.7 ≤ E < 3.9	6.7	7.0	8.6	9.2	7.8	8.8	8.7
3.9 ≤ E < 4.1	6.7	6.9	8.5	9.0	7.6	8.6	8.6
4.1 ≤ E < 4.3	6.6	6.8	8.4	8.9	7.6	8.5	8.5
4.3 ≤ E < 4.5	6.5	6.7	8.2	8.8	7.4	8.4	8.4
4.5 ≤ E < 4.7	6.4	6.7	8.1	8.7	7.4	8.3	8.3
4.7 ≤ E < 4.9	6.3	6.6	8.0	8.6	7.3	8.2	8.2
E ≥ 4.9	6.2	6.5	7.9	8.5	7.2	8.1	8.1

**Table B2-16 Loading Table for PWR Fuel – 911 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	48 < Assembly Average Burnup ≤ 49 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	7.8	8.1	10.2	11.1	9.0	10.4	10.4
2.9 ≤ E < 3.1	7.6	7.9	10.0	10.8	8.8	10.1	10.1
3.1 ≤ E < 3.3	7.5	7.8	9.7	10.5	8.6	9.9	9.8
3.3 ≤ E < 3.5	7.3	7.6	9.5	10.2	8.5	9.7	9.6
3.5 ≤ E < 3.7	7.2	7.5	9.3	10.0	8.3	9.5	9.4
3.7 ≤ E < 3.9	7.0	7.4	9.1	9.8	8.2	9.3	9.3
3.9 ≤ E < 4.1	6.9	7.2	9.0	9.6	8.0	9.1	9.1
4.1 ≤ E < 4.3	6.8	7.1	8.8	9.5	7.9	9.0	9.0
4.3 ≤ E < 4.5	6.8	7.0	8.7	9.3	7.8	8.9	8.9
4.5 ≤ E < 4.7	6.7	6.9	8.6	9.2	7.7	8.8	8.7
4.7 ≤ E < 4.9	6.6	6.9	8.5	9.1	7.6	8.7	8.6
E ≥ 4.9	6.5	6.8	8.4	9.0	7.6	8.6	8.5
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	49 < Assembly Average Burnup ≤ 50 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	8.0	8.3	10.7	11.6	9.4	10.9	10.9
3.1 ≤ E < 3.3	7.8	8.1	10.4	11.3	9.1	10.6	10.6
3.3 ≤ E < 3.5	7.7	7.9	10.1	11.0	9.0	10.3	10.3
3.5 ≤ E < 3.7	7.5	7.8	9.9	10.8	8.8	10.0	10.0
3.7 ≤ E < 3.9	7.4	7.6	9.7	10.5	8.6	9.9	9.9
3.9 ≤ E < 4.1	7.3	7.5	9.5	10.3	8.5	9.7	9.7
4.1 ≤ E < 4.3	7.1	7.4	9.4	10.1	8.3	9.6	9.5
4.3 ≤ E < 4.5	7.0	7.3	9.2	9.9	8.2	9.4	9.4
4.5 ≤ E < 4.7	6.9	7.2	9.1	9.8	8.1	9.3	9.2
4.7 ≤ E < 4.9	6.9	7.1	9.0	9.6	8.0	9.1	9.1
E ≥ 4.9	6.8	7.0	8.9	9.5	7.9	9.0	9.0

**Table B2-16 Loading Table for PWR Fuel – 911 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	50 < Assembly Average Burnup ≤ 51 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	8.3	8.7	11.5	12.3	10.0	11.6	11.6
3.1 ≤ E < 3.3	8.0	8.5	11.2	12.0	9.8	11.3	11.3
3.3 ≤ E < 3.5	7.9	8.3	10.9	11.7	9.5	11.1	11.1
3.5 ≤ E < 3.7	7.8	8.1	10.6	11.5	9.3	10.8	10.8
3.7 ≤ E < 3.9	7.6	8.0	10.4	11.3	9.1	10.6	10.6
3.9 ≤ E < 4.1	7.5	7.9	10.1	11.1	9.0	10.4	10.4
4.1 ≤ E < 4.3	7.4	7.8	10.0	10.9	8.8	10.2	10.1
4.3 ≤ E < 4.5	7.3	7.6	9.8	10.6	8.7	10.0	10.0
4.5 ≤ E < 4.7	7.1	7.5	9.7	10.5	8.6	9.8	9.8
4.7 ≤ E < 4.9	7.0	7.4	9.5	10.3	8.5	9.7	9.7
E ≥ 4.9	7.0	7.3	9.4	10.1	8.3	9.6	9.6
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	51 < Assembly Average Burnup ≤ 52 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	8.8	9.3	12.2	13.0	10.7	12.4	12.4
3.1 ≤ E < 3.3	8.5	9.0	11.9	12.6	10.4	12.1	12.0
3.3 ≤ E < 3.5	8.3	8.8	11.6	12.3	10.1	11.8	11.8
3.5 ≤ E < 3.7	8.1	8.6	11.4	11.9	9.9	11.6	11.5
3.7 ≤ E < 3.9	8.0	8.5	11.1	11.7	9.7	11.3	11.3
3.9 ≤ E < 4.1	7.9	8.3	10.9	11.5	9.5	11.1	11.1
4.1 ≤ E < 4.3	7.7	8.1	10.7	11.3	9.3	10.9	10.9
4.3 ≤ E < 4.5	7.6	8.0	10.5	11.1	9.2	10.7	10.7
4.5 ≤ E < 4.7	7.5	7.9	10.3	11.0	9.0	10.5	10.5
4.7 ≤ E < 4.9	7.4	7.8	10.1	10.8	8.9	10.3	10.3
E ≥ 4.9	7.3	7.7	10.0	10.6	8.8	10.2	10.2

**Table B2-16 Loading Table for PWR Fuel – 911 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	52 < Assembly Average Burnup ≤ 53 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	9.3	9.8	12.8	13.8	11.4	13.3	13.3
3.1 ≤ E < 3.3	9.0	9.6	12.4	13.5	11.2	13.0	13.0
3.3 ≤ E < 3.5	8.8	9.3	12.1	13.2	10.9	12.6	12.6
3.5 ≤ E < 3.7	8.6	9.1	11.8	12.8	10.6	12.3	12.3
3.7 ≤ E < 3.9	8.4	9.0	11.5	12.6	10.3	12.0	12.0
3.9 ≤ E < 4.1	8.2	8.8	11.3	12.3	10.1	11.8	11.8
4.1 ≤ E < 4.3	8.1	8.6	11.1	12.0	9.9	11.6	11.6
4.3 ≤ E < 4.5	8.0	8.5	10.9	11.8	9.7	11.4	11.4
4.5 ≤ E < 4.7	7.9	8.3	10.7	11.7	9.6	11.2	11.2
4.7 ≤ E < 4.9	7.8	8.2	10.6	11.5	9.4	11.1	11.0
E ≥ 4.9	7.7	8.1	10.4	11.3	9.3	10.9	10.9
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	53 < Assembly Average Burnup ≤ 54 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	9.8	10.5	13.6	14.9	12.2	14.2	14.2
3.1 ≤ E < 3.3	9.6	10.2	13.3	14.4	11.8	13.8	13.8
3.3 ≤ E < 3.5	9.3	9.9	12.9	14.0	11.6	13.5	13.5
3.5 ≤ E < 3.7	9.1	9.7	12.6	13.7	11.3	13.2	13.2
3.7 ≤ E < 3.9	8.9	9.5	12.3	13.4	11.0	12.9	12.9
3.9 ≤ E < 4.1	8.7	9.3	12.0	13.2	10.8	12.6	12.6
4.1 ≤ E < 4.3	8.6	9.1	11.8	12.9	10.6	12.4	12.4
4.3 ≤ E < 4.5	8.4	8.9	11.6	12.6	10.4	12.1	12.1
4.5 ≤ E < 4.7	8.3	8.8	11.4	12.4	10.1	11.9	11.9
4.7 ≤ E < 4.9	8.1	8.7	11.3	12.2	10.0	11.8	11.7
E ≥ 4.9	8.0	8.8	11.1	12.0	9.9	11.6	11.6

**Table B2-16 Loading Table for PWR Fuel – 911 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	54 < Assembly Average Burnup ≤ 55 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	10.1	10.9	14.1	15.4	12.7	14.8	14.8
3.3 ≤ E < 3.5	9.9	10.6	13.8	15.0	12.3	14.4	14.4
3.5 ≤ E < 3.7	9.6	10.3	13.5	14.7	12.0	14.0	14.0
3.7 ≤ E < 3.9	9.4	10.1	13.1	14.3	11.8	13.8	13.8
3.9 ≤ E < 4.1	9.2	9.8	12.9	14.0	11.5	13.5	13.5
4.1 ≤ E < 4.3	9.0	9.7	12.6	13.8	11.3	13.3	13.2
4.3 ≤ E < 4.5	8.9	9.5	12.3	13.5	11.1	13.0	13.0
4.5 ≤ E < 4.7	8.7	9.3	12.1	13.3	10.9	12.8	12.7
4.7 ≤ E < 4.9	8.6	9.1	11.9	13.1	10.7	12.6	12.5
E ≥ 4.9	8.5	9.0	11.7	12.9	10.5	12.3	12.3
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	55 < Assembly Average Burnup ≤ 56 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	10.9	11.6	15.1	16.5	13.1	15.8	15.8
3.3 ≤ E < 3.5	10.5	11.3	14.7	16.0	12.8	15.4	15.4
3.5 ≤ E < 3.7	10.2	11.0	14.3	15.7	12.4	15.1	15.0
3.7 ≤ E < 3.9	9.9	10.8	14.0	15.3	12.1	14.7	14.7
3.9 ≤ E < 4.1	9.7	10.5	13.7	15.0	11.9	14.4	14.4
4.1 ≤ E < 4.3	9.5	10.2	13.4	14.7	11.7	14.1	14.1
4.3 ≤ E < 4.5	9.3	10.0	13.2	14.5	11.4	13.8	13.8
4.5 ≤ E < 4.7	9.2	9.9	12.9	14.2	11.2	13.6	13.6
4.7 ≤ E < 4.9	9.0	9.7	12.7	13.9	11.1	13.4	13.4
E ≥ 4.9	8.9	9.5	12.5	13.8	10.9	13.2	13.2



**Table B2-16 Loading Table for PWR Fuel – 911 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	56 < Assembly Average Burnup ≤ 57 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	11.5	12.3	16.0	17.4	14.0	16.8	16.8
3.3 ≤ E < 3.5	11.2	12.0	15.6	17.1	13.6	16.4	16.4
3.5 ≤ E < 3.7	10.9	11.7	15.3	16.7	13.3	16.0	16.0
3.7 ≤ E < 3.9	10.6	11.4	14.9	16.3	13.0	15.7	15.6
3.9 ≤ E < 4.1	10.3	11.2	14.6	16.0	12.6	15.4	15.3
4.1 ≤ E < 4.3	10.1	10.9	14.2	15.7	12.4	15.1	15.1
4.3 ≤ E < 4.5	9.9	10.7	14.0	15.4	12.1	14.8	14.8
4.5 ≤ E < 4.7	9.7	10.5	13.8	15.2	11.9	14.5	14.5
4.7 ≤ E < 4.9	9.5	10.3	13.6	14.9	11.7	14.2	14.2
E ≥ 4.9	9.4	10.1	13.4	14.7	11.5	14.0	14.0
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	57 < Assembly Average Burnup ≤ 58 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	12.2	13.2	17.0	18.5	14.9	17.8	17.7
3.3 ≤ E < 3.5	11.9	12.8	16.7	18.1	14.5	17.4	17.4
3.5 ≤ E < 3.7	11.6	12.4	16.2	17.7	14.1	17.0	17.0
3.7 ≤ E < 3.9	11.3	12.1	15.9	17.3	13.8	16.7	16.6
3.9 ≤ E < 4.1	11.0	11.9	15.6	17.0	13.5	16.3	16.3
4.1 ≤ E < 4.3	10.7	11.6	15.3	16.7	13.2	16.0	16.0
4.3 ≤ E < 4.5	10.5	11.4	15.0	16.4	12.9	15.7	15.7
4.5 ≤ E < 4.7	10.3	11.2	14.7	16.1	12.7	15.5	15.4
4.7 ≤ E < 4.9	10.0	10.9	14.4	15.8	12.4	15.2	15.2
E ≥ 4.9	9.9	10.8	14.2	15.6	12.2	15.0	14.9

**Table B2-16 Loading Table for PWR Fuel – 911 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	58 < Assembly Average Burnup ≤ 59 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	13.0	14.0	18.0	19.5	15.8	18.8	18.8
3.3 ≤ E < 3.5	12.6	13.6	17.6	19.1	15.4	18.4	18.4
3.5 ≤ E < 3.7	12.2	13.3	17.2	18.7	15.0	18.0	18.0
3.7 ≤ E < 3.9	11.9	12.9	16.9	18.3	14.6	17.7	17.7
3.9 ≤ E < 4.1	11.6	12.6	16.5	18.0	14.3	17.4	17.3
4.1 ≤ E < 4.3	11.4	12.3	16.2	17.7	14.0	17.0	17.0
4.3 ≤ E < 4.5	11.1	12.0	15.9	17.4	13.7	16.7	16.7
4.5 ≤ E < 4.7	10.9	11.8	15.6	17.1	13.5	16.4	16.4
4.7 ≤ E < 4.9	10.7	11.6	15.4	16.8	13.2	16.1	16.1
E ≥ 4.9	10.5	11.4	15.1	16.6	13.0	15.9	15.9
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	59 < Assembly Average Burnup ≤ 60 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	-	-	-	-	-	-	-
3.3 ≤ E < 3.5	13.4	14.4	18.6	20.1	16.3	19.0	19.0
3.5 ≤ E < 3.7	13.0	14.1	18.2	19.7	15.9	18.6	18.5
3.7 ≤ E < 3.9	12.7	13.7	17.8	19.4	15.5	18.2	18.1
3.9 ≤ E < 4.1	12.3	13.4	17.5	19.0	15.2	17.9	17.8
4.1 ≤ E < 4.3	12.0	13.1	17.1	18.7	14.9	17.5	17.5
4.3 ≤ E < 4.5	11.8	12.8	16.8	18.4	14.6	17.2	17.2
4.5 ≤ E < 4.7	11.6	12.6	16.5	18.0	14.3	16.9	16.9
4.7 ≤ E < 4.9	11.3	12.3	16.2	17.8	14.0	16.6	16.6
E ≥ 4.9	11.2	12.1	16.0	17.6	13.8	16.4	16.3

**Table B2-17 Loading Table for PWR Fuel – 1,200 W/Assembly**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	30 < Assembly Average Burnup ≤ 32.5 GWd/MTU Minimum Cooling Time (years)						
	CE 14×14	WE 14×14	WE 15×15	B&W 15×15	CE 16×16	WE 17×17	B&W 17×17
2.1 ≤ E < 2.3	4.0	4.0	4.0	4.0	4.0	4.0	4.0
2.3 ≤ E < 2.5	4.0	4.0	4.0	4.0	4.0	4.0	4.0
2.5 ≤ E < 2.7	4.0	4.0	4.0	4.0	4.0	4.0	4.0
2.7 ≤ E < 2.9	4.0	4.0	4.0	4.0	4.0	4.0	4.0
2.9 ≤ E < 3.1	4.0	4.0	4.0	4.0	4.0	4.0	4.0
3.1 ≤ E < 3.3	4.0	4.0	4.0	4.0	4.0	4.0	4.0
3.3 ≤ E < 3.5	4.0	4.0	4.0	4.0	4.0	4.0	4.0
3.5 ≤ E < 3.7	4.0	4.0	4.0	4.0	4.0	4.0	4.0
3.7 ≤ E < 3.9	4.0	4.0	4.0	4.0	4.0	4.0	4.0
3.9 ≤ E < 4.1	4.0	4.0	4.0	4.0	4.0	4.0	4.0
4.1 ≤ E < 4.3	4.0	4.0	4.0	4.0	4.0	4.0	4.0
4.3 ≤ E < 4.5	4.0	4.0	4.0	4.0	4.0	4.0	4.0
4.5 ≤ E < 4.7	4.0	4.0	4.0	4.0	4.0	4.0	4.0
4.7 ≤ E < 4.9	4.0	4.0	4.0	4.0	4.0	4.0	4.0
E ≥ 4.9	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	32.5 < Assembly Average Burnup ≤ 35 GWd/MTU Minimum Cooling Time (years)						
	CE 14×14	WE 14×14	WE 15×15	B&W 15×15	CE 16×16	WE 17×17	B&W 17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	4.0	4.0	4.0	4.1	4.0	4.1	4.1
2.5 ≤ E < 2.7	4.0	4.0	4.0	4.1	4.0	4.0	4.0
2.7 ≤ E < 2.9	4.0	4.0	4.0	4.0	4.0	4.0	4.0
2.9 ≤ E < 3.1	4.0	4.0	4.0	4.0	4.0	4.0	4.0
3.1 ≤ E < 3.3	4.0	4.0	4.0	4.0	4.0	4.0	4.0
3.3 ≤ E < 3.5	4.0	4.0	4.0	4.0	4.0	4.0	4.0
3.5 ≤ E < 3.7	4.0	4.0	4.0	4.0	4.0	4.0	4.0
3.7 ≤ E < 3.9	4.0	4.0	4.0	4.0	4.0	4.0	4.0
3.9 ≤ E < 4.1	4.0	4.0	4.0	4.0	4.0	4.0	4.0
4.1 ≤ E < 4.3	4.0	4.0	4.0	4.0	4.0	4.0	4.0
4.3 ≤ E < 4.5	4.0	4.0	4.0	4.0	4.0	4.0	4.0
4.5 ≤ E < 4.7	4.0	4.0	4.0	4.0	4.0	4.0	4.0
4.7 ≤ E < 4.9	4.0	4.0	4.0	4.0	4.0	4.0	4.0
E ≥ 4.9	4.0	4.0	4.0	4.0	4.0	4.0	4.0

**Table B2-17 Loading Table for PWR Fuel – 1,200 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	35 < Assembly Average Burnup ≤ 37.5 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	4.0	4.0	4.3	4.4	4.2	4.4	4.4
2.5 ≤ E < 2.7	4.0	4.0	4.3	4.4	4.1	4.4	4.4
2.7 ≤ E < 2.9	4.0	4.0	4.2	4.3	4.1	4.3	4.3
2.9 ≤ E < 3.1	4.0	4.0	4.2	4.3	4.0	4.3	4.3
3.1 ≤ E < 3.3	4.0	4.0	4.1	4.2	4.0	4.2	4.2
3.3 ≤ E < 3.5	4.0	4.0	4.1	4.2	4.0	4.2	4.2
3.5 ≤ E < 3.7	4.0	4.0	4.0	4.2	4.0	4.2	4.2
3.7 ≤ E < 3.9	4.0	4.0	4.0	4.1	4.0	4.1	4.1
3.9 ≤ E < 4.1	4.0	4.0	4.0	4.1	4.0	4.1	4.1
4.1 ≤ E < 4.3	4.0	4.0	4.0	4.0	4.0	4.0	4.0
4.3 ≤ E < 4.5	4.0	4.0	4.0	4.0	4.0	4.0	4.0
4.5 ≤ E < 4.7	4.0	4.0	4.0	4.0	4.0	4.0	4.0
4.7 ≤ E < 4.9	4.0	4.0	4.0	4.0	4.0	4.0	4.0
E ≥ 4.9	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	37.5 < Assembly Average Burnup ≤ 40 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	4.0	4.1	4.6	4.8	4.4	4.7	4.7
2.7 ≤ E < 2.9	4.0	4.0	4.6	4.7	4.4	4.7	4.7
2.9 ≤ E < 3.1	4.0	4.0	4.5	4.6	4.3	4.6	4.6
3.1 ≤ E < 3.3	4.0	4.0	4.5	4.6	4.3	4.5	4.5
3.3 ≤ E < 3.5	4.0	4.0	4.4	4.5	4.2	4.5	4.5
3.5 ≤ E < 3.7	4.0	4.0	4.4	4.5	4.2	4.5	4.4
3.7 ≤ E < 3.9	4.0	4.0	4.3	4.4	4.1	4.4	4.4
3.9 ≤ E < 4.1	4.0	4.0	4.3	4.4	4.1	4.4	4.4
4.1 ≤ E < 4.3	4.0	4.0	4.2	4.3	4.1	4.3	4.3
4.3 ≤ E < 4.5	4.0	4.0	4.2	4.3	4.0	4.3	4.3
4.5 ≤ E < 4.7	4.0	4.0	4.2	4.3	4.0	4.3	4.3
4.7 ≤ E < 4.9	4.0	4.0	4.1	4.3	4.0	4.3	4.3
E ≥ 4.9	4.0	4.0	4.1	4.2	4.0	4.2	4.2

**Table B2-17 Loading Table for PWR Fuel – 1,200 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	40 < Assembly Average Burnup ≤ 41 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	4.2	4.2	4.8	4.9	4.5	4.9	4.9
2.7 ≤ E < 2.9	4.1	4.2	4.7	4.8	4.5	4.8	4.8
2.9 ≤ E < 3.1	4.0	4.1	4.7	4.8	4.4	4.8	4.7
3.1 ≤ E < 3.3	4.0	4.1	4.6	4.7	4.4	4.7	4.7
3.3 ≤ E < 3.5	4.0	4.0	4.5	4.7	4.4	4.6	4.6
3.5 ≤ E < 3.7	4.0	4.0	4.5	4.6	4.3	4.6	4.6
3.7 ≤ E < 3.9	4.0	4.0	4.4	4.5	4.2	4.5	4.5
3.9 ≤ E < 4.1	4.0	4.0	4.4	4.5	4.2	4.5	4.5
4.1 ≤ E < 4.3	4.0	4.0	4.4	4.5	4.2	4.5	4.5
4.3 ≤ E < 4.5	4.0	4.0	4.3	4.4	4.1	4.4	4.4
4.5 ≤ E < 4.7	4.0	4.0	4.3	4.4	4.1	4.4	4.4
4.7 ≤ E < 4.9	4.0	4.0	4.3	4.4	4.1	4.4	4.4
E ≥ 4.9	4.0	4.0	4.2	4.3	4.0	4.4	4.3
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	41 < Assembly Average Burnup ≤ 42 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	4.3	4.4	4.9	5.1	4.7	5.0	5.0
2.7 ≤ E < 2.9	4.2	4.3	4.9	5.0	4.6	5.0	5.0
2.9 ≤ E < 3.1	4.2	4.2	4.8	4.9	4.6	4.9	4.9
3.1 ≤ E < 3.3	4.1	4.2	4.7	4.9	4.5	4.8	4.8
3.3 ≤ E < 3.5	4.0	4.1	4.7	4.8	4.5	4.8	4.8
3.5 ≤ E < 3.7	4.0	4.1	4.6	4.8	4.4	4.7	4.7
3.7 ≤ E < 3.9	4.0	4.1	4.6	4.7	4.4	4.7	4.7
3.9 ≤ E < 4.1	4.0	4.0	4.5	4.6	4.3	4.6	4.6
4.1 ≤ E < 4.3	4.0	4.0	4.5	4.6	4.3	4.6	4.6
4.3 ≤ E < 4.5	4.0	4.0	4.4	4.6	4.3	4.5	4.5
4.5 ≤ E < 4.7	4.0	4.0	4.4	4.5	4.2	4.5	4.5
4.7 ≤ E < 4.9	4.0	4.0	4.4	4.5	4.2	4.5	4.5
E ≥ 4.9	4.0	4.0	4.3	4.5	4.2	4.5	4.5

**Table B2-17 Loading Table for PWR Fuel – 1,200 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	42 < Assembly Average Burnup ≤ 43 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	4.4	4.5	5.1	5.3	4.9	5.2	5.2
2.7 ≤ E < 2.9	4.4	4.4	5.0	5.2	4.8	5.1	5.1
2.9 ≤ E < 3.1	4.3	4.4	5.0	5.1	4.7	5.0	5.0
3.1 ≤ E < 3.3	4.2	4.3	4.9	5.0	4.7	5.0	5.0
3.3 ≤ E < 3.5	4.2	4.3	4.8	5.0	4.6	4.9	4.9
3.5 ≤ E < 3.7	4.1	4.2	4.8	4.9	4.5	4.9	4.9
3.7 ≤ E < 3.9	4.1	4.2	4.7	4.9	4.5	4.8	4.8
3.9 ≤ E < 4.1	4.0	4.1	4.7	4.8	4.4	4.8	4.8
4.1 ≤ E < 4.3	4.0	4.1	4.6	4.8	4.4	4.7	4.7
4.3 ≤ E < 4.5	4.0	4.0	4.6	4.7	4.4	4.7	4.7
4.5 ≤ E < 4.7	4.0	4.0	4.5	4.7	4.3	4.7	4.6
4.7 ≤ E < 4.9	4.0	4.0	4.5	4.6	4.3	4.6	4.6
E ≥ 4.9	4.0	4.0	4.4	4.6	4.3	4.6	4.5
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	43 < Assembly Average Burnup ≤ 44 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	4.5	4.6	5.3	5.5	5.0	5.4	5.4
2.7 ≤ E < 2.9	4.5	4.6	5.2	5.4	4.9	5.3	5.3
2.9 ≤ E < 3.1	4.4	4.5	5.1	5.3	4.9	5.2	5.2
3.1 ≤ E < 3.3	4.4	4.4	5.0	5.2	4.8	5.2	5.2
3.3 ≤ E < 3.5	4.3	4.4	5.0	5.1	4.7	5.1	5.1
3.5 ≤ E < 3.7	4.2	4.3	4.9	5.1	4.7	5.0	5.0
3.7 ≤ E < 3.9	4.2	4.3	4.9	5.0	4.6	5.0	5.0
3.9 ≤ E < 4.1	4.1	4.3	4.8	5.0	4.6	4.9	4.9
4.1 ≤ E < 4.3	4.1	4.2	4.8	4.9	4.5	4.9	4.9
4.3 ≤ E < 4.5	4.1	4.2	4.7	4.9	4.5	4.8	4.8
4.5 ≤ E < 4.7	4.0	4.2	4.7	4.8	4.5	4.8	4.8
4.7 ≤ E < 4.9	4.0	4.1	4.6	4.8	4.4	4.8	4.7
E ≥ 4.9	4.0	4.1	4.6	4.8	4.4	4.7	4.7

**Table B2-17 Loading Table for PWR Fuel – 1,200 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	44 < Assembly Average Burnup ≤ 45 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	4.6	4.7	5.4	5.6	5.1	5.5	5.5
2.9 ≤ E < 3.1	4.5	4.6	5.3	5.5	5.0	5.4	5.4
3.1 ≤ E < 3.3	4.5	4.6	5.2	5.4	4.9	5.4	5.4
3.3 ≤ E < 3.5	4.4	4.5	5.2	5.4	4.9	5.3	5.3
3.5 ≤ E < 3.7	4.4	4.5	5.1	5.3	4.8	5.2	5.2
3.7 ≤ E < 3.9	4.3	4.4	5.0	5.2	4.8	5.1	5.1
3.9 ≤ E < 4.1	4.3	4.4	5.0	5.1	4.7	5.1	5.1
4.1 ≤ E < 4.3	4.2	4.3	4.9	5.1	4.7	5.0	5.0
4.3 ≤ E < 4.5	4.2	4.3	4.9	5.0	4.6	5.0	5.0
4.5 ≤ E < 4.7	4.1	4.2	4.8	5.0	4.6	4.9	4.9
4.7 ≤ E < 4.9	4.1	4.2	4.8	4.9	4.5	4.9	4.9
E ≥ 4.9	4.0	4.2	4.7	4.9	4.5	4.9	4.8

**Note:** For fuel assembly average burnup greater than 45 GWd/MTU, cool time tables have been revised to account for a 5% margin in heat load.

**Table B2-18 Loading Table for PWR Fuel – 1,140 W/Assembly**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	45 < Assembly Average Burnup ≤ 46 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	5.0	5.2	6.0	6.2	5.6	6.0	6.0
2.9 ≤ E < 3.1	5.0	5.1	5.9	6.0	5.5	6.0	6.0
3.1 ≤ E < 3.3	4.9	5.0	5.8	6.0	5.5	5.9	5.9
3.3 ≤ E < 3.5	4.8	4.9	5.7	5.9	5.4	5.8	5.8
3.5 ≤ E < 3.7	4.8	4.9	5.6	5.8	5.3	5.7	5.7
3.7 ≤ E < 3.9	4.7	4.8	5.6	5.8	5.2	5.7	5.7
3.9 ≤ E < 4.1	4.6	4.8	5.5	5.7	5.1	5.6	5.6
4.1 ≤ E < 4.3	4.6	4.7	5.4	5.6	5.1	5.5	5.6
4.3 ≤ E < 4.5	4.5	4.6	5.4	5.6	5.0	5.5	5.5
4.5 ≤ E < 4.7	4.5	4.6	5.3	5.5	5.0	5.4	5.4
4.7 ≤ E < 4.9	4.4	4.6	5.3	5.5	4.9	5.4	5.4
E ≥ 4.9	4.4	4.5	5.2	5.4	4.9	5.4	5.3



**Table B2-18 Loading Table for PWR Fuel – 1,140 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	46 < Assembly Average Burnup ≤ 47 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	5.2	5.4	6.2	6.5	5.8	6.3	6.3
2.9 ≤ E < 3.1	5.1	5.3	6.1	6.4	5.7	6.2	6.2
3.1 ≤ E < 3.3	5.0	5.2	6.0	6.2	5.6	6.1	6.1
3.3 ≤ E < 3.5	5.0	5.1	5.9	6.1	5.6	6.0	6.0
3.5 ≤ E < 3.7	4.9	5.0	5.8	6.0	5.5	5.9	5.9
3.7 ≤ E < 3.9	4.8	5.0	5.8	6.0	5.4	5.9	5.9
3.9 ≤ E < 4.1	4.8	4.9	5.7	5.9	5.3	5.8	5.8
4.1 ≤ E < 4.3	4.7	4.8	5.6	5.8	5.3	5.8	5.7
4.3 ≤ E < 4.5	4.7	4.8	5.6	5.8	5.2	5.7	5.7
4.5 ≤ E < 4.7	4.6	4.7	5.5	5.7	5.2	5.6	5.6
4.7 ≤ E < 4.9	4.6	4.7	5.5	5.7	5.1	5.6	5.6
E ≥ 4.9	4.5	4.7	5.4	5.6	5.0	5.5	5.5
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	47 < Assembly Average Burnup ≤ 48 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	5.4	5.6	6.5	6.8	6.0	6.6	6.6
2.9 ≤ E < 3.1	5.3	5.5	6.4	6.6	5.9	6.5	6.5
3.1 ≤ E < 3.3	5.2	5.4	6.2	6.5	5.8	6.4	6.4
3.3 ≤ E < 3.5	5.1	5.3	6.1	6.4	5.8	6.2	6.2
3.5 ≤ E < 3.7	5.0	5.2	6.0	6.3	5.7	6.2	6.1
3.7 ≤ E < 3.9	5.0	5.1	5.9	6.2	5.6	6.0	6.0
3.9 ≤ E < 4.1	4.9	5.0	5.9	6.1	5.5	6.0	6.0
4.1 ≤ E < 4.3	4.9	5.0	5.8	6.0	5.5	5.9	5.9
4.3 ≤ E < 4.5	4.8	4.9	5.8	6.0	5.4	5.9	5.9
4.5 ≤ E < 4.7	4.8	4.9	5.7	5.9	5.3	5.8	5.8
4.7 ≤ E < 4.9	4.7	4.9	5.7	5.8	5.3	5.8	5.8
E ≥ 4.9	4.7	4.8	5.6	5.8	5.2	5.7	5.7

**Table B2-18 Loading Table for PWR Fuel – 1,140 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	48 < Assembly Average Burnup ≤ 49 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	5.6	5.8	6.8	7.0	6.3	6.9	6.9
2.9 ≤ E < 3.1	5.5	5.7	6.7	6.9	6.1	6.8	6.7
3.1 ≤ E < 3.3	5.4	5.6	6.5	6.8	6.0	6.6	6.6
3.3 ≤ E < 3.5	5.3	5.5	6.4	6.7	5.9	6.5	6.5
3.5 ≤ E < 3.7	5.2	5.4	6.3	6.6	5.9	6.4	6.4
3.7 ≤ E < 3.9	5.2	5.3	6.2	6.5	5.8	6.3	6.3
3.9 ≤ E < 4.1	5.1	5.2	6.1	6.4	5.7	6.2	6.2
4.1 ≤ E < 4.3	5.0	5.2	6.0	6.3	5.7	6.1	6.1
4.3 ≤ E < 4.5	5.0	5.1	5.9	6.2	5.6	6.0	6.0
4.5 ≤ E < 4.7	4.9	5.0	5.9	6.1	5.5	6.0	6.0
4.7 ≤ E < 4.9	4.8	5.0	5.8	6.0	5.5	5.9	5.9
E ≥ 4.9	4.8	4.9	5.8	6.0	5.4	5.9	5.9
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	49 < Assembly Average Burnup ≤ 50 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	5.7	5.8	6.9	7.3	6.4	7.0	7.0
3.1 ≤ E < 3.3	5.6	5.7	6.8	7.1	6.3	6.9	6.9
3.3 ≤ E < 3.5	5.5	5.6	6.7	7.0	6.2	6.8	6.8
3.5 ≤ E < 3.7	5.4	5.5	6.6	6.9	6.0	6.7	6.7
3.7 ≤ E < 3.9	5.4	5.5	6.5	6.8	6.0	6.6	6.6
3.9 ≤ E < 4.1	5.3	5.4	6.4	6.7	5.9	6.5	6.5
4.1 ≤ E < 4.3	5.2	5.3	6.3	6.6	5.8	6.4	6.4
4.3 ≤ E < 4.5	5.1	5.2	6.2	6.5	5.8	6.3	6.3
4.5 ≤ E < 4.7	5.0	5.2	6.1	6.4	5.7	6.2	6.2
4.7 ≤ E < 4.9	5.0	5.1	6.0	6.3	5.7	6.2	6.2
E ≥ 4.9	4.9	5.0	6.0	6.2	5.6	6.1	6.1

**Table B2-18 Loading Table for PWR Fuel – 1,140 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	50 < Assembly Average Burnup ≤ 51 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	5.8	6.0	7.3	7.6	6.7	7.4	7.4
3.1 ≤ E < 3.3	5.8	5.9	7.1	7.5	6.6	7.2	7.2
3.3 ≤ E < 3.5	5.7	5.8	7.0	7.3	6.4	7.1	7.0
3.5 ≤ E < 3.7	5.6	5.7	6.8	7.2	6.3	6.9	6.9
3.7 ≤ E < 3.9	5.5	5.7	6.7	7.0	6.2	6.9	6.8
3.9 ≤ E < 4.1	5.4	5.6	6.6	6.9	6.1	6.8	6.8
4.1 ≤ E < 4.3	5.3	5.5	6.5	6.8	6.0	6.7	6.7
4.3 ≤ E < 4.5	5.2	5.4	6.4	6.8	6.0	6.6	6.6
4.5 ≤ E < 4.7	5.2	5.4	6.4	6.7	5.9	6.5	6.5
4.7 ≤ E < 4.9	5.1	5.3	6.3	6.6	5.8	6.4	6.4
E ≥ 4.9	5.0	5.2	6.2	6.5	5.8	6.4	6.3
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	51 < Assembly Average Burnup ≤ 52 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	6.0	6.3	7.6	7.9	6.9	7.7	7.7
3.1 ≤ E < 3.3	5.9	6.1	7.5	7.7	6.8	7.6	7.6
3.3 ≤ E < 3.5	5.8	6.0	7.3	7.6	6.7	7.4	7.4
3.5 ≤ E < 3.7	5.8	5.9	7.1	7.4	6.6	7.3	7.3
3.7 ≤ E < 3.9	5.7	5.9	7.0	7.3	6.5	7.1	7.1
3.9 ≤ E < 4.1	5.6	5.8	6.9	7.1	6.4	7.0	7.0
4.1 ≤ E < 4.3	5.5	5.7	6.8	7.0	6.3	6.9	6.9
4.3 ≤ E < 4.5	5.4	5.6	6.7	6.9	6.2	6.8	6.8
4.5 ≤ E < 4.7	5.4	5.6	6.6	6.8	6.1	6.8	6.8
4.7 ≤ E < 4.9	5.3	5.5	6.5	6.8	6.0	6.7	6.7
E ≥ 4.9	5.2	5.4	6.5	6.7	6.0	6.6	6.6

**Table B2-18 Loading Table for PWR Fuel – 1,140 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	52 < Assembly Average Burnup ≤ 53 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	6.3	6.5	7.9	8.3	7.3	8.1	8.1
3.1 ≤ E < 3.3	6.2	6.4	7.7	8.1	7.1	7.9	7.9
3.3 ≤ E < 3.5	6.0	6.3	7.5	7.9	7.0	7.8	7.8
3.5 ≤ E < 3.7	5.9	6.1	7.4	7.8	6.9	7.6	7.6
3.7 ≤ E < 3.9	5.8	6.1	7.2	7.6	6.7	7.5	7.5
3.9 ≤ E < 4.1	5.8	6.0	7.1	7.5	6.6	7.4	7.3
4.1 ≤ E < 4.3	5.7	5.9	7.0	7.4	6.5	7.2	7.2
4.3 ≤ E < 4.5	5.6	5.8	6.9	7.2	6.4	7.1	7.1
4.5 ≤ E < 4.7	5.5	5.7	6.8	7.1	6.4	7.0	7.0
4.7 ≤ E < 4.9	5.5	5.7	6.7	7.0	6.3	6.9	6.9
E ≥ 4.9	5.4	5.6	6.6	6.9	6.2	6.9	6.9
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	53 < Assembly Average Burnup ≤ 54 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	6.6	6.8	8.3	8.8	7.6	8.6	8.6
3.1 ≤ E < 3.3	6.4	6.7	8.0	8.6	7.5	8.3	8.3
3.3 ≤ E < 3.5	6.3	6.5	7.9	8.3	7.3	8.2	8.1
3.5 ≤ E < 3.7	6.1	6.4	7.7	8.1	7.1	8.0	8.0
3.7 ≤ E < 3.9	6.0	6.3	7.6	8.0	7.0	7.9	7.8
3.9 ≤ E < 4.1	5.9	6.2	7.4	7.8	6.9	7.7	7.7
4.1 ≤ E < 4.3	5.9	6.1	7.3	7.7	6.8	7.6	7.6
4.3 ≤ E < 4.5	5.8	6.0	7.2	7.6	6.7	7.5	7.5
4.5 ≤ E < 4.7	5.7	5.9	7.0	7.5	6.6	7.4	7.3
4.7 ≤ E < 4.9	5.7	5.9	7.0	7.4	6.5	7.2	7.2
E ≥ 4.9	5.6	5.9	6.9	7.3	6.4	7.1	7.1

**Table B2-18 Loading Table for PWR Fuel – 1,140 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	54 < Assembly Average Burnup ≤ 55 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	6.7	6.9	8.5	9.0	7.8	8.8	8.8
3.3 ≤ E < 3.5	6.6	6.8	8.3	8.8	7.6	8.6	8.6
3.5 ≤ E < 3.7	6.4	6.7	8.1	8.6	7.5	8.4	8.4
3.7 ≤ E < 3.9	6.3	6.6	7.9	8.4	7.3	8.2	8.2
3.9 ≤ E < 4.1	6.2	6.5	7.8	8.2	7.2	8.0	8.0
4.1 ≤ E < 4.3	6.1	6.3	7.6	8.1	7.0	7.9	7.9
4.3 ≤ E < 4.5	6.0	6.2	7.5	7.9	7.0	7.8	7.8
4.5 ≤ E < 4.7	5.9	6.1	7.4	7.8	6.9	7.7	7.7
4.7 ≤ E < 4.9	5.9	6.0	7.3	7.7	6.8	7.6	7.6
E ≥ 4.9	5.8	6.0	7.2	7.6	6.7	7.5	7.5
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	55 < Assembly Average Burnup ≤ 56 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	6.9	7.3	8.9	9.6	8.0	9.3	9.3
3.3 ≤ E < 3.5	6.8	7.1	8.7	9.3	7.8	9.0	9.0
3.5 ≤ E < 3.7	6.7	6.9	8.5	9.1	7.7	8.8	8.9
3.7 ≤ E < 3.9	6.6	6.8	8.3	8.9	7.5	8.7	8.7
3.9 ≤ E < 4.1	6.4	6.7	8.1	8.7	7.4	8.5	8.5
4.1 ≤ E < 4.3	6.3	6.6	8.0	8.5	7.2	8.3	8.3
4.3 ≤ E < 4.5	6.2	6.5	7.9	8.4	7.1	8.2	8.1
4.5 ≤ E < 4.7	6.1	6.4	7.7	8.2	7.0	8.0	8.0
4.7 ≤ E < 4.9	6.0	6.3	7.6	8.1	6.9	7.9	7.9
E ≥ 4.9	6.0	6.2	7.5	8.0	6.8	7.8	7.8

**Table B2-18 Loading Table for PWR Fuel – 1,140 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	56 < Assembly Average Burnup ≤ 57 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	7.3	7.6	9.4	10.1	8.4	9.8	9.8
3.3 ≤ E < 3.5	7.1	7.4	9.2	9.9	8.2	9.6	9.6
3.5 ≤ E < 3.7	6.9	7.3	9.0	9.6	8.0	9.4	9.3
3.7 ≤ E < 3.9	6.8	7.1	8.8	9.4	7.9	9.1	9.1
3.9 ≤ E < 4.1	6.7	7.0	8.6	9.2	7.7	8.9	8.9
4.1 ≤ E < 4.3	6.6	6.9	8.4	9.0	7.6	8.8	8.8
4.3 ≤ E < 4.5	6.5	6.8	8.2	8.8	7.5	8.6	8.6
4.5 ≤ E < 4.7	6.4	6.7	8.1	8.7	7.3	8.5	8.4
4.7 ≤ E < 4.9	6.3	6.6	8.0	8.5	7.2	8.3	8.3
E ≥ 4.9	6.2	6.5	7.8	8.4	7.1	8.2	8.2
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	57 < Assembly Average Burnup ≤ 58 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	7.6	8.0	10.0	10.8	8.9	10.5	10.4
3.3 ≤ E < 3.5	7.4	7.8	9.7	10.5	8.7	10.2	10.1
3.5 ≤ E < 3.7	7.2	7.6	9.5	10.2	8.4	9.9	9.9
3.7 ≤ E < 3.9	7.1	7.5	9.3	9.9	8.2	9.7	9.6
3.9 ≤ E < 4.1	6.9	7.3	9.0	9.7	8.1	9.5	9.4
4.1 ≤ E < 4.3	6.8	7.1	8.8	9.5	7.9	9.2	9.2
4.3 ≤ E < 4.5	6.7	7.0	8.7	9.3	7.8	9.0	9.0
4.5 ≤ E < 4.7	6.6	6.9	8.5	9.1	7.7	8.9	8.9
4.7 ≤ E < 4.9	6.5	6.8	8.4	8.9	7.5	8.7	8.7
E ≥ 4.9	6.4	6.7	8.2	8.8	7.4	8.6	8.6

**Table B2-18 Loading Table for PWR Fuel – 1,140 W/Assembly (continued)**

Minimum Initial Asse  mby Avg. Enrichment wt % <sup>235</sup> U (E)	58 < Assembly Average Burnup ≤ 59 GWd/MTU Minimum Cooling Time (years)						
	CE 14×14	WE 14×14	WE 15×15	B&W 15×15	CE 16×16	WE 17×17	B&W 17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	7.9	8.4	10.7	11.5	9.4	11.1	11.1
3.3 ≤ E < 3.5	7.8	8.2	10.3	11.2	9.1	10.8	10.8
3.5 ≤ E < 3.7	7.6	8.0	10.0	10.9	8.9	10.5	10.5
3.7 ≤ E < 3.9	7.4	7.8	9.8	10.6	8.7	10.2	10.2
3.9 ≤ E < 4.1	7.2	7.6	9.5	10.3	8.5	10.0	9.9
4.1 ≤ E < 4.3	7.1	7.5	9.3	10.0	8.3	9.8	9.7
4.3 ≤ E < 4.5	7.0	7.3	9.1	9.8	8.1	9.6	9.5
4.5 ≤ E < 4.7	6.9	7.2	8.9	9.6	8.0	9.4	9.4
4.7 ≤ E < 4.9	6.8	7.1	8.8	9.5	7.9	9.2	9.2
E ≥ 4.9	6.7	7.0	8.7	9.3	7.8	9.0	9.0
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	59 < Assembly Average Burnup ≤ 60 GWd/MTU Minimum Cooling Time (years)						
	CE 14×14	WE 14×14	WE 15×15	B&W 15×15	CE 16×16	WE 17×17	B&W 17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	-	-	-	-	-	-	-
3.3 ≤ E < 3.5	8.1	8.6	11.0	11.8	9.6	11.2	11.2
3.5 ≤ E < 3.7	7.9	8.4	10.7	11.5	9.4	10.9	10.8
3.7 ≤ E < 3.9	7.7	8.2	10.3	11.2	9.1	10.6	10.5
3.9 ≤ E < 4.1	7.6	8.0	10.1	11.0	8.9	10.3	10.3
4.1 ≤ E < 4.3	7.4	7.8	9.8	10.7	8.7	10.0	10.0
4.3 ≤ E < 4.5	7.3	7.7	9.6	10.4	8.5	9.8	9.8
4.5 ≤ E < 4.7	7.1	7.6	9.4	10.2	8.4	9.7	9.6
4.7 ≤ E < 4.9	7.0	7.4	9.2	10.0	8.2	9.5	9.4
E ≥ 4.9	6.9	7.3	9.1	9.8	8.1	9.3	9.3

**Table B2-19 Loading Table for PWR Fuel – 922 W/Assembly**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	30 < Assembly Average Burnup ≤ 32.5 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	4.2	4.3	4.8	4.9	4.6	4.9	4.9
2.3 ≤ E < 2.5	4.2	4.2	4.7	4.8	4.5	4.8	4.8
2.5 ≤ E < 2.7	4.1	4.2	4.7	4.8	4.5	4.8	4.8
2.7 ≤ E < 2.9	4.1	4.1	4.6	4.7	4.4	4.7	4.7
2.9 ≤ E < 3.1	4.0	4.1	4.6	4.7	4.4	4.7	4.7
3.1 ≤ E < 3.3	4.0	4.0	4.5	4.6	4.3	4.6	4.6
3.3 ≤ E < 3.5	4.0	4.0	4.5	4.6	4.3	4.6	4.6
3.5 ≤ E < 3.7	4.0	4.0	4.5	4.5	4.3	4.5	4.5
3.7 ≤ E < 3.9	4.0	4.0	4.4	4.5	4.2	4.5	4.5
3.9 ≤ E < 4.1	4.0	4.0	4.4	4.5	4.2	4.5	4.5
4.1 ≤ E < 4.3	4.0	4.0	4.4	4.5	4.2	4.4	4.4
4.3 ≤ E < 4.5	4.0	4.0	4.3	4.4	4.2	4.4	4.4
4.5 ≤ E < 4.7	4.0	4.0	4.3	4.4	4.1	4.4	4.4
4.7 ≤ E < 4.9	4.0	4.0	4.3	4.4	4.1	4.4	4.4
E ≥ 4.9	4.0	4.0	4.3	4.4	4.1	4.4	4.4
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	32.5 < Assembly Average Burnup ≤ 35 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	4.5	4.6	5.2	5.3	4.9	5.3	5.3
2.5 ≤ E < 2.7	4.4	4.5	5.1	5.3	4.9	5.2	5.2
2.7 ≤ E < 2.9	4.4	4.5	5.0	5.2	4.8	5.1	5.1
2.9 ≤ E < 3.1	4.4	4.4	5.0	5.1	4.8	5.1	5.1
3.1 ≤ E < 3.3	4.3	4.4	4.9	5.0	4.7	5.0	5.0
3.3 ≤ E < 3.5	4.3	4.3	4.9	5.0	4.7	5.0	5.0
3.5 ≤ E < 3.7	4.2	4.3	4.8	5.0	4.6	4.9	4.9
3.7 ≤ E < 3.9	4.2	4.3	4.8	4.9	4.6	4.9	4.9
3.9 ≤ E < 4.1	4.1	4.2	4.8	4.9	4.5	4.9	4.9
4.1 ≤ E < 4.3	4.1	4.2	4.7	4.9	4.5	4.8	4.8
4.3 ≤ E < 4.5	4.1	4.2	4.7	4.8	4.5	4.8	4.8
4.5 ≤ E < 4.7	4.0	4.1	4.7	4.8	4.5	4.8	4.8
4.7 ≤ E < 4.9	4.0	4.1	4.6	4.8	4.4	4.7	4.7
E ≥ 4.9	4.0	4.1	4.6	4.7	4.4	4.7	4.7



**Table B2-19 Loading Table for PWR Fuel – 922 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	35 < Assembly Average Burnup ≤ 37.5 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	4.9	5.0	5.7	5.9	5.4	5.8	5.8
2.5 ≤ E < 2.7	4.8	4.9	5.7	5.8	5.3	5.7	5.7
2.7 ≤ E < 2.9	4.8	4.9	5.6	5.8	5.3	5.7	5.7
2.9 ≤ E < 3.1	4.7	4.8	5.5	5.7	5.2	5.6	5.6
3.1 ≤ E < 3.3	4.6	4.7	5.4	5.6	5.1	5.5	5.5
3.3 ≤ E < 3.5	4.6	4.7	5.4	5.6	5.0	5.5	5.5
3.5 ≤ E < 3.7	4.5	4.6	5.3	5.5	5.0	5.4	5.4
3.7 ≤ E < 3.9	4.5	4.6	5.3	5.4	5.0	5.4	5.4
3.9 ≤ E < 4.1	4.5	4.6	5.2	5.4	4.9	5.3	5.3
4.1 ≤ E < 4.3	4.4	4.5	5.2	5.4	4.9	5.3	5.3
4.3 ≤ E < 4.5	4.4	4.5	5.1	5.3	4.9	5.2	5.2
4.5 ≤ E < 4.7	4.4	4.5	5.1	5.3	4.8	5.2	5.2
4.7 ≤ E < 4.9	4.3	4.4	5.0	5.2	4.8	5.2	5.2
E ≥ 4.9	4.3	4.4	5.0	5.2	4.8	5.1	5.1
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	37.5 < Assembly Average Burnup ≤ 40 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	5.3	5.4	6.2	6.5	5.9	6.3	6.3
2.7 ≤ E < 2.9	5.2	5.3	6.1	6.4	5.8	6.2	6.2
2.9 ≤ E < 3.1	5.1	5.3	6.0	6.3	5.7	6.1	6.1
3.1 ≤ E < 3.3	5.0	5.2	6.0	6.2	5.6	6.0	6.0
3.3 ≤ E < 3.5	5.0	5.1	5.9	6.1	5.6	6.0	6.0
3.5 ≤ E < 3.7	4.9	5.0	5.9	6.0	5.5	5.9	5.9
3.7 ≤ E < 3.9	4.9	5.0	5.8	6.0	5.5	5.9	5.9
3.9 ≤ E < 4.1	4.8	5.0	5.7	5.9	5.4	5.8	5.8
4.1 ≤ E < 4.3	4.8	4.9	5.7	5.9	5.4	5.8	5.8
4.3 ≤ E < 4.5	4.8	4.9	5.7	5.8	5.3	5.8	5.7
4.5 ≤ E < 4.7	4.7	4.8	5.6	5.8	5.3	5.7	5.7
4.7 ≤ E < 4.9	4.7	4.8	5.6	5.8	5.2	5.7	5.7
E ≥ 4.9	4.6	4.8	5.5	5.7	5.2	5.6	5.6

**Table B2-19 Loading Table for PWR Fuel – 922 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	40 < Assembly Average Burnup ≤ 41 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	5.5	5.6	6.6	6.8	6.0	6.6	6.6
2.7 ≤ E < 2.9	5.4	5.6	6.4	6.7	6.0	6.5	6.5
2.9 ≤ E < 3.1	5.3	5.5	6.3	6.6	5.9	6.4	6.4
3.1 ≤ E < 3.3	5.3	5.4	6.2	6.5	5.8	6.3	6.3
3.3 ≤ E < 3.5	5.2	5.3	6.1	6.4	5.8	6.3	6.2
3.5 ≤ E < 3.7	5.1	5.3	6.1	6.3	5.7	6.2	6.2
3.7 ≤ E < 3.9	5.0	5.2	6.0	6.2	5.7	6.1	6.1
3.9 ≤ E < 4.1	5.0	5.1	5.9	6.2	5.6	6.0	6.0
4.1 ≤ E < 4.3	5.0	5.1	5.9	6.1	5.6	6.0	6.0
4.3 ≤ E < 4.5	4.9	5.0	5.9	6.0	5.5	5.9	5.9
4.5 ≤ E < 4.7	4.9	5.0	5.8	6.0	5.5	5.9	5.9
4.7 ≤ E < 4.9	4.8	5.0	5.8	6.0	5.4	5.9	5.9
E ≥ 4.9	4.8	4.9	5.7	5.9	5.4	5.8	5.8
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	41 < Assembly Average Burnup ≤ 42 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	5.7	5.9	6.9	7.1	6.4	6.9	6.9
2.7 ≤ E < 2.9	5.6	5.8	6.7	7.0	6.2	6.8	6.8
2.9 ≤ E < 3.1	5.6	5.7	6.6	6.9	6.1	6.7	6.7
3.1 ≤ E < 3.3	5.5	5.6	6.5	6.8	6.0	6.6	6.6
3.3 ≤ E < 3.5	5.4	5.5	6.4	6.7	6.0	6.6	6.5
3.5 ≤ E < 3.7	5.3	5.5	6.4	6.6	5.9	6.5	6.5
3.7 ≤ E < 3.9	5.3	5.4	6.3	6.6	5.9	6.4	6.4
3.9 ≤ E < 4.1	5.2	5.4	6.2	6.5	5.8	6.3	6.3
4.1 ≤ E < 4.3	5.1	5.3	6.1	6.4	5.8	6.3	6.2
4.3 ≤ E < 4.5	5.1	5.2	6.0	6.3	5.7	6.2	6.2
4.5 ≤ E < 4.7	5.0	5.2	6.0	6.3	5.7	6.1	6.1
4.7 ≤ E < 4.9	5.0	5.1	6.0	6.2	5.6	6.1	6.1
E ≥ 4.9	4.9	5.1	5.9	6.2	5.6	6.0	6.0

**Table B2-19 Loading Table for PWR Fuel – 922 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	42 < Assembly Average Burnup ≤ 43 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	5.9	6.1	7.2	7.5	6.7	7.3	7.3
2.7 ≤ E < 2.9	5.8	6.0	7.0	7.4	6.5	7.1	7.1
2.9 ≤ E < 3.1	5.8	5.9	6.9	7.3	6.4	7.0	7.0
3.1 ≤ E < 3.3	5.7	5.8	6.8	7.1	6.3	6.9	6.9
3.3 ≤ E < 3.5	5.6	5.8	6.7	7.0	6.2	6.8	6.8
3.5 ≤ E < 3.7	5.5	5.7	6.7	6.9	6.1	6.8	6.7
3.7 ≤ E < 3.9	5.5	5.6	6.6	6.8	6.1	6.7	6.7
3.9 ≤ E < 4.1	5.4	5.6	6.5	6.8	6.0	6.6	6.6
4.1 ≤ E < 4.3	5.3	5.5	6.4	6.7	6.0	6.5	6.5
4.3 ≤ E < 4.5	5.3	5.5	6.4	6.6	5.9	6.5	6.5
4.5 ≤ E < 4.7	5.2	5.4	6.3	6.6	5.9	6.4	6.4
4.7 ≤ E < 4.9	5.2	5.3	6.2	6.5	5.8	6.4	6.4
E ≥ 4.9	5.1	5.3	6.2	6.5	5.8	6.3	6.3
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	43 < Assembly Average Burnup ≤ 44 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	6.2	6.4	7.6	8.0	6.9	7.7	7.7
2.7 ≤ E < 2.9	6.0	6.2	7.4	7.8	6.8	7.5	7.5
2.9 ≤ E < 3.1	6.0	6.1	7.3	7.7	6.7	7.4	7.4
3.1 ≤ E < 3.3	5.9	6.0	7.2	7.5	6.6	7.3	7.3
3.3 ≤ E < 3.5	5.8	6.0	7.0	7.4	6.5	7.1	7.1
3.5 ≤ E < 3.7	5.8	5.9	6.9	7.3	6.4	7.0	7.0
3.7 ≤ E < 3.9	5.7	5.8	6.9	7.2	6.3	7.0	7.0
3.9 ≤ E < 4.1	5.6	5.8	6.8	7.1	6.3	6.9	6.9
4.1 ≤ E < 4.3	5.5	5.7	6.7	7.0	6.2	6.8	6.8
4.3 ≤ E < 4.5	5.5	5.7	6.7	6.9	6.1	6.8	6.8
4.5 ≤ E < 4.7	5.4	5.6	6.6	6.9	6.0	6.7	6.7
4.7 ≤ E < 4.9	5.4	5.6	6.5	6.8	6.0	6.6	6.6
E ≥ 4.9	5.3	5.5	6.5	6.8	6.0	6.6	6.6

**Table B2-19 Loading Table for PWR Fuel – 922 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	44 < Assembly Average Burnup ≤ 45 GWd/MTU Minimum Cooling Time (years)						
	CE 14×14	WE 14×14	WE 15×15	B&W 15×15	CE 16×16	WE 17×17	B&W 17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	6.3	6.6	7.8	8.3	7.1	7.9	7.9
2.9 ≤ E < 3.1	6.2	6.4	7.7	8.1	7.0	7.8	7.8
3.1 ≤ E < 3.3	6.1	6.3	7.6	7.9	6.9	7.7	7.7
3.3 ≤ E < 3.5	6.0	6.2	7.4	7.8	6.8	7.5	7.5
3.5 ≤ E < 3.7	5.9	6.1	7.3	7.7	6.7	7.4	7.4
3.7 ≤ E < 3.9	5.9	6.0	7.2	7.6	6.6	7.3	7.3
3.9 ≤ E < 4.1	5.8	6.0	7.1	7.5	6.6	7.2	7.2
4.1 ≤ E < 4.3	5.7	5.9	7.0	7.4	6.5	7.1	7.1
4.3 ≤ E < 4.5	5.7	5.9	6.9	7.3	6.4	7.0	7.0
4.5 ≤ E < 4.7	5.6	5.8	6.9	7.2	6.3	7.0	7.0
4.7 ≤ E < 4.9	5.6	5.8	6.8	7.1	6.3	6.9	6.9
E ≥ 4.9	5.5	5.7	6.7	7.0	6.2	6.9	6.9

**Note:** For fuel assembly average burnup greater than 45 GWd/MTU, cool time tables have been revised to account for a 5% margin in heat load.

**Table B2-20 Loading Table for PWR Fuel – 876 W/Assembly**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	45 < Assembly Average Burnup ≤ 46 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	7.1	7.4	9.2	9.8	8.2	9.3	9.3
2.9 ≤ E < 3.1	7.0	7.3	9.0	9.6	8.0	9.1	9.0
3.1 ≤ E < 3.3	6.9	7.1	8.8	9.4	7.9	8.9	8.9
3.3 ≤ E < 3.5	6.8	7.0	8.6	9.1	7.8	8.7	8.7
3.5 ≤ E < 3.7	6.7	6.9	8.5	9.0	7.6	8.6	8.6
3.7 ≤ E < 3.9	6.6	6.8	8.3	8.9	7.5	8.5	8.4
3.9 ≤ E < 4.1	6.5	6.7	8.2	8.7	7.4	8.3	8.3
4.1 ≤ E < 4.3	6.4	6.6	8.1	8.6	7.3	8.2	8.2
4.3 ≤ E < 4.5	6.3	6.6	8.0	8.5	7.2	8.1	8.1
4.5 ≤ E < 4.7	6.2	6.5	7.9	8.4	7.2	8.0	8.0
4.7 ≤ E < 4.9	6.2	6.4	7.8	8.3	7.1	8.0	7.9
E ≥ 4.9	6.1	6.4	7.7	8.2	7.0	7.9	7.9

**Table B2-20 Loading Table for PWR Fuel – 876 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	46 < Assembly Average Burnup ≤ 47 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	7.5	7.8	9.8	10.5	8.7	9.9	9.9
2.9 ≤ E < 3.1	7.4	7.7	9.6	10.3	8.5	9.7	9.7
3.1 ≤ E < 3.3	7.2	7.5	9.3	10.0	8.3	9.5	9.5
3.3 ≤ E < 3.5	7.1	7.4	9.1	9.8	8.1	9.3	9.3
3.5 ≤ E < 3.7	7.0	7.2	9.0	9.6	8.0	9.1	9.1
3.7 ≤ E < 3.9	6.9	7.1	8.8	9.4	7.9	9.0	8.9
3.9 ≤ E < 4.1	6.8	7.0	8.7	9.3	7.8	8.8	8.8
4.1 ≤ E < 4.3	6.7	6.9	8.6	9.1	7.7	8.7	8.7
4.3 ≤ E < 4.5	6.6	6.9	8.4	9.0	7.6	8.6	8.6
4.5 ≤ E < 4.7	6.5	6.8	8.3	8.9	7.5	8.5	8.5
4.7 ≤ E < 4.9	6.5	6.7	8.2	8.8	7.5	8.4	8.4
E ≥ 4.9	6.4	6.7	8.1	8.7	7.4	8.3	8.3
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	47 < Assembly Average Burnup ≤ 48 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	7.9	8.3	10.5	11.3	9.2	10.7	10.6
2.9 ≤ E < 3.1	7.7	8.1	10.2	11.1	9.0	10.4	10.3
3.1 ≤ E < 3.3	7.6	7.9	10.0	10.8	8.8	10.1	10.1
3.3 ≤ E < 3.5	7.4	7.8	9.7	10.5	8.7	9.9	9.9
3.5 ≤ E < 3.7	7.3	7.6	9.6	10.3	8.5	9.7	9.7
3.7 ≤ E < 3.9	7.2	7.5	9.4	10.1	8.4	9.5	9.5
3.9 ≤ E < 4.1	7.0	7.4	9.2	9.9	8.2	9.4	9.4
4.1 ≤ E < 4.3	7.0	7.3	9.0	9.7	8.1	9.2	9.2
4.3 ≤ E < 4.5	6.9	7.2	8.9	9.6	8.0	9.1	9.1
4.5 ≤ E < 4.7	6.8	7.1	8.8	9.5	7.9	9.0	9.0
4.7 ≤ E < 4.9	6.7	7.0	8.7	9.4	7.8	8.9	8.9
E ≥ 4.9	6.7	6.9	8.6	9.2	7.7	8.8	8.8

**Table B2-20 Loading Table for PWR Fuel – 876 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	48 < Assembly Average Burnup ≤ 49 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	8.4	8.8	11.3	12.1	9.9	11.4	11.4
2.9 ≤ E < 3.1	8.2	8.6	11.0	11.8	9.6	11.1	11.1
3.1 ≤ E < 3.3	8.0	8.4	10.7	11.6	9.4	10.9	10.8
3.3 ≤ E < 3.5	7.8	8.2	10.4	11.3	9.2	10.6	10.6
3.5 ≤ E < 3.7	7.7	8.0	10.2	11.1	9.0	10.4	10.4
3.7 ≤ E < 3.9	7.6	7.9	10.0	10.8	8.8	10.2	10.1
3.9 ≤ E < 4.1	7.4	7.8	9.8	10.6	8.7	10.0	9.9
4.1 ≤ E < 4.3	7.3	7.7	9.7	10.4	8.6	9.8	9.8
4.3 ≤ E < 4.5	7.2	7.6	9.5	10.3	8.4	9.7	9.7
4.5 ≤ E < 4.7	7.1	7.5	9.4	10.1	8.3	9.6	9.5
4.7 ≤ E < 4.9	7.0	7.4	9.2	10.0	8.2	9.4	9.4
E ≥ 4.9	6.9	7.3	9.1	9.8	8.1	9.3	9.3
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	49 < Assembly Average Burnup ≤ 50 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	8.7	8.9	11.8	12.7	10.2	11.9	11.9
3.1 ≤ E < 3.3	8.4	8.7	11.5	12.4	10.0	11.7	11.6
3.3 ≤ E < 3.5	8.2	8.5	11.2	12.1	9.8	11.4	11.4
3.5 ≤ E < 3.7	8.1	8.4	11.0	11.8	9.6	11.2	11.1
3.7 ≤ E < 3.9	7.9	8.2	10.7	11.6	9.4	10.9	10.9
3.9 ≤ E < 4.1	7.8	8.0	10.5	11.4	9.2	10.7	10.7
4.1 ≤ E < 4.3	7.7	7.9	10.3	11.2	9.0	10.5	10.5
4.3 ≤ E < 4.5	7.6	7.8	10.1	11.0	8.9	10.4	10.3
4.5 ≤ E < 4.7	7.5	7.7	9.9	10.9	8.8	10.2	10.1
4.7 ≤ E < 4.9	7.4	7.6	9.8	10.7	8.7	10.0	10.0
E ≥ 4.9	7.3	7.6	9.7	10.5	8.6	9.9	9.9

**Table B2-20 Loading Table for PWR Fuel – 876 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	50 < Assembly Average Burnup ≤ 51 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	8.9	9.5	12.6	13.7	11.0	12.8	12.8
3.1 ≤ E < 3.3	8.7	9.3	12.2	13.3	10.7	12.5	12.4
3.3 ≤ E < 3.5	8.5	9.0	11.9	13.0	10.5	12.1	12.1
3.5 ≤ E < 3.7	8.4	8.8	11.7	12.7	10.2	11.9	11.9
3.7 ≤ E < 3.9	8.2	8.7	11.5	12.4	10.0	11.7	11.6
3.9 ≤ E < 4.1	8.0	8.5	11.2	12.2	9.8	11.5	11.4
4.1 ≤ E < 4.3	7.9	8.4	11.0	11.9	9.6	11.3	11.2
4.3 ≤ E < 4.5	7.8	8.2	10.9	11.8	9.5	11.1	11.0
4.5 ≤ E < 4.7	7.7	8.1	10.7	11.6	9.3	10.9	10.9
4.7 ≤ E < 4.9	7.6	8.0	10.5	11.4	9.2	10.8	10.7
E ≥ 4.9	7.5	7.9	10.4	11.3	9.1	10.6	10.6
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	51 < Assembly Average Burnup ≤ 52 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	9.5	10.1	13.5	14.3	11.7	13.7	13.7
3.1 ≤ E < 3.3	9.2	9.8	13.2	13.9	11.5	13.4	13.4
3.3 ≤ E < 3.5	9.0	9.6	12.8	13.6	11.2	13.1	13.0
3.5 ≤ E < 3.7	8.8	9.4	12.5	13.3	10.9	12.8	12.7
3.7 ≤ E < 3.9	8.7	9.2	12.2	13.0	10.7	12.5	12.4
3.9 ≤ E < 4.1	8.5	9.0	12.0	12.8	10.4	12.2	12.2
4.1 ≤ E < 4.3	8.3	8.9	11.8	12.5	10.2	12.0	11.9
4.3 ≤ E < 4.5	8.2	8.7	11.6	12.3	10.0	11.8	11.8
4.5 ≤ E < 4.7	8.1	8.6	11.4	12.1	9.9	11.6	11.6
4.7 ≤ E < 4.9	8.0	8.5	11.2	11.9	9.8	11.5	11.5
E ≥ 4.9	7.9	8.3	11.1	11.8	9.6	11.3	11.3



**Table B2-20 Loading Table for PWR Fuel – 876 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	52 < Assembly Average Burnup ≤ 53 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	10.1	10.9	14.0	15.3	12.6	14.7	14.7
3.1 ≤ E < 3.3	9.8	10.5	13.7	14.9	12.2	14.3	14.3
3.3 ≤ E < 3.5	9.6	10.2	13.4	14.6	11.9	14.0	13.9
3.5 ≤ E < 3.7	9.3	10.0	13.1	14.2	11.6	13.7	13.6
3.7 ≤ E < 3.9	9.1	9.9	12.8	13.9	11.4	13.4	13.3
3.9 ≤ E < 4.1	8.9	9.6	12.5	13.7	11.2	13.1	13.1
4.1 ≤ E < 4.3	8.8	9.4	12.2	13.4	11.0	12.9	12.8
4.3 ≤ E < 4.5	8.7	9.2	12.0	13.2	10.8	12.6	12.6
4.5 ≤ E < 4.7	8.5	9.0	11.8	13.0	10.6	12.4	12.4
4.7 ≤ E < 4.9	8.4	8.9	11.7	12.8	10.4	12.2	12.2
E ≥ 4.9	8.3	8.8	11.5	12.6	10.2	12.0	12.0
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	53 < Assembly Average Burnup ≤ 54 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	10.8	11.6	15.1	16.4	13.5	15.7	15.6
3.1 ≤ E < 3.3	10.5	11.3	14.6	15.9	13.1	15.3	15.3
3.3 ≤ E < 3.5	10.1	11.0	14.2	15.6	12.7	14.9	14.9
3.5 ≤ E < 3.7	9.9	10.7	13.9	15.2	12.4	14.6	14.6
3.7 ≤ E < 3.9	9.7	10.4	13.6	14.9	12.1	14.3	14.2
3.9 ≤ E < 4.1	9.5	10.2	13.4	14.6	11.9	14.0	14.0
4.1 ≤ E < 4.3	9.3	9.9	13.1	14.3	11.7	13.7	13.7
4.3 ≤ E < 4.5	9.1	9.8	12.9	14.0	11.5	13.5	13.5
4.5 ≤ E < 4.7	9.0	9.6	12.6	13.8	11.3	13.3	13.3
4.7 ≤ E < 4.9	8.8	9.5	12.4	13.6	11.1	13.1	13.1
E ≥ 4.9	8.7	9.6	12.2	13.4	10.9	12.9	12.9

**Table B2-20 Loading Table for PWR Fuel – 876 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	54 < Assembly Average Burnup ≤ 55 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	11.2	12.0	15.6	17.0	13.9	16.3	16.3
3.3 ≤ E < 3.5	10.9	11.7	15.2	16.6	13.6	15.9	15.9
3.5 ≤ E < 3.7	10.6	11.4	14.9	16.2	13.3	15.6	15.6
3.7 ≤ E < 3.9	10.3	11.2	14.5	15.9	13.0	15.3	15.3
3.9 ≤ E < 4.1	10.0	10.9	14.2	15.6	12.7	15.0	14.9
4.1 ≤ E < 4.3	9.9	10.7	13.9	15.3	12.4	14.7	14.6
4.3 ≤ E < 4.5	9.7	10.5	13.7	15.1	12.2	14.4	14.4
4.5 ≤ E < 4.7	9.5	10.2	13.5	14.8	12.0	14.1	14.1
4.7 ≤ E < 4.9	9.3	10.0	13.3	14.6	11.8	13.9	13.9
E ≥ 4.9	9.2	9.9	13.1	14.3	11.6	13.8	13.7
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	55 < Assembly Average Burnup ≤ 56 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	11.9	12.8	16.6	18.1	14.5	17.4	17.3
3.3 ≤ E < 3.5	11.5	12.5	16.2	17.6	14.1	17.0	16.9
3.5 ≤ E < 3.7	11.3	12.1	15.8	17.3	13.7	16.6	16.6
3.7 ≤ E < 3.9	11.0	11.8	15.5	17.0	13.4	16.3	16.2
3.9 ≤ E < 4.1	10.7	11.6	15.2	16.6	13.2	15.9	15.9
4.1 ≤ E < 4.3	10.5	11.3	14.9	16.3	12.9	15.7	15.6
4.3 ≤ E < 4.5	10.2	11.1	14.6	16.0	12.6	15.4	15.3
4.5 ≤ E < 4.7	10.0	10.9	14.3	15.8	12.4	15.2	15.1
4.7 ≤ E < 4.9	9.9	10.7	14.1	15.6	12.2	14.9	14.9
E ≥ 4.9	9.7	10.5	13.9	15.3	12.0	14.7	14.6

**Table B2-20 Loading Table for PWR Fuel – 876 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	56 < Assembly Average Burnup ≤ 57 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	12.6	13.6	17.6	19.1	15.5	18.4	18.4
3.3 ≤ E < 3.5	12.3	13.3	17.2	18.7	15.0	18.0	18.0
3.5 ≤ E < 3.7	11.9	13.0	16.8	18.4	14.6	17.7	17.6
3.7 ≤ E < 3.9	11.7	12.6	16.5	18.0	14.3	17.3	17.3
3.9 ≤ E < 4.1	11.4	12.3	16.1	17.7	14.0	17.0	17.0
4.1 ≤ E < 4.3	11.2	12.0	15.8	17.4	13.7	16.7	16.7
4.3 ≤ E < 4.5	10.9	11.8	15.5	17.1	13.5	16.4	16.4
4.5 ≤ E < 4.7	10.7	11.6	15.3	16.8	13.2	16.1	16.1
4.7 ≤ E < 4.9	10.5	11.4	15.1	16.6	13.0	15.8	15.8
E ≥ 4.9	10.3	11.2	14.8	16.3	12.8	15.7	15.6
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	57 < Assembly Average Burnup ≤ 58 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	13.5	14.5	18.7	20.1	16.4	19.5	19.4
3.3 ≤ E < 3.5	13.1	14.1	18.3	19.8	15.9	19.1	19.0
3.5 ≤ E < 3.7	12.7	13.8	17.9	19.4	15.6	18.7	18.7
3.7 ≤ E < 3.9	12.4	13.4	17.5	19.0	15.3	18.4	18.3
3.9 ≤ E < 4.1	12.1	13.1	17.2	18.7	14.9	18.0	18.0
4.1 ≤ E < 4.3	11.8	12.9	16.9	18.4	14.6	17.7	17.7
4.3 ≤ E < 4.5	11.6	12.6	16.5	18.1	14.3	17.4	17.4
4.5 ≤ E < 4.7	11.4	12.3	16.3	17.8	14.0	17.2	17.1
4.7 ≤ E < 4.9	11.1	12.1	16.0	17.5	13.8	16.9	16.8
E ≥ 4.9	11.0	11.9	15.8	17.3	13.6	16.7	16.6

**Table B2-20 Loading Table for PWR Fuel – 876 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	58 < Assembly Average Burnup ≤ 59 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	14.3	15.4	19.7	21.2	17.4	20.5	20.5
3.3 ≤ E < 3.5	13.9	15.0	19.3	20.8	16.9	20.1	20.1
3.5 ≤ E < 3.7	13.5	14.7	18.9	20.4	16.6	19.8	19.7
3.7 ≤ E < 3.9	13.2	14.3	18.5	20.1	16.1	19.4	19.4
3.9 ≤ E < 4.1	12.9	14.0	18.2	19.7	15.8	19.1	19.0
4.1 ≤ E < 4.3	12.6	13.7	17.8	19.4	15.5	18.8	18.7
4.3 ≤ E < 4.5	12.2	13.4	17.6	19.1	15.2	18.4	18.4
4.5 ≤ E < 4.7	12.0	13.1	17.3	18.9	14.9	18.2	18.1
4.7 ≤ E < 4.9	11.8	12.9	17.0	18.6	14.7	17.9	17.8
E ≥ 4.9	11.6	12.7	16.8	18.4	14.5	17.6	17.6
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	59 < Assembly Average Burnup ≤ 60 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	-	-	-	-	-	-	-
3.3 ≤ E < 3.5	14.7	15.9	20.2	21.9	17.9	20.7	20.6
3.5 ≤ E < 3.7	14.3	15.6	19.9	21.5	17.5	20.3	20.2
3.7 ≤ E < 3.9	13.9	15.2	19.5	21.1	17.1	19.9	19.9
3.9 ≤ E < 4.1	13.6	14.9	19.2	20.8	16.8	19.6	19.5
4.1 ≤ E < 4.3	13.3	14.5	18.8	20.5	16.4	19.3	19.2
4.3 ≤ E < 4.5	13.1	14.2	18.5	20.2	16.1	18.9	18.9
4.5 ≤ E < 4.7	12.8	13.9	18.2	19.9	15.8	18.7	18.6
4.7 ≤ E < 4.9	12.5	13.7	18.0	19.6	15.6	18.4	18.3
E ≥ 4.9	12.3	13.5	17.7	19.4	15.4	18.2	18.1

**Table B2-21 Loading Table for PWR Fuel – 800 W/Assembly**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	30 < Assembly Average Burnup ≤ 32.5 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	4.8	4.9	5.6	5.7	5.2	5.6	5.6
2.3 ≤ E < 2.5	4.7	4.8	5.5	5.7	5.2	5.6	5.6
2.5 ≤ E < 2.7	4.7	4.8	5.4	5.6	5.1	5.5	5.5
2.7 ≤ E < 2.9	4.6	4.7	5.4	5.5	5.0	5.5	5.5
2.9 ≤ E < 3.1	4.6	4.7	5.3	5.5	5.0	5.4	5.4
3.1 ≤ E < 3.3	4.5	4.6	5.3	5.4	5.0	5.3	5.3
3.3 ≤ E < 3.5	4.5	4.6	5.2	5.4	4.9	5.3	5.3
3.5 ≤ E < 3.7	4.5	4.5	5.1	5.3	4.9	5.2	5.2
3.7 ≤ E < 3.9	4.4	4.5	5.1	5.3	4.8	5.2	5.2
3.9 ≤ E < 4.1	4.4	4.5	5.0	5.2	4.8	5.2	5.1
4.1 ≤ E < 4.3	4.4	4.4	5.0	5.2	4.8	5.1	5.1
4.3 ≤ E < 4.5	4.3	4.4	5.0	5.1	4.8	5.1	5.1
4.5 ≤ E < 4.7	4.3	4.4	5.0	5.1	4.7	5.0	5.0
4.7 ≤ E < 4.9	4.3	4.4	4.9	5.1	4.7	5.0	5.0
E ≥ 4.9	4.3	4.3	4.9	5.0	4.7	5.0	5.0
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	32.5 < Assembly Average Burnup ≤ 35 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	5.2	5.3	6.0	6.3	5.7	6.1	6.1
2.5 ≤ E < 2.7	5.1	5.2	6.0	6.2	5.7	6.0	6.0
2.7 ≤ E < 2.9	5.0	5.2	5.9	6.1	5.6	6.0	6.0
2.9 ≤ E < 3.1	5.0	5.1	5.9	6.0	5.5	5.9	5.9
3.1 ≤ E < 3.3	4.9	5.0	5.8	6.0	5.5	5.9	5.9
3.3 ≤ E < 3.5	4.9	5.0	5.8	5.9	5.4	5.8	5.8
3.5 ≤ E < 3.7	4.9	4.9	5.7	5.9	5.4	5.8	5.8
3.7 ≤ E < 3.9	4.8	4.9	5.7	5.8	5.3	5.8	5.8
3.9 ≤ E < 4.1	4.8	4.9	5.6	5.8	5.3	5.7	5.7
4.1 ≤ E < 4.3	4.7	4.8	5.6	5.8	5.2	5.7	5.7
4.3 ≤ E < 4.5	4.7	4.8	5.5	5.7	5.2	5.6	5.6
4.5 ≤ E < 4.7	4.7	4.8	5.5	5.7	5.2	5.6	5.6
4.7 ≤ E < 4.9	4.6	4.7	5.5	5.7	5.1	5.6	5.6
E ≥ 4.9	4.6	4.7	5.4	5.6	5.1	5.5	5.5

**Table B2-21 Loading Table for PWR Fuel – 800 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	35 < Assembly Average Burnup ≤ 37.5 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	5.8	5.9	6.9	7.1	6.4	6.9	6.9
2.5 ≤ E < 2.7	5.7	5.8	6.8	7.0	6.3	6.8	6.8
2.7 ≤ E < 2.9	5.6	5.7	6.7	6.9	6.2	6.7	6.7
2.9 ≤ E < 3.1	5.5	5.7	6.6	6.8	6.1	6.7	6.7
3.1 ≤ E < 3.3	5.5	5.6	6.5	6.8	6.0	6.6	6.6
3.3 ≤ E < 3.5	5.4	5.5	6.4	6.7	6.0	6.5	6.5
3.5 ≤ E < 3.7	5.3	5.5	6.3	6.6	5.9	6.5	6.4
3.7 ≤ E < 3.9	5.3	5.4	6.3	6.5	5.9	6.4	6.4
3.9 ≤ E < 4.1	5.2	5.4	6.2	6.5	5.8	6.3	6.3
4.1 ≤ E < 4.3	5.2	5.3	6.1	6.4	5.8	6.3	6.3
4.3 ≤ E < 4.5	5.1	5.3	6.1	6.4	5.7	6.2	6.2
4.5 ≤ E < 4.7	5.1	5.2	6.0	6.3	5.7	6.2	6.2
4.7 ≤ E < 4.9	5.0	5.2	6.0	6.3	5.7	6.1	6.1
E ≥ 4.9	5.0	5.1	6.0	6.2	5.6	6.1	6.1
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	37.5 < Assembly Average Burnup ≤ 40 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	6.3	6.5	7.7	8.1	7.0	7.8	7.8
2.7 ≤ E < 2.9	6.2	6.4	7.6	8.0	6.9	7.7	7.7
2.9 ≤ E < 3.1	6.1	6.3	7.5	7.8	6.9	7.6	7.6
3.1 ≤ E < 3.3	6.0	6.2	7.4	7.7	6.8	7.4	7.4
3.3 ≤ E < 3.5	5.9	6.1	7.2	7.6	6.7	7.3	7.3
3.5 ≤ E < 3.7	5.9	6.0	7.1	7.5	6.6	7.3	7.2
3.7 ≤ E < 3.9	5.8	6.0	7.1	7.4	6.5	7.2	7.1
3.9 ≤ E < 4.1	5.8	5.9	7.0	7.4	6.5	7.1	7.1
4.1 ≤ E < 4.3	5.7	5.9	6.9	7.3	6.4	7.0	7.0
4.3 ≤ E < 4.5	5.7	5.8	6.9	7.2	6.4	7.0	7.0
4.5 ≤ E < 4.7	5.6	5.8	6.8	7.1	6.3	6.9	6.9
4.7 ≤ E < 4.9	5.6	5.7	6.8	7.1	6.3	6.9	6.9
E ≥ 4.9	5.5	5.7	6.7	7.0	6.2	6.8	6.8

**Table B2-21 Loading Table for PWR Fuel – 800 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	40 < Assembly Average Burnup ≤ 41 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	6.6	6.8	8.2	8.7	7.4	8.3	8.3
2.7 ≤ E < 2.9	6.5	6.7	8.0	8.5	7.3	8.1	8.1
2.9 ≤ E < 3.1	6.4	6.6	7.9	8.3	7.2	8.0	8.0
3.1 ≤ E < 3.3	6.3	6.5	7.8	8.2	7.1	7.9	7.9
3.3 ≤ E < 3.5	6.2	6.4	7.7	8.0	7.0	7.8	7.8
3.5 ≤ E < 3.7	6.1	6.3	7.6	8.0	6.9	7.7	7.7
3.7 ≤ E < 3.9	6.0	6.2	7.5	7.9	6.8	7.6	7.6
3.9 ≤ E < 4.1	6.0	6.1	7.4	7.8	6.8	7.5	7.5
4.1 ≤ E < 4.3	5.9	6.1	7.3	7.7	6.7	7.4	7.4
4.3 ≤ E < 4.5	5.9	6.0	7.2	7.6	6.7	7.4	7.3
4.5 ≤ E < 4.7	5.8	6.0	7.1	7.6	6.6	7.3	7.3
4.7 ≤ E < 4.9	5.8	5.9	7.1	7.5	6.6	7.2	7.2
E ≥ 4.9	5.7	5.9	7.0	7.4	6.5	7.2	7.2
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	41 < Assembly Average Burnup ≤ 42 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	6.9	7.1	8.7	9.3	7.8	8.8	8.8
2.7 ≤ E < 2.9	6.8	7.0	8.6	9.0	7.7	8.6	8.6
2.9 ≤ E < 3.1	6.7	6.9	8.4	8.9	7.6	8.5	8.5
3.1 ≤ E < 3.3	6.6	6.8	8.2	8.7	7.5	8.3	8.3
3.3 ≤ E < 3.5	6.5	6.7	8.1	8.6	7.3	8.2	8.2
3.5 ≤ E < 3.7	6.4	6.6	8.0	8.5	7.2	8.1	8.1
3.7 ≤ E < 3.9	6.3	6.5	7.9	8.3	7.1	8.0	8.0
3.9 ≤ E < 4.1	6.2	6.5	7.8	8.2	7.1	7.9	7.9
4.1 ≤ E < 4.3	6.1	6.4	7.7	8.1	7.0	7.8	7.8
4.3 ≤ E < 4.5	6.1	6.3	7.6	8.0	6.9	7.8	7.7
4.5 ≤ E < 4.7	6.0	6.3	7.6	8.0	6.9	7.7	7.7
4.7 ≤ E < 4.9	6.0	6.2	7.5	7.9	6.8	7.6	7.6
E ≥ 4.9	5.9	6.1	7.4	7.8	6.8	7.6	7.6

**Table B2-21 Loading Table for PWR Fuel – 800 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	42 < Assembly Average Burnup ≤ 43 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	7.3	7.5	9.3	9.9	8.3	9.4	9.4
2.7 ≤ E < 2.9	7.1	7.4	9.1	9.7	8.1	9.2	9.2
2.9 ≤ E < 3.1	7.0	7.2	8.9	9.5	8.0	9.0	9.0
3.1 ≤ E < 3.3	6.9	7.1	8.8	9.3	7.9	8.9	8.8
3.3 ≤ E < 3.5	6.8	7.0	8.6	9.2	7.8	8.7	8.7
3.5 ≤ E < 3.7	6.7	6.9	8.5	9.0	7.7	8.6	8.6
3.7 ≤ E < 3.9	6.6	6.8	8.4	8.9	7.6	8.5	8.5
3.9 ≤ E < 4.1	6.5	6.8	8.2	8.8	7.5	8.4	8.4
4.1 ≤ E < 4.3	6.5	6.7	8.1	8.7	7.4	8.3	8.3
4.3 ≤ E < 4.5	6.4	6.6	8.0	8.6	7.3	8.2	8.2
4.5 ≤ E < 4.7	6.3	6.6	8.0	8.5	7.2	8.1	8.1
4.7 ≤ E < 4.9	6.2	6.5	7.9	8.4	7.2	8.0	8.0
E ≥ 4.9	6.2	6.4	7.8	8.3	7.1	8.0	8.0
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	43 < Assembly Average Burnup ≤ 44 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	7.7	8.0	10.0	10.8	8.8	10.0	10.1
2.7 ≤ E < 2.9	7.5	7.8	9.7	10.5	8.7	9.9	9.8
2.9 ≤ E < 3.1	7.4	7.7	9.5	10.2	8.5	9.7	9.6
3.1 ≤ E < 3.3	7.2	7.5	9.3	10.0	8.3	9.5	9.4
3.3 ≤ E < 3.5	7.1	7.4	9.2	9.8	8.2	9.3	9.3
3.5 ≤ E < 3.7	7.1	7.3	9.0	9.7	8.0	9.1	9.1
3.7 ≤ E < 3.9	6.9	7.2	8.9	9.5	8.0	9.0	9.0
3.9 ≤ E < 4.1	6.8	7.1	8.8	9.4	7.9	8.9	8.9
4.1 ≤ E < 4.3	6.7	7.0	8.7	9.2	7.8	8.8	8.8
4.3 ≤ E < 4.5	6.7	6.9	8.5	9.1	7.7	8.7	8.7
4.5 ≤ E < 4.7	6.6	6.9	8.5	9.0	7.6	8.6	8.6
4.7 ≤ E < 4.9	6.6	6.8	8.4	8.9	7.6	8.5	8.5
E ≥ 4.9	6.5	6.8	8.3	8.9	7.5	8.5	8.4



**Table B2-21 Loading Table for PWR Fuel – 800 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	44 < Assembly Average Burnup ≤ 45 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	7.9	8.2	10.5	11.4	9.2	10.6	10.6
2.9 ≤ E < 3.1	7.8	8.1	10.2	11.1	9.0	10.4	10.4
3.1 ≤ E < 3.3	7.6	7.9	10.0	10.8	8.8	10.1	10.1
3.3 ≤ E < 3.5	7.5	7.8	9.8	10.6	8.7	9.9	9.9
3.5 ≤ E < 3.7	7.3	7.7	9.6	10.4	8.6	9.8	9.8
3.7 ≤ E < 3.9	7.2	7.6	9.5	10.2	8.4	9.6	9.6
3.9 ≤ E < 4.1	7.1	7.5	9.3	10.0	8.3	9.5	9.5
4.1 ≤ E < 4.3	7.0	7.4	9.2	9.9	8.2	9.4	9.3
4.3 ≤ E < 4.5	7.0	7.3	9.1	9.8	8.1	9.2	9.2
4.5 ≤ E < 4.7	6.9	7.2	9.0	9.7	8.0	9.1	9.1
4.7 ≤ E < 4.9	6.8	7.1	8.9	9.6	7.9	9.0	9.0
E ≥ 4.9	6.8	7.0	8.8	9.5	7.9	9.0	8.9

**Note:** For fuel assembly average burnup greater than 45 GWd/MTU, cool time tables have been revised to account for a 5% margin in heat load.

**Table B2-22 Loading Table for PWR Fuel – 760 W/Assembly**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	45 < Assembly Average Burnup ≤ 46 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	9.2	9.8	12.8	13.9	11.2	13.0	13.0
2.9 ≤ E < 3.1	9.0	9.6	12.5	13.6	10.9	12.7	12.7
3.1 ≤ E < 3.3	8.9	9.4	12.1	13.3	10.6	12.4	12.4
3.3 ≤ E < 3.5	8.7	9.1	11.9	13.0	10.4	12.1	12.1
3.5 ≤ E < 3.7	8.6	9.0	11.8	12.8	10.2	11.9	11.9
3.7 ≤ E < 3.9	8.4	8.8	11.6	12.5	10.0	11.8	11.7
3.9 ≤ E < 4.1	8.3	8.7	11.4	12.3	9.9	11.6	11.5
4.1 ≤ E < 4.3	8.1	8.6	11.2	12.2	9.7	11.4	11.4
4.3 ≤ E < 4.5	8.0	8.5	11.1	12.0	9.6	11.3	11.3
4.5 ≤ E < 4.7	7.9	8.4	10.9	11.9	9.5	11.2	11.1
4.7 ≤ E < 4.9	7.9	8.3	10.8	11.7	9.4	11.0	11.0
E ≥ 4.9	7.8	8.2	10.7	11.6	9.3	10.9	10.9

**Table B2-22 Loading Table for PWR Fuel – 760 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	46 < Assembly Average Burnup ≤ 47 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	9.9	10.6	13.8	15.0	12.0	13.9	13.9
2.9 ≤ E < 3.1	9.7	10.3	13.5	14.7	11.7	13.7	13.7
3.1 ≤ E < 3.3	9.4	10.0	13.2	14.4	11.4	13.4	13.4
3.3 ≤ E < 3.5	9.2	9.8	12.9	14.0	11.2	13.1	13.1
3.5 ≤ E < 3.7	9.0	9.6	12.7	13.8	11.0	12.9	12.8
3.7 ≤ E < 3.9	8.9	9.4	12.4	13.6	10.8	12.6	12.6
3.9 ≤ E < 4.1	8.8	9.3	12.2	13.4	10.6	12.5	12.4
4.1 ≤ E < 4.3	8.6	9.1	12.0	13.2	10.4	12.2	12.2
4.3 ≤ E < 4.5	8.5	9.0	11.8	13.0	10.3	12.1	12.0
4.5 ≤ E < 4.7	8.4	8.9	11.7	12.8	10.1	11.9	11.9
4.7 ≤ E < 4.9	8.3	8.8	11.6	12.7	10.0	11.8	11.8
E ≥ 4.9	8.2	8.7	11.5	12.5	9.9	11.7	11.7
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	47 < Assembly Average Burnup ≤ 48 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	10.6	11.4	14.9	16.1	12.9	15.1	15.1
2.9 ≤ E < 3.1	10.4	11.1	14.5	15.8	12.5	14.7	14.7
3.1 ≤ E < 3.3	10.0	10.8	14.1	15.5	12.2	14.4	14.4
3.3 ≤ E < 3.5	9.9	10.5	13.9	15.2	12.0	14.1	14.0
3.5 ≤ E < 3.7	9.6	10.3	13.6	14.9	11.8	13.8	13.8
3.7 ≤ E < 3.9	9.5	10.1	13.4	14.6	11.6	13.6	13.6
3.9 ≤ E < 4.1	9.3	9.9	13.2	14.4	11.4	13.4	13.4
4.1 ≤ E < 4.3	9.1	9.8	13.0	14.1	11.2	13.2	13.2
4.3 ≤ E < 4.5	9.0	9.6	12.8	14.0	11.1	13.0	13.0
4.5 ≤ E < 4.7	8.9	9.5	12.6	13.8	10.9	12.9	12.8
4.7 ≤ E < 4.9	8.8	9.3	12.4	13.6	10.8	12.7	12.7
E ≥ 4.9	8.7	9.2	12.3	13.5	10.7	12.5	12.5

**Table B2-22 Loading Table for PWR Fuel – 760 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	48 < Assembly Average Burnup ≤ 49 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	11.4	12.2	16.0	17.3	13.9	16.2	16.2
2.9 ≤ E < 3.1	11.1	11.8	15.6	17.0	13.5	15.8	15.8
3.1 ≤ E < 3.3	10.8	11.6	15.3	16.6	13.2	15.5	15.5
3.3 ≤ E < 3.5	10.6	11.3	14.9	16.3	12.9	15.2	15.2
3.5 ≤ E < 3.7	10.3	11.1	14.7	16.0	12.7	14.9	14.9
3.7 ≤ E < 3.9	10.1	10.9	14.4	15.7	12.4	14.6	14.6
3.9 ≤ E < 4.1	9.9	10.7	14.1	15.5	12.1	14.4	14.4
4.1 ≤ E < 4.3	9.7	10.4	13.9	15.2	12.0	14.1	14.1
4.3 ≤ E < 4.5	9.6	10.2	13.7	15.0	11.8	13.9	13.9
4.5 ≤ E < 4.7	9.5	10.1	13.5	14.9	11.7	13.8	13.8
4.7 ≤ E < 4.9	9.3	9.9	13.4	14.6	11.5	13.6	13.6
E ≥ 4.9	9.2	9.8	13.2	14.5	11.4	13.5	13.5
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	49 < Assembly Average Burnup ≤ 50 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	11.9	12.4	16.8	18.2	14.5	17.0	17.0
3.1 ≤ E < 3.3	11.6	12.1	16.4	17.8	14.1	16.6	16.6
3.3 ≤ E < 3.5	11.3	11.8	16.0	17.5	13.8	16.3	16.2
3.5 ≤ E < 3.7	11.1	11.6	15.7	17.2	13.6	16.0	16.0
3.7 ≤ E < 3.9	10.8	11.4	15.5	16.9	13.3	15.7	15.7
3.9 ≤ E < 4.1	10.6	11.2	15.2	16.6	13.1	15.5	15.5
4.1 ≤ E < 4.3	10.4	11.0	14.9	16.3	12.9	15.3	15.2
4.3 ≤ E < 4.5	10.2	10.8	14.7	16.1	12.7	15.0	15.0
4.5 ≤ E < 4.7	10.1	10.6	14.5	15.9	12.5	14.9	14.8
4.7 ≤ E < 4.9	9.9	10.5	14.3	15.7	12.3	14.6	14.6
E ≥ 4.9	9.8	10.3	14.1	15.5	12.2	14.5	14.5

**Table B2-22 Loading Table for PWR Fuel – 760 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	50 < Assembly Average Burnup ≤ 51 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	12.4	13.4	17.8	19.3	15.6	18.1	18.1
3.1 ≤ E < 3.3	12.1	13.1	17.5	19.0	15.2	17.8	17.8
3.3 ≤ E < 3.5	11.8	12.7	17.2	18.7	14.9	17.4	17.4
3.5 ≤ E < 3.7	11.5	12.4	16.8	18.3	14.5	17.2	17.1
3.7 ≤ E < 3.9	11.3	12.1	16.5	18.0	14.3	16.9	16.8
3.9 ≤ E < 4.1	11.1	11.9	16.2	17.7	14.0	16.6	16.5
4.1 ≤ E < 4.3	10.9	11.7	16.0	17.5	13.8	16.3	16.3
4.3 ≤ E < 4.5	10.7	11.5	15.8	17.3	13.6	16.1	16.0
4.5 ≤ E < 4.7	10.5	11.4	15.5	17.1	13.4	15.8	15.9
4.7 ≤ E < 4.9	10.4	11.2	15.3	16.8	13.2	15.7	15.7
E ≥ 4.9	10.2	11.1	15.2	16.7	13.1	15.5	15.5
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	51 < Assembly Average Burnup ≤ 52 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	13.3	14.3	19.0	20.1	16.7	19.4	19.3
3.1 ≤ E < 3.3	12.9	14.0	18.6	19.7	16.3	19.0	18.9
3.3 ≤ E < 3.5	12.6	13.6	18.2	19.4	15.9	18.6	18.6
3.5 ≤ E < 3.7	12.3	13.3	17.9	19.1	15.6	18.3	18.3
3.7 ≤ E < 3.9	12.0	13.1	17.6	18.8	15.3	18.0	17.9
3.9 ≤ E < 4.1	11.8	12.8	17.4	18.5	15.0	17.7	17.7
4.1 ≤ E < 4.3	11.6	12.5	17.1	18.2	14.8	17.5	17.4
4.3 ≤ E < 4.5	11.4	12.3	16.8	18.0	14.5	17.3	17.2
4.5 ≤ E < 4.7	11.2	12.1	16.6	17.7	14.4	17.0	17.0
4.7 ≤ E < 4.9	11.1	11.9	16.4	17.5	14.1	16.8	16.8
E ≥ 4.9	10.9	11.8	16.2	17.4	13.9	16.6	16.5

**Table B2-22 Loading Table for PWR Fuel – 760 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	52 < Assembly Average Burnup ≤ 53 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	14.2	15.3	19.7	21.3	17.8	20.5	20.5
3.1 ≤ E < 3.3	13.8	15.0	19.3	20.9	17.4	20.1	20.1
3.3 ≤ E < 3.5	13.5	14.6	18.9	20.6	17.1	19.8	19.7
3.5 ≤ E < 3.7	13.1	14.3	18.6	20.3	16.7	19.5	19.4
3.7 ≤ E < 3.9	12.9	14.2	18.3	19.9	16.4	19.2	19.1
3.9 ≤ E < 4.1	12.6	13.7	18.0	19.6	16.0	18.9	18.8
4.1 ≤ E < 4.3	12.3	13.5	17.7	19.4	15.8	18.6	18.5
4.3 ≤ E < 4.5	12.1	13.2	17.5	19.1	15.6	18.4	18.3
4.5 ≤ E < 4.7	11.9	13.0	17.3	18.8	15.3	18.2	18.1
4.7 ≤ E < 4.9	11.8	12.8	17.0	18.7	15.2	17.9	17.8
E ≥ 4.9	11.6	12.6	16.9	18.5	14.9	17.7	17.7
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	53 < Assembly Average Burnup ≤ 54 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	15.2	16.4	20.9	22.5	18.9	21.7	21.6
3.1 ≤ E < 3.3	14.8	16.0	20.4	22.1	18.5	21.3	21.3
3.3 ≤ E < 3.5	14.4	15.6	20.0	21.8	18.1	21.0	20.9
3.5 ≤ E < 3.7	14.0	15.2	19.7	21.4	17.7	20.6	20.6
3.7 ≤ E < 3.9	13.7	14.9	19.4	21.1	17.4	20.3	20.3
3.9 ≤ E < 4.1	13.4	14.6	19.1	20.8	17.2	20.1	20.0
4.1 ≤ E < 4.3	13.2	14.4	18.9	20.5	16.9	19.8	19.7
4.3 ≤ E < 4.5	12.9	14.1	18.6	20.3	16.6	19.5	19.5
4.5 ≤ E < 4.7	12.7	13.9	18.3	20.1	16.4	19.3	19.2
4.7 ≤ E < 4.9	12.5	13.6	18.1	19.8	16.1	19.0	19.0
E ≥ 4.9	12.4	13.9	17.9	19.6	15.9	18.8	18.8

**Table B2-22 Loading Table for PWR Fuel – 760 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	54 < Assembly Average Burnup ≤ 55 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	15.7	17.1	21.6	23.2	19.6	22.5	22.4
3.3 ≤ E < 3.5	15.4	17.7	21.2	22.9	19.2	22.1	22.1
3.5 ≤ E < 3.7	15.0	16.3	20.9	22.6	18.9	21.8	21.8
3.7 ≤ E < 3.9	14.6	16.0	20.6	22.2	18.5	21.5	21.5
3.9 ≤ E < 4.1	14.4	15.7	20.2	21.9	18.3	21.2	21.2
4.1 ≤ E < 4.3	14.1	15.4	19.9	21.7	18.0	20.9	20.9
4.3 ≤ E < 4.5	13.8	15.1	19.7	21.4	17.7	20.7	20.6
4.5 ≤ E < 4.7	13.6	14.9	19.4	21.2	17.5	20.5	20.4
4.7 ≤ E < 4.9	13.4	14.6	19.2	21.0	17.2	20.2	20.1
E ≥ 4.9	13.2	14.4	19.0	20.7	17.0	19.9	19.9
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	55 < Assembly Average Burnup ≤ 56 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	16.8	18.1	22.7	24.4	20.2	23.6	23.6
3.3 ≤ E < 3.5	16.3	17.7	22.4	24.1	19.8	23.3	23.3
3.5 ≤ E < 3.7	15.9	17.3	21.9	23.7	19.5	23.0	22.9
3.7 ≤ E < 3.9	15.6	17.0	21.7	23.4	19.2	22.6	22.6
3.9 ≤ E < 4.1	15.3	16.7	21.4	23.1	18.8	22.4	22.3
4.1 ≤ E < 4.3	15.0	16.4	21.0	22.9	18.5	22.1	22.0
4.3 ≤ E < 4.5	14.8	16.1	20.8	22.6	18.3	21.8	21.8
4.5 ≤ E < 4.7	14.5	15.8	20.5	22.4	17.9	21.6	21.5
4.7 ≤ E < 4.9	14.3	15.6	20.3	22.2	17.8	21.3	21.3
E ≥ 4.9	14.0	15.4	20.0	21.9	17.6	21.1	21.1

**Table B2-22 Loading Table for PWR Fuel – 760 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	56 < Assembly Average Burnup ≤ 57 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	17.7	19.2	23.8	25.6	21.3	24.7	24.7
3.3 ≤ E < 3.5	17.3	18.8	23.4	25.2	20.9	24.4	24.4
3.5 ≤ E < 3.7	16.9	18.4	23.1	24.9	20.5	24.0	24.0
3.7 ≤ E < 3.9	16.6	18.1	22.7	24.6	20.2	23.7	23.7
3.9 ≤ E < 4.1	16.2	17.7	22.4	24.3	19.9	23.5	23.5
4.1 ≤ E < 4.3	15.9	17.4	22.2	24.0	19.6	23.2	23.2
4.3 ≤ E < 4.5	15.7	17.1	21.9	23.8	19.3	23.0	22.9
4.5 ≤ E < 4.7	15.4	16.8	21.6	23.5	19.1	22.7	22.6
4.7 ≤ E < 4.9	15.2	16.6	21.4	23.3	18.8	22.5	22.4
E ≥ 4.9	15.0	16.4	21.2	23.0	18.6	22.2	22.2
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	57 < Assembly Average Burnup ≤ 58 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	18.8	20.2	24.9	26.7	22.3	25.8	25.8
3.3 ≤ E < 3.5	18.3	19.9	24.6	26.3	22.0	25.5	25.5
3.5 ≤ E < 3.7	17.9	19.5	24.2	26.0	21.6	25.2	25.2
3.7 ≤ E < 3.9	17.6	19.1	23.9	25.7	21.3	24.9	24.8
3.9 ≤ E < 4.1	17.3	18.8	23.6	25.4	20.9	24.6	24.6
4.1 ≤ E < 4.3	16.9	18.4	23.3	25.1	20.6	24.4	24.3
4.3 ≤ E < 4.5	16.6	18.1	23.0	24.9	20.4	24.1	24.0
4.5 ≤ E < 4.7	16.3	17.9	22.8	24.6	20.0	23.8	23.8
4.7 ≤ E < 4.9	16.1	17.6	22.5	24.4	19.9	23.6	23.6
E ≥ 4.9	15.8	17.4	22.3	24.2	19.7	23.4	23.3



**Table B2-22 Loading Table for PWR Fuel – 760 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	58 < Assembly Average Burnup ≤ 59 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	19.8	21.3	25.9	27.7	23.4	26.9	26.9
3.3 ≤ E < 3.5	19.3	20.9	25.6	27.4	23.0	26.7	26.6
3.5 ≤ E < 3.7	18.9	20.5	25.3	27.1	22.7	26.3	26.2
3.7 ≤ E < 3.9	18.6	20.2	24.9	26.8	22.3	26.0	25.9
3.9 ≤ E < 4.1	18.2	19.8	24.6	26.5	22.0	25.7	25.7
4.1 ≤ E < 4.3	17.9	19.5	24.3	26.2	21.7	25.5	25.4
4.3 ≤ E < 4.5	17.6	19.2	24.1	26.0	21.4	25.2	25.2
4.5 ≤ E < 4.7	17.3	18.9	23.9	25.8	21.2	25.0	24.9
4.7 ≤ E < 4.9	17.1	18.7	23.6	25.5	20.9	24.7	24.7
E ≥ 4.9	16.8	18.4	23.4	25.3	20.7	24.5	24.4
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	59 < Assembly Average Burnup ≤ 60 GWd/MTU Minimum Cooling Time (years)						
	CE	WE	WE	B&W	CE	WE	B&W
	14×14	14×14	15×15	15×15	16×16	17×17	17×17
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	-	-	-	-	-	-	-
3.3 ≤ E < 3.5	20.3	22.0	26.7	28.4	24.1	27.2	27.1
3.5 ≤ E < 3.7	20.0	21.5	26.4	28.1	23.7	26.8	26.7
3.7 ≤ E < 3.9	19.6	21.2	26.0	27.8	23.4	26.5	26.5
3.9 ≤ E < 4.1	19.3	20.8	25.7	27.6	23.1	26.2	26.2
4.1 ≤ E < 4.3	18.9	20.5	25.4	27.3	22.7	26.0	25.9
4.3 ≤ E < 4.5	18.6	20.2	25.2	27.1	22.5	25.7	25.6
4.5 ≤ E < 4.7	18.3	20.0	24.9	26.8	22.2	25.5	25.4
4.7 ≤ E < 4.9	18.0	19.7	24.7	26.6	22.0	25.2	25.2
E ≥ 4.9	17.7	19.5	24.4	26.4	21.7	25.0	24.9

**Table B2-23 Loading Table for BWR Fuel – 379 W/Assembly**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	30 < Assembly Average Burnup ≤ 32.5 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/4-6
	7×7	7×7	8×8	8×8	9×9	9×9	10×10
2.1 ≤ E < 2.3	4.3	4.6	4.0	4.5	4.0	4.5	4.4
2.3 ≤ E < 2.5	4.2	4.6	4.0	4.5	4.0	4.4	4.4
2.5 ≤ E < 2.7	4.2	4.5	4.0	4.4	4.0	4.4	4.3
2.7 ≤ E < 2.9	4.1	4.5	4.0	4.4	4.0	4.3	4.3
2.9 ≤ E < 3.1	4.1	4.4	4.0	4.3	4.0	4.3	4.2
3.1 ≤ E < 3.3	4.0	4.4	4.0	4.3	4.0	4.2	4.2
3.3 ≤ E < 3.5	4.0	4.3	4.0	4.2	4.0	4.2	4.1
3.5 ≤ E < 3.7	4.0	4.3	4.0	4.2	4.0	4.2	4.1
3.7 ≤ E < 3.9	4.0	4.3	4.0	4.2	4.0	4.1	4.0
3.9 ≤ E < 4.1	4.0	4.2	4.0	4.1	4.0	4.1	4.0
4.1 ≤ E < 4.3	4.0	4.2	4.0	4.1	4.0	4.1	4.0
4.3 ≤ E < 4.5	4.0	4.2	4.0	4.1	4.0	4.0	4.0
4.5 ≤ E < 4.7	4.0	4.1	4.0	4.0	4.0	4.0	4.0
4.7 ≤ E < 4.9	4.0	4.1	4.0	4.0	4.0	4.0	4.0
E ≥ 4.9	4.0	4.1	4.0	4.0	4.0	4.0	4.0
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	32.5 < Assembly Average Burnup ≤ 35 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/4-6
	7×7	7×7	8×8	8×8	9×9	9×9	10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	4.7	5.0	4.3	4.9	4.0	4.9	4.8
2.5 ≤ E < 2.7	4.6	4.9	4.3	4.8	4.0	4.8	4.7
2.7 ≤ E < 2.9	4.5	4.9	4.2	4.8	4.0	4.7	4.6
2.9 ≤ E < 3.1	4.5	4.8	4.2	4.7	4.0	4.7	4.6
3.1 ≤ E < 3.3	4.4	4.8	4.1	4.7	4.0	4.6	4.5
3.3 ≤ E < 3.5	4.4	4.7	4.0	4.6	4.0	4.6	4.5
3.5 ≤ E < 3.7	4.3	4.7	4.0	4.6	4.0	4.5	4.5
3.7 ≤ E < 3.9	4.3	4.6	4.0	4.5	4.0	4.5	4.4
3.9 ≤ E < 4.1	4.2	4.6	4.0	4.5	4.0	4.5	4.4
4.1 ≤ E < 4.3	4.2	4.5	4.0	4.5	4.0	4.4	4.3
4.3 ≤ E < 4.5	4.2	4.5	4.0	4.4	4.0	4.4	4.3
4.5 ≤ E < 4.7	4.1	4.5	4.0	4.4	4.0	4.4	4.3
4.7 ≤ E < 4.9	4.1	4.5	4.0	4.4	4.0	4.3	4.2
E ≥ 4.9	4.1	4.4	4.0	4.3	4.0	4.3	4.2

**Table B2-23 Loading Table for BWR Fuel – 379 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	35 < Assembly Average Burnup ≤ 37.5 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/4-6
	7×7	7×7	8×8	8×8	9×9	9×9	10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	5.2	5.6	4.7	5.4	4.4	5.4	5.2
2.5 ≤ E < 2.7	5.1	5.5	4.7	5.3	4.3	5.3	5.2
2.7 ≤ E < 2.9	5.0	5.4	4.6	5.3	4.3	5.2	5.1
2.9 ≤ E < 3.1	4.9	5.4	4.5	5.2	4.2	5.1	5.0
3.1 ≤ E < 3.3	4.9	5.3	4.5	5.1	4.1	5.1	4.9
3.3 ≤ E < 3.5	4.8	5.2	4.4	5.0	4.1	5.0	4.9
3.5 ≤ E < 3.7	4.8	5.1	4.4	5.0	4.0	4.9	4.8
3.7 ≤ E < 3.9	4.7	5.1	4.3	4.9	4.0	4.9	4.8
3.9 ≤ E < 4.1	4.6	5.0	4.3	4.9	4.0	4.9	4.7
4.1 ≤ E < 4.3	4.6	5.0	4.3	4.9	4.0	4.8	4.7
4.3 ≤ E < 4.5	4.6	4.9	4.2	4.8	4.0	4.8	4.7
4.5 ≤ E < 4.7	4.5	4.9	4.2	4.8	4.0	4.7	4.6
4.7 ≤ E < 4.9	4.5	4.9	4.1	4.7	4.0	4.7	4.6
E ≥ 4.9	4.5	4.9	4.1	4.7	4.0	4.7	4.6
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	37.5 < Assembly Average Burnup ≤ 40 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/4-6
	7×7	7×7	8×8	8×8	9×9	9×9	10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	5.7	6.1	5.2	5.9	4.7	5.9	5.7
2.7 ≤ E < 2.9	5.6	6.0	5.1	5.8	4.6	5.8	5.7
2.9 ≤ E < 3.1	5.5	5.9	5.0	5.8	4.6	5.7	5.6
3.1 ≤ E < 3.3	5.5	5.9	4.9	5.7	4.5	5.6	5.5
3.3 ≤ E < 3.5	5.4	5.8	4.9	5.6	4.4	5.6	5.4
3.5 ≤ E < 3.7	5.3	5.7	4.8	5.6	4.4	5.5	5.4
3.7 ≤ E < 3.9	5.2	5.7	4.7	5.5	4.3	5.4	5.3
3.9 ≤ E < 4.1	5.2	5.6	4.7	5.4	4.3	5.4	5.2
4.1 ≤ E < 4.3	5.1	5.6	4.6	5.4	4.3	5.3	5.2
4.3 ≤ E < 4.5	5.0	5.5	4.6	5.3	4.2	5.3	5.1
4.5 ≤ E < 4.7	5.0	5.5	4.5	5.3	4.2	5.2	5.0
4.7 ≤ E < 4.9	5.0	5.4	4.5	5.2	4.1	5.2	5.0
E ≥ 4.9	4.9	5.4	4.5	5.2	4.1	5.1	5.0

**Table B2-23 Loading Table for BWR Fuel – 379 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	40 < Assembly Average Burnup ≤ 41 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/4-6
	7×7	7×7	8×8	8×8	9×9	9×9	10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	6.0	6.5	5.4	6.2	4.9	6.1	6.0
2.7 ≤ E < 2.9	5.9	6.4	5.3	6.1	4.8	6.0	5.9
2.9 ≤ E < 3.1	5.8	6.2	5.2	6.0	4.7	5.9	5.8
3.1 ≤ E < 3.3	5.7	6.1	5.1	5.9	4.7	5.9	5.7
3.3 ≤ E < 3.5	5.6	6.0	5.0	5.9	4.6	5.8	5.6
3.5 ≤ E < 3.7	5.5	6.0	5.0	5.8	4.5	5.7	5.6
3.7 ≤ E < 3.9	5.5	5.9	4.9	5.7	4.5	5.7	5.5
3.9 ≤ E < 4.1	5.4	5.9	4.9	5.7	4.4	5.6	5.5
4.1 ≤ E < 4.3	5.3	5.8	4.8	5.6	4.4	5.5	5.4
4.3 ≤ E < 4.5	5.3	5.8	4.8	5.6	4.4	5.5	5.3
4.5 ≤ E < 4.7	5.2	5.7	4.7	5.5	4.3	5.4	5.3
4.7 ≤ E < 4.9	5.2	5.7	4.7	5.5	4.3	5.4	5.2
E ≥ 4.9	5.1	5.6	4.6	5.4	4.2	5.4	5.2
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	41 < Assembly Average Burnup ≤ 42 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/4-6
	7×7	7×7	8×8	8×8	9×9	9×9	10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	6.3	6.8	5.6	6.5	5.1	6.4	6.2
2.7 ≤ E < 2.9	6.2	6.7	5.5	6.4	5.0	6.3	6.1
2.9 ≤ E < 3.1	6.0	6.6	5.5	6.3	4.9	6.2	6.0
3.1 ≤ E < 3.3	6.0	6.5	5.4	6.2	4.8	6.1	5.9
3.3 ≤ E < 3.5	5.9	6.4	5.3	6.1	4.8	6.0	5.9
3.5 ≤ E < 3.7	5.8	6.3	5.2	6.0	4.7	5.9	5.8
3.7 ≤ E < 3.9	5.7	6.2	5.1	5.9	4.6	5.9	5.7
3.9 ≤ E < 4.1	5.6	6.1	5.0	5.9	4.6	5.8	5.7
4.1 ≤ E < 4.3	5.6	6.0	5.0	5.8	4.5	5.8	5.6
4.3 ≤ E < 4.5	5.5	6.0	4.9	5.8	4.5	5.7	5.6
4.5 ≤ E < 4.7	5.5	5.9	4.9	5.7	4.5	5.7	5.5
4.7 ≤ E < 4.9	5.4	5.9	4.9	5.7	4.4	5.6	5.5
E ≥ 4.9	5.4	5.8	4.8	5.6	4.4	5.6	5.4

**Table B2-23 Loading Table for BWR Fuel – 379 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	42 < Assembly Average Burnup ≤ 43 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/4-6
	7×7	7×7	8×8	8×8	9×9	9×9	10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	6.6	7.1	5.9	6.8	5.3	6.8	6.6
2.7 ≤ E < 2.9	6.5	7.0	5.8	6.7	5.2	6.6	6.4
2.9 ≤ E < 3.1	6.4	6.9	5.7	6.6	5.1	6.5	6.3
3.1 ≤ E < 3.3	6.3	6.8	5.6	6.5	5.0	6.4	6.2
3.3 ≤ E < 3.5	6.1	6.7	5.5	6.4	4.9	6.3	6.1
3.5 ≤ E < 3.7	6.0	6.6	5.4	6.3	4.9	6.2	6.0
3.7 ≤ E < 3.9	6.0	6.5	5.4	6.2	4.8	6.1	5.9
3.9 ≤ E < 4.1	5.9	6.4	5.3	6.1	4.8	6.0	5.9
4.1 ≤ E < 4.3	5.8	6.3	5.2	6.0	4.7	6.0	5.8
4.3 ≤ E < 4.5	5.8	6.3	5.1	6.0	4.6	5.9	5.8
4.5 ≤ E < 4.7	5.7	6.2	5.1	6.0	4.6	5.9	5.7
4.7 ≤ E < 4.9	5.7	6.1	5.0	5.9	4.6	5.9	5.7
E ≥ 4.9	5.6	6.1	5.0	5.9	4.5	5.8	5.6
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	43 < Assembly Average Burnup ≤ 44 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/4-6
	7×7	7×7	8×8	8×8	9×9	9×9	10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	7.0	7.6	6.1	7.2	5.5	7.1	6.9
2.7 ≤ E < 2.9	6.8	7.4	6.0	7.0	5.4	6.9	6.7
2.9 ≤ E < 3.1	6.7	7.3	5.9	6.9	5.3	6.8	6.6
3.1 ≤ E < 3.3	6.6	7.1	5.8	6.8	5.2	6.7	6.5
3.3 ≤ E < 3.5	6.5	7.0	5.7	6.7	5.1	6.6	6.4
3.5 ≤ E < 3.7	6.4	6.9	5.7	6.6	5.0	6.5	6.3
3.7 ≤ E < 3.9	6.3	6.8	5.6	6.5	5.0	6.5	6.2
3.9 ≤ E < 4.1	6.2	6.7	5.5	6.4	4.9	6.4	6.1
4.1 ≤ E < 4.3	6.1	6.7	5.5	6.4	4.9	6.3	6.0
4.3 ≤ E < 4.5	6.0	6.6	5.4	6.3	4.8	6.2	6.0
4.5 ≤ E < 4.7	5.9	6.5	5.3	6.2	4.8	6.1	5.9
4.7 ≤ E < 4.9	5.9	6.5	5.3	6.2	4.7	6.1	5.9
E ≥ 4.9	5.8	6.4	5.2	6.1	4.7	6.0	5.9

**Table B2-23 Loading Table for BWR Fuel – 379 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	44 < Assembly Average Burnup ≤ 45 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3 7×7	BWR/4-6 7×7	BWR/2-3 8×8	BWR/4-6 8×8	BWR/2-3 9×9	BWR/4-6 9×9	BWR/4-6 10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	7.2	7.9	6.3	7.5	5.6	7.4	7.1
2.9 ≤ E < 3.1	7.0	7.7	6.2	7.3	5.5	7.2	6.9
3.1 ≤ E < 3.3	6.9	7.6	6.1	7.1	5.4	7.0	6.8
3.3 ≤ E < 3.5	6.8	7.4	6.0	7.0	5.4	6.9	6.7
3.5 ≤ E < 3.7	6.7	7.3	5.9	6.9	5.3	6.9	6.6
3.7 ≤ E < 3.9	6.6	7.2	5.8	6.8	5.2	6.8	6.5
3.9 ≤ E < 4.1	6.5	7.1	5.8	6.8	5.1	6.7	6.4
4.1 ≤ E < 4.3	6.4	7.0	5.7	6.7	5.0	6.6	6.3
4.3 ≤ E < 4.5	6.3	6.9	5.6	6.6	5.0	6.5	6.3
4.5 ≤ E < 4.7	6.3	6.8	5.6	6.5	4.9	6.4	6.2
4.7 ≤ E < 4.9	6.2	6.8	5.5	6.5	4.9	6.4	6.1
E ≥ 4.9	6.1	6.7	5.4	6.4	4.8	6.3	6.1

**Note:** For fuel assembly average burnup greater than 45 GWd/MTU, cool time tables have been revised to account for a 5% margin in heat load.

**Table B2-24 Loading Table for BWR Fuel – 360 W/Assembly**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	45 < Assembly Average Burnup ≤ 46 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/4-6
	7×7	7×7	8×8	8×8	9×9	9×9	10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	8.5	9.3	7.3	8.8	6.3	8.6	8.2
2.9 ≤ E < 3.1	8.3	9.0	7.1	8.6	6.2	8.4	8.0
3.1 ≤ E < 3.3	8.1	8.9	7.0	8.4	6.0	8.2	7.9
3.3 ≤ E < 3.5	8.0	8.8	6.8	8.2	6.0	8.0	7.7
3.5 ≤ E < 3.7	7.9	8.6	6.7	8.0	5.9	7.9	7.6
3.7 ≤ E < 3.9	7.7	8.4	6.7	7.9	5.8	7.8	7.5
3.9 ≤ E < 4.1	7.6	8.3	6.6	7.8	5.8	7.7	7.4
4.1 ≤ E < 4.3	7.5	8.2	6.5	7.7	5.7	7.6	7.3
4.3 ≤ E < 4.5	7.4	8.1	6.4	7.6	5.6	7.5	7.2
4.5 ≤ E < 4.7	7.3	8.0	6.3	7.6	5.6	7.4	7.1
4.7 ≤ E < 4.9	7.2	7.9	6.2	7.5	5.5	7.4	7.0
E ≥ 4.9	7.1	7.8	6.1	7.4	5.4	7.3	7.0

**Table B2-24 Loading Table for BWR Fuel – 360 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	46 < Assembly Average Burnup ≤ 47 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/4-6
	7×7	7×7	8×8	8×8	9×9	9×9	10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	9.1	10.0	7.7	9.3	6.7	9.2	8.7
2.9 ≤ E < 3.1	8.9	9.8	7.5	9.1	6.5	8.9	8.5
3.1 ≤ E < 3.3	8.7	9.5	7.4	8.9	6.4	8.8	8.3
3.3 ≤ E < 3.5	8.5	9.3	7.2	8.7	6.2	8.6	8.2
3.5 ≤ E < 3.7	8.3	9.1	7.0	8.6	6.1	8.4	8.0
3.7 ≤ E < 3.9	8.2	9.0	7.0	8.4	6.0	8.3	7.9
3.9 ≤ E < 4.1	8.0	8.8	6.9	8.3	6.0	8.1	7.8
4.1 ≤ E < 4.3	7.9	8.7	6.8	8.2	5.9	8.0	7.7
4.3 ≤ E < 4.5	7.8	8.6	6.7	8.1	5.8	7.9	7.6
4.5 ≤ E < 4.7	7.7	8.5	6.6	8.0	5.8	7.9	7.5
4.7 ≤ E < 4.9	7.6	8.4	6.5	7.9	5.7	7.8	7.4
E ≥ 4.9	7.5	8.3	6.5	7.8	5.7	7.7	7.4
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	47 < Assembly Average Burnup ≤ 48 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/4-6
	7×7	7×7	8×8	8×8	9×9	9×9	10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	9.8	10.7	8.2	9.9	6.9	9.8	9.3
2.9 ≤ E < 3.1	9.6	10.5	8.0	9.7	6.8	9.5	9.1
3.1 ≤ E < 3.3	9.3	10.2	7.8	9.5	6.7	9.3	8.9
3.3 ≤ E < 3.5	9.1	9.9	7.7	9.3	6.6	9.2	8.7
3.5 ≤ E < 3.7	8.9	9.7	7.5	9.1	6.5	9.0	8.5
3.7 ≤ E < 3.9	8.7	9.6	7.4	8.9	6.3	8.8	8.4
3.9 ≤ E < 4.1	8.6	9.4	7.2	8.8	6.2	8.7	8.2
4.1 ≤ E < 4.3	8.4	9.3	7.1	8.7	6.1	8.6	8.1
4.3 ≤ E < 4.5	8.3	9.1	7.0	8.6	6.0	8.4	8.0
4.5 ≤ E < 4.7	8.1	9.0	6.9	8.5	6.0	8.3	7.9
4.7 ≤ E < 4.9	8.0	8.9	6.9	8.3	5.9	8.2	7.8
E ≥ 4.9	7.9	8.8	6.8	8.2	5.9	8.1	7.8



**Table B2-24 Loading Table for BWR Fuel – 360 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	48 < Assembly Average Burnup ≤ 49 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3 7×7	BWR/4-6 7×7	BWR/2-3 8×8	BWR/4-6 8×8	BWR/2-3 9×9	BWR/4-6 9×9	BWR/4-6 10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	10.5	11.6	8.7	10.8	7.3	10.6	9.9
2.9 ≤ E < 3.1	10.2	11.3	8.5	10.4	7.1	10.2	9.7
3.1 ≤ E < 3.3	10.0	11.0	8.3	10.1	7.0	9.9	9.4
3.3 ≤ E < 3.5	9.7	10.7	8.1	9.9	6.9	9.8	9.2
3.5 ≤ E < 3.7	9.5	10.5	7.9	9.7	6.8	9.6	9.0
3.7 ≤ E < 3.9	9.3	10.3	7.8	9.5	6.7	9.4	8.9
3.9 ≤ E < 4.1	9.1	10.1	7.7	9.4	6.5	9.2	8.7
4.1 ≤ E < 4.3	9.0	9.9	7.5	9.2	6.4	9.0	8.6
4.3 ≤ E < 4.5	8.8	9.7	7.4	9.1	6.3	8.9	8.5
4.5 ≤ E < 4.7	8.7	9.6	7.3	8.9	6.3	8.8	8.4
4.7 ≤ E < 4.9	8.6	9.5	7.2	8.9	6.2	8.7	8.3
E ≥ 4.9	8.5	9.3	7.1	8.8	6.1	8.6	8.2
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	49 < Assembly Average Burnup ≤ 50 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3 7×7	BWR/4-6 7×7	BWR/2-3 8×8	BWR/4-6 8×8	BWR/2-3 9×9	BWR/4-6 9×9	BWR/4-6 10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	11.0	12.0	9.0	11.2	7.6	11.0	10.3
3.1 ≤ E < 3.3	10.7	11.7	8.8	10.9	7.4	10.7	10.1
3.3 ≤ E < 3.5	10.4	11.5	8.6	10.7	7.2	10.4	9.8
3.5 ≤ E < 3.7	10.2	11.3	8.4	10.4	7.0	10.2	9.7
3.7 ≤ E < 3.9	10.0	11.0	8.2	10.2	7.0	10.0	9.5
3.9 ≤ E < 4.1	9.7	10.8	8.0	10.0	6.8	9.8	9.3
4.1 ≤ E < 4.3	9.6	10.6	7.9	9.8	6.7	9.7	9.1
4.3 ≤ E < 4.5	9.4	10.4	7.8	9.7	6.7	9.5	9.0
4.5 ≤ E < 4.7	9.3	10.2	7.7	9.5	6.6	9.4	8.9
4.7 ≤ E < 4.9	9.1	10.1	7.6	9.4	6.5	9.2	8.7
E ≥ 4.9	9.0	10.0	7.5	9.3	6.4	9.1	8.6

**Table B2-24 Loading Table for BWR Fuel – 360 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	50 < Assembly Average Burnup ≤ 51 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/4-6
	7×7	7×7	8×8	8×8	9×9	9×9	10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	11.8	12.9	9.6	12.0	8.0	11.8	11.1
3.1 ≤ E < 3.3	11.5	12.6	9.4	11.7	7.8	11.5	10.9
3.3 ≤ E < 3.5	11.2	12.3	9.1	11.5	7.6	11.2	10.6
3.5 ≤ E < 3.7	10.9	11.9	8.9	11.1	7.5	11.0	10.3
3.7 ≤ E < 3.9	10.7	11.8	8.7	10.9	7.3	10.7	10.0
3.9 ≤ E < 4.1	10.4	11.6	8.6	10.7	7.2	10.5	9.9
4.1 ≤ E < 4.3	10.3	11.3	8.4	10.5	7.0	10.3	9.7
4.3 ≤ E < 4.5	10.0	11.2	8.3	10.4	7.0	10.1	9.6
4.5 ≤ E < 4.7	9.9	11.0	8.1	10.1	6.8	9.9	9.4
4.7 ≤ E < 4.9	9.8	10.9	8.0	10.0	6.8	9.8	9.3
E ≥ 4.9	9.6	10.7	7.9	9.9	6.7	9.7	9.1
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	51 < Assembly Average Burnup ≤ 52 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/4-6
	7×7	7×7	8×8	8×8	9×9	9×9	10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	12.7	13.9	10.3	12.9	8.4	12.6	11.9
3.1 ≤ E < 3.3	12.3	13.4	10.0	12.5	8.2	12.3	11.6
3.3 ≤ E < 3.5	11.9	13.2	9.8	12.1	8.0	11.9	11.3
3.5 ≤ E < 3.7	11.7	12.9	9.5	11.9	7.9	11.7	11.0
3.7 ≤ E < 3.9	11.5	12.6	9.3	11.7	7.7	11.4	10.8
3.9 ≤ E < 4.1	11.2	12.4	9.1	11.5	7.6	11.3	10.5
4.1 ≤ E < 4.3	11.0	12.1	8.9	11.3	7.4	11.0	10.3
4.3 ≤ E < 4.5	10.8	11.8	8.8	11.1	7.3	10.9	10.2
4.5 ≤ E < 4.7	10.6	11.7	8.7	10.9	7.2	10.7	10.0
4.7 ≤ E < 4.9	10.5	11.6	8.5	10.7	7.1	10.5	9.9
E ≥ 4.9	10.2	11.4	8.4	10.6	7.0	10.4	9.8

**Table B2-24 Loading Table for BWR Fuel – 360 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	52 < Assembly Average Burnup ≤ 53 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/4-6
	7×7	7×7	8×8	8×8	9×9	9×9	10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	13.6	14.8	11.0	13.7	8.9	13.4	12.7
3.1 ≤ E < 3.3	13.2	14.5	10.7	13.3	8.7	13.1	12.4
3.3 ≤ E < 3.5	12.8	14.1	10.4	13.0	8.5	12.8	12.0
3.5 ≤ E < 3.7	12.6	13.8	10.1	12.7	8.3	12.5	11.8
3.7 ≤ E < 3.9	12.2	13.5	9.8	12.4	8.1	12.2	11.5
3.9 ≤ E < 4.1	11.9	13.2	9.7	12.2	7.9	12.0	11.3
4.1 ≤ E < 4.3	11.7	13.0	9.5	12.0	7.8	11.8	11.1
4.3 ≤ E < 4.5	11.6	12.7	9.3	11.8	7.7	11.5	10.9
4.5 ≤ E < 4.7	11.4	12.5	9.2	11.6	7.6	11.4	10.7
4.7 ≤ E < 4.9	11.2	12.4	9.0	11.5	7.5	11.3	10.5
E ≥ 4.9	11.0	12.1	8.9	11.3	7.4	11.1	10.4
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	53 < Assembly Average Burnup ≤ 54 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/4-6
	7×7	7×7	8×8	8×8	9×9	9×9	10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	14.5	15.8	11.8	14.6	9.5	14.4	13.6
3.1 ≤ E < 3.3	14.1	15.4	11.4	14.3	9.2	14.0	13.2
3.3 ≤ E < 3.5	13.8	15.1	11.1	13.9	8.9	13.6	12.8
3.5 ≤ E < 3.7	13.4	14.7	10.9	13.6	8.7	13.4	12.6
3.7 ≤ E < 3.9	13.1	14.4	10.6	13.3	8.6	13.1	12.2
3.9 ≤ E < 4.1	12.9	14.1	10.4	13.1	8.4	12.8	12.0
4.1 ≤ E < 4.3	12.6	13.9	10.1	12.8	8.2	12.5	11.8
4.3 ≤ E < 4.5	12.4	13.6	9.9	12.6	8.1	12.3	11.6
4.5 ≤ E < 4.7	12.1	13.4	9.7	12.3	7.9	12.1	11.4
4.7 ≤ E < 4.9	11.9	13.2	9.6	12.2	7.9	11.9	11.2
E ≥ 4.9	11.7	13.1	9.4	12.0	7.8	11.7	11.1

**Table B2-24 Loading Table for BWR Fuel – 360 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	54 < Assembly Average Burnup ≤ 55 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/4-6
	7×7	7×7	8×8	8×8	9×9	9×9	10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	15.0	16.4	12.1	15.2	9.8	14.9	14.1
3.3 ≤ E < 3.5	14.7	16.0	11.9	14.9	9.5	14.6	13.7
3.5 ≤ E < 3.7	14.3	15.7	11.5	14.5	9.3	14.2	13.4
3.7 ≤ E < 3.9	13.9	15.4	11.3	14.2	9.0	13.9	13.1
3.9 ≤ E < 4.1	13.6	15.1	11.1	13.9	8.9	13.6	12.8
4.1 ≤ E < 4.3	13.3	14.7	10.8	13.6	8.7	13.4	12.5
4.3 ≤ E < 4.5	13.1	14.5	10.5	13.4	8.5	13.1	12.3
4.5 ≤ E < 4.7	12.9	14.3	10.4	13.2	8.4	13.0	12.1
4.7 ≤ E < 4.9	12.8	14.1	10.2	13.0	8.3	12.8	11.9
E ≥ 4.9	12.5	13.9	10.0	12.8	8.1	12.5	11.7
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	55 < Assembly Average Burnup ≤ 56 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/4-6
	7×7	7×7	8×8	8×8	9×9	9×9	10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	15.8	17.5	13.1	16.2	10.4	15.9	15.0
3.3 ≤ E < 3.5	15.5	17.1	12.7	15.8	10.1	15.5	14.6
3.5 ≤ E < 3.7	15.1	16.7	12.3	15.5	9.9	15.2	14.3
3.7 ≤ E < 3.9	14.7	16.3	12.0	15.1	9.7	14.8	13.9
3.9 ≤ E < 4.1	14.4	16.0	11.8	14.9	9.4	14.6	13.6
4.1 ≤ E < 4.3	14.0	15.7	11.5	14.5	9.2	14.3	13.4
4.3 ≤ E < 4.5	13.8	15.4	11.3	14.3	9.0	14.0	13.1
4.5 ≤ E < 4.7	13.7	15.2	11.1	14.1	8.8	13.8	12.9
4.7 ≤ E < 4.9	13.4	15.0	10.9	13.9	8.7	13.7	12.8
E ≥ 4.9	13.3	14.8	10.7	13.7	8.6	13.4	12.5

**Table B2-24 Loading Table for BWR Fuel – 360 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	56 < Assembly Average Burnup ≤ 57 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3 7×7	BWR/4-6 7×7	BWR/2-3 8×8	BWR/4-6 8×8	BWR/2-3 9×9	BWR/4-6 9×9	BWR/4-6 10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	16.8	18.4	13.8	17.2	11.1	16.9	16.0
3.3 ≤ E < 3.5	16.5	18.1	13.5	16.8	10.9	16.4	15.5
3.5 ≤ E < 3.7	16.0	17.7	13.1	16.4	10.5	16.2	15.2
3.7 ≤ E < 3.9	15.7	17.3	12.9	16.1	10.2	15.7	14.8
3.9 ≤ E < 4.1	15.4	17.1	12.5	15.8	10.0	15.4	14.5
4.1 ≤ E < 4.3	15.1	16.8	12.2	15.4	9.8	15.2	14.3
4.3 ≤ E < 4.5	14.8	16.4	12.0	15.2	9.6	14.8	14.0
4.5 ≤ E < 4.7	14.6	16.2	11.8	15.0	9.4	14.7	13.8
4.7 ≤ E < 4.9	14.3	15.9	11.6	14.7	9.2	14.4	13.5
E ≥ 4.9	14.0	15.7	11.4	14.5	9.0	14.3	13.4
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	57 < Assembly Average Burnup ≤ 58 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3 7×7	BWR/4-6 7×7	BWR/2-3 8×8	BWR/4-6 8×8	BWR/2-3 9×9	BWR/4-6 9×9	BWR/4-6 10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	17.8	19.5	14.8	18.2	11.8	17.8	16.8
3.3 ≤ E < 3.5	17.3	19.1	14.4	17.7	11.5	17.5	16.5
3.5 ≤ E < 3.7	17.0	18.7	14.0	17.4	11.2	17.1	16.1
3.7 ≤ E < 3.9	16.6	18.3	13.6	17.0	10.9	16.8	15.7
3.9 ≤ E < 4.1	16.3	17.9	13.3	16.7	10.6	16.4	15.4
4.1 ≤ E < 4.3	15.9	17.7	13.1	16.3	10.3	16.1	15.1
4.3 ≤ E < 4.5	15.7	17.4	12.8	16.1	10.1	15.8	14.8
4.5 ≤ E < 4.7	15.5	17.1	12.5	15.9	9.9	15.5	14.6
4.7 ≤ E < 4.9	15.2	16.9	12.3	15.6	9.8	15.3	14.4
E ≥ 4.9	15.0	16.7	12.1	15.4	9.6	15.1	14.2

**Table B2-24 Loading Table for BWR Fuel – 360 W/Assembly (continued)**

Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	58 < Assembly Average Burnup ≤ 59 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/4-6
	7×7	7×7	8×8	8×8	9×9	9×9	10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	18.7	20.4	15.7	19.2	12.6	18.9	17.8
3.3 ≤ E < 3.5	18.4	20.0	15.2	18.8	12.2	18.4	17.4
3.5 ≤ E < 3.7	18.0	19.7	14.9	18.4	11.9	18.1	17.1
3.7 ≤ E < 3.9	17.6	19.3	14.5	18.1	11.6	17.7	16.7
3.9 ≤ E < 4.1	17.2	18.9	14.1	17.7	11.2	17.3	16.3
4.1 ≤ E < 4.3	16.9	18.7	13.8	17.4	11.0	17.1	16.1
4.3 ≤ E < 4.5	16.6	18.4	13.6	17.1	10.8	16.8	15.7
4.5 ≤ E < 4.7	16.4	18.0	13.3	16.9	10.6	16.5	15.5
4.7 ≤ E < 4.9	16.1	17.8	13.1	16.6	10.3	16.2	15.3
E ≥ 4.9	15.9	17.6	12.9	16.3	10.2	15.9	15.1
Minimum Initial Assembly Avg. Enrichment wt % <sup>235</sup> U (E)	59 < Assembly Average Burnup ≤ 60 GWd/MTU Minimum Cooling Time (years)						
	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/2-3	BWR/4-6	BWR/4-6
	7×7	7×7	8×8	8×8	9×9	9×9	10×10
2.1 ≤ E < 2.3	-	-	-	-	-	-	-
2.3 ≤ E < 2.5	-	-	-	-	-	-	-
2.5 ≤ E < 2.7	-	-	-	-	-	-	-
2.7 ≤ E < 2.9	-	-	-	-	-	-	-
2.9 ≤ E < 3.1	-	-	-	-	-	-	-
3.1 ≤ E < 3.3	-	-	-	-	-	-	-
3.3 ≤ E < 3.5	19.3	21.0	16.0	19.7	12.9	19.5	18.4
3.5 ≤ E < 3.7	18.9	20.7	15.6	19.3	12.7	19.1	17.9
3.7 ≤ E < 3.9	18.6	20.3	15.2	19.0	12.3	18.7	17.7
3.9 ≤ E < 4.1	18.2	19.9	14.9	18.7	11.9	18.3	17.3
4.1 ≤ E < 4.3	17.9	19.7	14.5	18.3	11.6	17.9	17.0
4.3 ≤ E < 4.5	17.6	19.4	14.2	18.1	11.4	17.7	16.6
4.5 ≤ E < 4.7	17.3	19.1	14.0	17.7	11.2	17.5	16.4
4.7 ≤ E < 4.9	17.1	18.8	13.8	17.6	11.0	17.2	16.1
E ≥ 4.9	16.9	18.6	13.6	17.3	10.8	16.9	15.9