


GMRS 1E-5 LF
Sa amplification factor at depth(ft)= 0.0 - outcrop

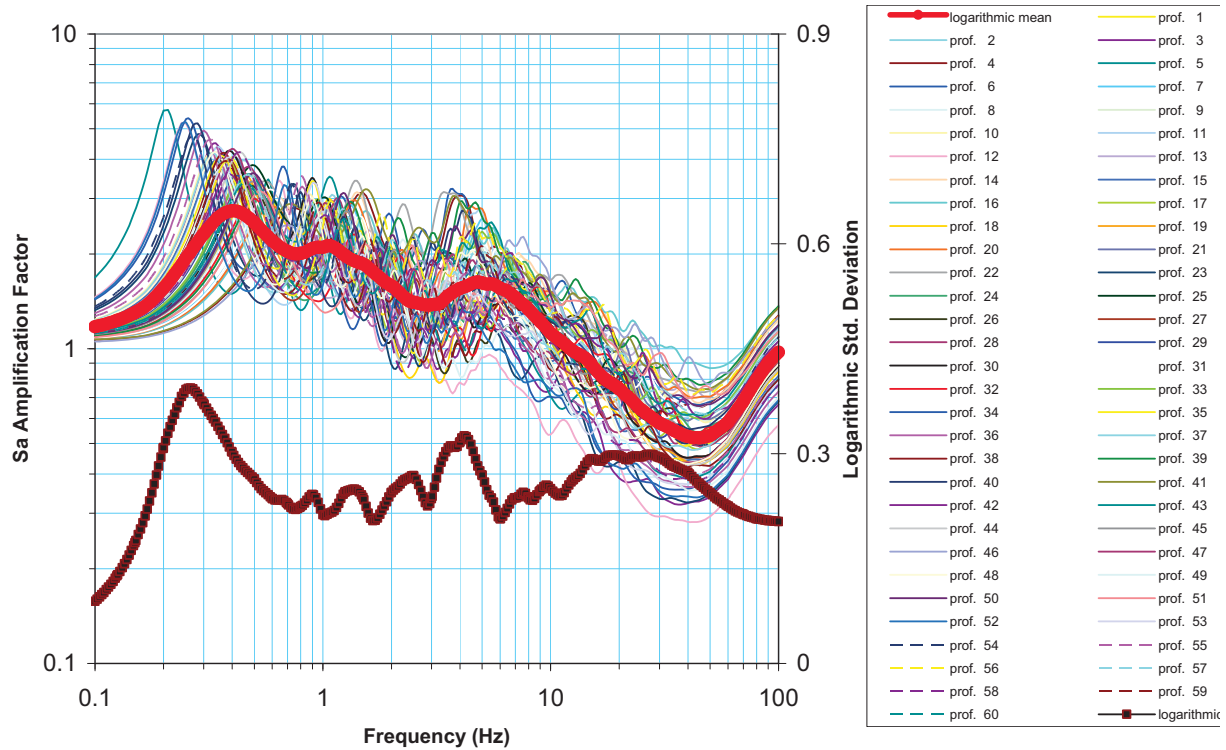

Amplification Factors (Left Y Axis) and Associated Logarithmic Standard Deviation (Right Y Axis) Calculated with the 60 Synthetic Profiles, for the 10-5 Low-Frequency Rock Input

PSEG Power, LLC

PSEG Site ESPA
 Part 2, Site Safety Analysis Report

Amplification Factors Calculated with
 the 60 Synthetic Profiles, for the 10⁻⁵
 Low-Frequency Rock Input

FIGURE 2.5.2-41 Rev 0