	Nuclear Regulatory Commission		
	Exhibit #	- GLE024-00-BD01	
	Docket #	- 07007016	
	Identified :	7/11/2012	
Admitted:	7/11/2012	Withdrawn:	
Rejected:		Stricken:	

GLE Commercial Facility Mandatory Hearing

ASLB Presentation Topic #'s 6.A. & 6.C. Environmental Monitoring Program

Joseph Alexander, RTI International
Kimberly Matthews, RTI International
Andrew Stahl, RTI International
Julie Olivier, Global Laser Enrichment

Submitted June 22, 2012



Contents

- Overview of GLE's Environmental Monitoring Program (EMP) (6.A.)
- Environmental Pathways (6.A.)
 - Air
 - Surface Water
 - Groundwater
- Management and Tracking of Environmental Monitoring Data (6.C.)
- Application of Monitoring Results (6.C.)

Overview of GLE's Environmental Monitoring Program (6.A.)

Purpose

- Detection of effluents and emissions at or below regulatory limits
- Monitor at points of release, verified by additional samples taken farther away

Quality Assurance (QA) Program

- Sampling, analytical, and reporting procedures
- Instrument maintenance and calibration
- Laboratories participate in third-party, inter-comparison programs
- Validation of field and laboratory results

Overview of GLE Environmental Monitoring Program

Organization of EMP

- Implemented by the GLE Environmental, Health and Safety Organization (EHS)
- GLE EHS has independent oversight of operations

Modifications to EMP

- To maintain effectiveness, changes to the EMP may be made based on, for example: 1) operations, 2) vendor information, 3) removal of materials, and 4) regulatory actions

Air Pathway

Atmospheric Setting

- Influence of jet stream position and Bermuda High on weather
- Meteorological and atmospheric data collected from Wilmington International Airport
- Annual wind direction predominantly southwesterly
- Prevailing wind speed 9 knots

Air Pathway

Air Monitoring

- Potential Radiological Emission Releases
 - Primary release point: GLE operations building, but contained and vented through high-efficiency filter
 - Sampling strategy:
 - (1) Vent stack exhaust gas
 - continuous
 - (2) Ambient air
 - 11 samplers (Figure 6-2)
 - (3) Soil
 - assess for deposition on a semi-annual basis (Figure 6-3)

Air Pathway

Air Monitoring

- Potential Non-radiological Emission Releases
 - Primary source is small gaseous emissions from the GLE operations building potentially containing the air toxic, hydrogen fluoride (HF)
 - Initial daily measurements planned to decrease to weekly measurements
 - Sample analyses conducted according to North Carolina Division of Air Quality requirements (Table 6-2)

Surface Water Pathway

Surface Water Environmental Setting

- Northeast Cape Fear River (NCFR) Sub-basin
- NCFR nearest waterbody, (southwestern portion of the Wilmington Site)
- Drained by small streams and an effluent channel that begins in eastern portion of Site (Figure 6-4)
- Surface water not used for drinking water at or downstream of Site

Surface Water Pathway

Surface Water Monitoring

- Potential Radiological Effluent Releases
 - Monitored by GNF-A/GLE at Site dam and NCFR
 - Sampling done according to North Carolina standard operating procedures and applicable best practices
- Potential Non-radiological Effluent Releases
 - GNF-A/GLE will monitor at the Site dam, via a partnership with Lower Cape Fear River Program, and will monitor the NCFR upstream and downstream from the Site (Figure 6-5)
- Monitoring also includes wastewater effluent, stormwater discharge, and sediment samples (Table 6-2)

Surface Water Pathway

Wastewater Effluent Monitoring

- Discharge combined with effluent discharges for treatment at Site lagoon treatment facility
- Utilize GNF-A monitoring locations (Figure 6-6)
- Treatment of process wastewater
 - Uranium removal by adjusting pH
 - Fluoride removed by adding salt
- Routed to lagoon, then discharge according to 10 CFR Part 20 and NPDES permit
- Treated process wastewater collected daily
- Sanitary wastewater treated at existing facility

Surface Water Pathway

Stormwater Discharge Monitoring

- Three current site-wide monitoring locations (Figure 6-7)
- GLE cylinder pad runoff to be collected in holding pond, monitored, and then released to a stormwater basin


Sediment Monitoring

- Semiannual sampling in effluent channel downstream (Figure 6-8)
- Samples analyzed for uranium (Table 6-2)

Groundwater Pathway

Hydrogeologic Setting

- Site is located within the North Carolina Coastal Plain physiographic province
- Surficial aquifer (Figure 6-10)
- Semiconfining layer
- Principal aquifer (Figure 6-11)

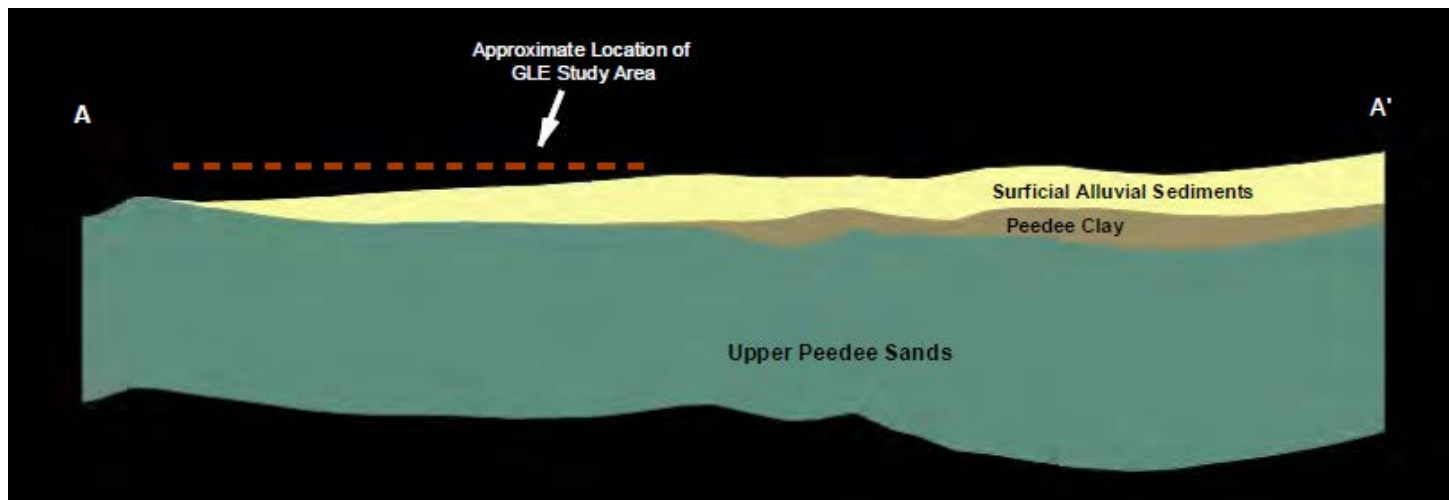

Groundwater Pathway

Groundwater Monitoring

- Will add 13 wells to eight currently in GLE Study Area
- Wells positioned in seven clusters
 - Two positioned near and slightly upgradient of main GLE operations building
 - Five positioned to cover the perimeter of the Proposed GLE Facility in downgradient locations
- Quarterly sampling
 - Analyzed for uranium and fluoride (Table 6-2)

Management and Tracking of Environmental Monitoring Data (6.C.)

QA Program

- Procedures for reviewing, handling, retaining, retrieving and maintaining records
- Records will include results of tests and inspections

Program-specific relational database

Data Tracked by Database Modules

- Designed to ensure sample completeness and to conduct timely reviews of monitoring results

Application of Monitoring Results (6.C.)

Internal Action Levels

- Primary purpose is to provide margin and identify off-standard conditions
- Provide guidance on compliance with regulatory requirements
- Levels will be specified in procedures
- Levels will be based on guidelines, regulations, best professional judgment, minimum detection limits, and historical data

Application of Monitoring Results

Correcting Problems

- Enter corrective action request into the CAP
- CAP captures precursors to more significant issues, possibly involving noncompliances
- CAP includes follow-up actions to verify proper implementation
- Investigation
 - Begin with decision to initiate immediate or long-term remedial actions
 - Possible re-sampling and analysis
 - Careful scrutiny of timing of incident