

Proposed Filtering Strategy

aprox 500 gpm to sprays
Reliable hardened wetwell and drywell vent
Containment pressure controller
Installed connections for spray external to reactor building

FLEX

> 300 gpm to RPV to support indefinite coping
Equipment protected from external hazards
Installed connections

RHV Order

A hardened vent

B.5.b

300 gpm in drywell
Connection points inside the reactor building, may require piping /valve disassembly for hookup
Only 12 hour capability requirement

BWR Mark I Results


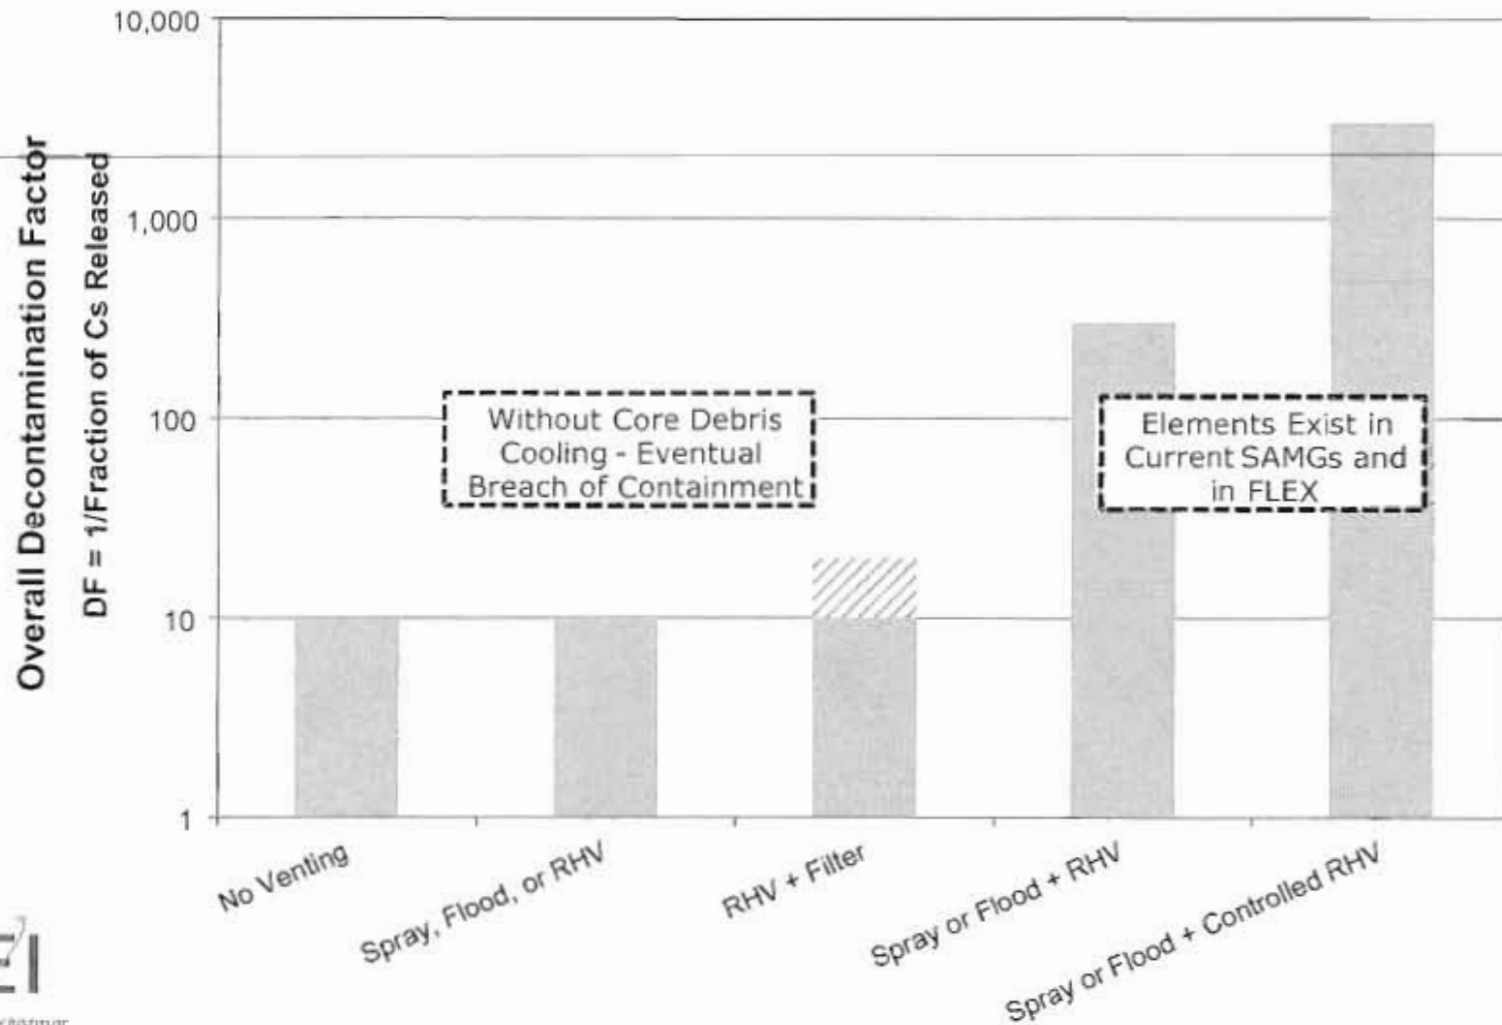


Table Top Process



Results – Overall DF

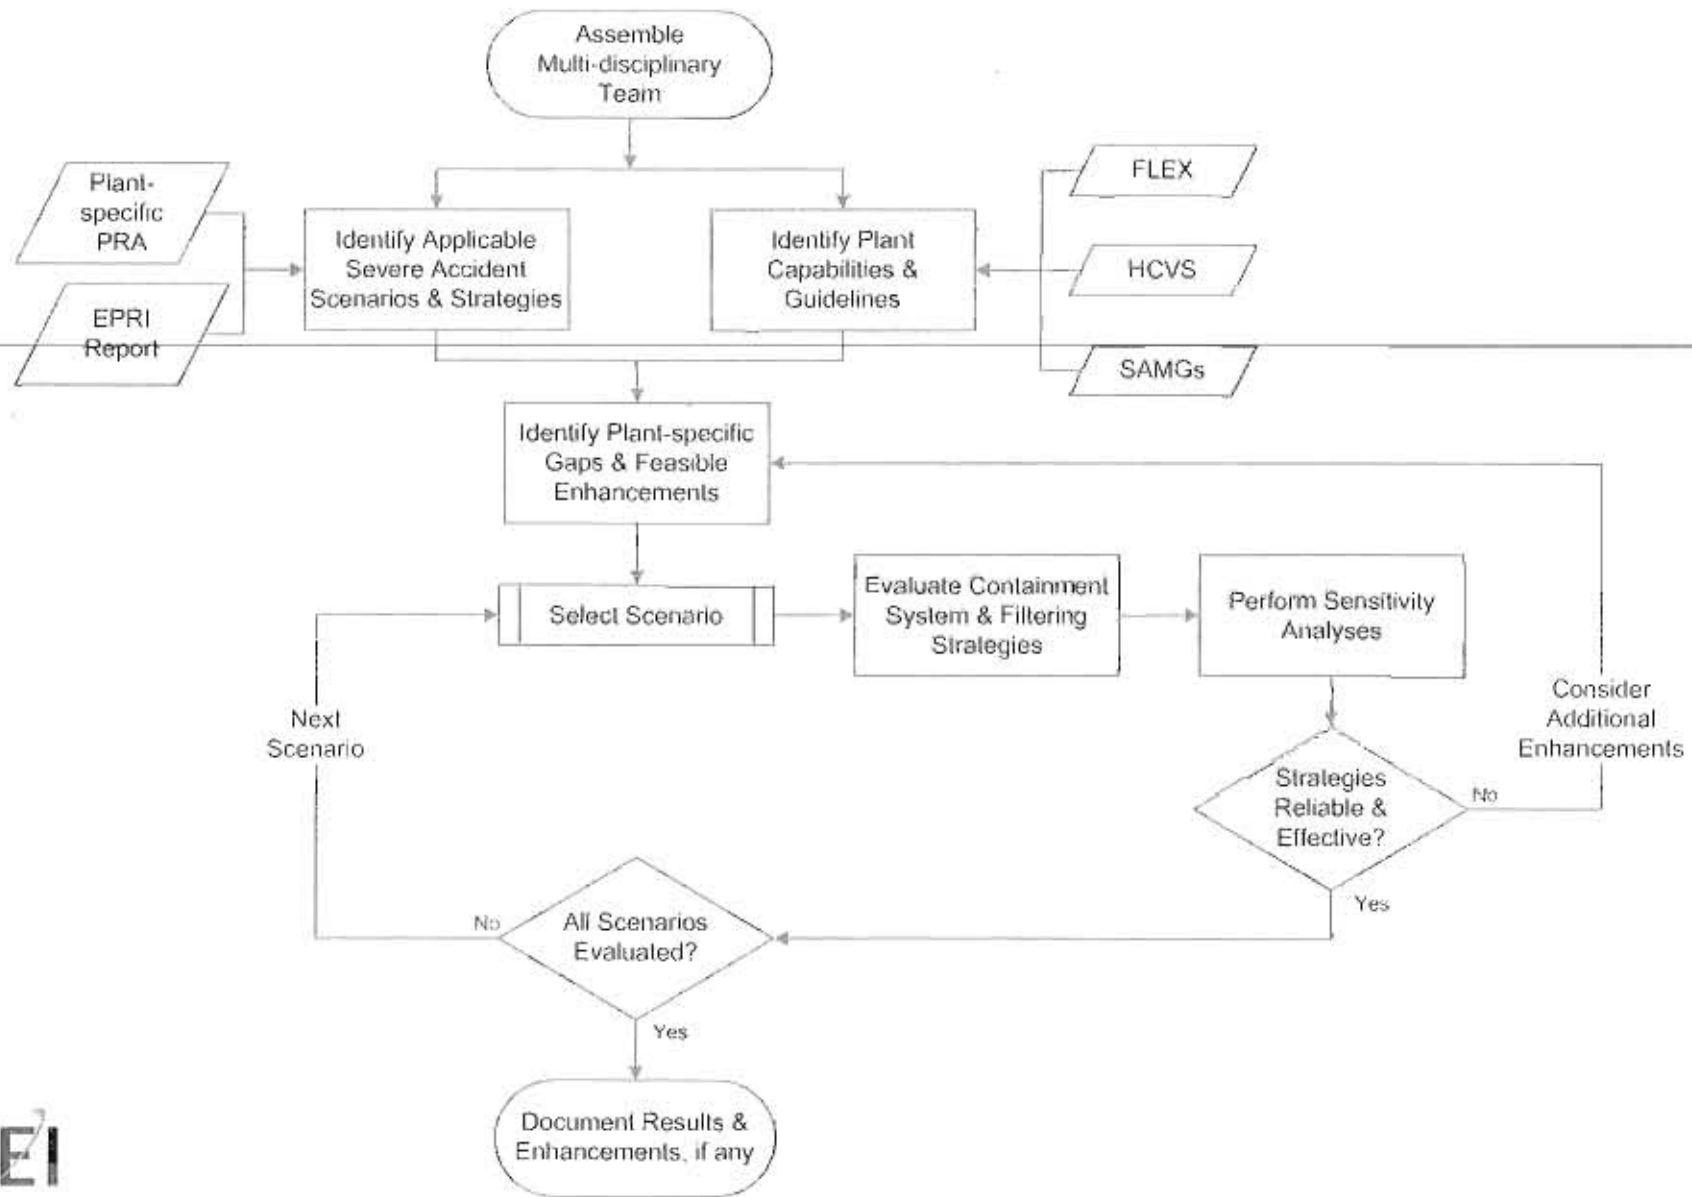