

## **Enclosure 4**

### **MFN 12-065, Revision 1**

#### **GE Hitachi Nuclear Energy, “Steam Dryer - Acoustic Load Definition,” NEDO-33312P Rev. 3, Class I (Non-Proprietary), February 2013**

##### **Public Version**

This is a non-proprietary version of Enclosure 1, from which the proprietary information has been removed. Portions of the document that have been removed are identified by white space within double brackets, as shown here [[ ]].

#### **IMPORTANT NOTICE REGARDING CONTENTS OF THIS DOCUMENT**

##### **Please Read Carefully**

The information contained in this document is furnished solely for the purpose(s) stated in the transmittal letter. The only undertakings of GEH with respect to information in this document are contained in the contracts between GEH and its customers or participating utilities, and nothing contained in this document shall be construed as changing that contract. The use of this information by anyone for any purpose other than that for which it is intended is not authorized; and with respect to any unauthorized use, GEH makes no representation or warranty, and assumes no liability as to the completeness, accuracy, or usefulness of the information contained in this document.



**HITACHI**

**GE Hitachi Nuclear Energy**

NEDO-33312

Revision 3

DRF Section 0000-0077-3671 R8

February 2013

*Non-Proprietary Information-Class I (Public)*

Engineering Report

**ESBWR STEAM DRYER ACOUSTIC LOAD DEFINITION**

*Copyright 2007, 2010, 2013 GE-Hitachi Nuclear Energy Americas LLC*

*All Rights Reserved*

**INFORMATION NOTICE**

This is a non-proprietary version of the document NEDE-33312P, Revision 3, which has the proprietary information removed. Portions of the document that have been removed are indicated by an open and closed bracket as shown here [[                      ]].

**IMPORTANT NOTICE REGARDING THE CONTENTS OF THIS REPORT**

**Please Read Carefully**

The information contained in this document is furnished for the purpose of supporting the NRC review of the certification of the ESBWR, with the information here being used as ESBWR supporting reference. The only undertakings of GE Hitachi Nuclear Energy (GEH) with respect to information in this document are contained in contracts between GEH and participating utilities, and nothing contained in this document shall be construed as changing those contracts. The use of this information by anyone other than for which it is intended is not authorized; and with respect to any unauthorized use, GEH makes no representation or warranty, and assumes no liability as to the completeness, accuracy, or usefulness of the information contained in this document.

### REVISION SUMMARY

This table includes revisions to NEDE-33312P from Revision 2 to Revision 3.

Location	Comment
Page vii	Updated the revision number of NEDE-33312P referenced in the ABSTRACT.
S1.0	3 <sup>rd</sup> bullet – deleted [[ ]] per MFN 12-130, dated December 12, 2012.
S1.0	Added 4 <sup>th</sup> bullet for MASR of 2.0; see MFN 12-130, dated December 12, 2012.
S1.0	Revised 6 <sup>th</sup> bullet to be consistent with application of MASR of 2.0 in dryer design.
S1.0	Corrected 7 <sup>th</sup> bullet from “steam dome pressure” to “dryer pressure loads.”
S1.0	Revised 8 <sup>th</sup> bullet from “in vessel instruments” to “on-dryer instruments”
S1.0	Deleted 9 <sup>th</sup> bullet consistent with deletion of PBLE “Method 2” per MFN 12-130, dated December 12, 2012.
S1.0	10 <sup>th</sup> bullet – deleted “and steam line” consistent with deletion of PBLE “Method 2” per MFN 12-130, dated December 12, 2012.
S1.0	Revised 12 <sup>th</sup> bullet to be consistent with revised end-to-end benchmark process in References 2 and 3.
S1.0	Revised last bullet to use on-dryer instrumentation for subsequent plants per MFN 12-130 dated December 12, 2012.
S2.2	[[ ]] consistent with deletion of PBLE “Method 2” per MFN 12-130, dated December 12, 2012.
S3.1	Included reference to Reference 3 in first paragraph.
S4.1	First paragraph - deleted “and steam line” consistent with deletion of PBLE “Method 2” per MFN 12-130, dated December 12, 2012.
S4.1	Added statement that the load projections in Figure 4.1-1 are illustrative of the design load definitions that will be used for the ESBWR dryer design.
S4.1	Deleted references to Reference 4 (NEDC-33408 S1 PBLE Method 2) consistent with MFN 12-130, dated December 12, 2012.

NEDO-33312 Revision 3  
Non-Proprietary Information-Class I (Public)

<b>Location</b>	<b>Comment</b>
S4.1	Edited 7 <sup>th</sup> and 8 <sup>th</sup> paragraphs for clarification.
S4.1	Included reference to Reference 3 in 9 <sup>th</sup> paragraph.
S6.0	Updated References 2 and 3 to be consistent with revisions to these reports.
S6.0	Deleted Reference 4 consistent with deletion of PBLE “Method 2” per MFN 12-130, dated December 12, 2012.
Attachment 1	Deleted.

## Table of Contents

Revision Summary.....	iii
Acronyms and Abbreviations .....	viii
1.0 INTRODUCTION .....	1
2.0 ESBWR DRYER CONFIGURATION .....	3
2.1 Dryer and RPV Geometry .....	3
2.2 Comparative CFD Analysis.....	6
3.0 ACOUSTIC FINITE ELEMENT MODELING OF THE RPV AND STEAM-LINES .....	7
3.1 RPV Steam Dome Acoustic Finite Element Model .....	7
3.2 Coupled RPV Steam Dome and Main steam Lines Acoustic Finite Element Model .....	8
4.0 FIV LOAD DEFINITION BASED ON DATA FROM PLANT INSTRUMENTATION.....	9
4.1 FIV Loads Developed from Data from Multiple Plants .....	9
5.0 FIV LOAD MITIGATION.....	15
5.1 FIV Load Mitigation Through Design .....	15
5.2 (Deleted).....	15
6.0 REFERENCES .....	18

**List of Tables**

Table 4.1-1 Comparison of Geometry and Flow Parameters .....	12
Table 4.1-2 RMS Comparison of Loads and Test Data.....	13

**List of Figures**

Figure 2.1-1. Comparison of Planned ESBWR and Typical ABWR Vessel Steam Regions .....4  
Figure 2.1-2. Depiction of ABWR Steam Dryer with Test Instrumentation.....5  
Figure 4.1-1. PSD Comparison of Loads and Test Data .....14  
Figure 5.2-1. (Deleted) .....16  
Figure 5.2-2. (Deleted) .....17

## ACRONYMS AND ABBREVIATIONS

<b>Term</b>	<b>Definition</b>
ABWR	Advanced Boiling Water Reactor
BWR	Boiling Water Reactor
CFD	Computation Fluid Dynamics
EPU	Extended Power Uprate
ESBWR	Economic Simplified Boiling Water Reactor
FRF	Frequency Response Functions
GEH	GE Hitachi Nuclear Energy
FE	Finite Element
FIV	Flow Induced Vibration
ID	Inside Diameter
MSIV	Main Steam Isolation Valve
MSL	Main Steam Line
OLTTP	Original Licensed Thermal Power
PBLE	Plant Based Load Evaluation
PSD	Power Spectral Density
RMS	Root Mean Square
RPV	Reactor Pressure Vessel
SST	Shear Stress Transport

### **ABSTRACT**

This document describes the GE Hitachi Nuclear Energy (GEH) approach used to develop the Economic Simplified Boiling Water Reactor (ESBWR) flow induced vibration (FIV) load definition for the ESBWR steam dryer. There has been much development in FIV load modeling in the last several years, including techniques developed using measurements taken from several operating plants. Events in the industry including technical developments and regulatory interactions have dictated that GEH further develop the ESBWR Steam Dryer Load Definition approach. The current GEH approach to load definition is defined as the Plant Based Load Evaluation (PBLE) method.

Revision 3 of this report describes the ESBWR Steam Dryer Load Definitions with the PBLE method. The GEH approach to the ESBWR FIV load definition focuses on utilizing an ABWR-based steam dryer design, allowing the use of instrumented ABWR in-plant steam dryer test data to form the basis for the ESBWR load definition. This basic load definition will then be further improved through comparison with testing and operating experience gained from GEH Extended Power Uprates (EPUs) conducted on several operating plants.

The development of the FIV loads as described here are in accordance with Regulatory Guide 1.20 Revision 3. The FIV loads will be used in combination with other design loads in qualifying the steam dryer as described in Engineering Report NEDE-33313P.

## 1.0 INTRODUCTION

This document describes the Flow Induced Vibration (FIV) loads for the Economic Simplified Boiling Water Reactor (ESWR) steam dryer. The development of the FIV loads as described here are in accordance with Regulatory Guide 1.20 Revision 3. The FIV loads will be used in combination with other design loads in order to qualify the steam dryer as described in NEDE-33313P.

The FIV loads are unsteady differential pressure loads created by the unsteady flow adjacent to the steam dryer (hydrodynamic FIV loads) and from acoustic pressure waves present in the reactor dome and steam lines that create unsteady differential pressure forces on steam dryer components (acoustic loads). The loads addressed here are associated with normal operation of the plant.

There is no purely analytical methodology for accurately predicting the FIV loads resulting from hydrodynamic and acoustic load sources in a complex system such as the Reactor Pressure Vessel (RPV) reactor dome and steam lines. Therefore, the approach used on the ESBWR includes the following:

- []

|  
|  
|  
  
|  
|  
|  
  
|  
|

]].

## 2.0 ESBWR DRYER CONFIGURATION

### 2.1 Dryer and RPV Geometry

A key aspect in the development of the ESBWR FIV load definition is to incorporate the ABWR dryer geometry. By minimizing the geometrical differences between the ABWR and the ESBWR steam dryers, this approach will build on the successful operating experience of the ABWR steam dryer and will allow the ABWR steam dryer measurement data to be used in developing the FIV load definition for the ESBWR. The ESBWR and ABWR have the same RPV inside diameter (ID) and main steam line (MSL) outlet nozzle configuration. Both plants have the venturi-flow restrictor as a component of the MSL nozzle. Figure 2.1-1 provides a comparison of the ABWR and ESBWR vessel in the steam dome region.

The six bank dryer used in the ESBWR will have similar vane height, skirt length, and water submergence as the ABWR steam dryer. The ESBWR steam flow rate will be approximately 15% higher than the ABWR. There is less neck down in the vessel head flange region of the ESBWR than in the ABWR. This will provide additional clearance allowing a larger dryer diameter and longer vane banks (more vanes) to be used in the ESBWR dryer steam.

[[


]] There is less vessel neck-down at the vessel flange; therefore, the plenum area between the dryer and vessel above the MSL nozzles is larger.

The vessel head for ABWR is hemispherical; the ESBWR uses a torispherical head, [[

]] The effect of these differences on the acoustic response will be evaluated as discussed in Sections 3.1 and 3.2 of this report.

The ABWR steam dryer, shown in Figure 2.1-2, was instrumented as part of the ABWR startup and power ascension test program. This instrumentation provides test data that can be used as a benchmark for the ESBWR FIV design loads. There have been no identified FIV problems with the in-service ABWR steam dryers. As shown in Figure 4.1-1, the ABWR steam dryer test data indicates that the amplitudes of acoustic loads in the ABWR dome are low.

ESBWR

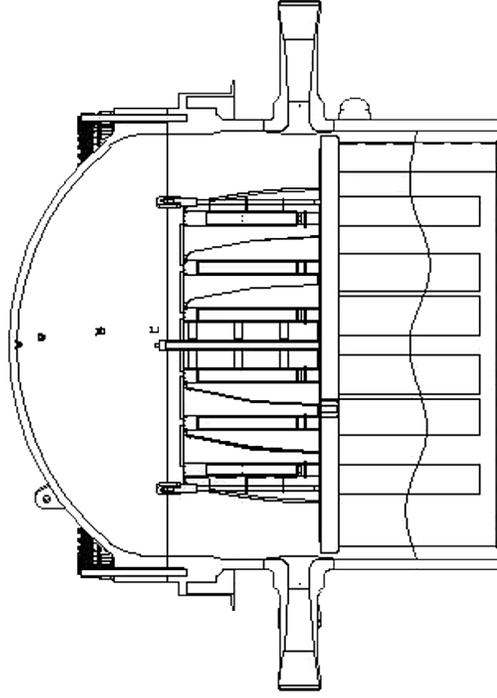

ABWR

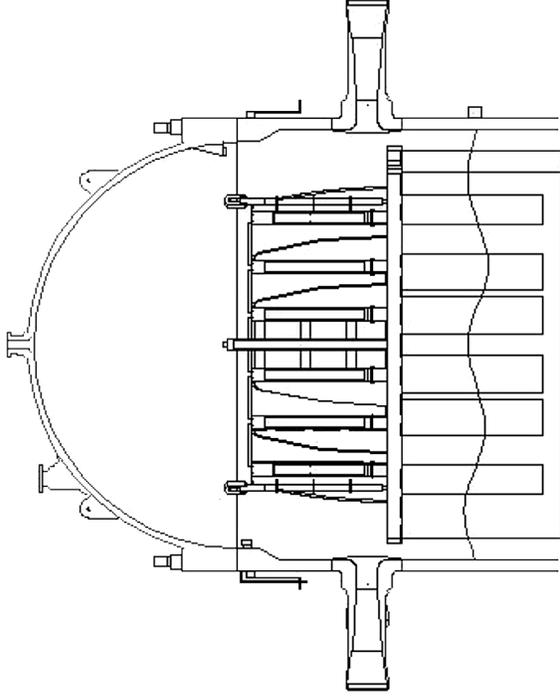


Figure 2.1-1. Comparison of Planned ESBWR and Typical ABWR Vessel Steam Regions

[[

]]

**Figure 2.1-2. Depiction of ABWR Steam Dryer with Test Instrumentation**

P: Pressure Transmitter

S: Strain Gage

A: Accelerometer

## 2.2 Comparative CFD Analysis

A comparison of the ABWR and ESBWR geometry and flow changes to the flow patterns and hydrodynamic loads on the steam dryer is further evaluated with CFD. The steam dome, outlet nozzle and a portion of the downstream steam line of the ABWR and ESBWR is modeled with CFD. The CFD study [[

]]

|

### **3.0 ACOUSTIC FINITE ELEMENT MODELING OF THE RPV AND STEAM-LINES**

#### **3.1 RPV Steam Dome Acoustic Finite Element Model**

[[

|

]]

### **3.2 Coupled RPV Steam Dome and Main steam Lines Acoustic Finite Element Model**

[[

]]

## **4.0 FIV LOAD DEFINITION BASED ON DATA FROM PLANT INSTRUMENTATION**

### **4.1 FIV Loads Developed from Data from Multiple Plants**

[[

]]

Figure 4.1-1 includes comparison of instrumented steam dryer data for [[

]]

Table 4.1-1 provides a comparison of geometry and flow parameters for the ESBWR, the ABWR at full power and the BWRs at extended power uprate conditions.

Figure 4.1-1 includes a comparison of PBLE load projections based on test data from both [[

]]

A comparison of the root mean square (RMS) values of the selected plant data sets and the ABWR test data shown in Figure 4.1-1 is included in Table 4.1-2. The design loads RMS values are approximately 50% higher than the measured ABWR data factored to ESBWR steam flow velocity conditions.

The ESBWR steam dryer loads are generated by [[

]]

The structural assessment for each set includes a +/-10% frequency variation to provide a range of applied load frequencies. [[

]]

A frequency dependent bias and uncertainty evaluation is included in the structural evaluation for areas of the steam dryer with the highest alternating stress.

[[

]] This methodology identifies the acoustic load frequencies and associated steam dryer structural response modes that are most affected by FIV loads.  
[[

]]



**Table 4.1-2 RMS Comparison of Loads and Test Data**

	[[			
				]]

[[

**Figure 4.1-1. PSD Comparison of Loads and Test Data**

]]

## **5.0 FIV LOAD MITIGATION**

### **5.1 FIV Load Mitigation Through Design**

As described in Section 3, [[

]]

### **5.2 (Deleted)**

**Figure 5.2-1. (Deleted)**

**Figure 5.2-2. (Deleted)**

## 6.0 REFERENCES

- [1] Regulatory Guide 1.20, “Comprehensive Vibration Assessment Program For Reactor Internals During Preoperational And Initial Startup Testing,” Revision 3, March 2007.
- [2] GE Hitachi Nuclear Energy, “Steam Dryer - Structural Evaluation,” NEDE-33313P, Revision 3, Class III (Proprietary), February 2013, and NEDO-33313, Revision 3, Class I (Non-Proprietary), February 2013.
- [3] GE Hitachi Nuclear Energy, “ESBWR Steam Dryer – Plant Based Load Evaluation Methodology,” NEDC-33408P, Revision 2, Class III (Proprietary), February 2013, and NEDO-33408, Revision 2, Class I (Non-proprietary), February 2013.