

Appendix B

Cost Estimating and Best Practices

DRAFT

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Contents

Abbreviations and Acronyms	4
B.1. Purpose.....	5
B.2. Guidance Overview.....	5
B.2.1 Purpose of the Cost Estimate	6
B.2.2 Overview of the Cost Estimating Process.....	6
B.3. Cost Estimating Inputs	9
B.3.1 Project Requirements	10
B.3.2 Documentation Requirements	10
B.4. Cost Estimating Characteristics and Classifications	10
B.4.1 Planning the Cost Estimates.....	10
B.4.2 Cost Estimate Classifications.....	11
B.4.3 Cost Estimate Ranges	13
B.5. Cost Estimating Methods	13
B.5.1 Engineering Build-up Estimating Method.....	14
B.5.2 Parametric Estimating Techniques	15
B.5.2.1 Cost Estimating Relationships.....	15
B.5.2.2 End Product Unit Method.....	16
B.5.2.3 Physical Dimension Method	16
B.5.2.4 Capacity Factored Method.....	16
B.5.2.5 Ratio or Factor Method	17
B.5.3 Other Estimating Methods	18
B.5.3.1 Level of Effort Method.....	18
B.5.3.2 Specific Analogy Method	18
B.5.3.3 Expert Opinion Method	19
B.5.3.4 Learning Curve Method	20
B.6 Methods of Estimating Other Life-Cycle Costs	21
B.6.1 Count Deliverables Method.....	22
B.6.2 Full-Time Equivalent Method	22
B.6.3 Percentage Method.....	22
B.7 Cost Estimating Development Process.....	22
B.7.1 Overview of the Cost Estimating Process.....	23
B.7.2 Estimate Planning	23
B.7.3 Cost Estimate Inputs.....	24
B.7.3.1 Sources of Cost Estimate Data.....	24

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

B.7.3.2	Cost Estimate Development Considerations	26
B.7.4	Cost Estimate Preparation	27
B.7.4.1	Work Breakdown Structure	29
B.7.4.2	Collect, Validate, and Adjust Data	30
B.7.4.3	Select Cost Estimating Methods or Models	30
B.7.4.4	Estimate Costs	32
B.7.4.5	Conduct Uncertainty Analysis	32
B.7.4.6	Cost Estimate Results	32
B.7.5	Cost Estimate Review	33
B.7.6	Estimate Reconciliation	33
B.7.7	Cost Estimate Documentation	33
B.7.7.1	Cost Estimate Package	34
B.8	Cost Estimating Outputs	35
B.8.1	Baselines	35
B.8.2	Analysis	35
B.9	Cost Estimating Expectations	36
B.9.1	Summary of Expectations – cost estimate is of sufficient quality, is appropriate for its intended use, and has been subjected to internal checks and reviews	36
B.9.2	Independent Cost Estimates	36
B.10	References	37
Enclosure B-1	Cost Estimate Review Criteria	39
Enclosure B-2:	Definitions	40
Enclosure B-3	Independent Cost Review and Independent Cost Estimate Guidance	47
Enclosure B-4:	Expectations for Quality Cost Estimates	50
Enclosure B-5:	Cross Reference to GAO-09-3SP	50

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Abbreviations and Acronyms

AACEI	Advancement of Cost Engineering International
BWR	boiling water reactor
CER	cost estimating relationship
DOE	U.S. Department of Energy
EEDB	Energy Economic Data Base
EAC	estimate at completion
E.O.	Executive Order
EVM	earned value management
FTE	full-time equivalent
GAO	Government Accountability Office
ICE	independent cost estimate
ISPA	International Society of Parametric Analysts
LCC	life-cycle cost
LCCE	life-cycle cost estimate
LOE	level of effort
NRC	U.S. Nuclear Regulatory Commission
PEI	parametric estimating initiative
PWR	pressurized water reactors
RP	recommended practices
SCEA	Society for Cost Estimating and Analysis
WBS	work breakdown structure

B.1. Purpose

The purpose of this *Cost Estimating and Best Practices Appendix* is to provide uniform guidance and best practices that describe the methods and procedures recommended for use at the U.S. Nuclear Regulatory Commission (NRC) in preparing cost estimates that are specific to all work including, but not limited to, preparing cost estimates for regulatory analyses, backfit analyses, and environmental analyses. Practices relative to estimating life-cycle cost (LCC) are described. LCCs include all anticipated costs associated with a project or program alternative throughout its life; i.e., from authorization through end-of-life-cycle operations.

This appendix does not impose new requirements, establish NRC policy, or instruct NRC staff in preparing cost estimates. Rather, this appendix provides information on accepted standard industry estimating best practices and processes—including practices promulgated by the Government Accountability Office (GAO) *Cost Estimating and Assessment Guide* (GAO-09-3SP) (Ref. 2). The GAO has specifically recommended that NRC cost estimating guidance be aligned with relevant cost estimating best practices identified in the *GAO Cost Estimating and Assessment Guide* to ensure that future cost estimates are prepared in accordance with relevant cost estimating best practices.¹

B.2. Guidance Overview

High quality cost estimates provide an essential element for successful project and program management. The main objective of this appendix is to provide guidance that should improve the quality of cost estimates supporting Commission decisionmaking. The cost estimating principles and processes provided herein meet or exceed Federal and NRC requirements while utilizing industry standards and best practices, where appropriate.

High-quality cost estimates should satisfy four characteristics as established by industry best practices—they should be credible, well-documented, accurate, and comprehensive.² An estimate should be:

- credible when the assumptions and estimates are realistic. It has been cross-checked and reconciled with independent cost estimates, the level of confidence associated with the point estimate³ has been identified, and a sensitivity analysis (i.e., an examination of the effect of changing one variable relative to the cost estimate while all other variables are held constant in order to identify which variable most affects the cost estimate) has been conducted;
- well-documented when supporting documentation includes a narrative explaining the process, sources, and methods used to create the estimate and identifies the underlying data and assumptions used to develop the estimate;

¹ See GAO report GAO-15-98, *Nuclear Regulatory Commission: NRC Needs to Improve Its Cost Estimates by Incorporating More Best Practices*, “Recommendation for Executive Action,” page 21) (Ref. 11).

² *GAO Cost Estimating and Assessment Guide*, GAO-09-3SP (Ref. 2)).

³ A point estimate is the best guess or the most likely value for the cost estimate, given the underlying data. The level of confidence for the point estimate is the probability that the point estimate will actually be met.

Appendix B: Cost Estimating and Best Practices

- accurate when actual costs deviate little from the assessment of costs likely to be incurred; and
- comprehensive when it accounts for all possible costs associated with a project, is structured in sufficient detail to ensure that costs are neither omitted nor duplicated, and has been formulated by an estimating team with composition commensurate with the assignment.

This guide contains industry best practices for carrying out these steps. Enclosure B-5 contains a cross reference of the 12 key GAO estimating steps and their implementing tasks to the sections of this appendix wherein NRC guidance for accomplishing those steps are addressed and discussed.

B.2.1 Purpose of the Cost Estimate

The purpose of a cost estimate is determined by its intended use (e.g., studies, regulatory analyses, backfitting analyses, environmental analyses) and its intended use determines its scope and detail. Accordingly, the principal purposes of a regulatory cost estimate are to help ensure the following:

- Regulatory decisions made in support of statutory responsibilities are based on adequate information concerning the need for and consequences of proposed actions.
- Appropriate alternative approaches to achieve regulatory objectives are identified and analyzed.
- The proposed action is the clearly preferred alternative.
- Proposed actions subject to the backfit rule (10 CFR 50.109), (Ref. 12) and not within the exceptions at 10 CFR 50.109(a)(4), provide a substantial⁴ increase in the overall protection of the public health and safety or the common defense and security and that the direct and indirect costs of implementation are justified in view of this substantial increase in protection.

B.2.2 Overview of the Cost Estimating Process

Traditionally, cost estimates are produced by gathering input, developing the cost estimate and its documentation, and generating necessary output. Table B-1 explains the GAO cost estimating process steps that should be followed if accurate and credible cost estimates are to be developed. These best practices represent an overall process of established, repeatable

⁴ The Commission has stated that “substantial” means important or significant in a large amount, extent, or degree (Ref. 1). Applying such a standard, the Commission would not ordinarily expect that safety-applying improvements would be required as backfits that result in an insignificant or small benefit to the public health and safety, regardless of costs. On the other hand, the standard is not intended to be interpreted in a manner that would result in disapprovals of worthwhile safety or security improvements having costs that are justified in view of the increased protection that would be provided. This approach is flexible enough to allow for qualitative arguments that a given proposed rule would substantially increase safety. The approach is also flexible enough to allow for arguments that consistency with national and international standards, or the incorporation of widespread industry practices, contributes either directly or indirectly to a substantial increase in safety. Such arguments concerning consistency with other standards, or incorporation of industry practices, would have to rest on the particulars of a given proposed rule. The Commission also believes that this approach of “substantial increase” is consistent with the Agency’s policy of encouraging voluntary initiatives.

DISCLAIMER: *This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.*

Appendix B: Cost Estimating and Best Practices

methods that result in high-quality cost estimates that are comprehensive and accurate and that can be easily and clearly traced, replicated, and updated.

This cost estimating process contains 12 steps that should result in reliable and valid cost estimates that can be used for making informed decisions. Table B-1 identifies all 12 steps in this process.

Table B-1 The Twelve Steps of a High-Quality Cost Estimating Process

Step	Description	Associated tasks
1	Define estimate's purpose	<ul style="list-style-type: none"> • Determine estimate's purpose, required level of detail, and overall scope; • Determine who will receive the estimate
2	Develop estimating plan	<ul style="list-style-type: none"> • Determine the composition of the cost estimating team and develop the master schedule; • Determine who will do the independent cost estimate; • Outline the cost estimating approach; • Develop the estimate timeline
3	Define program characteristics	<ul style="list-style-type: none"> • In a technical baseline description document, identify the program's purpose and its system and performance characteristics as well as all system configurations; • Identify any technology implications; • Develop the program acquisition schedule and acquisition strategy; • Determine the relationship to other existing systems, including predecessor or similar legacy systems; • Identify support (manpower, training, etc.) and security needs and risk items; • Determine system quantities for development, test, and production; • Develop deployment and maintenance plans
4	Determine estimating structure	<ul style="list-style-type: none"> • Define a work breakdown structure (WBS) and describe each element in a WBS dictionary (a major automated information system may have only a cost element structure); • Choose the best estimating method for each WBS element; • Identify potential cross-checks for likely cost and schedule drivers; • Develop a cost estimating checklist
5	Identify ground rules and assumptions	<ul style="list-style-type: none"> • Clearly define what the estimate includes and excludes; • Identify global and program-specific assumptions, such as the estimate's base year, including time-phasing and life cycle; • Identify program schedule information by phase and program acquisition strategy; • Identify any schedule or budget constraints, inflation assumptions, and travel costs; • Specify equipment the government is to furnish as well as the use of existing facilities or new modification or development; • Identify prime contractor and major subcontractors; • Determine technology refresh cycles, technology assumptions, and new technology to be developed; • Define commonality with legacy systems and assumed heritage savings; • Describe effects of new ways of doing business

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

Step	Description	Associated tasks
6	Obtain data	<ul style="list-style-type: none"> • Create a data collection plan with emphasis on collecting current and relevant technical, programmatic, cost, and risk data; • Investigate possible data sources; • Collect data and normalize them for cost accounting, inflation, learning, and quantity adjustments; • Analyze the data for cost drivers, trends, and outliers and compare results against rules of thumb and standard factors derived from historical data; • Interview data sources and document all pertinent information, including an assessment of data reliability and accuracy; • Store data for future estimates
7	Develop point estimate and compare it to an independent cost estimate	<ul style="list-style-type: none"> • Develop the cost model, estimating each WBS element, using the best methodology from the data collected, and including all estimating assumptions; • Express costs in constant year dollars; • Time-phase the results by spreading costs in the years they are expected to occur, based on the program schedule; • Sum the WBS elements to develop the overall point estimate; • Validate the estimate by looking for errors like double counting and omitted costs; • Compare estimate against the independent cost estimate and examine where and why there are differences; • Perform cross-checks on cost drivers to see if results are similar; • Update the model as more data become available or as changes occur and compare results against previous estimates
8	Conduct sensitivity analysis	<ul style="list-style-type: none"> • Test the sensitivity of cost elements to changes in estimating input values and key assumptions; • Identify effects on the overall estimate of changing the program schedule or quantities; • Determine which assumptions are key cost drivers and which cost elements are most affected by changes
9	Conduct risk and uncertainty analysis	<ul style="list-style-type: none"> • Determine and discuss with technical experts the level of cost, schedule, and technical risk associated with each WBS element; • Analyze each risk for its severity and probability; • Develop minimum, most likely, and maximum ranges for each risk element; • Determine type of risk distributions and reason for their use; • Ensure that risks are correlated; • Use an acceptable statistical analysis method (e.g., Monte Carlo simulation) to develop a confidence interval around the point estimate; • Identify the confidence level of the point estimate; • Identify the amount of contingency funding and add this to the point estimate to determine the risk-adjusted cost estimate; • Recommend that the project or program office develop a risk management plan to track and mitigate risks
10	Document the estimate	<ul style="list-style-type: none"> • Document all steps used to develop the estimate so that a cost analyst unfamiliar with the program can recreate it quickly and produce the same result; • Document the purpose of the estimate, the team that prepared it, and who approved the estimate and on what date;

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

Step	Description	Associated tasks
		<ul style="list-style-type: none"> • Describe the program, its schedule, and the technical baseline used to create the estimate; • Present the program's time-phased life-cycle cost; • Discuss all ground rules and assumptions; • Include auditable and traceable data sources for each cost element and document for all data sources how the data were normalized; • Describe in detail the estimating methodology and rationale used to derive each WBS element's cost (prefer more detail over less); • Describe the results of the risk, uncertainty, and sensitivity analyses and whether any contingency funds were identified; • Document how the estimate compares to the funding profile; • Track how this estimate compares to any previous estimates
11	Present estimate to management for approval	<ul style="list-style-type: none"> • Develop a briefing that presents the documented life-cycle cost estimate; • Include an explanation of the technical and programmatic baseline and any uncertainties; • Compare the estimate to an independent cost estimate (ICE) and explain any differences; • Compare the estimate (life-cycle cost estimate (LCCE)) or independent cost estimate to the budget with enough detail to easily defend it by showing how it is accurate, complete, and high in quality; • Focus in a logical manner on the largest cost elements and cost drivers; • Make the content clear and complete so that those who are unfamiliar with it can easily comprehend the basis for the estimate results; • Make backup slides available for more probing questions; • Act on and document feedback from management; • Seek acceptance of the estimate
12	Update the estimate to reflect actual costs and changes	<ul style="list-style-type: none"> • Update the estimate to reflect changes in technical or program assumptions to keep it current as the program passes through new phases and milestones; • Replace estimates with EVM EAC and independent estimate at completion (EAC) from the integrated EVM system; • Report progress on meeting cost and schedule estimates; • Perform a post mortem and document lessons learned for those elements whose actual costs or schedules differ from the estimate; • Document all changes to the program and how they affect the cost estimate

^a In a data-rich environment, the estimating approach should precede the investigation of data sources; in reality, a lack of data often determines the approach.

Source: GAO-09-3SP, Table 2

B.3. Cost Estimating Inputs

Cost estimate development is initiated by inputs to the process. These inputs are process elements that can be either one-time or iterative in nature. Internal NRC reviews or external feedback may identify the need to revisit various process elements to improve the quality of the cost estimate. Cost estimates that are developed early in the analysis of proposed regulatory alternatives may not be derived from detailed engineering designs and specifications, but the cost estimate should be sufficiently developed to support the purpose intended. During the life

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

of the project, cost estimate inputs become increasingly more definitive, and reflect the scope and specificity defined for the project.

B.3.1 Project Requirements

Cost estimates are performed for regulatory analyses, backfitting analyses, and environmental analyses. Each analysis may have more specific, detailed, or different requirements.

B.3.2 Documentation Requirements

Scope assumptions, regulatory baseline determinations, and likely alternatives are documented. The analyses consider accuracy of supporting estimates and project specific analysis.

B.4. Cost Estimating Characteristics and Classifications

B.4.1 Planning the Cost Estimates

Table B-2 describes the cost estimate planning steps required to produce credible cost estimates.⁵ In a 2006 survey to identify the characteristics of a good estimate, participants from a wide variety of industries—including aerospace, automotive, energy, consulting firms, the Navy, and the Marine Corps—concurred that the characteristics listed in the table are valid.⁶ The GAO also found that despite the fact that these characteristics have been published and known for decades, many agencies still lack the ability to develop cost estimates that can satisfy these basic characteristics.

Table B-2 Basic Characteristics of Credible Cost Estimates

Cost Estimate Planning Step	Description
Clear Identification of Task	The cost analyst must be provided with the scope description, ground rules and assumptions, and technical and performance characteristics. Estimate constraints and conditions must be clearly identified to ensure the preparation of a well-documented estimate.
Broad Participation in Preparing Estimates	Stakeholders should be involved in providing requirements, system parameters, and cost data based on stated regulatory objectives. External data should be independently verified for accuracy, completeness, and reliability.
Use of Valid Data	Use numerous sources of suitable and relevant data. Use relevant, historical data from similar work to project costs of the new work. The historical data should be directly related to the scope's performance characteristics.
Standardized Structure for the Estimate	Use of a standard WBS that is as detailed as appropriate, continually refining it as the maturity of the scope develops and the regulatory actions become

⁵ GAO-09-3SP

⁶ *Id.*, Chapter 1, page 7.

Appendix B: Cost Estimating and Best Practices

Cost Estimate Planning Step	Description
	more defined. The WBS helps to ensure that no necessary portions of the estimate (and schedule) are omitted or duplicated. This makes it easier to make comparisons to similar work.
Provision for Uncertainties and Risk	Identify the confidence level (e.g., 80 percent) appropriate for the cost estimate. Identify uncertainties and develop an allowance to mitigate cost effects of uncertainties.
Recognition of Escalation	Ensure that economic escalation ⁷ is properly and realistically reflected in the cost estimate. Assumptions need to be clearly noted. The source of escalation information used should be identified and the applicability of the rates should be explained and justified.
Recognition of Excluded Costs	Include all costs associated with the scope of work; if any cost has been excluded, disclose and include a rationale for the exclusion.
Independent Review of Estimates	Conducting an independent review of an estimate is crucial to establishing confidence in the estimate. The independent reviewer should verify, modify, and validate an estimate to ensure realism, completeness, and consistency.
Revision of Estimates for Significant Changes	Update estimates to reflect changes during the project. Large changes that affect costs can significantly influence decisions. Such changes should be appropriately justified and explained.

Source: GAO-09-3SP, Table 1, based upon GAO table

B.4.2 Cost Estimate Classifications

Cost estimates have common characteristics. The most common characteristics are levels of definition, requirements, and techniques used. These characteristic levels are generally grouped into cost estimate classifications. Cost estimate classifications may be used with any type of project or work and may include consideration of (1) where a project stands in its life cycle, (2) level of definition (amount of information available), (3) techniques to be used in estimation (e.g., parametric vs. definitive), and/or (4) time constraints and other estimating variables.

Typically, as a project evolves, it becomes more definitive. Cost estimates depicting evolving projects or work also become more definitive over time. Determinations of cost estimate classifications help ensure that the cost estimate quality is appropriately considered. Classifications may also help determine the appropriate application of contingency, escalation, use of direct/indirect costs (as determined by cost estimate techniques), etc.

Widely accepted cost estimate classifications are found in the Association for Advancement of Cost Engineering International (AACEI), Recommended Practices (RP) No. 17R-97 (Ref. 5) and RP No. 18R-97 (Ref. 6). The five suggested cost estimate classifications are listed in Table B-3 along with their primary and secondary characteristics and the estimate uncertainty range, as a function of the estimate class.

⁷ The practice of inflating the price of goods and services using an appropriate consumer price index to account for changes in prices over time.

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

Table B-3 Cost Estimate Classification

ESTIMATE CLASS	<i>Primary Characteristic</i>	<i>Secondary Characteristic</i>		
	DEGREE OF PROJECT DEFINITION Expressed as % of complete definition	END USAGE Purpose of estimate	METHODOLOGY Typical Estimating Methodology	EXPECTED ACCURACY RANGE Typical variation in low and high ranges
Class 5	0% to 2%	Concept	Capacity factored, parametric models, judgment, or analogy	Low: -20% to -50% High: +30% to +100%
Class 4	1% to 15%	Study or feasibility	Equipment factored, parametric models, judgment, or analogy	Low: -15% to -30% High: +20% to +50%
Class 3	10% to 40%	Budget authorization	Semi-detailed unit costs	Low: -10% to -20% High +10% to +30%
Class 2	30% to 70%	Bid / tender	Detailed unit costs with forced detailed take-off	Low: -5% to -15% High +5% to +20%
Class 1	70% to 100%	Check estimate or bid/tender	Detailed unit costs with forced detailed take-off	Low: -3% to -10% High +3% to +15%

- a The state of scope and requirements definition and the availability of applicable reference cost data can significantly affect the expected accuracy range.
 - b The expected accuracy range low and high values represents typical percentage variation of actual costs from the cost estimate after application of contingency (typically at 50 percent level of confidence) for a given scope)
- Source: DOE Cost Estimating Guide, Table 4.3 (Ref. 3)

Table B-3 is intended only as an illustration of the general relationship between estimate accuracy and the level of specificity defined (e.g., level of project definition or level of engineering complete). As described in AACEI’s *Recommended Practices on Estimate Classification* (Ref. 5), there is no absolute standard range on any estimate or class of estimate. The common +/- percent measure associated with an estimate is a useful simplification given that each individual estimate is associated with a different level of uncertainty.

Although the level of project definition is an important determinant of estimate accuracy, there are other factors which also affect it. Some of these other factors include the quality of reference cost estimating data (i.e., material pricing, labor hours, labor wage rates), the quality of the assumptions used in preparing the estimate, the state of new technology in the project, the experience and skill level of the cost analyst, the specific estimating techniques used, the level of effort or time budgeted to prepare the estimate, and extraneous market conditions (e.g., periods of rapid price escalation, labor climate factors).

As a general rule, particularly for regulatory actions that are in the early stages of development, a combination of estimate classifications must be used to develop the estimate. In these situations, the analyst should use a combination of detailed unit cost estimating (Class 1) techniques for work that will be executed in the near future, preliminary estimating (Class 3) techniques for work that is currently in the planning stages but less defined, and order of magnitude estimating (Class 5) techniques for future work that has not been well defined. For example, the regulatory basis phase is a Class 5 estimate, the proposed rule phase estimate is

DISCLAIMER: *This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.*

Appendix B: Cost Estimating and Best Practices

a Class 4, and the final rule phase is a Class 3 estimate, although specific cost elements within any of these three phases may be estimated at more detailed levels (e.g., Class 1 or Class 2).

B.4.3 Cost Estimate Ranges

When preparing cost estimates for early conceptual designs, it is important to realize that variations in the design basis will have the greatest impact on costs. Estimating tools and methods, while important, are not usually the main problem during the early stages of a project when estimate accuracy is poorest. In the early phases of defining and evaluating proposed regulatory requirements, effort should be directed towards establishing a better design basis than concentrating on utilizing more detailed estimating methods.

The cost estimate range (lower and upper bounds) is determined by independently assessing the lower and upper cost estimate range for each cost element. In some situations, the range may in part be a function of scope variability (e.g., if a decision to add five or 10 submittals is pending) or could result from cost and schedule estimate uncertainties as part of the risk analysis.

The lower bound of the cost range may represent a scenario where the analyst has determined a low likelihood of impact and therefore it may not need additional resources to modify the current design or practice.

The upper bound of the cost range may represent a scenario where the analyst determined a large cost uncertainty associated with the required regulatory treatment for the modification, lack of specificity in the process steps or controls, or other cost drivers. Regardless, the cost estimates should be unbiased. Uncertainty should be reflected in the estimate range, and not in padding the costs of each element or component of the estimate.⁸ The use of sensitivity analysis and uncertainty analysis (discussed elsewhere) provide a means to determine the contingency amount required for a project budget. Therefore, contingency should not be added to the upper range cost estimate.

B.5. Cost Estimating Methods

Many cost estimating methods and techniques are available to use in performing a cost estimate. Depending on project scope, estimate purpose, level of project definition, and availability of cost estimating resources, the analyst may use one, or a combination, of these techniques. As shown in Table B-3, as the level of project definition increases, the estimating methodology tends to progress from conceptual (judgment, analogy, parametric) techniques to

⁸ GAO-09-3SP defines two types of contingency—contingency reserve and management reserve. Contingency reserve represents funds held at or above the program office for “unknown unknowns” that are outside a contractor’s control. In this context, contingency funding is added to an estimate to allow for items, conditions, or events for which the state, occurrence, or effect is uncertain and experience shows are likely to result in additional costs. Management reserve funds, in contrast, are for “known unknowns” that are tied to the contract’s scope and managed at the contractor level. Unlike contingency reserve, which is funding related, management reserve is budget related. The value of the contract includes these known unknowns in the budget base, and the contractor decides how much money to set aside. Neither one is used in NRC regulatory analysis cost estimates.

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

more detailed (activity-based, unit cost) techniques. The following sections include techniques that may be employed in developing cost estimates.

B.5.1 Engineering Build-up Estimating Method

Activity-based, detailed or unit cost estimates are typically the most definitive of the estimating techniques and use information down to the lowest level of detail available. They are also the most commonly understood and utilized estimating techniques.

The accuracy of activity-based detailed or unit cost techniques depends on the accuracy of available information, resources spent to develop the cost estimate, and the validity of the bases of the estimate. Typically, a work statement and set of drawings or specifications are used to identify activities that make up the project. Nontraditional estimates may use a WBS, team input, and the work statement to identify the activities that make up the work.

The analyst separates each activity into detailed tasks so that labor hours, material costs, equipment costs, and subcontract costs are itemized and quantified. Standard estimating practice is to use a verb as the first word in an activity description. Use of verbs provides a definitive description and clear communication of the work that is to be accomplished. Subtotaled, the detailed items comprise the direct costs. Indirect costs, overhead costs, contingencies and escalation are then added, as necessary.⁹ The estimate may be revised as details are refined. The activity-based detailed or unit cost estimating techniques are used mostly for Class 1 and Class 2 estimates, and they should always be used for proposal or execution estimates.

Activity-based detailed cost estimates imply that activities, tasks, work packages, or planning packages are well-defined, quantifiable, and are to be monitored,¹⁰ so that performance can be reported accurately. Quantities should be objective, discrete, and measurable. These quantities provide the basis for an earned value management (EVM) of the work within the activities and the WBS. A handbook reference suitable for use in developing a product-oriented work breakdown structure is the U.S. Department of Energy (DOE) E Work Breakdown Structure Handbook (Ref. 4)

Advantages in using activity-based detailed or unit cost estimating methods include:

- a greater level of confidence
- more detail that can be used for better monitoring, change control, etc.
- enhanced scope and individual activity definition
- detailed quantities to establish more accurate metrics
- better resource basis for the schedule

⁹ Many of these factors may not be appropriate when performing an incremental cost estimate (e.g., regulatory analyses). When performing a sensitivity analysis for a regulatory analysis (i.e., a high estimate), the analyst should include contingencies. The concept of Sensitivity Analysis is discussed in Appendix C as a subset of contingency analysis.

¹⁰ Cost estimates used in regulatory analyses to estimate regulatory burden are not used by the NRC to develop work packages or planning packages and are not updated after the Commission decision on the proposed action. Therefore, the NRC does not monitor those estimated costs.

DISCLAIMER: *This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.*

Appendix B: Cost Estimating and Best Practices

Disadvantages include:

- more time needed to develop the estimate
- more costly to develop than relationship estimating

B.5.2 Parametric Estimating Techniques

A parametric model is a useful tool for preparing early conceptual estimates when there is little technical data or engineering deliverables to provide a basis for using more detailed estimating methods. A parametric estimate comprises cost estimating relationships and other cost estimating functions that provide logical and repeatable relationships between independent variables, such as design parameters or physical characteristics and cost, the dependent variable. Capacity factor and equipment factor are simple examples of parametric estimates; however, sophisticated parametric models typically involve several independent variables or cost drivers. Parametric estimating is reliant on the collection and analysis of previous project cost data in order to develop the cost estimating relationships.

B.5.2.1 Cost Estimating Relationships

Cost estimating relationships (CERs), also known as cost models, composites, or assemblies/subassemblies, are developed from historical data for similar systems or subsystems. A CER is used to estimate a particular cost or price by using an established relationship with an independent variable. For example, a CER of design hours per drawing may be applied to the estimated number of drawings to determine total design hours. Identifying an independent variable (driver) that demonstrates a measurable relationship with contract cost or price develops a CER. That CER may be mathematically simple (e.g., a simple ratio), or it may involve a complex equation.

Parametric estimates are commonly used in conceptual and check estimates. A limitation to the use of CERs is that to be most effective, one must understand completely how the CER was developed and where and how indirect costs, overhead costs, contingency, and escalation are applicable. The parametric estimating technique is most appropriate for Class 5, 4, and 3 cost estimates. The parametric technique is best used when the design basis has evolved little, but the overall parameters have been established.

There are several advantages to parametric cost estimating. Among them are:

- **Versatility**—If the data are available, parametric relationships can be derived at any level (system, subsystem component, etc.). As the design changes, CERs can be quickly modified and used to answer “what-if” questions about design alternatives.
- **Sensitivity**—Simply varying input parameters and recording the resulting changes in cost will produce a sensitivity analysis
- **Statistical output**—Parametric relationships derived through statistical analysis will generally have both objective measures of validity (statistical significance of each estimated coefficient and of the model as a whole) and a calculated standard error that can be used in risk analysis. This information can be used to provide a confidence level for the estimate based on the CERs predictive capability.

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

There are also disadvantages to parametric estimating techniques, including:

- **Database requirements**—The underlying data must be consistent and reliable. In addition, it may be time-consuming to normalize the data or to ensure that the data were normalized correctly. Without understanding how data were normalized, the analyst is accepting the database on faith, thereby increasing the estimate's risk.
- **Currency**—CERs must be periodically updated to capture the most current cost, technical, and programmatic data.
- **Relevancy**—Using data outside the CER range may cause errors because the CER loses its predictive capability for data outside the development range.
- **Complexity**—Complicated CERs (e.g., non-linear CERs) may be difficult to readily understand the relationship between cost and its independent variables.

B.5.2.2 End Product Unit Method

The End Products Unit Method is used when enough historical data are available from similar work based on the capacity of that work. The method does not take into account any economies of scale, or location or timing of the work.

Consider an example of estimating the cost of reviewing a routine submittal. From a previous estimate the total cost was found to be \$150,000 to review 10 submittals, or \$15,000 per submittal. For a new reporting requirement of similar complexity, the estimated cost would be \$15,000 per review for two submittals or \$30,000.

B.5.2.3 Physical Dimension Method

The Physical Dimension Method is used when enough historical data is available from similar work based on the area or volume of that work. This method uses the physical dimension relationship of existing work data to that of the physical dimensions of similar new work. The method does not take into account any economies of scale, or location or timing of the work. For example, the total cost of a previous project was \$150,000 for a 1,000 square feet foundation. A new foundation is to be 3,000 square feet. Using the dollar per square foot value from the previous project yields a value of \$150 per square foot (i.e., \$150,000 divided by 1,000 square feet). The estimated cost of the new foundation is \$450,000 (i.e., \$150 per square feet x 3,000 square feet).

B.5.2.4 Capacity Factored Method

The Capacity Factored Method is used during the feasibility stage of a project when enough historical data are available from similar work based on the capacity of that work. The method uses the capacity relationship of existing work data to that of the capacity of similar new work. It accounts for economies of scale, but not location or timing of the work and provides a sufficiently accurate means of determining whether a proposed project, regulatory action, or alternative should be continued. This screening method (Class 5 estimate) is most often used. The capacity factored method is most often used to estimate the cost of entire facilities, but may also be applied at the system or equipment level.

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

When estimating using the capacity factored method, the cost of a new plant is derived from the cost of a similar plant of a known capacity, with similar operational characteristics (e.g., batch processing, base load, etc.), but not necessarily the same end products.¹¹ The method uses a nonlinear relationship between capacity and cost as shown in the following equation.

$$\frac{\$B}{\$A} = \left[\frac{\text{Capacity}_B}{\text{Capacity}_A} \right]^e$$

Where: \$A and \$B are the costs of the two similar plants.
 Capacity_A and Capacity_B are the capacities of the two plants.
 e is the exponent or proration factor.¹²

The value of the exponent e typically lies between 0.5 and 0.85, depending on the type of plant, and must be analyzed carefully for its applicability to each estimating situation. As plant capacity increases to the limits of existing technology, the exponent approaches a value of one. At this point, it becomes as economical to build two plants of a smaller size, rather than one large plant.

Companies may not make proration factor data available, and recent studies are sparse. However, if the proration factor used in the estimating algorithm is relatively close to the actual value, and if the plant being estimated is relatively close in size to the similar plant of known cost, then the potential error is certainly well within the level of accuracy that would be expected from a stochastic method.¹³

B.5.2.5 Ratio or Factor Method

The Ratio or Factor Method is used when historical building and component data are available from similar work. Scaling relationships of existing component costs are used to predict the cost of similar new work. This method is also known as “equipment factor” estimating. The method does not account for any economies of scale, or location or timing of the work.

To illustrate, if a plant that cost \$1,000,000 to construct has major equipment that costs \$250,000, then the plant cost to equipment cost factor is:

$$\text{plant cost to equipment cost factor} = \frac{\text{plant cost}}{\text{equipment cost}} = \frac{\$1,000,000}{\$250,000} = 4.0$$

¹¹ Although the end products do not need to be the same the products should be relatively similar.

¹² The exponent e used in the capacity factor equation is the slope of the log curve that is drawn to reflect the change in the cost of a plant as it is made larger or smaller. These curves are typically drawn from the data points of the known costs of completed plants. With an exponent less than 1, scales of economy are achieved such that as plant capacity increases by a percentage (say, by 20 percent), the costs to build the larger plant increase by less than 20 percent. This methodology of using capacity factors is sometimes referred to as the Scale of Operations method or the Six-tenths Factor method because of the reliance on an exponent of 0.6 if no other information is available.

¹³ A purely stochastic method is one whose state is randomly determined, having a random probability distribution or pattern that may be analyzed statistically but may not be predicted precisely. In this regard, it can be classified as non-deterministic (i.e., "random") so that the subsequent state of the system is determined probabilistically.

DISCLAIMER: *This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.*

Appendix B: Cost Estimating and Best Practices

If a proposed new plant will have \$600,000 of major equipment, then the factor method would predict that the new plant is estimated to cost $\$600,000 \times 4.0 = \$2,400,000$.

B.5.3 Other Estimating Methods

B.5.3.1 Level of Effort Method

A form of parametric estimating is based on level of effort (LOE). Historically, LOE is used to determine future repetitive costs based on past cost data, (e.g. If 2 employees spent 1000 person-hours to develop a guidance document last year, then similar documents may need a similar level of effort.). Often LOE estimates have few parameters or performance objectives from which to measure or estimate, but are carried for several time periods at a similar rate (e.g., the number of workers for a specified amount of time). LOE estimates are normally based on hours and the number of full-time equivalents (FTEs). Since they are perceived to have little objective basis, LOE estimates are often subject to scrutiny. The keys to LOE estimates are that they should generally be based on a known scope of similar work.

Numerous cost elements may impact a LOE estimate. For instance, using the LOE method to estimate the costs for installing a new pump may raise questions about the impacts of radiological contamination or security issues and related productivity adjustments. Other cost factors that need to be considered are indirect costs, overhead costs, profit/fee, and other assumptions.

B.5.3.2 Specific Analogy Method

Specific analogies use the known cost or schedule of an item as an estimate for a similar item in a new system. Adjustments are made to known costs to account for differences in relative complexities of performance, design, and operational characteristics. The analogy method uses actual costs from a similar program with adjustment to account for difference between the requirements of the existing and new systems. A cost analyst typically uses this method early in a program's life cycle, when insufficient actual cost data are available but the technical and program definition is good enough to make the necessary adjustments (e.g., regulatory basis and possibly during the proposed rule stage).

Adjustments should be made as objectively as possible, by using factors (sometimes scaling parameters) that represent differences in size, performance, technology, or complexity. The cost analyst should identify the important cost drivers, determine how the old item relates to the new item, and decide how each cost driver affects the overall cost. All estimates based on the analogy method, however, must pass a reasonable person test. That is, the sources of the analogy and any adjustments must be logical, credible, and acceptable to a reasonable person. In addition, since analogies are one-to-one comparisons, the historical and new systems should have a strong parallel.

Analogy relies a great deal on expert opinion to modify the existing system data to approximate the new system. If possible, the adjustments should be quantitative rather than qualitative, avoiding subjective judgments as much as possible. An analogy is often used as a cross-check

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

for other methods. Even when an analyst is using a more detailed cost estimating technique, an analogy can provide a useful check. Table B-4 shows how the analogy method is used.

Table B-4 Analogy Cost Estimating Method Example

Parameter	Existing system	New system	Cost of new system (assumes a linear relationship)
Diesel driven air compressor	F-100	F-200	
Cubic feet per minute	100	175	
Cost	\$1,406	unknown	$(175/100) \times \$1406 = \$2,461$

The equation in Table B-4 assumes a linear relationship between the air compressor cost and its output. However, there should be a compelling scientific or engineering reason why the air compressor cost is directly proportional to its output. Without more data, it is hard to know what parameters are the true drivers of cost. Therefore, when using the analogy method, it is important that the cost analyst research and discuss with experts the reasonableness of technical program drivers to determine whether they are significant cost drivers.

There are several advantages to using the analogy method, including:

- It can be used before detailed program requirements are known;
- If the analogy is strong, the estimate will be defensible;
- An analogy can be developed quickly and at minimal cost; and
- The tie to historical data is simple enough to be readily understood.

There are, however, also some disadvantages in using the analogy method, such as:

- An analogy relies on a single data point;
- It is often difficult to find the detailed cost, technical, and programmatic data required for analogies; and
- There is a tendency to be too subjective about the technical parameter adjustment factors.

The last disadvantage can be better explained with an example. If a cost analyst assumes that a new component will be 20 percent more complex, but cannot explain why, this adjustment factor is unacceptable. The complexity must be related to the system's parameters, e.g., the new system will have 20 percent more data processing capacity or will weigh 20 percent more. GAO Case Study 34 highlights what can happen when technical parameter assumptions are too optimistic (Ref. 2, page 110).

B.5.3.3 Expert Opinion Method

The expert opinion method is commonly used to fill gaps in a relatively detailed WBS when one or more experts are the only qualified source of information. Expert opinion is an estimating technique whereby experts are consulted regarding the cost of a program, project, sub-project, task, or activity. The expert opinion technique is most appropriate in the early stages of a project, (i.e., regulatory bases or proposed rule cost estimates). Cost analysts should verify experts' credentials before relying on their opinions. Cost analysts should not ask experts to estimate costs outside their expertise.

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

For example, the Oracle Method is used to forecast cost based on expert opinion. A group (e.g., six or more experts) are given a specific, usually quantifiable, question. Each expert sees the estimates produced by others and the rationale supporting the estimates and then can modify previous estimates until a group consensus is reached. If after multiple rounds there is no consensus, the original question may be broken into smaller parts for further rounds of discussion, or a mediator may be used to facilitate a final consensus, if feasible.

Such techniques may be used for either portions of or entire estimates and activities for which there is no other defensible basis. The advantages of using an expert opinion are:

- It can be used in cases where there are no historical data available;
- The approach takes minimal time and is easy to implement once the experts are assembled;
- An expert may provide a different perspective or identify facets not previously considered leading to a better understanding of the program; and
- It can be useful as a cross-check for CERs that require data significantly beyond the data range.
- It can be blended with other estimation techniques within the same WBS element; and
- It can be applied in all acquisition phases.

The disadvantages associated with an expert opinion include:

- It should be used as a last resort due to its lack of objectivity;
- There is always a risk that one expert will try to dominate the discussion and sway the group toward his/her opinion;
- The possibility of impasse exists, and
- This approach is not considered very accurate or valid as a primary estimating method.

The bottom line is that because of its subjectivity and lack of supporting documentation, expert opinion should be used sparingly. GAO Case Study 35 (Ref 2, page 117) shows how relying on expert opinion as a main source for a cost estimate is unwise.

B.5.3.4 Learning Curve Method

The learning curve is a way to understand the efficiency of producing or delivering large quantities. Studies have found that people engaged in repetitive tasks will improve their performance over time, i.e., for large quantities of time and units, labor costs will decrease, per unit. This observation led to the formulation of the learning curve equation $Y = AX^b$ and the concept of a constant learning curve slope b that captures the change in Y given a change in X .¹⁴

The aircraft industry first recognized and named the learning curve and successfully used it in estimating. It can be used most effectively when new procedures are being fielded and where labor costs are a significant percentage of total unit cost. But it should always be understood that the learning curve applies only to direct labor input. Materials and overhead will not necessarily be affected by the learning curve. Figure B-1 illustrates a hypothetical learning curve.

¹⁴ The constant slope b is given by the formula $b = \log(\text{slope})/\log 2$.

Appendix B: Cost Estimating and Best Practices

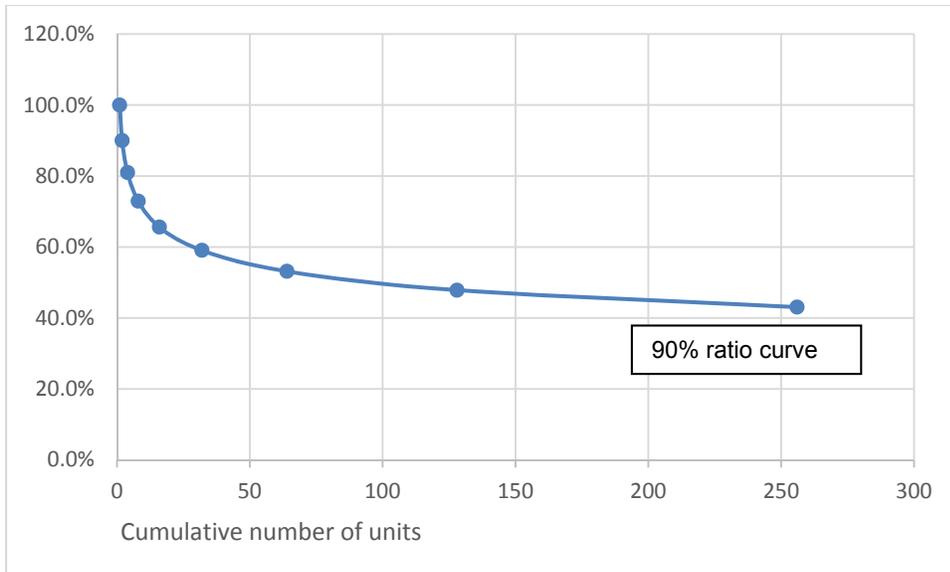


Figure B-1 A Learning Curve

Figure B-1 shows how an item's cost gets cheaper as its quantities increase. For example, if the learning curve slope is 90 percent and it takes 1,000 hours to produce the first unit, then it will take 900 hours to produce the second unit. Every time the quantity doubles—for example, from 2 to 4, 4 to 8, 8 to 16—the resource requirements will reduce according to the learning curve slope.

Typical learning curves start with high labor costs (hours) that decrease rapidly on early production units, and then flatten as production continues. This exponential relationship between labor productivity and cumulative production is expressed in terms of labor reduction resulting from production increases. For example, a 90-percent learning curve function requires only 90 percent of the labor hours per unit each time production doubles. When a total of 200 units are produced, labor costs for the second 100 units will be only nine tenths the costs of the first 100.

Increased productivity allows for lower labor costs later in a project, and should result in a lower overall project cost. Subsequent similar projects should have fewer labor hours for each unit of production also, which could result in both more contractor profit and lower government contract costs.

No standard reduction rate applies to all programs, and learning curve benefits will vary. When labor hour reductions of the first units are known, an accurate percentage reduction can be calculated and extended to subsequent units. If no data exists, it may be risky to assume that learning curve savings will be experienced.

The learning curve estimating technique can be considered for all traditional and nontraditional projects. The learning curve is most effective when applied to repetitive activities, and can also be used to update labor hours calculated in earlier estimates.

B.6 Methods of Estimating Other Life-Cycle Costs

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

Different methods may be used to estimate other project/program support costs (e.g., design, engineering, inspections, regulatory review). Some common methods are described below.

B.6.1 Count Deliverables Method

The cost analyst calculates the number of deliverables (e.g., drawings, specifications, procurements, license amendment requests, safety evaluations) representing a specific project. The more complex a project is, the more deliverables it will require meaning that the associated costs will be higher.

B.6.2 Full-Time Equivalent Method

The number of individuals anticipated to perform specific functions of a project forms the basis. The labor hour quantity is calculated and multiplied by the cost per labor hour and the duration of the project function to arrive at the cost.

B.6.3 Percentage Method

The cost analyst calculates a certain percentage of the direct costs and assigns this amount to the other project functions (i.e., design, project management). Some possible benchmarks include:

- Total design percentages are usually 15-25 percent of estimated construction costs. Non-traditional, first of a kind projects may be higher, while simple construction such as buildings will be lower than this range (on the order of 6 percent); the more safety and regulatory intervention is involved, the higher the percentage.
- Project management costs range from 5 to 15 percent of the other estimated project costs, depending on the nature of the project and the scope of what is covered under project management. The work scope associated with this range should be defined.

B.7 Cost Estimating Development Process

Cost is defined as the resources that will be consumed if an objective is undertaken. The value of consumed resources, which can be quantified, is measured in dollars. This makes different cost elements comparable with themselves, as well as with benefits. In addition, because resource value indicates what resources are required for a particular proposed objective, it is a measure of the cost of other objectives that cannot be pursued. Each alternative method of accomplishing the regulatory objective will have its own associated cost. Costs include all incremental capital, labor, and natural resources required to undertake each alternative whether they are explicitly paid out of pocket, involve an opportunity cost, or constitute an external cost which is imposed on third parties. Costs may be borne by the NRC, other governmental agencies, industry, the general public, or some other group. Inclusion of all costs borne by all groups is required in order to measure the total value of what must be forgone to undertake each alternative and to avoid errors in answering the economic questions.

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

B.7.1 Overview of the Cost Estimating Process

The overall Cost Estimating Process Model was explained in Section 0. The cost estimating development process discussed in this section follows the 12 steps model recommended by GAO (Ref. 2) as it applies to regulatory decision making. Table B-1, located in Section 0, identifies the implementing tasks related to the GAO 12-step cost estimating development process. Systematically performing these tasks enhances the reliability and validity of cost estimates.

B.7.2 Estimate Planning

The estimate planning task (Input in Table B-1, Estimating Process) includes:

- Establishing when the estimate is required
- Determining who will prepare the estimate
- Producing a plan/schedule for estimate completion
- Selecting and notifying individuals whose input is required
- Collecting scoping documents
- Selecting estimating technique(s)
- Conducting an estimate kickoff meeting

Develop Estimate Purpose Statement—The purpose should be stated in precise, unambiguous terms. The purpose statement should indicate why the estimate is being prepared and how the estimate is to be used. This should include a description of any relevant regulatory or cost drivers. In many cases, this activity will be performed in conjunction with the NRC rulemaking project manager and his or her working group.

Develop Technical Scope—The technical scope summary should provide a detailed description of the work included in the estimate. The technical scope should identify the activities included in the cost estimate as well as relevant activities excluded from the cost estimate and the rationale for their exclusion. For performance-based rulemaking,¹⁵ the cost analyst needs to work closely with the rulemaking project manager and his or her team to develop in sufficient detail how the proposed regulatory changes could be implemented.

Determine Approaches to be used to Develop the Estimate—Decide on the estimating techniques and methodologies that will be used to develop the cost estimate such as the ones described in section B.5.

¹⁵ A regulation can be either prescriptive or performance-based. A prescriptive requirement specifies particular features, actions, or programmatic elements to be included in the design or process, as the means for achieving a desired objective. A performance-based requirement relies upon measurable (or calculable) outcomes (i.e., performance results) to be met, but provides more flexibility to the licensee as to the means of meeting those outcomes. A performance-based regulatory approach is one that establishes performance and results as the primary basis for regulatory decision-making, and incorporates the following attributes: (1) measurable (or calculable) parameters (i.e., direct measurement of the physical parameter of interest or of related parameters that can be used to calculate the parameter of interest) exist to monitor system, including facility and licensee, performance, (2) objective criteria to assess performance are established based on risk insights, deterministic analyses and/or performance history, (3) licensees have flexibility to determine how to meet the established performance criteria in ways that will encourage and reward improved outcomes; and (4) a framework exists in which the failure to meet a performance criterion, while undesirable, will not in and of itself constitute or result in an immediate safety concern. (Ref. 7)

DISCLAIMER: *This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.*

The cost analyst completes this task when he or she has a concise statement of the regulatory problems or concerns that need to be remedied and which are defined within the context of the existing regulatory framework. The statement describes exactly what the problem is and why it exists, the extent of the problem and where it exists, and why it requires action. In this context, the cost analyst can develop his or her plan for deciding on the measure of the proposed regulatory change safety importance, what regulatory alternatives are available to address the issue, what cost benefit attributes are affected, the estimating methodology(ies) that will be used, and potential sources of data. The cost analyst completes this task when he or she has a clear plan for preparing the cost estimate and can describe these planning elements in the regulatory analysis.

B.7.3 Cost Estimate Inputs

B.7.3.1 Sources of Cost Estimate Data

Because all cost estimating methods are data-driven, the cost analyst must know the best data sources (Input into Table B-1, step 6). Whenever possible, cost analysts should use primary data sources. Primary data are obtained from the original source, are considered the best in quality, and are the most useful. Secondary data are derived, rather than obtained directly from a primary data source. Because secondary data were derived (and thus changed) from the original data, they may be of lower overall quality and usefulness. In many cases, data may have been “sanitized” for a variety of reasons (e.g., proprietary data) that may further complicate its use as full details and explanations may not be available. Cost analysts must understand if and how data were changed before determining if the data will be useful or how that data can be adjusted for use. Of course, it is always better to use actual costs, rather than estimates because actual costs represent the most accurate data available.

In many cases, secondary data may be all that are available. Therefore, the cost analyst must seek to understand how the data were normalized, what the data represent, how old the data are, and whether the data are incomplete. If these questions can be answered, the secondary data should be useful for estimating and would certainly be helpful for crosschecking the estimate for reasonableness.

Some specific sources of data are the following:

Estimating Manuals—The construction industry produces numerous costing manuals to assist in the pricing of work. RS Means and Richardson are two readily available manuals.

NRC Technical Documents—The NRC has sponsored several studies on generic costs associated with the construction activity at nuclear power plants. These generic studies are intended to provide tools and methods to assist cost analysts in the estimation of costs resulting from new and revised regulatory requirements and are listed in xx.

Table B-5 List of NRC Cost Manuals

Document No.	Title
Nuclear Power Plant Construction Costs	

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

NUREG/CR-5160	Guidelines for the Use of the EEDB at the Sub-Component and Subsystem Level
NUREG/CR-4546	Labor Productivity Adjustment Factors: A Method for Estimating Labor Construction Costs Associated with Physical Modifications to Nuclear Power Plants
SEA Report 84-116-05-A:1	Generic Methodology for Estimating the Labor Cost Associated with the Removal of Hardware, Materials, and Structures from Nuclear Power Plants
NUREG/CR-4921	Engineering and Quality Assurance Cost Factors Associated with Nuclear Plant Modification
NRC Cost Estimating Methods, Reference Assumptions, and Data	
DOE/NE-0044/3	Nuclear Energy Cost Data Base: A Reference Data Base for Nuclear and Coal-fired Power Plant Power Generating Cost Analysis
NUREG/CR-3971	A Handbook for Cost Estimating: A Method for Developing Estimates of Cost for Generic Actions for Nuclear Power Plants
NUREG/CR-4627	Generic Cost Estimates: Abstracts from Generic Studies for Use in Preparing Regulatory Impact Analyses
NUREG/CR-4568	A Handbook for Quick Cost Estimates: A Method for Developing Quick Approximate Estimates of Costs for Generic Actions for Nuclear Power Plants
NUREG/CR-4555	Generic Cost Estimates for the Disposal of Radioactive Wastes
NUREG/CR-3194	Improved Cost-Benefit Techniques in the U.S. Nuclear Regulatory Commission
Under contract NRC-33-84-407-006	The Identification and Estimation of the Cost of Required Procedural Changes at Nuclear Power Plants
NUREG/CR-5138	Validation of Generic Cost Estimates for Construction-Related Activities at Nuclear Power Plants
Nuclear Power Plant Worker Radiation Dose Estimating Method	
NUREG/CR-5035	Data Base of System-Average Dose Rates at Nuclear Power Plants

Data Bases—Commercial data bases provide the cost analyst with the ability to retrieve cost estimating data. Commercial data bases are readily available. The Energy Economic Data Base (EEDB).¹⁶

Industry Estimates—Industry estimates provide for a greater confidence of real time accuracy. Although the cost analyst must use caution when using industry-supplied cost estimates. Similar to secondary data, the cost analyst must seek to understand how the data were normalized, what the data represent, how old the data are, and whether the estimates were generated with incomplete or preliminary information. Other times only a few industry estimates may be provided, which could potentially skew the cost data.

¹⁶ The Energy Economic Data Base provides complete plant construction cost estimates for boiling-water reactors (BWRs) and pressurized-water reactors (PWRs). The generic cost estimating methods developed for the NRC utilize the EEDB cost data as a basis for estimating the costs of physical modifications to nuclear plants.

DISCLAIMER: *This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.*

Appendix B: Cost Estimating and Best Practices

Level of Effort Data—As discussed in Section 0, LOE activities are of a general or supportive nature usually without a deliverable end product. Such activities do not readily lend themselves to measurement of discrete accomplishment and are generally characterized by a uniform rate of activity over a specific period of time. Value is earned at the rate that the effort is being expended. Use of LOE activity cost estimates should be kept at a minimum for Class 1 and 2 estimates.

Expert Opinions (Subject Matter Experts)—As described in Section 0, expert opinions can provide valuable cost information in the early stages of a project, for Class 5, 4, and 3 cost estimates. The data collected should include a list of the experts consulted, their relevant experience, and the basis for their opinions. If a formalized procedure was used, it should be documented.

Benchmarking—Benchmarking is a way to establish rules-of-thumb estimates. Benchmarks may be useful when other means of establishing reasonable estimates are unavailable. Benchmark examples include the statistic indicating that design should be 6 percent of construction cost for non-complex facilities. If construction costs can be calculated (even approximately) using a parametric technique, design should be approximately 6 percent. Typical benchmarks include such rules as:

- Large equipment installation costs should be X percent of the cost of the equipment
- Process piping costs should be Y percent of the process equipment costs
- DOE facility work should cost approximately Z percent of current, local, commercial work

Team/Individual Judgment Data—Team/Individual judgment data are used when the maturity of the scope has not been fully developed and/or the ability to compare the work to historical or published data is difficult. This involves the reliance of information on individuals or team members who have experience in the work that is to be estimated. This process may involve interviewing the person(s) and applying their judgment to assist in the development of the cost estimate. Because of its subjectivity and usually the lack of supporting documentation, team/individual judgment should be used sparingly.

The Learning Curve Data—As described in Section 0, learning curve data are useful for understanding the efficiency of producing or delivering large quantities. Numerous sources are available from trade associations and governmental organizations. NUREG/CR-5138 provides guidance learning curve factors based on nuclear power plant modification activities and gives guidelines for selecting the appropriate factors and its use.

B.7.3.2 Cost Estimate Development Considerations

When assigned the task of developing a cost-benefit estimate, the cost analyst must gather general project information including:

- Project background
- project scope
- pertinent contract or sub-contract information, if applicable
- estimate purpose, classification, how the estimate will be used, and techniques anticipated, and
- project schedule

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

If the assignment is for a regulatory analysis supporting the evaluation of a proposed regulatory action, such as for rulemaking, the cost analyst would collect specific inputs such as:

- draft federal register notice
- draft rule language
- statements of consideration
- applicable guidance documents
- work breakdown structure, if generated
- historical information and other sources of information, including previous regulatory analyses / cost estimates
- project assumptions
- industry cost estimates

From this information, whether provided by others or developed by the cost analyst as an assumption, appropriate estimating techniques may be determined.

B.7.4 Cost Estimate Preparation

The principle step in the estimating process is producing the cost estimate and its corresponding schedule and basis of estimate. It is important that scope development, documentation, and control be coordinated with the cost estimate production as key iterative processes. In general, cost estimate production includes several steps that should be based on requirements, purpose, use, classification, and technique, including:

- Identify the scope of work, activities, and tasks
- Document all bases of the estimate, assumptions, allowances, risks, etc. during the estimating process.
- For detailed engineering estimates, perform quantity takeoffs and field walk-downs, if applicable.
- Develop the detail items or models that make up the activities.
- Assign measurable quantities to the detail items or models.
- Obtain vendor information, conduct market research, or establish other pertinent sources of information.
- Establish productivity rates or perform task analyses.
- Calculate all applicable costs, including direct costs, indirect costs, contingency, and allowances.
- Determine if risks (and to what extent) should be mitigated with activities (or assumptions) in the cost estimate.
- Consider other inputs, including peer reviews or independent cost estimates, as appropriate.

However for cost estimates for proposed regulatory actions, the scope of the cost estimate is to compute the incremental costs to implement the proposed regulatory action. These incremental costs measure the additional costs imposed by regulation in that they are costs that would not have been incurred in the absence of that regulation. In general, there are three steps that the cost analyst should follow in order to estimate these incremental costs:

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

1. Estimate the amount and types of equipment, materials, and/or labor that will be affected by the proposed regulatory action.
2. Estimate the costs associated with implementation and operation
3. If appropriate, discount the implementation costs, then sum

In preparing an estimate of industry implementation costs, the analyst should also carefully consider all cost categories that may be affected as a result of implementing the action.

Example categories include:

- land and land-use rights
- structures
- hydraulic, pneumatic, and electrical equipment
- radioactive waste disposal
- health physics
- monitoring equipment
- personnel construction facilities, equipment, and services
- engineering services
- recordkeeping
- procedural changes
- license modifications
- staff training/retraining
- administration
- facility shutdown and restart
- replacement power (power reactors only)
- reactor fuel and fuel services (power reactors only)
- items for averting illness or injury (e.g., bottled water or job safety equipment).

Transfer payments should not be included.

For the standard analysis, the cost analyst should use consolidated information to estimate the cost for implementing the action.

Step 1 - Estimate the amounts and types of equipment, materials, and/or labor that will be affected by the proposed action, including not only physical equipment and craft labor, but professional staff labor for design, engineering, quality assurance, and licensing associated with the action. If the action requires work in a radiation zone, the analyst should account for the extra labor required by radiation exposure limits and low worker efficiency due to awkward radiation protection gear and tight quarters.

When performing a sensitivity analysis, but not for the best estimate, the analyst should include contingencies as discussed in section 0.

Step 2 - Estimate the costs associated with implementation, both direct and indirect. Direct costs include materials, equipment, and labor used for the construction and initial operation of the facility during the implementation phase. Indirect costs include required services. The analyst should identify any significant secondary costs that may arise. One-time-component replacement costs and associated labor costs

DISCLAIMER: *This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.*

Appendix B: Cost Estimating and Best Practices

should be accounted for here. For additional information on cost categories, especially for reactor facilities, see Schulte et al. (Ref. 9), United Engineers and Constructors, Inc. (Ref. 10), and Wagner (Ref. 8).

Step 3 - If appropriate, discount the costs, and then sum. If costs occur at some future time, they should be discounted to yield present values. If all costs occur in the first year or if present value costs can be directly estimated, discounting is not required. Generally, implementation costs would occur shortly after adoption of the proposed action.

When performing cost-benefit analyses for non-reactor facilities, the analyst may encounter difficulty in finding consolidated information on industry costs comparable to that for power reactors. Comprehensive data sources such as Sciacca (1992) (Ref. 13) and the references from which he drew his information are generally unavailable for non-reactor facilities. The types of non-reactor facilities are quite diverse. Furthermore, within each type, the facility layouts typically lack the limited standardization of the reactor facilities. These combine to leave the analyst pretty much “on his own” in developing industry implementation costs for non-reactor facilities. Specific data may be best obtained through direct contact with knowledgeable sources for the facility concerned, possibly even the facility personnel themselves.

For a major effort beyond the standard analysis, the analyst should obtain very detailed information, in terms of the cost categories and the costs themselves. The analyst should seek cost data from NRC contractors or industry sources experienced in this area (e.g., AE firms). The incremental costs of the action should be defined at a finer level of detail. The analyst, should refer to the code of accounts in the Energy Economic Data Base (EEDB [United Engineers and Constructors, Inc. 1988b]) or Schulte et al. (Ref. 9) to prepare a detailed account of implementation costs.

B.7.4.1 Work Breakdown Structure

A WBS should be developed because it defines in detail the work necessary to accomplish the proposed regulatory action. By going through the process of WBS development, the activities needed to be performed are clearly identified and appropriately sequenced. This then forms a basis for estimating the resources and costs needed to accomplish the regulatory action. That process in turn provides a basis for estimating activity durations and resource requirements. Establishing a product-oriented WBS is a best practice because it shows how elements relate to one another as well as to the overall end product.

The 100 Percent Rule

A 100 percent rule states that “the next level of decomposition of a WBS element (child level) must represent 100 percent of the work applicable to the next higher (parent) element.” This is considered a best practice by many experts in cost estimating, because a product-oriented WBS following the 100 percent rule ensures that all costs for all deliverables are identified. Failing to include all work for all deliverables can lead to unrealistic cost estimates. To avoid *DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.*

Appendix B: Cost Estimating and Best Practices

this problem, standardizing the WBS is a best practice in organizations where there is a set of program types that are standard and typical. This enables an organization to simplify the development of the top-level program work breakdown structures by publishing the standard. It also facilitates an organization's ability to collect and share data from common WBS elements among many programs. The more data that are available for creating the cost estimate, the higher the confidence level will be. As this process indicates, the development of work breakdown structure and cost estimates is a highly iterative and inter-related process.

B.7.4.2 Collect, Validate, and Adjust Data

Many possible sources of data can be used in NRC cost estimates. Regardless of the source, the validation of the data (relative to the purpose of its intended use) always remains the responsibility of the cost analyst. In some cases, the data will need to be adjusted or normalized. For example, in analogy estimates, the reference system cost should be adjusted to account for any differences—in system characteristics (technical, physical, complexity, or hardware cost), support concepts, or operating environment—between the reference system and the proposed system being estimated.

For most cost elements, historical cost data is available as discussed in Section 0. Data should always be carefully examined before use in a cost estimate. Historical data should be displayed over a period of a few years (not just a single year), and stratified by organization or location. This should be done so that abnormal outliers in the data can be identified, investigated, and resolved as necessary.¹⁷ In some cases, it may also be necessary to ensure that the content of the data being used is consistent with the content of what is being estimated (to avoid any gaps in coverage).

Data that can be used for detailed bottoms-up engineering build-up estimates often come from contractor databases. The cost analyst should validate this type of data before use, possibly on a sampling basis. This is especially important in cases when the proposed regulatory action being estimated is not mature (i.e., incomplete design details). The validation should address the completeness of the estimate, the realism of component reliability and maintainability estimates, the legitimacy of the component unit prices, and so forth.

B.7.4.3 Select Cost Estimating Methods or Models

A number of techniques may be employed to estimate the costs of a proposed regulatory action. The suitability of a specific approach will depend to a large degree on the maturity of the proposed regulatory solution and the level of detail of the available data. Most regulatory analysis estimates are accomplished using a combination of five estimating techniques:

¹⁷ For example, historical cost data may contain information based on the use of past technologies, so it is essential that appropriate adjustments are made to account for differences between the new system and the existing system with respect to such things as design characteristics, manufacturing processes (automation versus hands-on labor), and types of material used. This is where statistical methods, like regression, that analyze cost against time and performance characteristics can reveal the appropriate technology-based adjustment.

DISCLAIMER: *This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.*

Appendix B: Cost Estimating and Best Practices

- **Parametric.** The parametric technique uses regression or other statistical methods to develop CERs.¹⁸ The relationship may be mathematically simple or it may involve a complex equation (often derived from regression analysis of historical systems or subsystems). CERs should be current, applicable to the system or subsystem in question, and appropriate for the range of data being considered.
- **Analogy.** An analogy is a technique used to estimate a cost based on historical data for one or more analogous system(s).¹⁹ In this technique, a currently fielded system, similar in design and operation to the proposed system, is used as a basis for the analogy. The cost of the proposed system is then estimated by adjusting the historical cost of the current system to account for differences (between the proposed and current systems). Such adjustments can be made through the use of factors (sometimes called scaling parameters) that represent differences in size, performance, technology, reliability and maintainability, complexity, or other attributes. Adjustment factors based on quantitative data are usually preferable to adjustment factors based on judgments from subject-matter experts.
- **Engineering Estimate.** This technique uses discrete estimates of labor and material costs for maintenance and other support functions. The system being estimated normally is broken down into lower-level subsystems and components, each of which is estimated separately. The component costs, with additional factors for integration, are then aggregated using simple algebraic equations to estimate the cost of the entire system (hence the common name “bottoms-up” estimate). For example, system maintenance costs could be calculated for each system component using data inputs such as system operating tempo, component mean time between maintenance action, component mean labor hours to repair, and component mean material cost per repair. Engineering estimates require extensive knowledge of a system’s (and its components’) characteristics and a significant amount of detailed data. These methods are normally employed for mature programs and are used by regulated entities after the regulation is promulgated.
- **Extrapolation of Actual Costs.** With this technique, actual cost experience or trends (from prototypes, engineering development models, and/or early production items, or early adopters) are used to project future costs for the same system at other facilities. Such projections may be made at various levels of detail, depending on the availability of data.
- **Cost Factors.** Cost factors are applicable to certain cost elements not related to the proposed system characteristics. Often, cost factors are simple per capita factors that are applied to direct (i.e., unit-level) labor to estimate indirect cost elements such as general training and education, coordination, or quality assurance.

¹⁸ A CER is an equation or algorithm used to estimate a given cost element using an established relationship with one or more independent variables.

¹⁹ An analogy may also be used to estimate a cost for a subsystem (such as an engineered containment filtered vent subsystem).

DISCLAIMER: *This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.*

Appendix B: Cost Estimating and Best Practices

In many instances, it is a common practice to employ more than one cost estimating method, so that a second method can serve as a cross-check to the preferred method. Analogy estimates are often used as cross-checks, even for mature systems.

B.7.4.4 Estimate Costs

With the completion of the steps described earlier, the actual computations of the cost estimate can begin. The time and energy in front-end planning for the estimate will help to minimize the amount of mid-course corrections and wasted effort. In actual practice, the planning process may be more iterative than the sequence of discrete steps described earlier. Nevertheless, the basic principles remain valid and important.

The cost estimation techniques selected typically depend on the stage of the proposed regulatory change (e.g., regulatory basis, proposed rule, or final rule) and the availability and specificity of the supporting regulatory guidance. In the earlier phases, cost estimates are commonly based on analogies and parametric CERs. In some cases, as the proposed regulatory change definition is refined, the use of analogies and CERs may be improved by increasing the level of detail of the cost estimate—for some cost elements, making distinct estimates for major subsystems and components.

B.7.4.5 Conduct Uncertainty Analysis

For any proposed regulatory change, estimates of future costs are subject to varying degrees of uncertainty. The uncertainties are due not only to uncertainties in cost estimating methods, but also due to facility designs differences and uncertainties in the methods that licensees will implement changes to their facilities and processes to comply with a new or revised performance based regulation. Although these uncertainties cannot be eliminated, they should be addressed in the cost estimate. For each major concern, it is useful to quantify its degree of uncertainty and its effect on the cost estimate.

Typically, the cost analyst identifies the relevant cost elements and their associated cost drivers, and then examines how costs vary with changes in the cost-driver values. For example, a sensitivity analysis might examine how maintenance cost varies with different assumptions about system reliability and maintainability values. In good sensitivity analyses, the cost-driver values are not changed by arbitrary plus/minus percentages, but rather by a careful assessment of the underlying uncertainties.

B.7.4.6 Cost Estimate Results

A cost estimate should be formally documented. The documentation serves as a permanent record of source data, methods, and results, and should be easy to read and well organized to allow any reviewer to understand the estimate. The key standard is that an outside professional cost analyst should be able to review the data and methods employed, and understand the results.

The documentation should address all aspects of the cost estimate: ground rules and assumptions; the description of the alternatives evaluated; the selection of cost estimating

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

methods; data sources; the actual estimate computations; and the results of the uncertainty analyses. The documentation may be provided within a regulatory analyses or similar report.

B.7.5 Cost Estimate Review

Cost estimates should be reviewed for quality and reasonableness before release. Reviews can be either objective, subjective, or a combination of both. As a minimum, NRC cost estimates should address the review criteria listed in Enclosure B-1.

NRC regulatory analyses, and the cost estimates that supports them should include an assessment of cost realism and reasonableness. To test the reasonableness and realism of a cost estimate, an NRC cost analyst will review the regulatory analysis, the cost estimate, and supporting documentation to analyze whether the estimate is sufficient with regard to the validity of cost assumptions and cost estimate methodology rational and whether it is complete.

This review should provide an unbiased check of the assumptions, productivity factors, and cost data used to develop the estimate. This is a vital step in providing consistent, professionally prepared cost estimates.²⁰ The review should be documented to indicate:

- The name of the reviewer(s) – Office/Agency/Contractor affiliation and
- The date of the review

B.7.6 Estimate Reconciliation

Reconciliation may be necessary to account for changes made in proposed rulemaking or guidance documents or the availability of new data. Reconciliations should cover all aspects of the cost estimating documentation (e.g., cost estimate, basis of estimate, schedule, and risks). In general, reconciliation should recognize or focus on specific changes in scope, basis of estimate, schedule, and risks. There should be an understanding that, as time progresses, more and better information is expected to be available and used as cost estimate documentation.

B.7.7 Cost Estimate Documentation

Well-documented cost estimates are considered a best practice for high-quality cost estimates for several reasons.

- First, complete and detailed documentation is essential for validating and defending a cost estimate.
- Second, documenting the estimate in detail, step by step, provides enough documentation so that someone unfamiliar with the estimate could recreate or update it.
- Third, good documentation helps with analyzing changes in costs and contributes to the collection of cost and technical data that can be used to support future cost estimates.
- Finally, a well-documented cost estimate is essential if an effective independent review is to ensure that it is valid and credible. It also supports reconciling differences with an

²⁰ Refer to Step 7 of Table 2: “The Twelve Steps of a High-Quality Cost Estimating Process,” contained in GAO-09-3SP.

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

independent cost estimate, improving understanding of the cost elements and their differences so that decision makers can be better informed.

B.7.7.1 Cost Estimate Package

A cost estimate package or report (i.e., a regulatory analysis or a backfitting analysis) should be prepared for all cost estimates. Each estimate package should contain the same categories of information and the same types of documentation; only the level of detail in the estimate package varies.²¹

- **Estimate Purpose Statement**—the reason the estimate was prepared including
 - Determine the estimate’s purpose
 - The level of detail required
 - Determine who will receive the estimate
 - Identify the overall scope of the estimate
- **Technical Scope Summary**—summary of the technical scope of the project including what is included in the project as well as what is not included.
- **Qualifications and Assumptions**—the key estimate qualifications and cost assumptions that provide a “bounding” of the estimate and scope. The qualifications and assumptions may describe the types of work expected, the amount of work expected, the source of various materials, conditions in which the work is to be performed (e.g., general access, confined space, contaminated building), and any other information that significantly influences the estimate but is not clearly identified in the problem statement or alternative description(s). Major assumptions and exclusions that affect the estimate or the accuracy of the estimate are also described.

In completing this activity, the cost analyst should identify areas where scope descriptions have deficiencies, or where key information is missing and has to be assumed. Key information is identified for those reviewing or using the estimate. Qualifications and assumptions should be described and documented to the level practical, and they should be clearly described so an individual not intimately involved with the estimate can understand the estimate’s basis.

- **Method and Justification for Use of Labor Rates**—an explanation of how labor rates were selected and applied.
- **Method and Justification for use of Contingencies**—an explanation of how contingencies were determined and applied.
- **Method and Justification for use of Escalation**—an explanation of the escalation rates used, how they were obtained, why they were selected and how they were applied.

²¹ GAO-09-3SP provides good practices for preparing cost estimates for developing and managing capital program costs. When documenting cost estimates for other purposes, a graded approach to cost estimate packaging and reporting should be used with its scope limited to the intended function of the estimate.

- **Documentation of Review and Concurrence**—evidence that the estimate was reviewed and concurred.

B.8 Cost Estimating Outputs

B.8.1 Baselines

Typically, NRC cost estimates are performed to analyzed proposed regulatory changes and are used to quantify the incremental impacts of this change. In the problem statement the need for regulatory action must be justified within the context of what would prevail if regulatory action were not taken. This justification requires assumptions as to whether, and to what degree, voluntary practices may change in the future. In general, the no action alternative serves as the regulatory baseline and is central to the estimation of incremental costs and benefits.

B.8.2 Analysis

The regulatory analysis process, and the supporting cost-benefit analysis, is intended to be an integral part of the NRC's decision making that systematically provides complete disclosure of the relevant information supporting a regulatory decision. The process is to be used neither to produce after-the-fact rationalizations to justify decisions already made, nor to unnecessarily delay regulatory actions. The conclusions and recommendations included in a regulatory analysis document are neither final nor binding, but are intended to enhance the soundness of decision making by NRC managers and the Commission.

The NRC performs regulatory analyses to support numerous NRC actions affecting reactor and materials licenses. Executive Order (E.O.) 12866 (Ref. **Error! Reference source not found.**) requires that a regulatory analysis be prepared for all significant regulatory actions.²² The NRC requires regulatory analyses for a broader range of regulatory actions than for significant rulemakings as defined in E.O. 12866. In general, each NRC office should ensure that all mechanisms used by the NRC staff to establish or communicate generic requirements, guidance, requests, or staff positions that would affect a change in the use of resources by its licensees include an accompanying regulatory analysis. This requirement applies to actions initiated internally by the NRC or by a petition to the NRC. These mechanisms include rules, bulletins, generic letters, cost-benefit guides, orders, standard review plans, branch technical positions, and standard technical specifications.

More information on parametric cost estimates, including the Parametric Estimating Initiative (PEI) Parametric Estimating Handbook, can be found through the International Society of Parametric Analysts (ISPA), at <http://www.ispa-cost.org/>.

²² Significant regulatory actions are defined in E.O. 12866 (Ref. **Error! Reference source not found.**) to include actions that "are likely to result in a rule that may (1) have an annual effect on the economy of \$100 million or more or adversely affect in a material way the economy, a sector of the economy, productivity, competition, jobs, the environment, public health or safety, or State, local, or tribal governments or communities; (2) create a serious inconsistency or otherwise interfere with an action taken or planned by another agency; (3) materially alter the budgetary impact of entitlements, grants, user fees, or loan programs or the rights and obligations of recipients thereof; or (4) raise novel legal or policy issues arising out of legal mandates, the President's priorities, or the principles set forth in this Executive Order."

DISCLAIMER: *This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.*

More information on cost estimating and analysis can be found through the Society for Cost Estimating and Analysis (SCEA), at <http://www.sceaonline.net/>.

More information on cost engineering can be found through the AACEI, at <http://www.aacei.org/>.

B.9 Cost Estimating Expectations

This Section summarizes what could be expected from the use of NRC cost estimates that are prepared to support regulatory analyses, backfitting analyses, and environmental analyses.

B.9.1 Summary of Expectations – cost estimate is of sufficient quality, is appropriate for its intended use, and has been subjected to internal checks and reviews

An NRC cost estimate, regardless of purpose, classification, or technique employed, should demonstrate sufficient quality to infer that it is appropriate for its intended use, is complete, and has been subjected to internal checks and reviews. It should also be clear, concise, reliable, fair, reasonable, and accurate, within some probability or confidence levels. In addition, it is expected to have followed accepted standards such as the GAO 12 steps of a high quality cost estimating process (Ref. 2), as applicable.

Common elements of good cost estimates are expected to be constant. Suggested review criteria are summarized in Enclosure B-1.

B.9.2 Independent Cost Estimates

In December 2014, the GAO published GAO-15-98, “Nuclear Regulatory Commission—NRC Needs to Improve Its Cost Estimates by Incorporating More Best Practices” (Ref. 11). GAO-15-98 examines the extent to which NRC’s cost estimating procedures support development of reliable cost estimates and follow specific best practices identified in GAO-09-3SP, “GAO Cost Estimating and Managing Capital Program Costs”. As a result of these evaluations, GAO recommended that NRC align its cost estimating procedures with relevant cost estimating best practices in GAO-09-3SP and ensure that future cost estimates are prepared in accordance with relevant cost estimating best practices. GAO recommended, among other aspects, that NRC demonstrate credibility of its cost estimates by cross-checking agency results with ICEs developed by others, providing confidence levels, and conducting a sensitivity analysis to identify variables most affecting cost estimates.

In response to the GAO concerns and recommendations, the NRC has initiated a pilot program to have selected ICEs performed for the same proposed action.

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

B.10 References

1. Chilk, S. 1993. Staff Requirements Memorandum to the Office of the Executive Director for Operations, J.M. Taylor and W.C. Parker, "SECY-93-086—Backfit Considerations," ADAMS Accession No. ML003760758.
2. U.S. Government Accountability Office (GAO). 2009. "GAO Cost Estimating and Assessment Guide: Best Practices for Developing and Managing Capital Program Costs." GAO-09-3SP, Washington, D.C. Accessed at <http://www.gao.gov/assets/80/77175.pdf>
3. U.S. Department of Energy (DOE). 2011. "Cost Estimating Guide." DOE G 413.3-21. May 9, 2011. Accessed at <https://www.directives.doe.gov/directives-documents/400-series/0413.3-EGuide-21>.
4. U.S. Department of Energy (DOE). 2012. "Work Breakdown Structure Handbook." August 16, 2012. Accessed at <http://energy.gov/sites/prod/files/DOE%20WBS%20Handbook%20%202012-08-16.pdf>.
5. Association for Advancement of Cost Engineering International (AACEI). 2011. "Cost Estimate Classification System TCM Framework: 7.3 – Cost Estimating and Budgeting." Recommended Practice No. 17R-97. November 29, 2011. Accessed at http://www.aacei.org/toc/toc_17R-97.pdf.
6. Association for Advancement of Cost Engineering International (AACEI). 2011. "Cost Estimate Classification System – As Applied in Engineering, Procurement, and Construction: TCM Framework: 7.3 – Cost Estimating and Budgeting." Recommended Practice No. 18R-97. November 29, 2011. Accessed at http://www.aacei.org/toc/toc_18R-97.pdf.
7. U.S. Nuclear Regulatory Commission (NRC). 1999. Staff Requirements - SECY-98-144, "White Paper on Risk-Informed and Performance-Based Regulation," ADAMS Accession No. ML003753601.
8. Wagner, L.M. 2013. "ARIES Cost Account Documentation." UCSD-CER-13-01. University of California, San Diego, Center for Energy Research. Accessed at <http://aries.ucsd.edu/LIB/REPORT/ARIES-ACT/UCSD-CER-13-01.pdf>.
9. Schule, S. C., Young, Theodore L., and Robert, John. 1978. "Fusion Reactor Design Studies – Standard Accounts for Cost Estimates." PNL-2648. Pacific Northwest National Laboratory, Richmond, WA.
10. United Engineers and Constructors, Inc., NUREG-0248, "Commercial Electric Power Cost Studies, Part 8, Total Generating Costs: Coal and Nuclear Plants," 1979.
11. U.S. Government Accountability Office (GAO). 2014. Report to Congressional Requesters, "NRC Needs to Improve Its Cost Estimates by Incorporating More Best Practices." GAO-15-98, Washington, D.C. Accessed at

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

<http://www.gao.gov/assets/670/667501.pdf>

12. 10 CFR Part 50. *Code of Federal Regulations*, Title 10, *Energy*, Part 50, “Domestic Licensing of Production and Utilization Facilities.” Washington, D.C. Accessed at <http://www.nrc.gov/reading-rm/doc-collections/cfr/part050/>
13. Sciacca, F. 1992. “Generic Cost Estimates.” NUREG/CR-4627, revision 2. Science and Engineering Associates, Inc., Albuquerque, New Mexico.

DRAFT

DISCLAIMER: *This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.*

Enclosure B-1 Cost Estimate Review Criteria

When reviewing NRC cost estimates, this generic criteria is suggested as a minimum. All criteria should be addressed to be complete, and if all criteria are reasonably addressed, then the estimates represented may be considered of quality, reasonable and as accurate as possible. The estimates should also have been prepared by following the GAO 12 steps for a High Quality Estimating Process (GAO-09-3SP) as recommended in this document.²³

Work Breakdown Structure (WBS) - A WBS if used should be consistent between the technical definition, the cost estimate, and the implementation schedule. The use of a common WBS should be considered for consistency between cost estimates.

Scope of the Problem – The scope of the problem should be discussed in terms of the classes of licensees or facilities being affected, including their numbers, sizes, etc. Any distinction between NRC and Agreement State licensees should be made. The implications of taking no action (i.e., maintaining the status quo) should be identified. The planning phase size and cost estimating modeling should be commensurate with the scope of the problem and the alternatives identified. The cost estimate should be activity-based to the extent practical.

Costs - All costs should be included appropriately and unit rates should be documented and referenced. The quantification should employ monetary terms whenever possible. Dollar values should be established using constant dollar values (i.e., dollars of constant purchasing power).

Contingency - Contingency should be included appropriately in the uncertainty analysis, based on apparent project risks or project risk analysis to the most possible extent. In any event, contingency should have a documented basis. Contingency may be calculated using a deterministic or probabilistic approach, but the method employed should be appropriate and documented.

Contingency is an amount included in an estimate to cover costs that may result from incomplete design, unforeseen and unpredictable conditions, or uncertainties. Contingency should also be commensurate with risk—a factor, element, constraint, or course of action in a project that introduces the uncertainty of outcomes and the possibilities of technical deficiencies, inadequate performances, schedule delays, or cost overruns. In the evaluation of project risk, the potential impact and the probability of occurrence should be considered.

Contingency is most significant and appropriate for long-term projects and most order of magnitude and preliminary estimate classes with significant size and complexity. Contingency may be less significant for nearer term projects that are well defined and with less significant size and complexity.

When performing an uncertainty analysis, the cost analysis should include contingencies on the low estimate and the high estimate and not for the best estimate.

²³ GAO-09-3SP, Chapter 15, Validating the Estimate

Enclosure B-2: Definitions

Definition of terms used within this appendix.

Activity-based costing (ABC)

- Costing using a method to ensure that the budgeted amounts in an account truly represent all the resources consumed by the activity or item represented in the account.
- Cost estimating in which the project is divided into activities and an estimate is prepared for each activity. Also used with detailed, unit cost, or activity-based cost estimating.

Actual Cost – the costs actually incurred and recorded in accomplishing work performed.

Allowance – an amount included in a base cost estimate to cover known but undefined requirements.

Analysis – the separation of a whole (project) into parts; examination of a complex entity, its elements, and their relationships; a statement of such analysis.

Assumptions – factors used for planning purposes that are considered true, real or certain. Assumptions affect all aspects of the estimating process and of the progression of the project activities. (Generally, the assumptions will contain an element of risk.)

Baseline – a quantitative definition of cost, schedule, and technical performance that serves as a standard for estimating incremental costs and benefits of alternatives.

Basis (basis of estimate, or BOE) – documentation that describes how an estimate was developed, and defines the information used in support of its development.

Benchmark – a standard by which performance may be measured.

Bias – a repeated or systematic distortion of a statistic or value, imbalanced about its mean.

Bounding assumption – identified risks that are totally outside the control of the project team and therefore cannot be managed (i.e., transferred, avoided, mitigated, or accepted).

Buried contingency – costs that may have been hidden in the details of an estimate. To reviewers, buried contingency often implies inappropriately inflated quantities, lowered productivity, or other means to increase estimated costs or benefits. Buried contingency should not be used.

Code of accounts (COA) – a systematic coding structure for organizing and managing asset, cost, resource, and schedule information; an index to facilitate finding, sorting, compiling, summarizing, and otherwise managing information to which the code is tied. A complete COA includes definitions of the content of each account.

Conceptual design – the concept that meets a regulatory need; requires a regulatory need as an input. Concepts for meeting a regulatory need are explored and alternatives considered before arriving at the set of alternatives that are technically viable, affordable, and sustainable.

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Confidence (confidence level) – the probability that a cost estimate can be achieved or bettered. This is typically determined from a cumulative probability profile (see Cumulative Distribution Function”) that is the output from a Monte Carlo simulation.

Construction – a combination of engineering, procurement, erection, installation, assembly, demolition, or fabrication to create a new facility or to alter, add to, rehabilitate, dismantle or remove an existing facility; includes alteration and repair (dredging, excavating, and painting) of buildings, structures, or other real property and construction, demolition, and excavation conducted as part of environmental restoration or remediation.

Consequence – is the outcome of an event.

Construction management – a wide range of professional services relating to the management of a project during the pre-design, design, and construction phases; includes development of project strategy, design review of cost and time consequences, value management, budgeting, cost estimating, scheduling, monitoring of cost and schedule trends, procurement, observation to ensure that workmanship and materials comply with plans and specifications, contract administration, labor relations, construction methodology and coordination, and other management of construction acquisition.

Contingency or Contingency Reserve – An amount within an estimate that is derived from a structured evaluation of identified risks, to cover a likely future event or condition, arising from presently known or unknown causes, within a defined project scope. Contingency is not included within regulatory analyses for best estimates.

Correlation – relationship between variables such that changes in one (or more) variable(s) is generally associated with changes in another. Correlation is caused by one or more dependency relationships. Measure of a statistical or dependence relationship existing between two items estimated for accurate quantitative risk analysis.

Cost account - the point at which budgets (resource plans) and actual costs are accumulated and compared to earned value for management control purposes; a natural management point for planning and control that represents work assigned to one responsible organizational on one work breakdown structure element.

Cost accounting – historical reporting of actual and/or committed disbursements (costs and expenditures) on a project. Costs are denoted and segregated within cost codes that are defined in a chart of accounts. In project control practice, cost accounting provides measure of cost commitment and expenditure that can be compared to the measure of physical completion (earned value) of an account.

Cost-Benefit Analysis – is the systematic, quantitative method of assessing the desirability of proposed regulatory actions.

Cost-effective analysis – one method to inform decision machining, in limited cases, when quantitative analyses are not possible or practical (i.e., due to lack of methodologies or data) to consider the dollar value of the benefits provided by the alternatives under consideration

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

Cost-effective analysis values policy consequences in monetary terms; the difference is that at least one policy consequence is not valued but instead is quantified in physical units. The analysis then quantifies the monetized value in terms of one physical unit. The alternative with the largest benefits per unit (or the smallest costs per unit) would normally be preferred.

Cost estimate – A documented statement of costs to be incurred to complete a proposed regulatory action.

Cumulative Distribution Function (CDF) – a statistical function based on the accumulation of the probabilistic likelihood of occurrences. In the case of the cost estimate uncertainty analysis, it represents the likelihood that at a given percentage the project cost will be at or below a given value. As an example, the x-axis might represent the range of potential cost estimate values evaluated by the Monte Carlo simulation and the y-axis represents the project's probability of the costs be less than or equal to that value.

Decision analysis – is the process for assisting decision makers in capturing judgments about risks as probability distributions, having single value measure, and putting these together with expected value calculations.

Delphi technique – technique used to gather information used to reach consensus within a group of subject matter experts on a particular item. Generally a questionnaire is used on an agreed set of items regarding the matter to be decided. Responses are summarized, further comments elicited. The process is often repeated several times. Technique is used to reduce bias in the estimate.

Discount rate – the interest rate used in calculating the present value of expected yearly benefits and costs (see definitions for *nominal interest rate* and *real interest rate*).

Escalation – the provision in actual or estimated costs for an increase in the cost of equipment, material, labor, etc., due to continuing price level changes over time. Inflation may be a component of escalation, but non-monetary policy influences, such as supply-and-demand, are often components.

Estimate – is the assessment of the most likely quantitative result. (Generally, it is applied to costs and durations with a confidence percentage indication of likelihood of its accuracy.)

Estimate uncertainty – the inherent accuracy of a cost-benefit estimate. Represents a function of the level of project definition that is available, the resources used (skill set and knowledge) and time spent to develop the cost estimate and the data (e.g., vendor quotes, catalogue pricing, historical databases, etc.) and methodologies used to develop the cost estimate.

Expert interviews – process of seeking opinions or assistance on the project from subject matter experts (SMEs).

Facilities – buildings and other structures; their functional systems and equipment; site development features such as landscaping, roads, walks, and parking areas; outside lighting and communications systems; central utility plants; utility supply and distribution systems; and other physical plant features.

DISCLAIMER: *This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.*

Appendix B: Cost Estimating and Best Practices

Historical cost information – a database of information from completed projects normalized to some standard (geographical, national average, etc.) and time-based (e.g., brought to current year data) using historical cost indices.

Improvements to land – site clearing, grading, drainage, and facilities common to a project as a whole (such as roads, walks, paved areas, fences, guard towers, railroads, port facilities, etc.) but excluding buildings, structures, utilities, special equipment/process systems, and demolition, tunneling, and drilling that are a significant intermediate or end products of the project.

Independent cost estimate (ICE) – a cost estimate, prepared by an organization independent of the cost-benefit analysis preparation, using the same detailed technical and procurement information to make the project estimate. It can be used to validate the project estimate to determine whether it is accurate and reasonable.

Independent cost review – an independent evaluation of a project's cost estimate that examines its quality and accuracy, with emphasis on specific cost and technical risks. It involves the analysis of the existing estimate's approach and assumptions.

Inflation – the proportionate rate of change in general price, as opposed to the proportionate increase in a specific price.

Influence diagram – a graphical aid to decision making under uncertainty, it depicts what is known or unknown at the time of making a choice, and the degree of dependence or independence (influence) of each variable on other variables and choices.

Key risk – key risks are a set of risks considered to be of particular interest to the project team. These key risks are those estimated to have the most impact on cost and benefits and could include project, technical, internal, external, and other sub-categories of risk.

Lessons learned – formal or informal set of “learning” collected from project or program experience that can be applied to future projects or programs. They can be gathered at any point during the life of the project or program.

Level-of-effort – A form of parametric estimating. Level-of-effort (LOE) is used to determine future repetitive costs based on past cost data, (e.g. If 2 employees spent 1000 person-hours to develop a guidance document last year, then similar documents may need a similar level of effort.). Often LOE estimates have few parameters or performance objectives from which to measure or estimate, but are carried for several time periods at a similar rate (e.g., the number of workers for a specified amount of time). LOE estimates are normally based on hours and the number of full-time equivalents (FTEs).

Life cycle – is the length of time over which an alternative is analyzed.

Management reserve – Management reserve funds are funds set aside for “known unknowns” that are tied to the contract's scope and managed at the contractor level. Unlike contingency reserve, which is funding related, management reserve is budget related. The value of the contract includes these known unknowns in the budget base, and the contractor decides how

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

much money to set aside. Management reserve is not used in NRC regulatory analysis cost estimates.

Monte Carlo Analysis – a method of calculation that approximates solutions to a variety of mathematical problems by performing statistical sampling experiments on a computer.

Net present value (NPV) – is the difference between the discounted present values of benefits and costs.

Nominal interest rate – a rate that is not adjusted to remove the effects of actual or expected inflation. Market interest rates are generally nominal interest rates.

Probability – likelihood of an event occurring, expressed as a qualitative and/or quantitative metric.

Probability Distribution Function (PDF) – a probability distribution, also described as a probability density function, represents the distribution of the probability of an outcome. As an example, the Monte Carlo analysis may be designed to estimate the cost of an alternative.

The PDF represents the number of times a certain estimated cost or benefit is achieved.

Productivity – consideration for factors that affect the efficiency of construction labor (e.g., location, weather, work space, coordination, schedule).

Program Evaluation and Review Technique (PERT) distribution – a special form of the beta distribution with a minimum and maximum value specified. The shape parameter is calculated from the defined *most likely* value. The PERT distribution is similar to a Triangular distribution, in that it has the same set of three parameters.

Qualitative risk analysis – involves assessing the probability and impact of project risks using a variety of subjective and judgmental techniques to rank or prioritize the risks.

Quantitative risk analysis – involves assessing the probability and impact of project risks and using more numerically based techniques, such as simulation and decision tree analysis for determining risk implications.

Range (cost estimate range) – is an expected range of estimated costs or benefits for a proposed regulatory alternative. Ranges may be established based on a range of alternatives, confidence levels, or expected accuracy, and are dependent on a proposed alternative's stage of development, size, complexity, and other factors.

Reconciliation – comparison of a current estimate to a previous estimate to ensure that differences between them is appropriate and reasonably expected. A formal reconciliation may include an account of those differences.

Risk – a factor or element that introduces an uncertainty of outcome, either positively or negatively that could impact the cost estimate of the considered regulatory alternative. This narrow definition for risk is limited for risk as it pertains to performing cost-benefit analyses.

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

Risk analysis – process by which risks are examined in further detail to determine the extent of the risks, how they relate to each other, and which ones are the highest risks.

Risk analysis method – the technique used to analyze the risks associated with a regulatory alternative. Three categories of risk analysis methods are:

1. Qualitative - based on project characteristics and historical data (e.g., check lists, scenarios)
2. Risk models - combination of risks assigned to parts of the estimate to define the risk of the total estimate.
3. Probabilistic models - combining risks from various sources and events (e.g., Monte Carlo, Latin hypercube, decision tree, influence diagrams, etc.)

Risk assessment – identification and analysis of project and program risks ensuring an understanding of each risk in terms of probability and consequences.

S-curve (spending curve) –

- Graphic display of cumulative costs, labor hours, or other quantities plotted against time. The name is derived from the S-shaped curve (flatter at the beginning and end, steeper in the middle) produced on a project that starts slowly, accelerates, and then slows again.
- A representation of costs over the life of a project.

Sensitivity analysis – considers all activities associated with one cost estimate. If a cost estimate can be sorted by total activity cost, unit cost, or quantity, sensitivity analyses can determine which activities are “cost drivers.” A sensitivity analysis is used to determine what variables most affect the mean cost estimate.

Simulation, (Monte Carlo) – process for modeling the behavior of a stochastic (probabilistic) system. A random sampling technique is used to obtain trial values for key uncertain model input variables. By repeating the process for many trials, a frequency distribution is created, which approximates the true probability distribution for the system’s output.

Triangle distribution – subjective distribution of a population for which there is limited sample data. It is based on knowledge of the minimum and maximum and a best estimate as to what the modal value might be. It is also used as an alternative to the Beta distribution or PERT distribution.

Uncertainty analysis – considers all activities associated with one cost estimate and their associated risks. An uncertainty analysis may also be considered part of a risk analysis or risk assessment.

Unidentified Risks (or unknown-unknowns) – risks that were not anticipated or foreseen. Unidentified risks might originally be unanticipated because the probability of the event is so small that its occurrence is virtually unimaginable. Alternatively, an unidentified risk might be one that falls into an unanticipated or uncontrolled risk event category.

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

Work breakdown structure (WBS) – product-oriented grouping of project elements that organizes and defines the total scope of the project; a multi-level framework that organizes and graphically displays elements representing work to be accomplished in logical relationships. Each descending level represents an increasingly detailed definition of a project component. Components may be products or services. The structure and code that integrate and relate all project work (technical, schedule, and cost) and are used throughout the life cycle of a project to identify and track specific work scope. Note: WBS should not be developed or organized along financial or organizational lines. It should be broken into organized blocks of work scope, and scope related activities. Financial and/or organizational identification needs should be attached as separate codes that relate to the WBS element.

Work package – a task or set of tasks performed within a control account

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Enclosure B-3 Independent Cost Review and Independent Cost Estimate Guidance

General Guidance

- ICR/ICE teams need to be comprised of individuals with appropriate industry and DOE experience and credentials. Ideally, teams will include individuals with appropriate industry certifications (PE, CCE, PMP, etc.) and subject matter experts knowledgeable in the areas addressed by the project (in particular any unique technical areas or project execution strategies).
- It is important to establish a charter or scope of work that clearly defines the boundaries of the ICR and ICE teams. For example, it should be clearly understood that the purpose of an ICR or ICE is to establish an independent cost estimate for a project based on the same execution strategy, conditions, technical scope and schedule as used by the project team. It is not appropriate for an ICR or ICE team to question regulatory need, develop new alternatives, etc. and then generate an estimate based on these new strategies, scope, or alternatives. The ICR or ICE team may propose or recommend alternatives based on observation and expert opinion; however attempting to use those alternatives to compare to project estimates is not appropriate.

Table 1 provides a typical schedule for performing either an ICR or an ICE.

Table 6 ICR/ICE Schedule (suggested and varies by project size and complexity)

Activity	Typical Duration (weeks)
Establish ICR/ICE requirements and approved budget	1 – 2
Develop task order and complete negotiations with ICE contractor	2–4
Hold kick-off meeting and initial site briefings	1–2
Development of ICR/ICE and draft report	2–10 (varies with project and ICE Type)
Reconciliation between ICE and project estimate	1–2
Complete and issue final report	1–4
Overall Duration	8–24

Typical Information Requirements for ICR/ICE

The following lists some typical data needs to support an ICR or ICE. These needs should be addressed in light of the stage of the project and the nature of the project.

1. Project Status/Management/Technical Briefings should include, but not be limited to:
 - a. Project history and overview
 - b. Technical baseline
 - c. Current project status
 - d. Major issues and problems
 - e. Project organization
 - f. Work Breakdown Structure (WBS)
2. Project Schedule should include, but not be limited to:

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

- a. Milestones
- b. Critical Path
3. Design and Estimate Documentation/Back-up should include, but not be limited to:
 - a. Project information such as
 - i. Facilities descriptions
 - ii. Plot plans and layout drawings
 - iii. P&IDs, Process Diagrams
 - iv. Electrical One-Line drawings
 - v. System Descriptions
 - b. Design basis documentation
 - c. Cost estimate summary
 - d. Cost estimate details
 - e. Cost estimate backup data, such as
 - i. Vendor quotes
 - ii. Labor rates
 - iii. Productivity factors
 - iv. Estimate basis/assumptions
 - v. Overhead/markup assumptions and calculations
 - vi. labor estimates
4. ICR/ICE results should include, but not be limited to:
 - a. Current estimate
 - b. Estimate basis (all major components)
 - c. Contingency analysis (and supporting risk and uncertainty analysis)
 - d. Escalation
 - e. Major assumptions
 - f. resource availability/leveling analysis

Reconciliation of ICR/ICE and Project Estimate

- A draft of the DOE ICE report is generated which represents the consensus of both the DOE lead (e.g., OEM) and the ICE contractor, and includes the ICE contractor's report as backup.
- The DOE ICE report includes the team leader's programmatic observations and comments.
- The draft DOE ICE report is transmitted to the project office for review and comments.
- The ICE team leader will review the comments with the support contractor to determine whether the major differences between the project estimate and the ICE can be resolved via a teleconference or if a face-to-face meeting is required for reconciliation.
- Reconciliations
 - Concentrate on major cost differences or items of special interest.
 - Reconciliation does not necessarily mean consensus.
 - An attempt should be made to keep reconciliations non-adversarial.
 - If data is presented at the reconciliation that proves the ICE is in error, the ICE should be changed. The project team should adhere to this rule as well.
- A final draft ICE report will be developed to reflect any changes resulting from the reconciliation meeting.

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

ICE Report Contents

- Executive Summary
- Background (including project cost/baseline history)
- Project Status
- Technical Baseline Description
- Information available to the ICE team
- Cost estimate methodology (s) used
- Comparison of Project Estimate and the ICE by WBS
- Variance Analysis
- Contingency Analysis
- Conclusions
- Recommendations

DRAFT

Enclosure B-4: Expectations for Quality Cost Estimates

A later draft will provides guidance for checking the quality of cost estimates to meet the four characteristics (credible, well-documented, accurate, and comprehensive) of quality cost estimates and the reasonableness of the cost estimating techniques employed

Enclosure B-5: Cross Reference to GAO-09-3SP

This appendix provides a cross reference of the 12 key GAO estimating steps and their implementing tasks²⁴ to the section of this document where guidance for accomplishing those steps is addressed and discussed.

Table B-7 Cross Reference to GAO-09-3SP Best Practices

GAO Project Phase	GAO Best Practice	GAO Associated Task ²⁵	Where Conformance to GAO Practice is Demonstrated
INITIATION AND RESEARCH – Your audience, what you are estimating, and why you are estimating it are of the utmost importance.	Step 1: Define the Estimate’s Purpose	Determine estimate’s purpose, required level of detail, and overall scope	Guidance related to the purpose of the estimate can be found in Sections xx.
		Determine who will receive the estimate	
	Step 2: <i>Develop an Estimating Plan</i>	Determine the cost estimating team and develop its master schedule.	Guidance related to planning the estimate development can be found in Section xx.
		Determine who will do the independent cost estimate	
		Outline the cost estimating approach Develop the estimating timeline.	
	ASSESSMENT— Cost assessment steps are iterative and can be accomplished in varying order or concurrently.	Step 3: <i>Define the Program Characteristics</i>	In a technical baseline description document, identify the program’s purpose and its system and performance characteristics and all system configurations.
Describe technology implications.			
Describe acquisition schedule and strategy Describe relationship to other existing systems, including predecessor or similar legacy systems.			

²⁴ The GAO project phase is identified in Figure 1, “The Cost Estimating Process,” from the main text. The GAO best practice and GAO associated task is listed in Table 2, “The Twelve Steps of a High-Quality Cost Estimating Process,” from the main text.

²⁵ The shaded boxes are not applicable to regulatory analysis cost estimates used to evaluate proposed actions affecting entities that the NRC regulates.

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

GAO Project Phase	GAO Best Practice	GAO Associated Task ²⁵	Where Conformance to GAO Practice is Demonstrated
		Define support (manpower, training, etc.) and security needs and risk items. Develop system quantities for development, test, and production Develop system quantities for development, test, and production Define deployment and maintenance plans.	
	Step 4: Determine the Estimating Structure	Define a work breakdown structure (WBS) and describe each element in a WBS dictionary (a major automated information system may have only a cost element structure). Choose the best estimating method for each WBS element. Identify potential cross-checks for likely cost and schedule drivers. Develop a cost estimating checklist.	Guidance relative to estimate structure is found in Section xx.
	Step 5: Identify Ground Rules and Assumptions	Clearly define what the estimate includes and excludes. Identify global and program-specific assumptions, such as the estimate's base year, including time-phasing and life cycle. The estimate's base year, including time-phasing and life cycle. Identify program schedule information by phase and program acquisition strategy. Identify any schedule or budget constraints, inflation assumptions, and travel costs. Specify equipment the government is to furnish as well as the use of existing facilities or new modification or development. Identify prime contractor and major subcontractors. Determine technology refresh cycles, technology assumptions, and new technology to be developed. Define commonality with legacy systems and assumed heritage savings. Describe effects of new ways of doing business.	The concepts related to ground rules and assumptions are discussed in Section xx.
	Step 6: Obtain Data	Create a data collection plan with emphasis on collecting current and	Estimate data sources and

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

GAO Project Phase	GAO Best Practice	GAO Associated Task ²⁵	Where Conformance to GAO Practice is Demonstrated
		relevant technical, programmatic, cost, and risk data.	associated guidance can be found in Section xx.
		Investigate possible data sources.	
		Collect data and normalize them for cost accounting, inflation, learning and quantity adjustments.	
		Analyze the data for cost drivers, trends, and outliers and compare results against rules of thumb and standard factors derived from historical data.	
		Interview data sources and document all pertinent information, including an assessment of data reliability and accuracy.	
		Store data for future estimates	
	Step 7: Develop a Point Estimate and Compare it to an Independent Cost Estimate	Develop the cost model, estimating each WBS element, using the best methodology from the data collected, and including all estimating assumptions.	The techniques available for estimate development are described in Section xx and the estimate development process itself is discussed extensively in Section xx.
		Express costs in constant year dollars	
		Time-phase the results by spreading costs in the years they are expected to occur.	
		Sum the WBS elements to develop the overall point estimate	
		Validate the estimate by looking for errors like double counting and omitted costs.	
		Compare estimate against the independent cost estimate and examine where and why there are differences.	
		Perform cross-checks on cost drivers to see if results are similar	
		Update the model as more data become available or as changes occur and compare results against previous estimates.	
ANALYSIS—The confidence in the point or range of the estimate is crucial to the decision maker.	Step 8: Conduct Sensitivity Analysis	Test the sensitivity of cost elements to changes in estimating input values and key assumptions.	The concept of Sensitivity Analysis is discussed in Section xx as a subset of contingency analysis. However the requirements for such analyses can also be found throughout the
		Identify effects on the overall estimate of changing the program schedule or quantities.	
		Determine which assumptions are key cost drivers and which cost	

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

GAO Project Phase	GAO Best Practice	GAO Associated Task ²⁵	Where Conformance to GAO Practice is Demonstrated
		elements are affected most by changes.	Guidance document, specifically, Section xx.
	Step 9: Conduct Risk and Uncertainty Analysis	Determine and discuss with technical experts the level of cost, schedule, and technical risk associated with each WBS element.	An explanation of NRC's guidance relative to risk and uncertainty analysis and contingency allowances can be found in Section xx.
		Analyze each risk for its severity and probability.	
		Develop minimum, most likely, and maximum ranges for each risk element.	
		Determine type of risk distributions and reason for their use.	
		Ensure that risks are correlated	
		Use an acceptable statistical analysis method (e.g., Monte Carlo simulation) to develop a confidence interval around the point estimate.	
		Identify the confidence level of the point estimate.	
		Identify the amount of contingency funding and add this to the point estimate to determine the risk-adjusted cost estimate.	
	Recommend that the project or program office develop a risk management plan to track and mitigate risks.		
	Step 10: Document the Estimate	Document all steps used to develop the estimate so that a cost analyst unfamiliar with the program can recreate it quickly and produce the same result.	Estimate documentation is discussed in Section xx.
		Document the purpose of the estimate, the team that prepared it, and who approved the estimate and on what date	
		Describe the program, its schedule, and the technical baseline used to create the estimate.	
		Present the program's time-phased life-cycle cost.	
		Discuss all ground rules and assumptions.	
		Include auditable and traceable data sources for each cost element and document for all data sources how the data were normalized.	

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

GAO Project Phase	GAO Best Practice	GAO Associated Task ²⁵	Where Conformance to GAO Practice is Demonstrated
		<p>Describe in detail the estimating methodology and rationale used to derive each WBS element's cost (prefer more detail over less).</p> <p>Describe the results of the risk, uncertainty, and sensitivity analyses and whether any contingency funds were identified.</p> <p>Document how the estimate compares to the funding profile.</p> <p>Track how this estimate compares to any previous estimates.</p>	
<p>PRESENTATION – Documentation and presentation make or break a cost estimating decision outcome.</p>	<p><i>Step 11: Present Estimate to Management for Approval</i></p>	<p>Develop a briefing that presents the documented life-cycle cost estimate.</p> <p>Include an explanation of the technical and programmatic baseline and any uncertainties</p> <p>Compare the estimate to an independent cost estimate (ICE) and explain any differences.</p> <p>Compare the estimate (life-cycle cost estimate (LCCE)) or independent cost estimate to the budget with enough detail to easily defend it by showing how it is accurate, complete, and high in quality.</p> <p>Focus in a logical manner on the largest cost elements and cost drivers.</p> <p>Make the content clear and complete so that those who are unfamiliar with it can easily comprehend the competence that underlies the estimate results.</p> <p>Make backup slides available for more probing questions.</p> <p>Act on and document feedback from management.</p> <p>Request acceptance of the estimate.</p>	<p>Guidance related to the presentation of estimate results can be found in Section xx.</p>
	<p><i>Step 12: Update the Estimate to Reflect Actual Costs and Changes</i></p>	<p>Update the estimate to reflect changes in technical or program assumptions or keep it current as the program passes through new phases or milestones.</p> <p>Replace estimates with EVM EAC and Independent estimate at completion (EAC) from the integrated EVM system.</p> <p>Report progress on meeting cost and schedule estimates.</p>	<p>Estimate maintenance is discussed in Section xx.</p>

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.

Appendix B: Cost Estimating and Best Practices

GAO Project Phase	GAO Best Practice	GAO Associated Task ²⁵	Where Conformance to GAO Practice is Demonstrated
		Perform a post mortem and document lessons learned for elements whose actual costs or schedules differ from the estimate. Document all changes to the program and how they affect the cost estimate.	

DRAFT

DISCLAIMER: This is a working draft document for discussion purposes only. All information contained herein is subject to change upon further review by the U.S. Nuclear Regulatory Commission.