


- SYMBOLS**
- VOLUME DAMPER NORMALLY OPEN
 - ◻ VOLUME DAMPER NORMALLY CLOSED (UNLESS SPECIFIED)
 - ⊗ BACK DRAFT DAMPER
 - ⊕ REGISTER WITH OPPOSED BLADE DAMPER (RETURN)
 - ⊞ ELECTRIC HEAT COIL HEATER
 - ⊞ COOLING COIL

REFERENCES:
OP-1 (2) -5147

NOTES:
1. VALVE POSITIONS ARE NOT GOVERNED BY THE UFSAR FIGURES BUT RATHER BY STATION PROCEDURES (EXCEPT VALVES WITH LOCKED OR SEALED, AND FAILURE POSITIONS AS INDICATED).

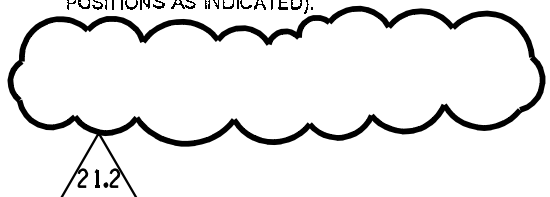

DATE NO.	DESCRIPTION	APPRO.
21.2	REVISED PER UCR-1837, REV. 0.	
REVISIONS FILENAME: fcr-fig-5.5-1 21-2.dgn (raster file): fcr-fig-5.5-1 21-2.tif		
THIS DRAWING IS THE PROPERTY OF THE AMERICAN ELECTRIC POWER SERVICE CORP. AND IS LOANED UPON CONDITION THAT IT IS NOT TO BE REPRODUCED OR COPIED, IN WHOLE OR IN PART, OR USED FOR FURNISHING INFORMATION TO ANY PERSON WITHOUT THE WRITTEN CONSENT OF THE AEP SERVICE CORP., OR FOR ANY PURPOSE DETRIMENTAL TO THEIR INTEREST, AND IS TO BE RETURNED UPON REQUEST.		
INDIANA MICHIGAN POWER COMPANY DONALD C. COOK NUCLEAR PLANT BRIDGMAN MICHIGAN		
CONTAINMENT VENTILATION UNITS NO. 1 OR 2 SHEET 1 OF 2		
DWG. NO. FSAR FIG. 5.5-1		
ARCH	ELEC	MECH STR
SCALE:	DR:	
DATE:	CR:	
DESIGN ENGINEERING DIVISION		
AEP AMERICAN ELECTRIC POWER		AEP SERVICE CORP. 7 RIVERSIDE PLAZA COLUMBUS, OH 43215