

Niagara Mohawk Power Corporation  
 Syracuse, N.Y. 13202  
 T. J. Brennan

DATE OF DOCUMENT:

June 18, 1971

DATE RECEIVED

July 9, 1971

NO.:

2891-A

LTR.

MEMO:

REPORT:

OTHER:

ORIG.:

CC:

OTHER:

1 Conf'd cy

ACTION NECESSARY

NO ACTION NECESSARY

CONCURRENCE

COMMENT

DATE ANSWERED:

BY:

CLASSIF:

U

POST OFFICE

REG. NO.:

FILE CODE:

50-220

DESCRIPTION: (Must Be Unclassified)

Ltr trans the following:

REFERRED TO

DATE

RECEIVED BY

DATE

Ziemann  
 w/9 cys for ACTION

7-14-71

DISTRIBUTION:

Reg File Cy  
 AEC PDR  
 OGC-Rm-P-506-A  
 Compliance (2)

Skovholt  
 N. Dube

Saltzman  
 D. Thompson

Boyd(4)  
 DTIE(Laughlin)  
 NSIC(Buchanan)  
 H. Price & Staff

DO NOT REMOVE

ACKNOWLEDGED

ENCLOSURES:

Technical Specifications & Bases for  
 Nine Mile Point Nuclear Station Operation  
 at Thermal Megawatts.....

REMARKS:

Updated submittal of Tech Specs rec'd  
 on 6-23-71 & (50) addl cys of Tech Specs  
 rec'd 7-9-71.....

2891-A

DL

ACKNOWLEDGED

DO NOT REMOVE



50-220

NIAGARA MOHAWK POWER CORPORATION


Regulatory

File Cy.

NIAGARA MOHAWK

300 ERIE BOULEVARD WEST  
SYRACUSE, N.Y. 13202

June 18, 1971

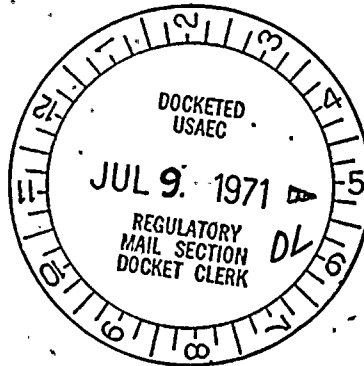

Dr. Peter A. Morris, Director  
Division of Reactor Licensing  
U. S. Atomic Energy Commission  
Washington, D. C. 20545

Dear Dr. Morris:

Your letter of April 14, 1971 transmitted change No. 4 to the Nine Mile Point Nuclear Station Technical Specifications which we have now incorporated in the enclosed new printing of these specifications. This printing also incorporates changes No. 1 through 3, previously directed by the Commission, and a number of additional changes, listed below, which were suggested during the course of subsequent discussions with members of your Staff for the reasons indicated during these meetings.

Technical Specification

Change

Pg. 11, Limiting Safety System Setting  
2.1.2 Objective

Changed 1st & 2nd line to read: "To provide automatic corrective action to prevent exceeding the fuel cladding safety limits."

Pg. 33, Bases 2. 1st paragraph,  
3rd and 5th lines

Changed "High-High" to "High"

Pg. 67, Section 4.3.3.e.(4)

Added item (4) to read: "(4) The main steam line isolation valves are to be tested at a pressure of 22 psig during each refueling outage."

Pg. 74, Bases 3rd paragraph,  
6th line


Changed "High-High" to "High"

Pg. 76, Bases 3rd paragraph,  
4th line

Changed "0.25 mph" to "0.25 inch of water"

2891-A

LB

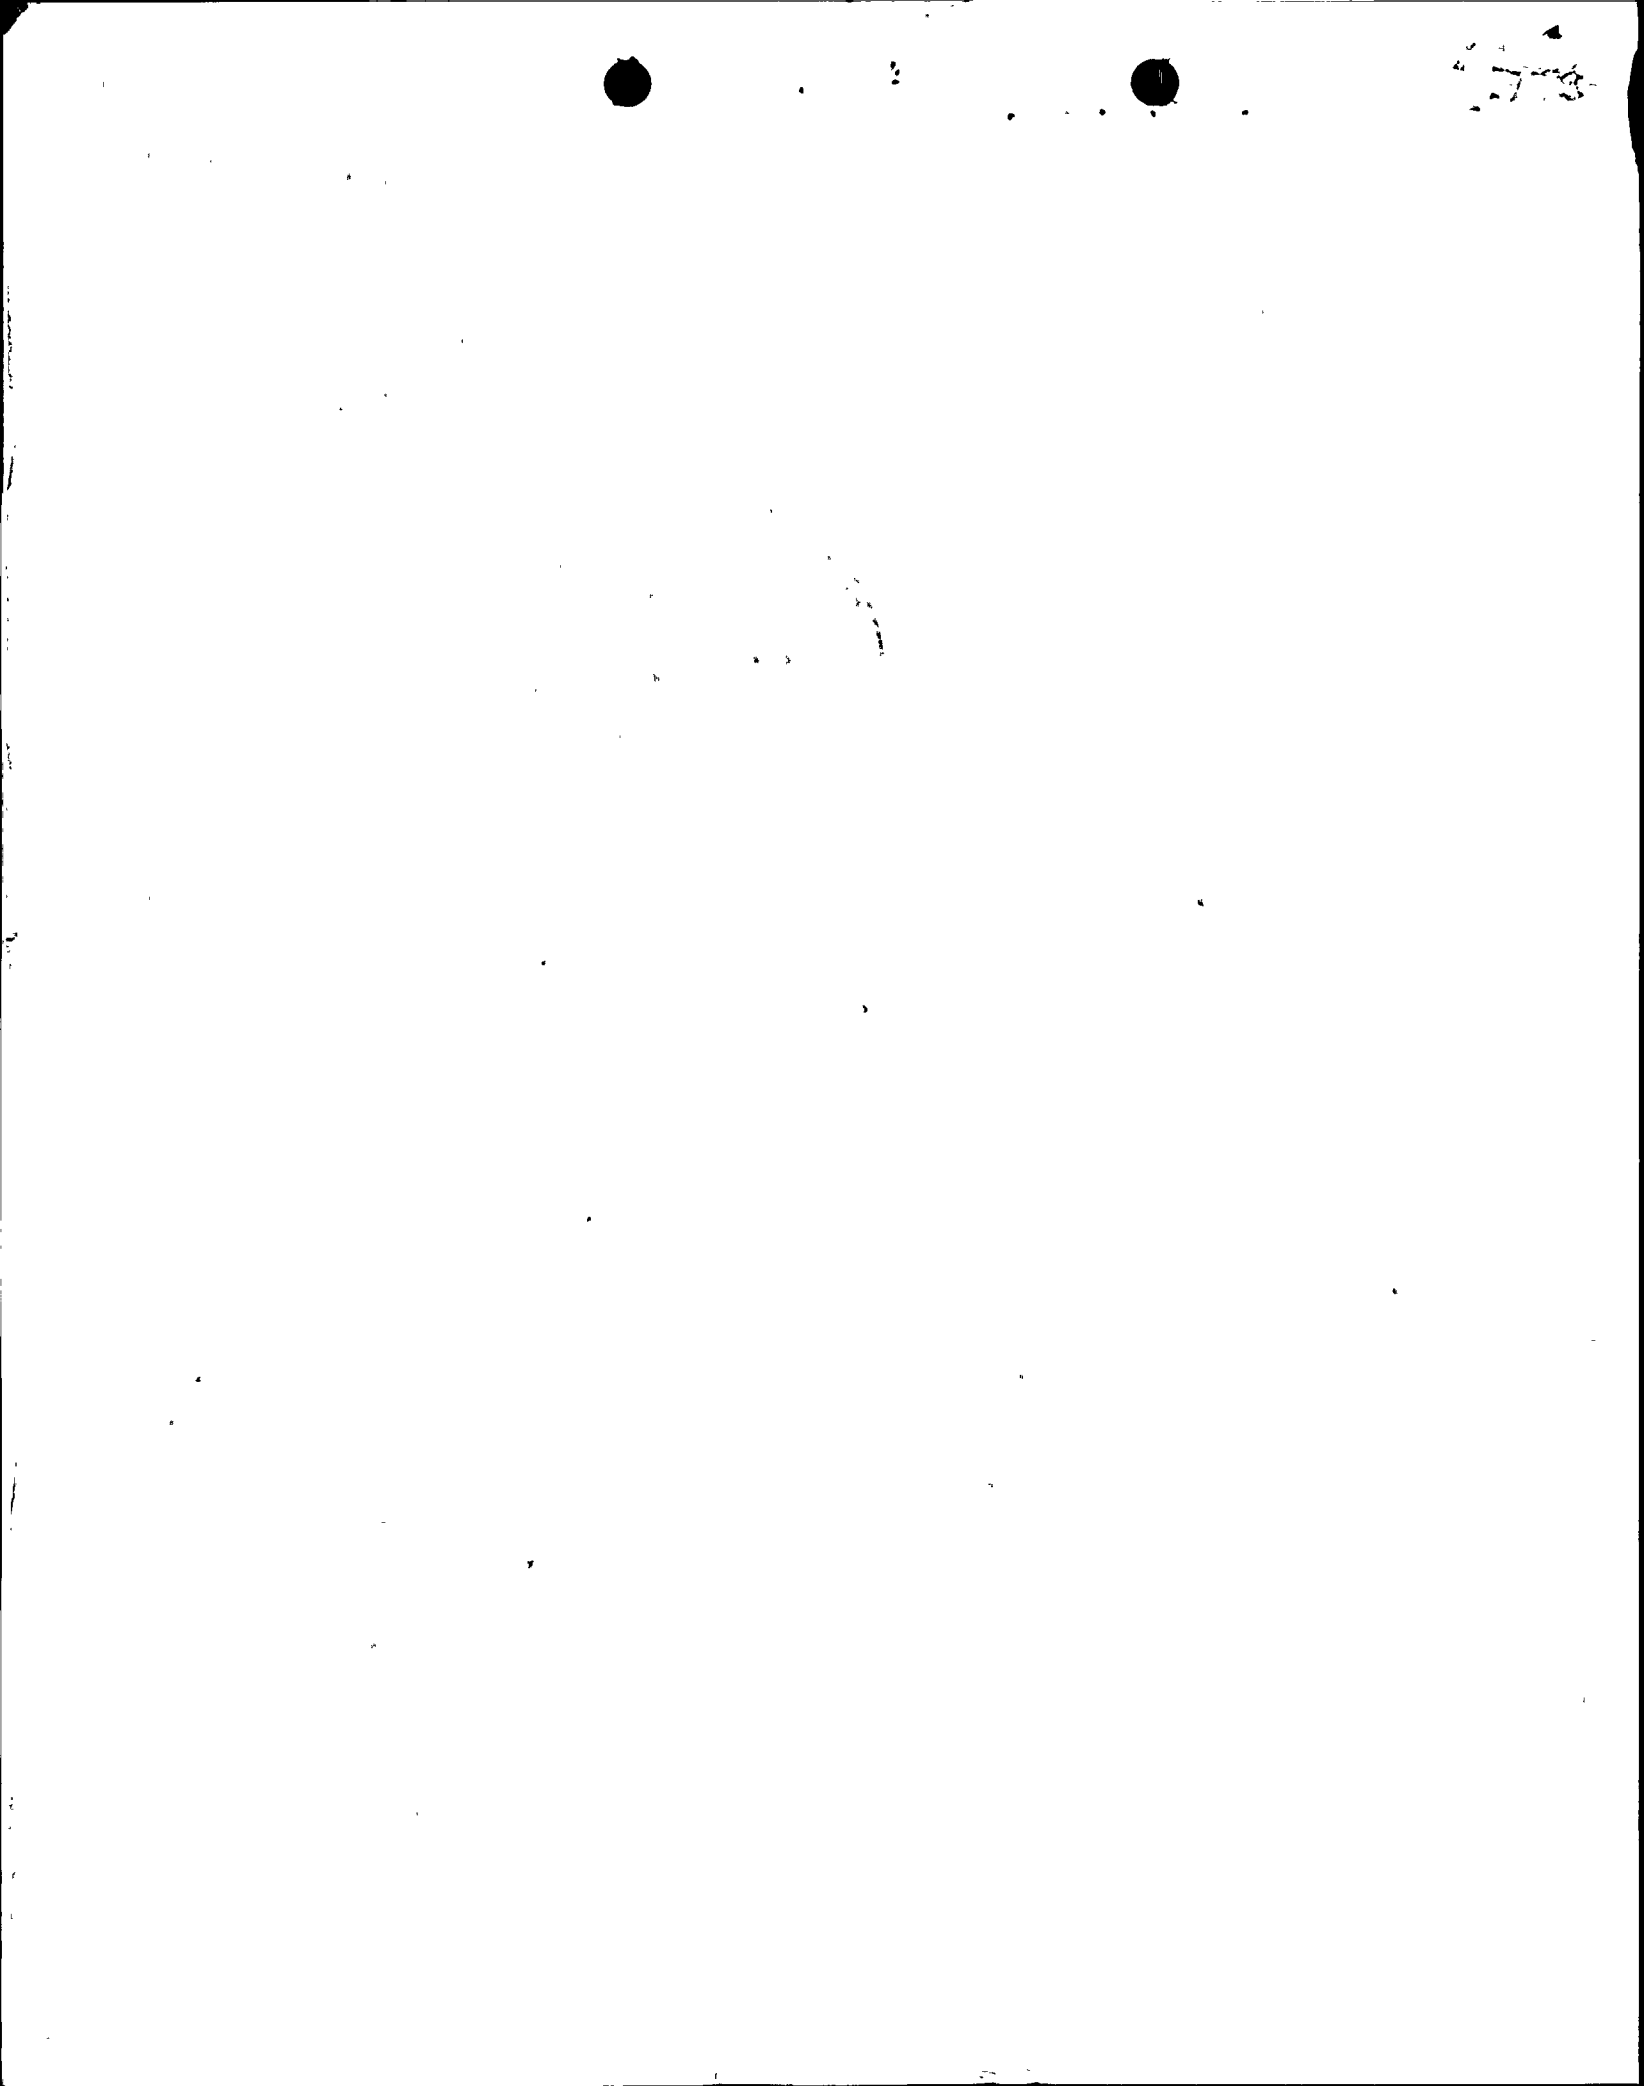

Technical Specification

Change

Pg. 88, Stack Release Bases (3)

Changed the first sentence of Bases (3) to read: "The isolation of the off-gas system is initiated by high radiation in the off-gas piping."

Pg. 109, Table 3.6.2.h

Changed " $\leq 0.57$  Ci/sec" to " $\leq 0.57/E$  Ci/sec"

Pg. 42 of change No. 4

Changed: [Page 119-line 10 from top of page, change "Group Head-Reactor Engineering" to "Staff Engineer-Environment"] to [page 119-lines 10-13, delete entirely.]

Add: Page 119-line 14 from top of page, change "Group Head-Environmental Engineering" to "Staff Engineer-Environment"


We await your approval of this latest printing of Technical Specifications and Bases before submitting additional copies.

Sincerely,



T. J. Brosnan  
Vice President and Chief Engineer

TJB/ks



50-220

NIAGARA MOHAWK POWER CORPORATION




300 ERIE BOULEVARD WEST  
SYRACUSE, N. Y. 13202

Regulatory

File Cy.

July 7, 1971

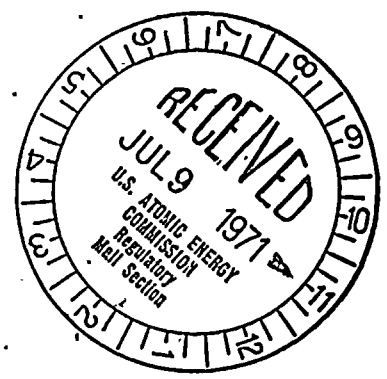

Dr. Peter A. Morris, Director  
Division of Reactor Licensing  
U. S. Atomic Energy Commission  
Washington, D. C. 20545

Dear Dr. Morris:

We acknowledge receipt of your letter of June 30, 1971 and are transmitting this date under separate cover the requested 50 additional copies of "Technical Specifications and Bases for Nine Mile Point Nuclear Station Operation at 1850 Thermal Megawatts".

Sincerely,

T. J. Brosnan  
Vice President and Chief Engineer

TJB:sn

cc: Arvin E. Upton, Esq.

2891

