


GENERAL NOTE: DWG. M-536-31-9 WAS RECREATED FROM M-536-41-6 FOR LEGIBILITY AND ID'S CORRECTED.

NOTES:
 THIS DENOTES A SEPARATE 12 AWG CONDUCTOR RUN FROM THE COAX CONNECTOR BOX DIRECTLY TO THE INSTRUMENT GROUND BUS.
 2. EMI SUPPRESSION CORES INSTALLED ON CABLE ILRPS-BOOSE IN CS401, HELD IN PLACE AND SUPPORTED BY HEAT SHRINK TUBING. (REF. EWR 02-0314-00)

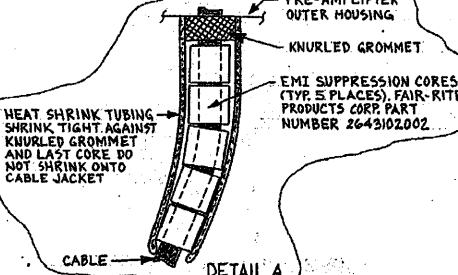

DATE	BY	CHK'D	APPROV'D	REVISION

I certify that the design contained on this page was made in the normal and regular course of business, on the date stated below and that it is not a reproduction of the design of another person.

24X