



CALCULATION COVER SHEET

CALC. NO. M-SLD-002

FILE NO. R2-1

SUPERSEDED BY NA

SAFETY-RELATED [X]
ASME III OR XI []
OTHER QUALITY []
NON QUALITY []

PROJECT STEAM LEAK DETECTION PROJECT ER/CTN NO. NA

DESIGN ACTIVITY/PMR NUMBER BUR * M81000 PAGE 1 OF 16

TITLE/DESCRIPTION STEAM LEAK DETECTION CALC - RCIC PUMP ROOM (UNIT 1)

SYSTEMS AFFECTED S083G, S050

STATEMENT OF PROBLEM

REFER TO PAGE 3 FOR STATEMENT OF PROBLEM.

DESIGN BASIS (EPM-QA-208 OR EPM-QA-400)

REFER TO ATTACHED DESIGN INPUTS GENERATED FOR THIS CALCULATION.

REFERENCES/FORMLAE

REFER TO PAGE 4 FOR REFERENCES.

SUMMARY/CONCLUSIONS

REFER TO PAGE 12 FOR SUMMARY/CONCLUSIONS.

ENGINEERING TURNOVER

(ETO) BINDER AFFECTED? YES-If Yes enter: Binder # _____ Vol. _____

Calc. File _____ Pgs. _____

NO

REV. NO. DATE PREPARED BY REVIEWED/CHECKED BY DATE APPROVED BY DATE

0 7/7/89 M.R. Jastrzewski [Signature] 7/20/89 [Signature] 7/24/89

9108260176 910819
PDR ADOCK 05000387
PDR

FORM EPM-QA-216A REV. 1

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

TABLE OF CONTENTS

1.0 PURPOSE	3
2.0 REFERENCES	4
3.0 ASSUMPTIONS	5
4.0 METHODOLOGY	6
5.0 RESULTS/CONCLUSIONS	12

ATTACHMENT 1 COTTAP Output for RCIC Pump Room -
5 GPM Leak (Summer)

ATTACHMENT 2 COTTAP Output for RCIC Pump Room -
5 GPM Leak (Winter)

ATTACHMENT 3 COTTAP Output for RCIC Pump Room -
25 GPM Leak (Summer)

ATTACHMENT 4 COTTAP Output for RCIC Pump Room -
25 GPM Leak (Winter)

APPENDIX A Data Input Section - RCIC Pump Room (I-12/I-107)

1:0 PURPOSE

The purpose of this calculation is to predict the room temperature profile expected when a small steam leak is introduced in the Unit 1 RCIC Pump Room. The results of this calculation will be used as a basis for development of Steam Leak Detection System setpoints.

0 REFERENCES

- 2.1 Calc # M-RAF-024, Rev. 0 "RB Post DBA Transient Temperature Analysis"
- 2.2 Bechtel Calc # 176-18, Rev. 5 "RB Cooling Modes"
- 2.3 SEA-EE-129, Rev. 0 "SSES Unit 1 and Unit 2 Reactor Building Heat Loads"
- 2.4 Drawings :
 - P&ID M-176, Rev. 20
 - P&ID M-149, Rev. 30
 - P&ID M-150, Rev. 17
 - V-28-1, Rev. 15
 - V-28-2, Rev. 14
 - V-28-3, Rev. 17
 - C-105, Rev. 20
 - C-134, Rev. 15
 - C-156, Rev. 12
 - C-111, Rev. 15
 - C-117, Rev. 17
 - DBB-109-2, Rev. 8
 - GBD-135-1, Rev. 3
- 2.5 M-199 Piping Class Sheets
- 2.6 SEIS Pipeline General Index
- 2.7 Crane Technical Paper No. 410, 23rd Printing
- 2.8 ASHRAE 1985 Fundamentals Handbook
- 2.9 FSAR Table 3.11-6
- 2.10 FSAR Section 5.2.5.1.3
- 2.11 Calc # M-PAF-001, Rev. 1 "HVAC Environmental Analysis - Reactor Buildings & Control Structure"
- 2.12 COTTAP-2 Theory and Input Description Manual (User's Manual), Rev. 1, dated 1/27/89.

1954年10月

0 ASSUMPTIONS

- 1) Plant is operating under normal conditions prior to introducing a steam leak.
- 2) All adjacent rooms will be maintained at their design maximum temperature for summer conditions and at the average temperature for the month of January (if blue-box data is available) for winter conditions. Where winter temperature data is not available, the design minimum temperature of 60°F will be used.
- 3) The room under consideration will not be allowed to pressurize, as the blowout panel will relieve at approximately 0.5 psid. Therefore, a leakage path out of the room will be used to maintain pressure as close to 14.7 psia as possible. The temperature effects due to slight room pressurization are assumed to be negligible.
- 4) The effects of adjacent room heatup are not considered in this analysis (i.e. adjacent room temperatures are held constant). This results in a conservative temperature profile for the room under consideration. The actual adjacent room heatup due to the steam leak is expected to be minimal (when considering conductive heat losses).
- 5) The COTTAP model assumes perfect mixing of the air and steam in the room under consideration.

1. 姓名：张明
2. 性别：男
3. 出生日期：1985年10月10日
4. 身份证号：110101198510101010
5. 联系电话：13800138000
6. 电子邮箱：zhangming@example.com

0 METHODOLOGY

The Compartment Transient Temperature Analysis Program (COTTAP) was used to analyze the affects of a steam leak in various rooms within the plant. The program predicted temperature profiles for the room under consideration with the following set of conditions :

- 1) 5 gpm water equivalent steam leak (Summer)
- 2) 5 gpm water equivalent steam leak (Winter)
- 3) 25 gpm water equivalent steam leak (Summer)
- 4) 25 gpm water equivalent steam leak (Winter)

The individual room models were developed from various sources of information, as identified in Section 2.0 References. The results will consist of the COTTAP output and the plots of various profiles for the conditions stated above. The following discussion is provided to outline the steps used in developing the individual room models.

4.1 General Data For Rooms

Room Volumes : The room volume was taken from Reference 2.1 for the room under consideration. Adjacent room volumes were set to a large value (i.e. 1.0 EE15 cu. ft.) to maintain constant properties such as temperature, pressure and relative humidity.

Initial Pressure : All rooms were assumed to be at an initial pressure of 14.7 psia.

Initial Temperature : All rooms were assumed to be at their maximum normal design temperature initially for summer conditions. Actual winter data was used, where available, as a starting point for the winter runs. The winter data was taken as the "blue-box" average temperature for January 1988. The January data was considered to be more conservative than February data. Where actual winter data was not available, the design minimum room temperature of 60 F was used. Where winter data was not available for the room in question, the room was started at a temperature which allows it to reach a steady-state with its adjacent rooms.

2

2

2

2

2

2

2

2

2

2

2



The outside ambient temperature was taken as 79 F (summer) and 26 F (winter). The summer ambient was taken from Reference 2.8 as the 24 hour daily average temperature, based upon the 1% ASHRAE design value for the Wilkes-Barre/Scranton area. The winter value was taken as the actual monthly average for January over the years 1986 thru 1989. This average was based upon SSES Meteorological Data taken from the plant computer. A comparison of February data over this same time period indicated that the January data was more conservative.

- Relative Humidity : The relative humidity for all rooms connected by ventilation or leakage paths is based upon supply air temperatures of 85 F (summer) and 60 F (winter) at 90% RH. Air at these conditions was then allowed to heat up (sensible heating only) to the initial room temperature, and the corresponding RH value was calculated or read from the psychrometric chart.
- Room Height : This value is no longer used by COTTAP. It's original purpose was associated with the wall condensation calculation used within COTTAP. COTTAP has been revised and no longer uses this information. Therefore, a value of 10.0 ft was inputted for each room. This value has no significance to the calculation. Note that the actual room height was used in the calculation of room volume.

4.2 Airflow and Leakage Path Data

- Airflow Data : The design airflow is provided for the room under consideration. All flow paths are identified (i.e. supply, exhaust and transfer air). The source of the airflow data is the P&ID associated with the particular ventilation system for that room. The data identifies the room from which the air comes, and the room to which the air goes.

Since air flows are balanced to $\pm 10\%$ accuracy, a conservative value of 550 cfm was used for this room (500 cfm x 1.1). The RCIC supply and exhaust duct has back draft isolation dampers to prevent the spread of steam to adjacent

1945年10月

10月

1945年10月

rooms in the event of a steam leak. These dampers isolate at a differential pressure of 2 " wg. The BDID's would be expected to close under the presence of a steam leak. To simplify the model, a conservative assumption was made which leaves the BDID's open during the steam leak. This would have the effect of predicting a lower temp. vs. time profile.

Leakage
Path Data

: As with the airflow data, all rooms connected to the leakage path are identified. The leakage path area is only used to scale the leakage flowrates for the entire compartment under consideration. The intent of the leakage path is to prevent compartment pressurization. For most rooms (except RWCU), only one leakage path is used, and a value of 1.0 sq. ft. is inputted for the leakage path area. When more than one leakage path exists, actual leakage areas can be inputted to better understand leakage flows between adjacent compartments.

4.3 Heat Load Data

Heat Load
Type

: The type of heat load was identified using the following nomenclature :

Type	Description
----	-----
1	Lighting
2	Electrical Panels
3	Motors
4	Unit Coolers
5	Piping
8	Misc. Mechanical Equipment

Heat Input
Rate

: The heat rate input in Btu/hr for the associated heat load.

The values for heat load types 1 thru 3 were obtained from References 2.2 & 2.3. The heat rate inputs for type 4 heat loads are inputted as negative values since the unit coolers remove heat from the room. The heat input rate for type 5 heat loads were input as -1. This value directs COTTAP to obtain piping information necessary to calculate the piping heat loads. The heat input rate for type 8 heat loads was obtained from References 2.2 & 2.3, as necessary for the appropriate room.

Vertical text on the left side of the page, possibly a page number or header.

Faint, illegible text located in the center of the page.



To achieve an initial steady-state condition, a miscellaneous heat load (positive or negative) was added to the main room to balance all other time zero heat loads. This heat load was inputted as type 8.

Note that COTTAP neglects cold pipe and equipment as heat sinks. This represents non-conservatism in this calculation. A sample run made to determine the effects of these heat sinks indicated that resultant temperatures were only slightly lower than the values predicted when neglecting these heat sinks. Therefore, this calculation assumes the effects of these heat sinks are negligible.

For walls and floors in contact with ground, the model predicts a conservative value of heat loss to ground. The slabs are assumed to be in contact with soil at a temperature of 55 F. To model the heat loss to ground, a large value of surface film convective heat transfer coefficient (100 Btu/hr-sq ft- F) has been introduced on the ground side of the floors and walls to achieve a ground contact temperature of 55 F.

4.4 Piping Input Data

Only piping with a design temperature greater than that of the normal room design temperature was included, since COTTAP ignores cold pipe as a heat sink. This generally meant that piping at or close to Reactor conditions was included. Also note that this calculation neglects heat loss from small pipe (i.e. less than 2" OD).

- Pipe OD : The outside diameter of the pipe was obtained from Reference 2.4 .
- Pipe ID : The pipe schedule was obtained from Reference 2.5 . Knowing the schedule, the inside diameter was obtained from Reference 2.7 .
- Insulation OD : The insulation OD was obtained from Reference 2.11 .
- Pipe Length : The pipe length was obtained from Reference 2.4 .
- Emmissivity : The emmissivity was obtained from Reference 2.11 .

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

- Insulation
k Value : The insulation thermal conductivity (k) was obtained from Reference 2.11 .
- Pipe Fluid
Temperature : The design fluid temperature was obtained from Reference 2.6 .
- Fluid Phase : The state of the fluid was determined by reviewing the system P&ID's and design temperatures/pressures. If a particular line could carry steam or water, it was assumed to be liquid for conservatism.

4.5 General Data For Thick Slabs

- Room ID #
on Side 1 : The room number on one side of the slab.
- Room ID #
on Side 2 : The room number on the other side of the slab. When slab is adjacent to ground, a room # of "0" is used.
- Thickness : The thickness of the slab was obtained from Reference 2.4 .
- Heat
Transfer
Area : The area of the slab was obtained from Reference 2.4 . The area was calculated by scaling plant ventilation drawings, utilizing centerline to centerline dimensions. The slab areas are calculated in the Data Input Section (Refer to Appendix A).
- Thermal
Conductivity : The thermal conductivity of the concrete slabs were obtained from Reference 2.8 , Chapter 23 Table 3A. A value of 1.0 Btu/hr ft F was used for all concrete slabs.
- Density : The density of all concrete slabs is assumed to be 140 lbm/cu ft. This value was obtained from Reference 2.8 , Chapter 23 Table 3A.
- Specific
Heat : The specific heat for all concrete slabs was assumed to be 0.22 Btu/lbm F as obtained from Reference 2.8 , Chapter 23 Table 3A.



2

20
21

22

23

24

25

26

27



28

29

30

31

32

33

34

35

36

37

38



6 Film Coefficient Data For Thick Slabs

Type w/r to
Room on
Side 1

: The type of slab with respect to the room on Side 1 was defined using the following codes :

Type 1	Vertical Wall
Type 2	Floor
Type 3	Ceiling

h1 & h2

: All film coefficients (h) for inside walls were calculated by COTTAP. The film coefficient for walls in contact with outside air were inputted as :

Summer	4.0 Btu/hr-sq ft- F
Winter	6.0 Btu/hr-sq ft- F

(Per Reference 2.8 , Chapter 23, Table 1)

A value of 100 Btu/hr-sq ft- F was inputted for walls in contact with ground. This value helps to simulate a wall (or floor) in contact with soil at 55 F. This will result in a conservative prediction of the heat loss to ground.

4.7 Pipe Break Data

Fluid
Pressure

: The fluid pressure within the pipe (psia). All rooms (except RWCU) used a fluid pressure of 1000 psia, which was considered representative of normal Reactor conditions.

Mass Flow

: The total mass flow exiting the pipe break (lbm/hr) was inputted as follows :

for 5 gpm water equivalent steam leak :

$5 \text{ gal/min} \times 1 \text{ cu ft}/7.48 \text{ gal} \times 60 \text{ min/hr} \times .02159 \text{ cu ft/lbm} = 1860 \text{ lbm/hr}$

$v_f = 0.02159 \text{ cu ft/lbm} @ 1000 \text{ psia}$
(per ASME Steam Tables)

for 25 gpm water equivalent steam leak :

$5 \times 1860 \text{ lbm/hr} = 9300 \text{ lbm/hr}$

The break occurs at $t=0.5$ hrs. This allows the room to reach equilibrium conditions prior to initiation of the break. In all room models, the break mass flow is allowed to increase linearly (ramp) from 0 lbm/hr to its maximum value over 0.1 hrs.

0 RESULTS/CONCLUSIONS


The following pages provide the temperature profiles resulting from the RCIC Pump Room model for the conditions stated below :

- 1) 5 gpm water equivalent steam leak (Summer)
- 2) 5 gpm water equivalent steam leak (Winter)
- 3) 25 gpm water equivalent steam leak (Summer)
- 4) 25 gpm water equivalent steam leak (Winter)

The COTTAP output for each case above can be found as Attachments 1 thru 4, respectively. Each output provides a summary of the data input, and the results of each time step within the 24 hour run time. At the end of each COTTAP output, a summary table of Temp vs Time information is also provided.

第 一 章

RCIC PUMP ROOM HEATUP EVALUATION (5 GPM STEAM LEAK/SUMMER)

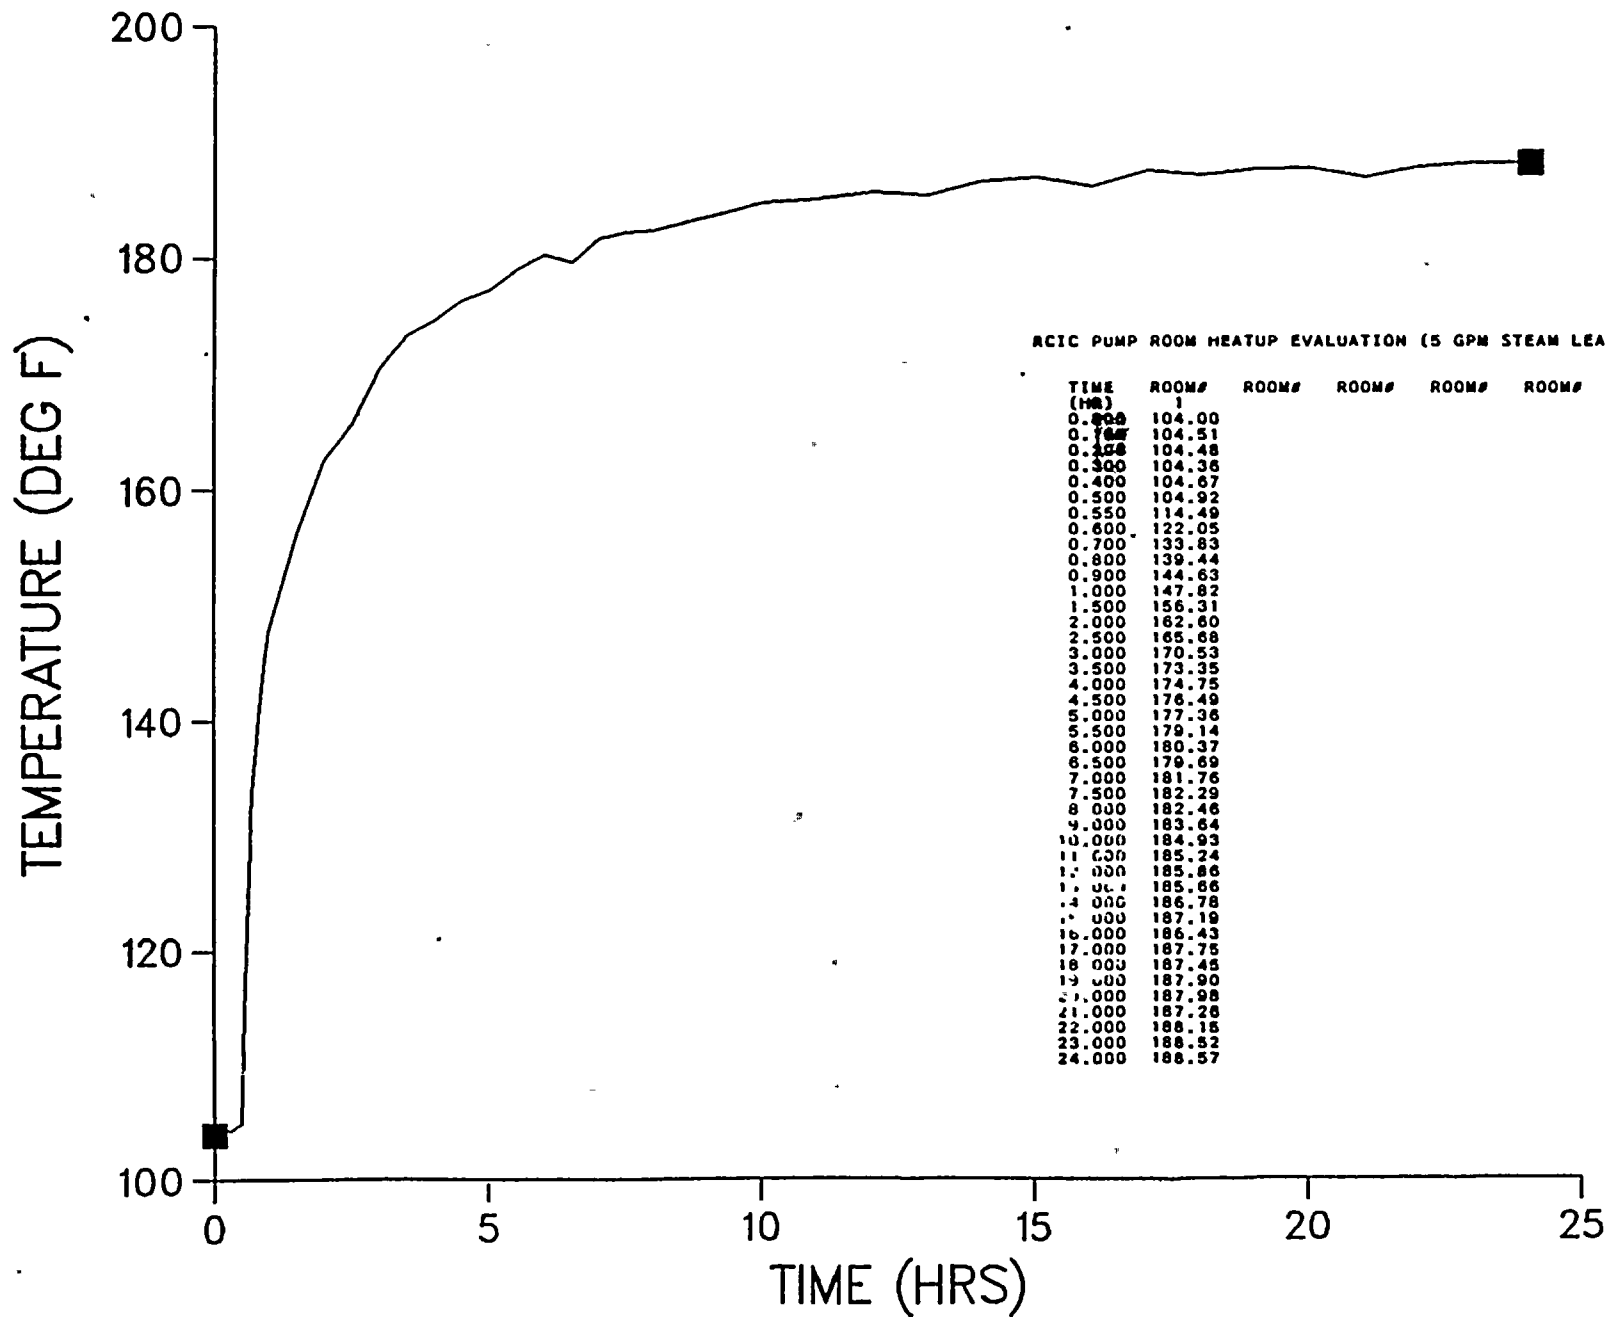


RCIC PUMP ROOM HEATUP EVALUATION (5 GPM STEAM LEAK/SUMMER)

TIME (HRS)	ROOM#	ROOM#	ROOM#	ROOM#	ROOM#	ROOM#	ROOM#	TEMPERATURE (DEG F)
0.000	1							104.00
0.100	1							104.51
0.200	1							104.48
0.300	1							104.36
0.400	1							104.67
0.500	1							104.92
0.550	1							114.49
0.600	1							122.05
0.700	1							133.83
0.800	1							139.44
0.900	1							144.63
1.000	1							147.82
1.500	1							156.31
2.000	1							162.60
2.500	1							165.68
3.000	1							170.53
3.500	1							173.35
4.000	1							174.75
4.500	1							176.49
5.000	1							177.36
5.500	1							179.14
6.000	1							180.37
6.500	1							179.69
7.000	1							181.76
7.500	1							182.29
8.000	1							182.46
9.000	1							183.64
10.000	1							184.93
11.000	1							185.24
12.000	1							185.86
13.000	1							185.66
14.000	1							186.78
15.000	1							187.19
16.000	1							186.43
17.000	1							187.75
18.000	1							187.45
19.000	1							187.90
20.000	1							187.98
21.000	1							187.28
22.000	1							188.15
23.000	1							188.52
24.000	1							188.57


2000

RCIC PUMP ROOM HEATUP EVALUATION (5 GPM STEAM LEAK/WINTER)

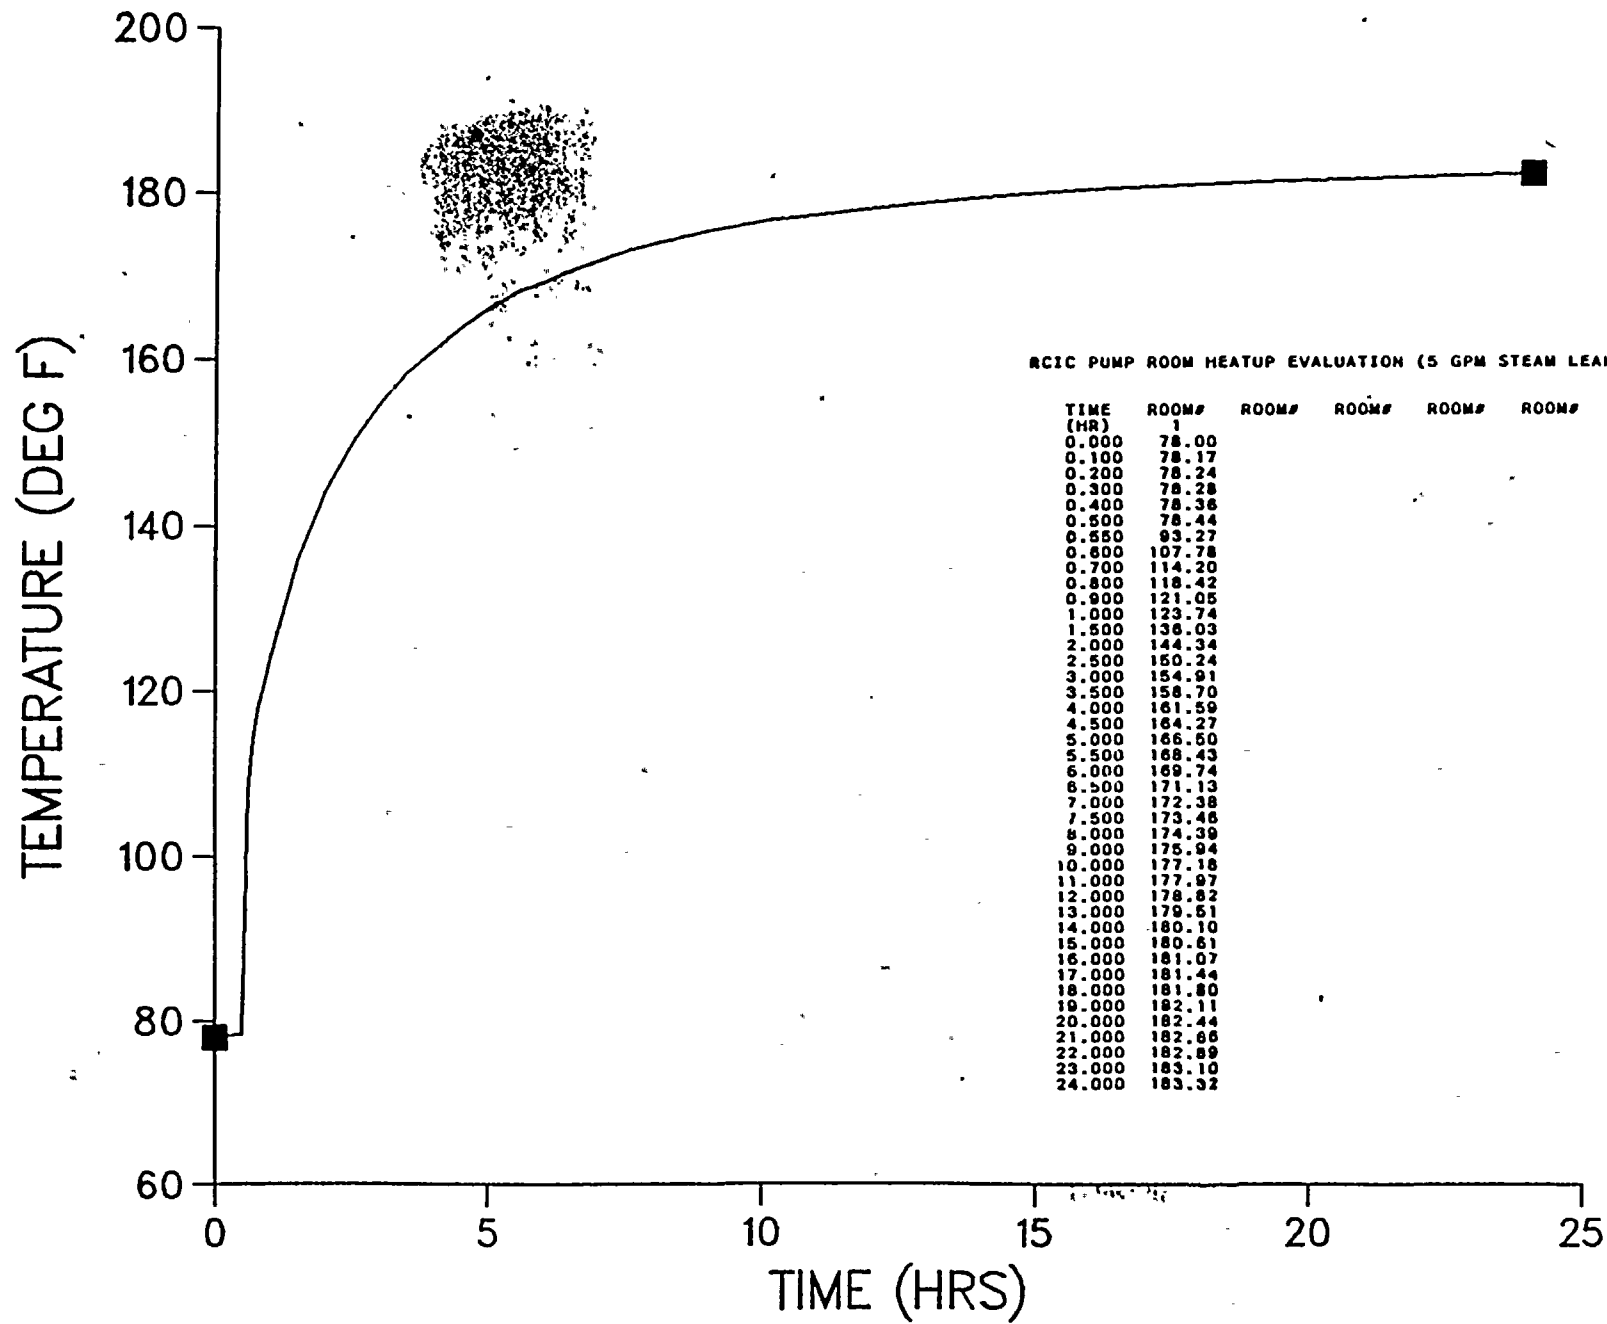

Calc # M-5LD-002
Page 14 of 16

RCIC PUMP ROOM HEATUP EVALUATION (25 GPM STEAM LEAK/SUMMER)

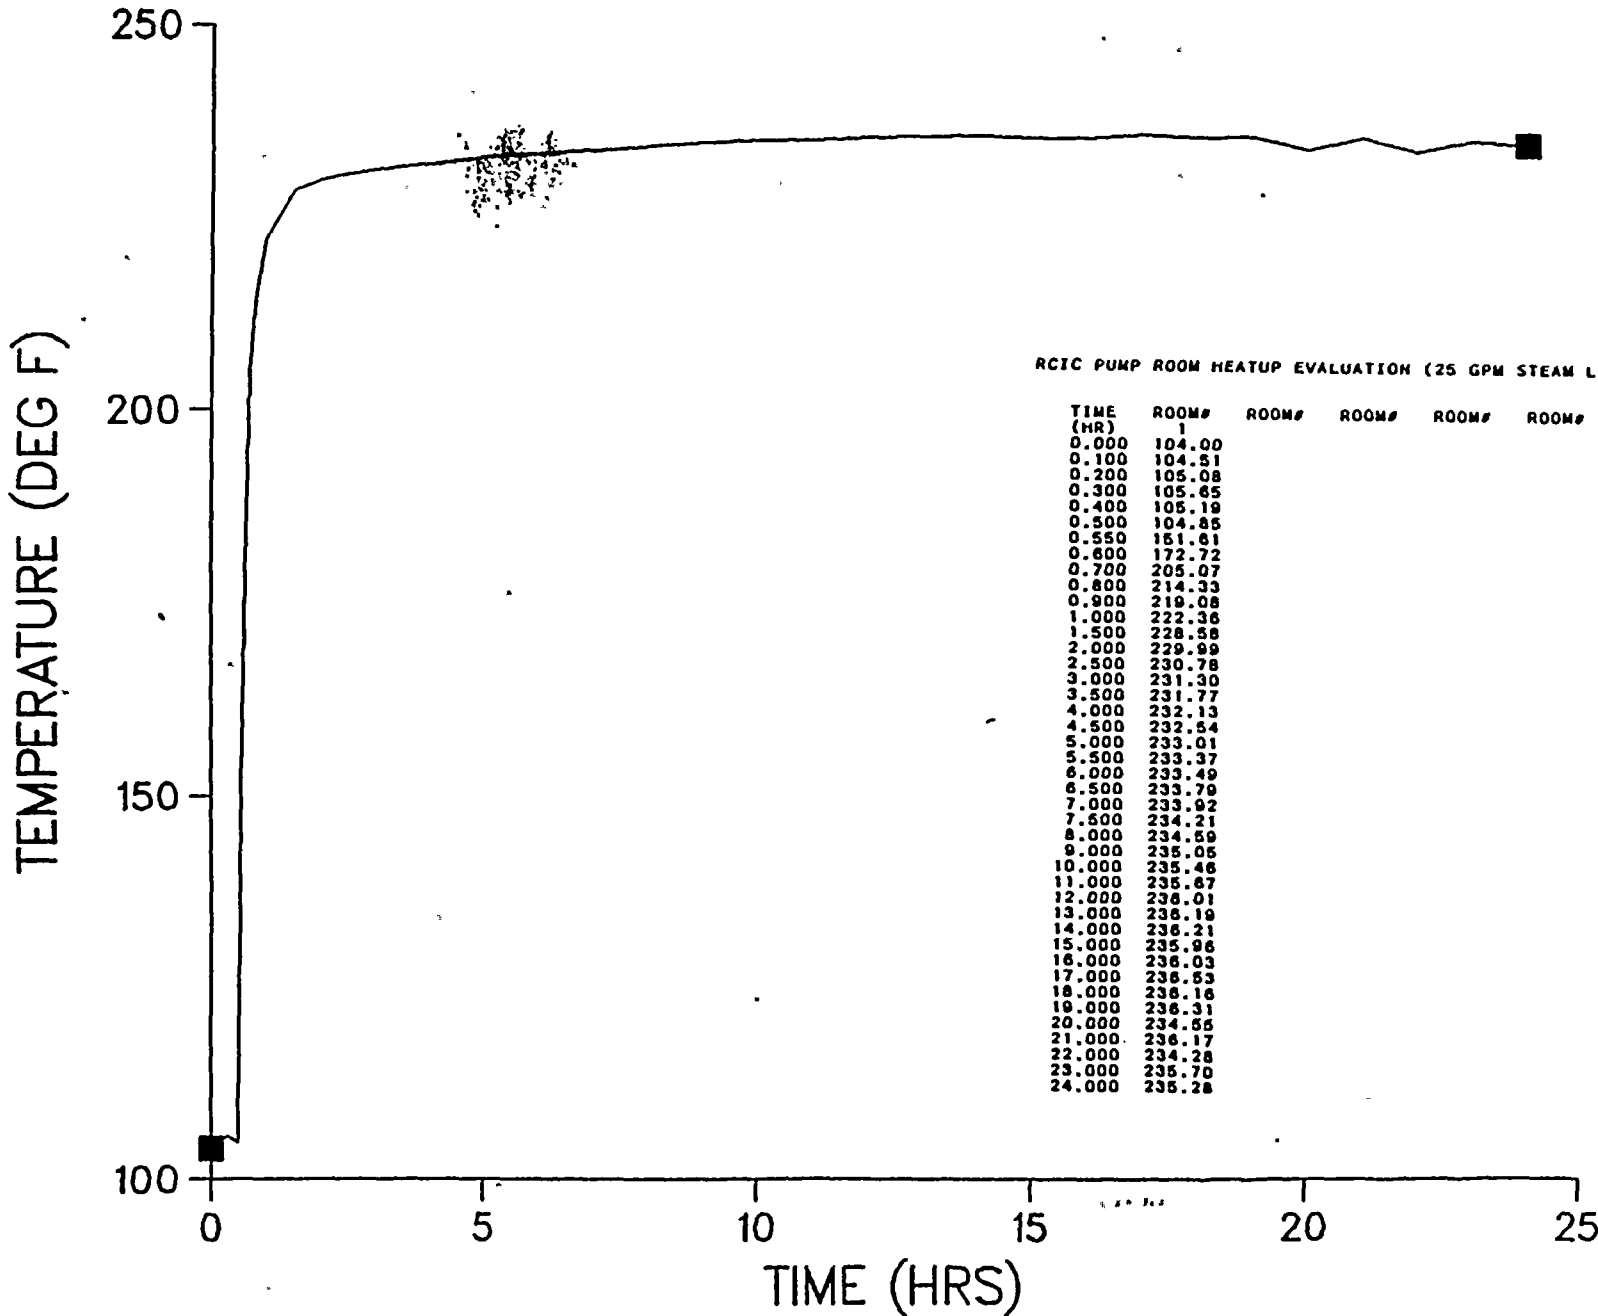


Calc # H-SLD-002
Page 15 of 16



100

RCIC PUMP ROOM HEATUP EVALUATION (25 GPM STEAM LEAK/WINTER)

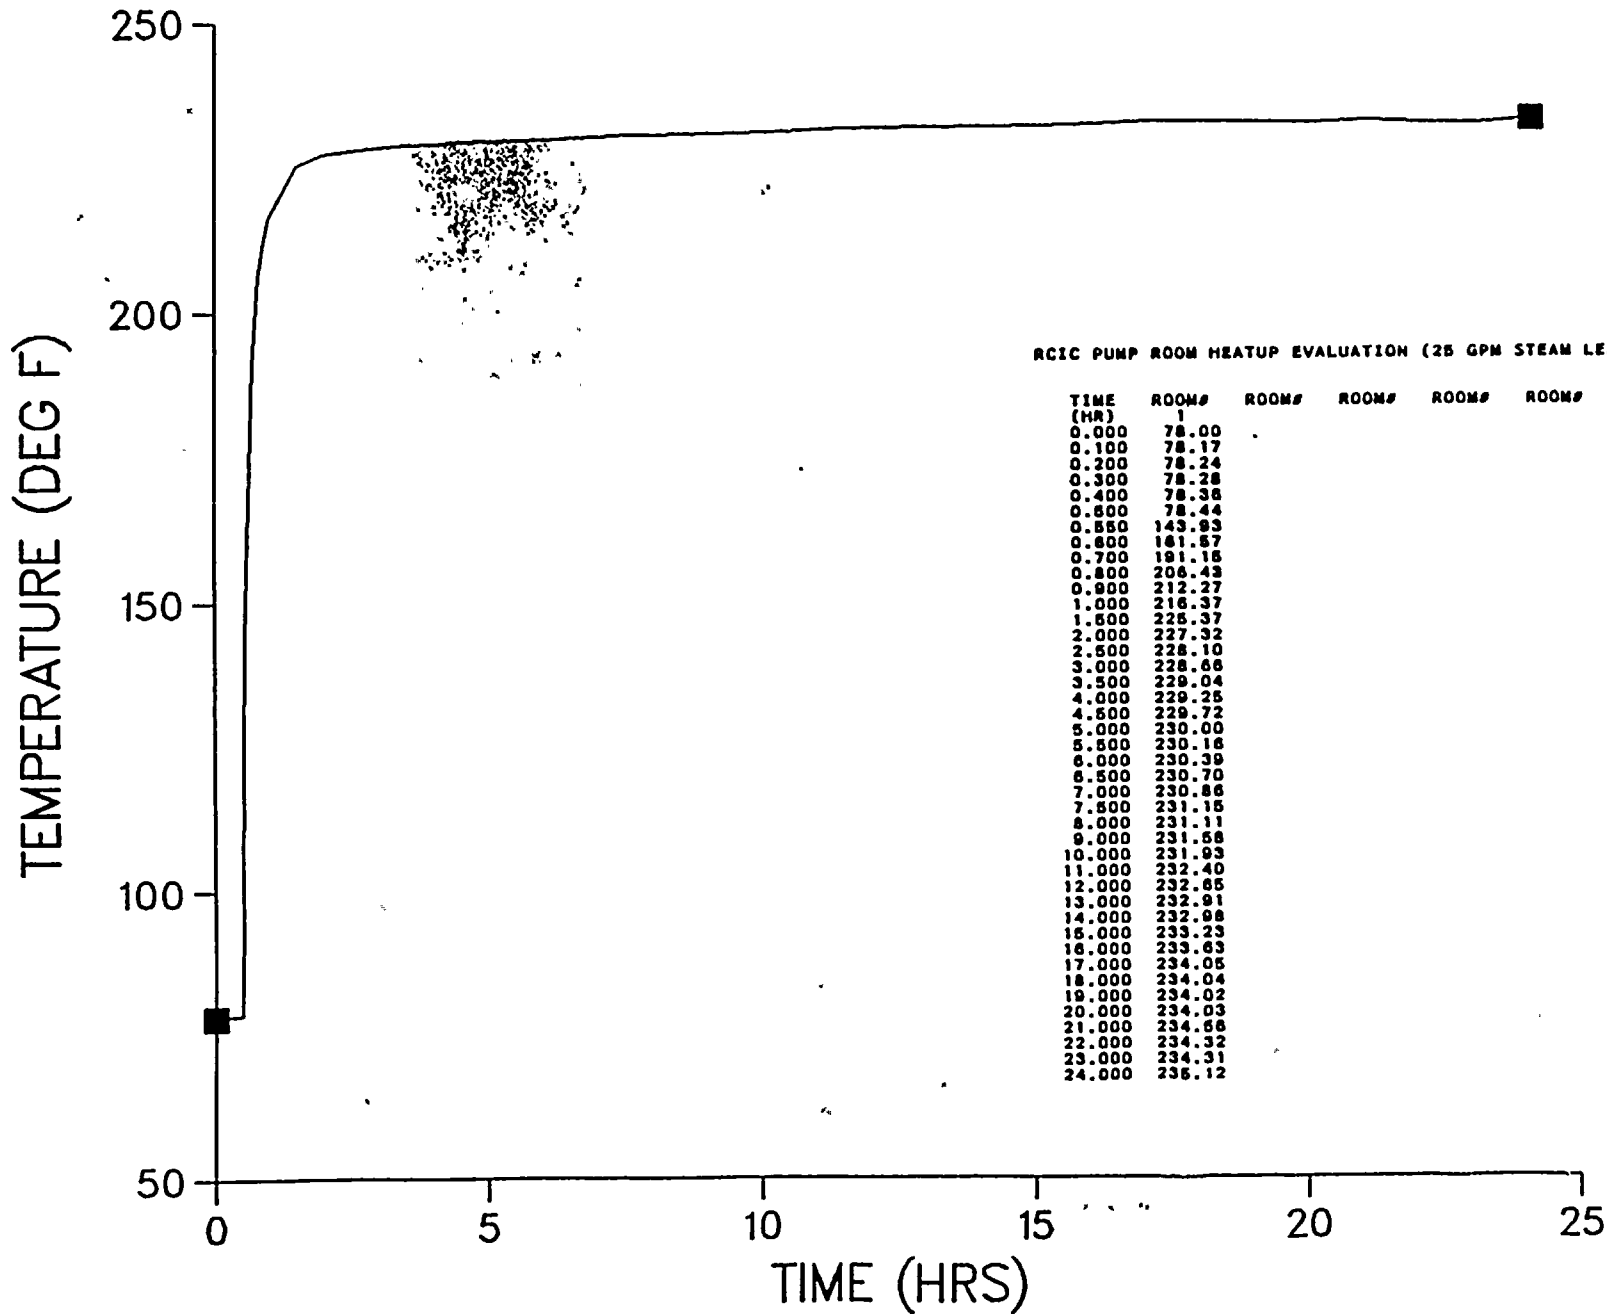

RCIC PUMP ROOM HEATUP EVALUATION (25 GPM STEAM LEAK/WINTER)

TIME (HRS)	ROOM#	ROOM#	ROOM#	ROOM#	ROOM#	ROOM#	TEMPERATURE (DEG F)		
							ROOM#	ROOM#	ROOM#
0.000	1								
0.100									
0.200									
0.300									
0.400									
0.500									
0.600									
0.650									
0.700									
0.800									
0.900									
1.000									
1.500									
2.000									
2.500									
3.000									
3.500									
4.000									
4.500									
5.000									
5.500									
6.000									
6.500									
7.000									
7.500									
8.000									
9.000									
10.000									
11.000									
12.000									
13.000									
14.000									
15.000									
16.000									
17.000									
18.000									
19.000									
20.000									
21.000									
22.000									
23.000									
24.000									

