

CONTAINMENT SYSTEMS

SURVEILLANCE REQUIREMENTS (Continued)

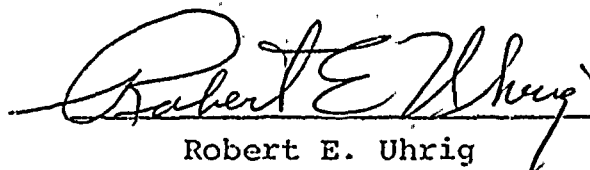
- d. At least once per five years by verifying a sodium hydroxide (NaOH) flow rate of ___ ± ___ gpm from the spray additive tank to a drain connection immediately downstream of the tank outlet valve, and a demineralized water flow rate of ___ ± ___ gpm from that same drain connection to each containment spray pump. (Flow rates and tolerances for each of these two sources are to be determined following installation of flow rate test connections and completion of base-line test.)

STATE OF FLORIDA)
)
) SS.
COUNTY OF DADE)

Robert E. Uhrig, being first duly sworn, deposes and says:

That he is a Vice President of Florida Power & Light Company,
the Licensee herein;

That he has executed the foregoing document; that the state-
ments made in this said document are true and correct to the
best of his knowledge, information, and belief, and that he
is authorized to execute the document on behalf of said
Licensee.


Robert E. Uhrig

Subscribed and sworn to before me this

19th day of January, 1981

Lois J. Marino

NOTARY PUBLIC, in and for the county of Dade,
State of Florida

NOTARY PUBLIC STATE OF FLORIDA - LARGE
MY COMMISSION EXPIRES AUGUST 21, 1981
BONDED THRU MAYNARD BONDING AGENCY

My commission expires: _____