

1947
1948
1949

1950
1951
1952

1953

1954

1955
1956
1957

1958
1959
1960

1961

1962
1963
1964

1965
1966

1967
1968

1969
1970

1971
1972


1973

1974

1975

1976

1977
1978

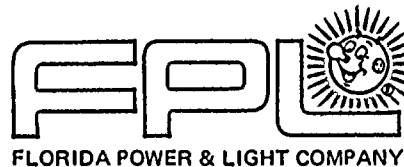

APRIL 28 1987

L-87-179

U. S. Nuclear Regulatory Commission
Attn: Document Control Desk
Washington, D. C. 20555

Gentlemen:


Re: St. Lucie Units 1 and 2
Docket Nos. 50-335 and 50-389
Spent Fuel Transfer - Occupational Exposure

By letter L-86-250, dated July 2, 1986, Florida Power & Light Company (FPL) proposed to amend the St. Lucie Unit 2 operating license, NPF-16, to establish the option of storing spent fuel from St. Lucie Unit 1 in the St. Lucie Unit 2 spent fuel pool. The Unit 1 spent fuel pool lost full core reserve capacity as a result of the 1987 refueling outage, and the planned Unit 1 spent fuel pool rerack cannot be accomplished prior to 1988. If, in the interim, full core off-load of Unit 1 should be necessary, Unit 1 spent fuel could be stored in the Unit 2 spent fuel pool.

Additional information was requested by the staff concerning occupational exposures and plant specific procedures in a letter dated March 29, 1987 (E. G. Tourigny to C. O. Woody). Attached is FPL's response to this information request.

If additional information is required on this topic, please contact us.

Very truly yours,


C. O. Woody
Group Vice President
Nuclear Energy

COW/EJW/gp

Attachment

cc: Dr. J. Nelson Grace, Regional Administrator, Region II, USNRC
Senior Resident Inspector, USNRC, St. Lucie Plant

8705010099 870428
PDR ADDCK 05000335
PDR

*Add: R.F. Burnett
Nmss*
Ltr Ench
A001



[The text in this section is extremely faint and illegible due to low contrast and noise. It appears to be a large block of text, possibly a list or a series of paragraphs.]

[The text in this section is also extremely faint and illegible. It appears to be a single line or a short paragraph.]

REQUEST FOR ADDITIONAL INFORMATION

FLORIDA POWER & LIGHT COMPANY
ST. LUCIE UNITS 1 AND 2
DOCKET NOS. 50-335 AND 50-389

SPENT FUEL TRANSFER BETWEEN UNITS

1. Provide a table showing the occupational doses to site and contractor support personnel resulting from (1) removing Unit No. 1 spent fuel from the Unit No. 1 spent fuel pool storage racks; (2) placing the spent fuel in a fuel shipping cask that meets the packaging and transportation requirements of 10 CFR 71; (3) removing the fuel shipping cask from the Unit No. 1 fuel handling building; (4) moving the fuel shipping cask on a transporter vehicle from fuel handling building No. 1 to fuel handling building No. 2 (a distance of approximately 300 feet); (5) moving the fuel shipment cask into the Unit No. 2 fuel handling building; (6) removing the spent fuel from the fuel shipping cask; and (7) placing the spent fuel in the Unit No. 2 spent fuel pool storage racks. The table should include a breakdown of each task by estimated dose rates, person-hours and person-rems.

Response 1

Attached is a Projected Occupational Exposure Table.

2. Confirm that Florida Power & Light Company will prepare and implement a plant-specific procedure to be used for the transfer of Unit No. 1 spent fuel between the units.

Response 2

Prior to any trans-shipment of Unit 1 fuel between units at St. Lucie Plant, plant-specific procedures for the trans-shipment will be prepared, reviewed and implemented.

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY

RESEARCH REPORT
NO. 1234

BY
J. D. HARRIS

Submitted in partial fulfillment of the requirements for the Ph.D. degree
in the Department of Chemistry
The University of Chicago
Chicago, Illinois
1955

RESEARCH REPORT NO. 1234

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
5708 SOUTH CAMPUS DRIVE

CHICAGO, ILLINOIS 60637

SPENT FUEL TRANSFER - PROJECTED

<u>Task</u>	<u>mR/Hr*</u> (Estimated Dose Rate)	<u>Person-Hrs</u> (Estimated Task Duration)	<u>Person-Rem*</u>
1) Remove PSL-1 SFA from SFP Storage Rack	1 to 5	0.5	0.0015
2) Place SFA in Shipping Cask			
a) Unload Cask from Transporter Vehicle	1	20	0.020
b) Place Cask in SFP	1 to 5	3	0.009
c) Prepare Cask to Receive SFA	1 to 5	4	0.012
d) Place SFA in Cask	1 to 5	1	0.003
3) Remove Cask from FHB			
a) Prepare Cask for Removal from SFP	1 to 5	2	0.006
b) Remove Cask from SFP, Decontaminate	1 to 10	10	0.050
c) Place Cask on Transporter Vehicle	1	20	0.020
4) Transport Cask with SFA to PSL-2 FHB (300 ft)	1	0.2	0.0002
5) Move Cask with SFA into PSL-2 FHB			
a) Unload Cask from Transporter Vehicle	1 to 10	10	0.050
b) Place Cask in SFP	1 to 5	3	0.009
6) Remove SFA from Cask	1 to 5	4	0.012



Handwritten marks or numbers in the top right corner.

Faint, illegible text or markings in the upper middle section of the page.

A vertical column of small, faint marks or characters on the left side of the page.

A large, faint, and mostly illegible block of text or markings in the center of the page.

Faint text or markings in the lower right quadrant of the page.

Spent Fuel Transfer - Projected
Occupational Exposure Table (con't)

<u>Task</u>	<u>mR/Hr*</u> (Estimated Dose Rate)	<u>Person-Hrs</u> (Estimated Task Duration)	<u>Person-Rem*</u>
7) Place SFA in SFP Storage Rack			
a) Remove SFA from Cask	1 to 5	1	0.003
b) Prepare Cask for Removal from SFP	1 to 5	2	0.006
c) Remove Cask from SFP, Decontaminate	1 to 5	10	0.030
d) Place Cask on Transporter Vehicle	1	20	0.020
e) Return Transporter Vehicle to PSL-1 FHB	1	0.2	0.0002
		<hr/>	<hr/>
TOTAL		110.9	0.2519

Approximate Person-Rem per SFA Transferred - 252 mRem

Abbreviations

FHB - Fuel Handling Building
 PSL-1 - St. Lucie Unit 1
 PSL-2 - St. Lucie Unit 2
 SFA - Spent Fuel Assembly
 SFP - Spent Fuel Pool

*For variable estimated dose rates, the Person-Rem Exposure is calculated by using the average of the Estimated Dose Rate.

CONFIDENTIAL

MEMORANDUM FOR THE DIRECTOR, FBI

RE: [Illegible]

1. [Illegible]

2. [Illegible]

3. [Illegible]

4. [Illegible]

5. [Illegible]

6. [Illegible]

7. [Illegible]