

REGULATORY INFORMATION DISTRIBUTION SYSTEM (RIDS)

ACCESSION NBR: 8606110297 DDC DATE: 86/06/05 NOTARIZED: NO DOCKET #
 FACIL: 50-397 WPPSS Nuclear Project, Unit 2, Washington Public Powe 05000397
 AUTH. NAME AUTHOR AFFILIATION
 SORENSEN, G. C. Washington Public Power Supply System
 RECIP. NAME RECIPIENT AFFILIATION
 ADENSAM, E. G. BWR Project Directorate 3

SUBJECT: Supplemental application for amend to License NPF-21,
 changing Tech Spec Section 3.7.1.3 (UHS) to permit reliance
 on single spray pond for DHR when plant in mode "star".

DISTRIBUTION CODE: A001D COPIES RECEIVED: LTR 1 ENCL 1 SIZE: 3
 TITLE: OR Submittal: General Distribution

NOTES:

	RECIPIENT ID CODE/NAME	COPIES LTTR ENCL	RECIPIENT ID CODE/NAME	COPIES LTTR ENCL
	BWR ADTS	1 0	BWR EB	1 1
	BWR EICSB	2 2	BWR FOB	1 1
	BWR PD3 LA	1 0	BWR PD3 PD 01	5 5
	BRADFUTE, J	1 1	BWR PSB	1 1
	BWR RSB	1 1		
INTERNAL:	ACRS 09	6 6	ADM/LFMB	1 0
	ELD/HDS2	1 0	NRR/DHET/TSCB	1 1
	NRR/ORAS	1 0	<u>REG-FILE</u> 04	1 1
	RGN5	1 1		
EXTERNAL:	24X	1 1	EG&G BRUSKE, S	1 1
	LPDR 03	1 1	NRC PDR 02	1 1
	NSIC 05	1 1		

PROJECT: 8207-00-007 Water Treatment Unit 2 Washington Public Power
 AUTHOR: WASHINGTON PUBLIC POWER SUPPLY SYSTEM
 REVISION: 01
 DATE: 8/20/82
 DRAWING NO: 8207-00-007-01

SUBJECT: Supplemental application for award to contract W-82-01
 changing Tech Spec Section 2.7.1.2 (UIC) to permit reliance
 on single spray pond for DHR when plant in mode "standby".

TITLE: OR Submittal: General Distribution
 DISTRIBUTION CODE: WOOD COPIES RECEIVED: LTR 1 ENCL 1

EXTERNAL:		INTERNAL:		RECIPIENT ID CODE NAME		COMPILES		RECIPIENT ID CODE NAME		COPIES	
NO	TR	NO	TR	NO	TR	NO	TR	NO	TR	NO	TR
01	1	01	1	BWR RDR	1	1		BWR RDR	1	1	
				BWR RDR 1	1	1		BWR RDR	1	1	
				BWR RDR 2	1	1		BWR RDR	1	1	
				BWR RDR 3	1	1		BWR RDR	1	1	
				BWR RDR 4	1	1		BWR RDR	1	1	
				BWR RDR 5	1	1		BWR RDR	1	1	
				BWR RDR 6	1	1		BWR RDR	1	1	
				BWR RDR 7	1	1		BWR RDR	1	1	
				BWR RDR 8	1	1		BWR RDR	1	1	
				BWR RDR 9	1	1		BWR RDR	1	1	
				BWR RDR 10	1	1		BWR RDR	1	1	
				BWR RDR 11	1	1		BWR RDR	1	1	
				BWR RDR 12	1	1		BWR RDR	1	1	
				BWR RDR 13	1	1		BWR RDR	1	1	
				BWR RDR 14	1	1		BWR RDR	1	1	
				BWR RDR 15	1	1		BWR RDR	1	1	
				BWR RDR 16	1	1		BWR RDR	1	1	
				BWR RDR 17	1	1		BWR RDR	1	1	
				BWR RDR 18	1	1		BWR RDR	1	1	
				BWR RDR 19	1	1		BWR RDR	1	1	
				BWR RDR 20	1	1		BWR RDR	1	1	
				BWR RDR 21	1	1		BWR RDR	1	1	
				BWR RDR 22	1	1		BWR RDR	1	1	
				BWR RDR 23	1	1		BWR RDR	1	1	
				BWR RDR 24	1	1		BWR RDR	1	1	
				BWR RDR 25	1	1		BWR RDR	1	1	
				BWR RDR 26	1	1		BWR RDR	1	1	
				BWR RDR 27	1	1		BWR RDR	1	1	
				BWR RDR 28	1	1		BWR RDR	1	1	
				BWR RDR 29	1	1		BWR RDR	1	1	
				BWR RDR 30	1	1		BWR RDR	1	1	
				BWR RDR 31	1	1		BWR RDR	1	1	
				BWR RDR 32	1	1		BWR RDR	1	1	
				BWR RDR 33	1	1		BWR RDR	1	1	
				BWR RDR 34	1	1		BWR RDR	1	1	
				BWR RDR 35	1	1		BWR RDR	1	1	
				BWR RDR 36	1	1		BWR RDR	1	1	
				BWR RDR 37	1	1		BWR RDR	1	1	
				BWR RDR 38	1	1		BWR RDR	1	1	
				BWR RDR 39	1	1		BWR RDR	1	1	
				BWR RDR 40	1	1		BWR RDR	1	1	
				BWR RDR 41	1	1		BWR RDR	1	1	
				BWR RDR 42	1	1		BWR RDR	1	1	
				BWR RDR 43	1	1		BWR RDR	1	1	
				BWR RDR 44	1	1		BWR RDR	1	1	
				BWR RDR 45	1	1		BWR RDR	1	1	
				BWR RDR 46	1	1		BWR RDR	1	1	
				BWR RDR 47	1	1		BWR RDR	1	1	
				BWR RDR 48	1	1		BWR RDR	1	1	
				BWR RDR 49	1	1		BWR RDR	1	1	
				BWR RDR 50	1	1		BWR RDR	1	1	
				BWR RDR 51	1	1		BWR RDR	1	1	
				BWR RDR 52	1	1		BWR RDR	1	1	
				BWR RDR 53	1	1		BWR RDR	1	1	
				BWR RDR 54	1	1		BWR RDR	1	1	
				BWR RDR 55	1	1		BWR RDR	1	1	
				BWR RDR 56	1	1		BWR RDR	1	1	
				BWR RDR 57	1	1		BWR RDR	1	1	
				BWR RDR 58	1	1		BWR RDR	1	1	
				BWR RDR 59	1	1		BWR RDR	1	1	
				BWR RDR 60	1	1		BWR RDR	1	1	
				BWR RDR 61	1	1		BWR RDR	1	1	
				BWR RDR 62	1	1		BWR RDR	1	1	
				BWR RDR 63	1	1		BWR RDR	1	1	
				BWR RDR 64	1	1		BWR RDR	1	1	
				BWR RDR 65	1	1		BWR RDR	1	1	
				BWR RDR 66	1	1		BWR RDR	1	1	
				BWR RDR 67	1	1		BWR RDR	1	1	
				BWR RDR 68	1	1		BWR RDR	1	1	
				BWR RDR 69	1	1		BWR RDR	1	1	
				BWR RDR 70	1	1		BWR RDR	1	1	
				BWR RDR 71	1	1		BWR RDR	1	1	
				BWR RDR 72	1	1		BWR RDR	1	1	
				BWR RDR 73	1	1		BWR RDR	1	1	
				BWR RDR 74	1	1		BWR RDR	1	1	
				BWR RDR 75	1	1		BWR RDR	1	1	
				BWR RDR 76	1	1		BWR RDR	1	1	
				BWR RDR 77	1	1		BWR RDR	1	1	
				BWR RDR 78	1	1		BWR RDR	1	1	
				BWR RDR 79	1	1		BWR RDR	1	1	
				BWR RDR 80	1	1		BWR RDR	1	1	
				BWR RDR 81	1	1		BWR RDR	1	1	
				BWR RDR 82	1	1		BWR RDR	1	1	
				BWR RDR 83	1	1		BWR RDR	1	1	
				BWR RDR 84	1	1		BWR RDR	1	1	
				BWR RDR 85	1	1		BWR RDR	1	1	
				BWR RDR 86	1	1		BWR RDR	1	1	
				BWR RDR 87	1	1		BWR RDR	1	1	
				BWR RDR 88	1	1		BWR RDR	1	1	
				BWR RDR 89	1	1		BWR RDR	1	1	
				BWR RDR 90	1	1		BWR RDR	1	1	
				BWR RDR 91	1	1		BWR RDR	1	1	
				BWR RDR 92	1	1		BWR RDR	1	1	
				BWR RDR 93	1	1		BWR RDR	1	1	
				BWR RDR 94	1	1		BWR RDR	1	1	
				BWR RDR 95	1	1		BWR RDR	1	1	
				BWR RDR 96	1	1		BWR RDR	1	1	
				BWR RDR 97	1	1		BWR RDR	1	1	
				BWR RDR 98	1	1		BWR RDR	1	1	
				BWR RDR 99	1	1		BWR RDR	1	1	
				BWR RDR 100	1	1		BWR RDR	1	1	

Washington Public Power Supply System

3000 George Washington Way P.O. Box 968 Richland, Washington 99352-0968 (509)372-5000

June 5, 1986
G02-86-537

Docket No. 50-397

Director of Nuclear Reactor Regulation
Attn: Ms. E. G. Adensam, Project Director
BWR Project Directorate No. 3
Division of BWR Licensing
U. S. Nuclear Regulatory Commission
Washington, D. C. 20555

Dear Ms. Adensam:

Subject: NUCLEAR PLANT NO. 2
OPERATING LICENSE NPF-21, REQUEST FOR AMENDMENT
TO LICENSE - (ULTIMATE HEAT SINK), SUPPLEMENTAL
INFORMATION

Reference: 1) Letter, G02-86-243, G.C. Sorensen to E.G. Adensam,
same subject, dated March 21, 1986.
2) Letter, G02-86-333, G.C. Sorensen to E.G. Adensam,
same subject, dated April 10, 1986.

The referenced letters discuss the background to and the request for an amendment to Section 3.7.1.3 (Ultimate Heat Sink) of the WNP-2 Technical Specification. This amendment would allow reliance on a single spray pond for decay heat removal when the plant is in mode "star" as defined in the Technical Specification. This letter supplies additional information about the proposed technical specification amendment and addresses questions discussed by Messrs. J.O. Bradfute of your staff and P.L. Powell of the Supply System, during an April 10, 1986 phone conversation on this subject.

In this phone conversation, additional information was requested on the safety impact of a postulated loss of both inflatable plugs in the siphon of the standby service water cross-connection. During startup testing it was shown that the siphon would not continue to function when the water level in the pond with the most water was below the level of the inter-connecting pipe between the ponds and the water level on the other side dropped below the end of the 30 inch siphon pipe, which is 18 inches above the pond bottom. With the siphon plugged and only one pond full of water, failure of the plugs would allow water to flow to the other pond until the levels equalized. Under this condition, the siphon is self priming because the normal water level in the full pond

8606110297 860605
PDR ADOCK 05000397
P PDR

Accol
1/1



22

E. G. Adensam

Page Two

June 5, 1986

REQUEST FOR AMENDMENT TO LICENSE (ULTIMATE HEAT SINK), SUPP. INFO.

is at least 3 feet above the centerline of the 30 inch siphon where it crosses between the ponds (see attached figure). The siphon is then functional, and the water in both ponds is available for use by the operating SW pump except for 1.5' of water in the previously dry pond that the siphon can not access. This water could be transferred with portable pumps or the other division of SW could be put into operation. The loss of direct access to this 1.5' of water still leaves over 19 days to effect the transfer since the balance of the water inventory will last that long. After the 19 days further flow of water through the siphon is not possible and water inventory would be transferred with portable pumps or operation of the other SW division.

The flow of water to the previously empty pond is, therefore, not a loss of water, and constitutes usable volume if the Standby Service Water (SW) pump associated with that pond is brought into service, or other temporary means are used to transfer water from one pond to the other. Ample time is available to make provisions to transfer water back to the original pond, or to bring the other division of SW into operation. The Supply System has analyzed this change according to the criteria of 10CFR50.92 and determined that the subject request can not create the possibility of a new or different kind of accident, as sufficient time is available to marshal the resources necessary to meet the design 30 day inventory requirement.

With these considerations in mind, and with the low probability of a loss of two independent plugs, we have concluded that the proposed design assures the safe condition of the plant. Please direct any questions regarding this matter to Mr. P. L. Powell, Manager, WNP-2 Licensing.

Very truly yours,




G. C. Sorensen, Manager
Regulatory Programs

SIS/bk
Attachment

cc: JO Bradfute - NRC
C Eschels - EFSEC
JB Martin - NRC RV
E Revell - BPA
NS Reynolds - BLCP&R
NRC Site Inspector



11-11-11

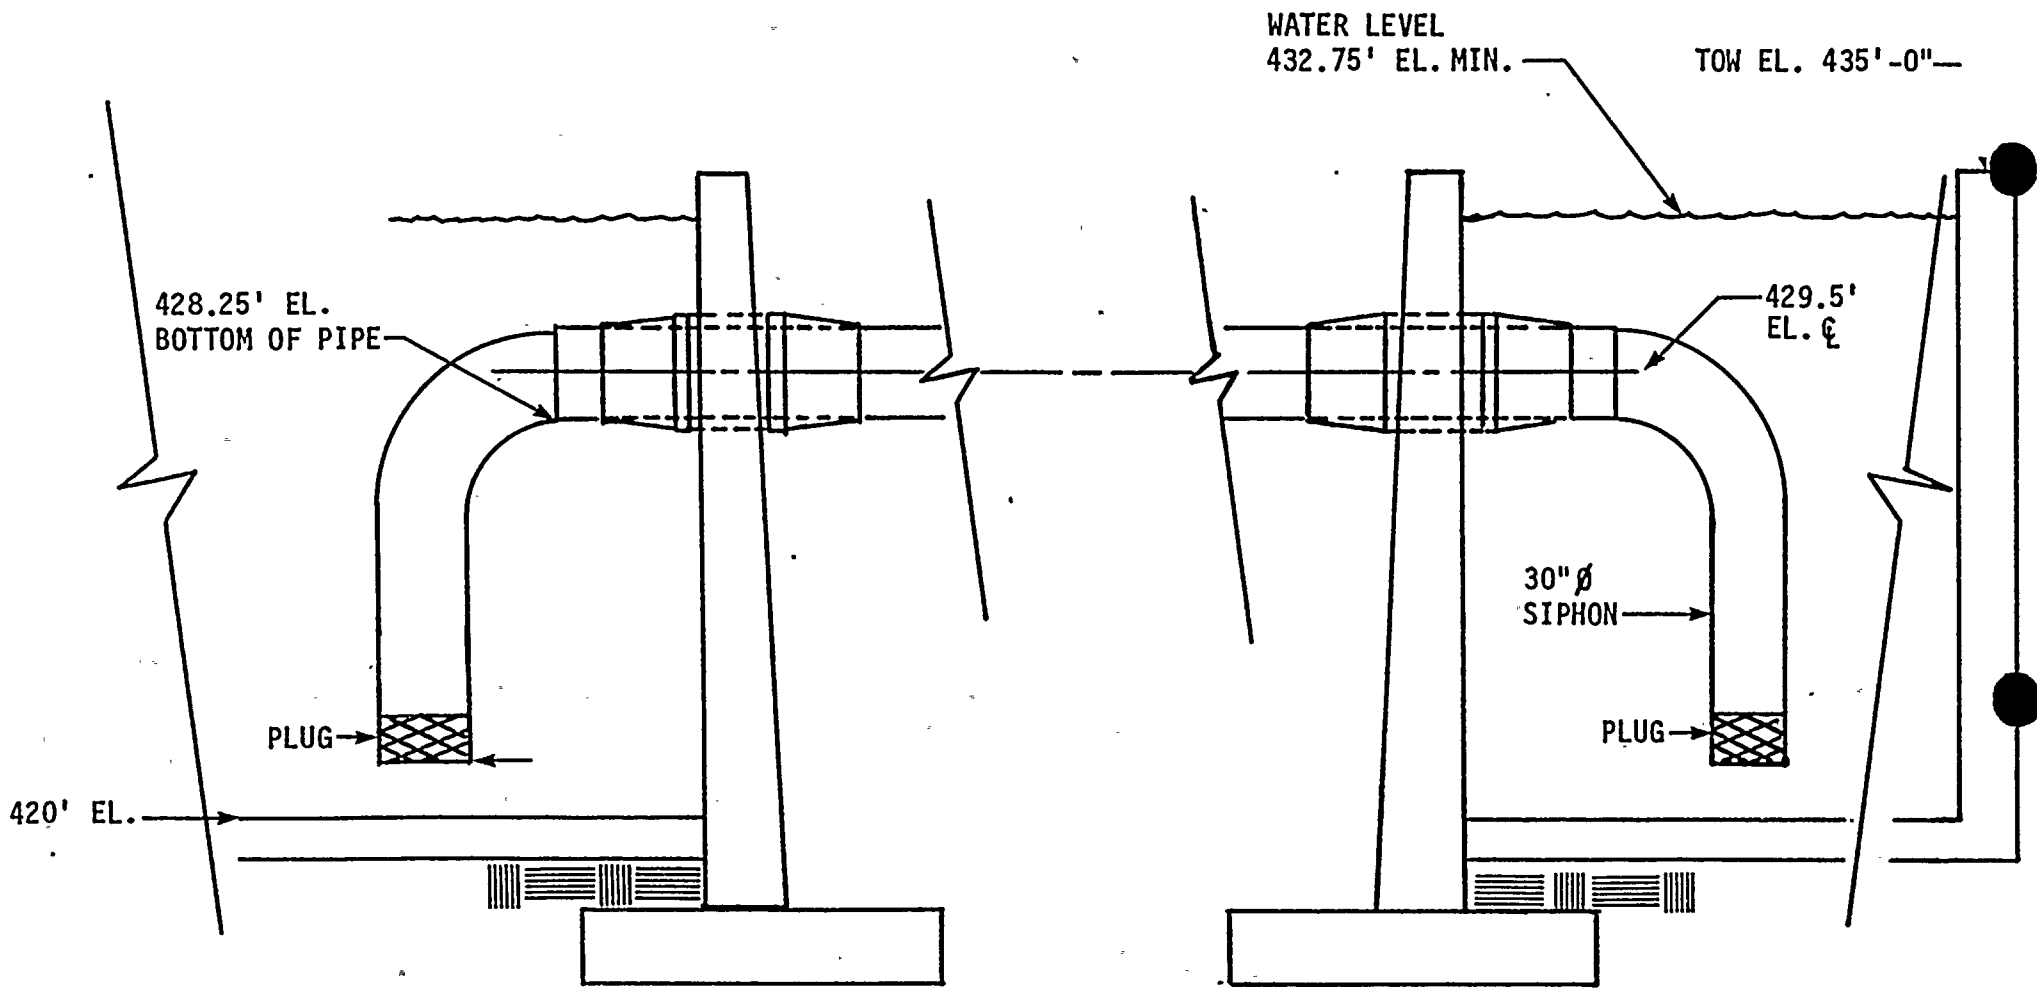

SIPHON GEOMETRY