



UNITED STATES
NUCLEAR REGULATORY COMMISSION
WASHINGTON, D. C. 20555

WASHINGTON PUBLIC POWER SUPPLY SYSTEM

DOCKET NO. 50-397

WPPSS NUCLEAR PROJECT NO. 2

AMENDMENT TO FACILITY OPERATING LICENSE


License No. NPF-21
Amendment No. 41

1. The Nuclear Regulatory Commission (the Commission) has found that:
 - A. The application for amendment by the Washington Public Power Supply System, (the Supply System or licensee) dated January 31, 1986, and as clarified by letters dated April 11 and July 22, 1986, and January 9, February 11, March 4, and April 17, 1987 complies with the standards and requirements of the Atomic Energy Act of 1954, as amended (the Act), and the Commission's Rules and Regulations set forth in 10 CFR Chapter I;
 - B. The facility will operate in conformity with the application, the provisions of the Act, and the rules and regulations of the Commission;
 - C. There is reasonable assurance (i) that the activities authorized by this amendment can be conducted without endangering the health and safety of the public, and (ii) that such activities will be conducted in compliance with the Commission's regulation;
 - D. The issuance of this amendment will not be inimical to the common defense and security or the health and safety of the public; and
 - E. The issuance of this amendment is in accordance with 10 CFR Part 51 of the Commission's regulations and all applicable requirements have been satisfied.
2. Accordingly, Facility Operating License No. NPF-21 is amended to revise the Technical Specifications as indicated in the attachment to this amendment, and paragraph 2.C.(2) of Facility Operating License is hereby amended to read as follows:

(2) Technical Specifications and Environmental Protection Plan

The Technical Specifications contained in Appendix A, as revised through Amendment No. 41, and the Environmental Protection Plan contained in Appendix B, are hereby incorporated in the license. The licensee shall operate the facility in accordance with the Technical Specifications and the Environmental Protection Plan.

8705060124 870429
PDR ADOCK 05000397
P PDR

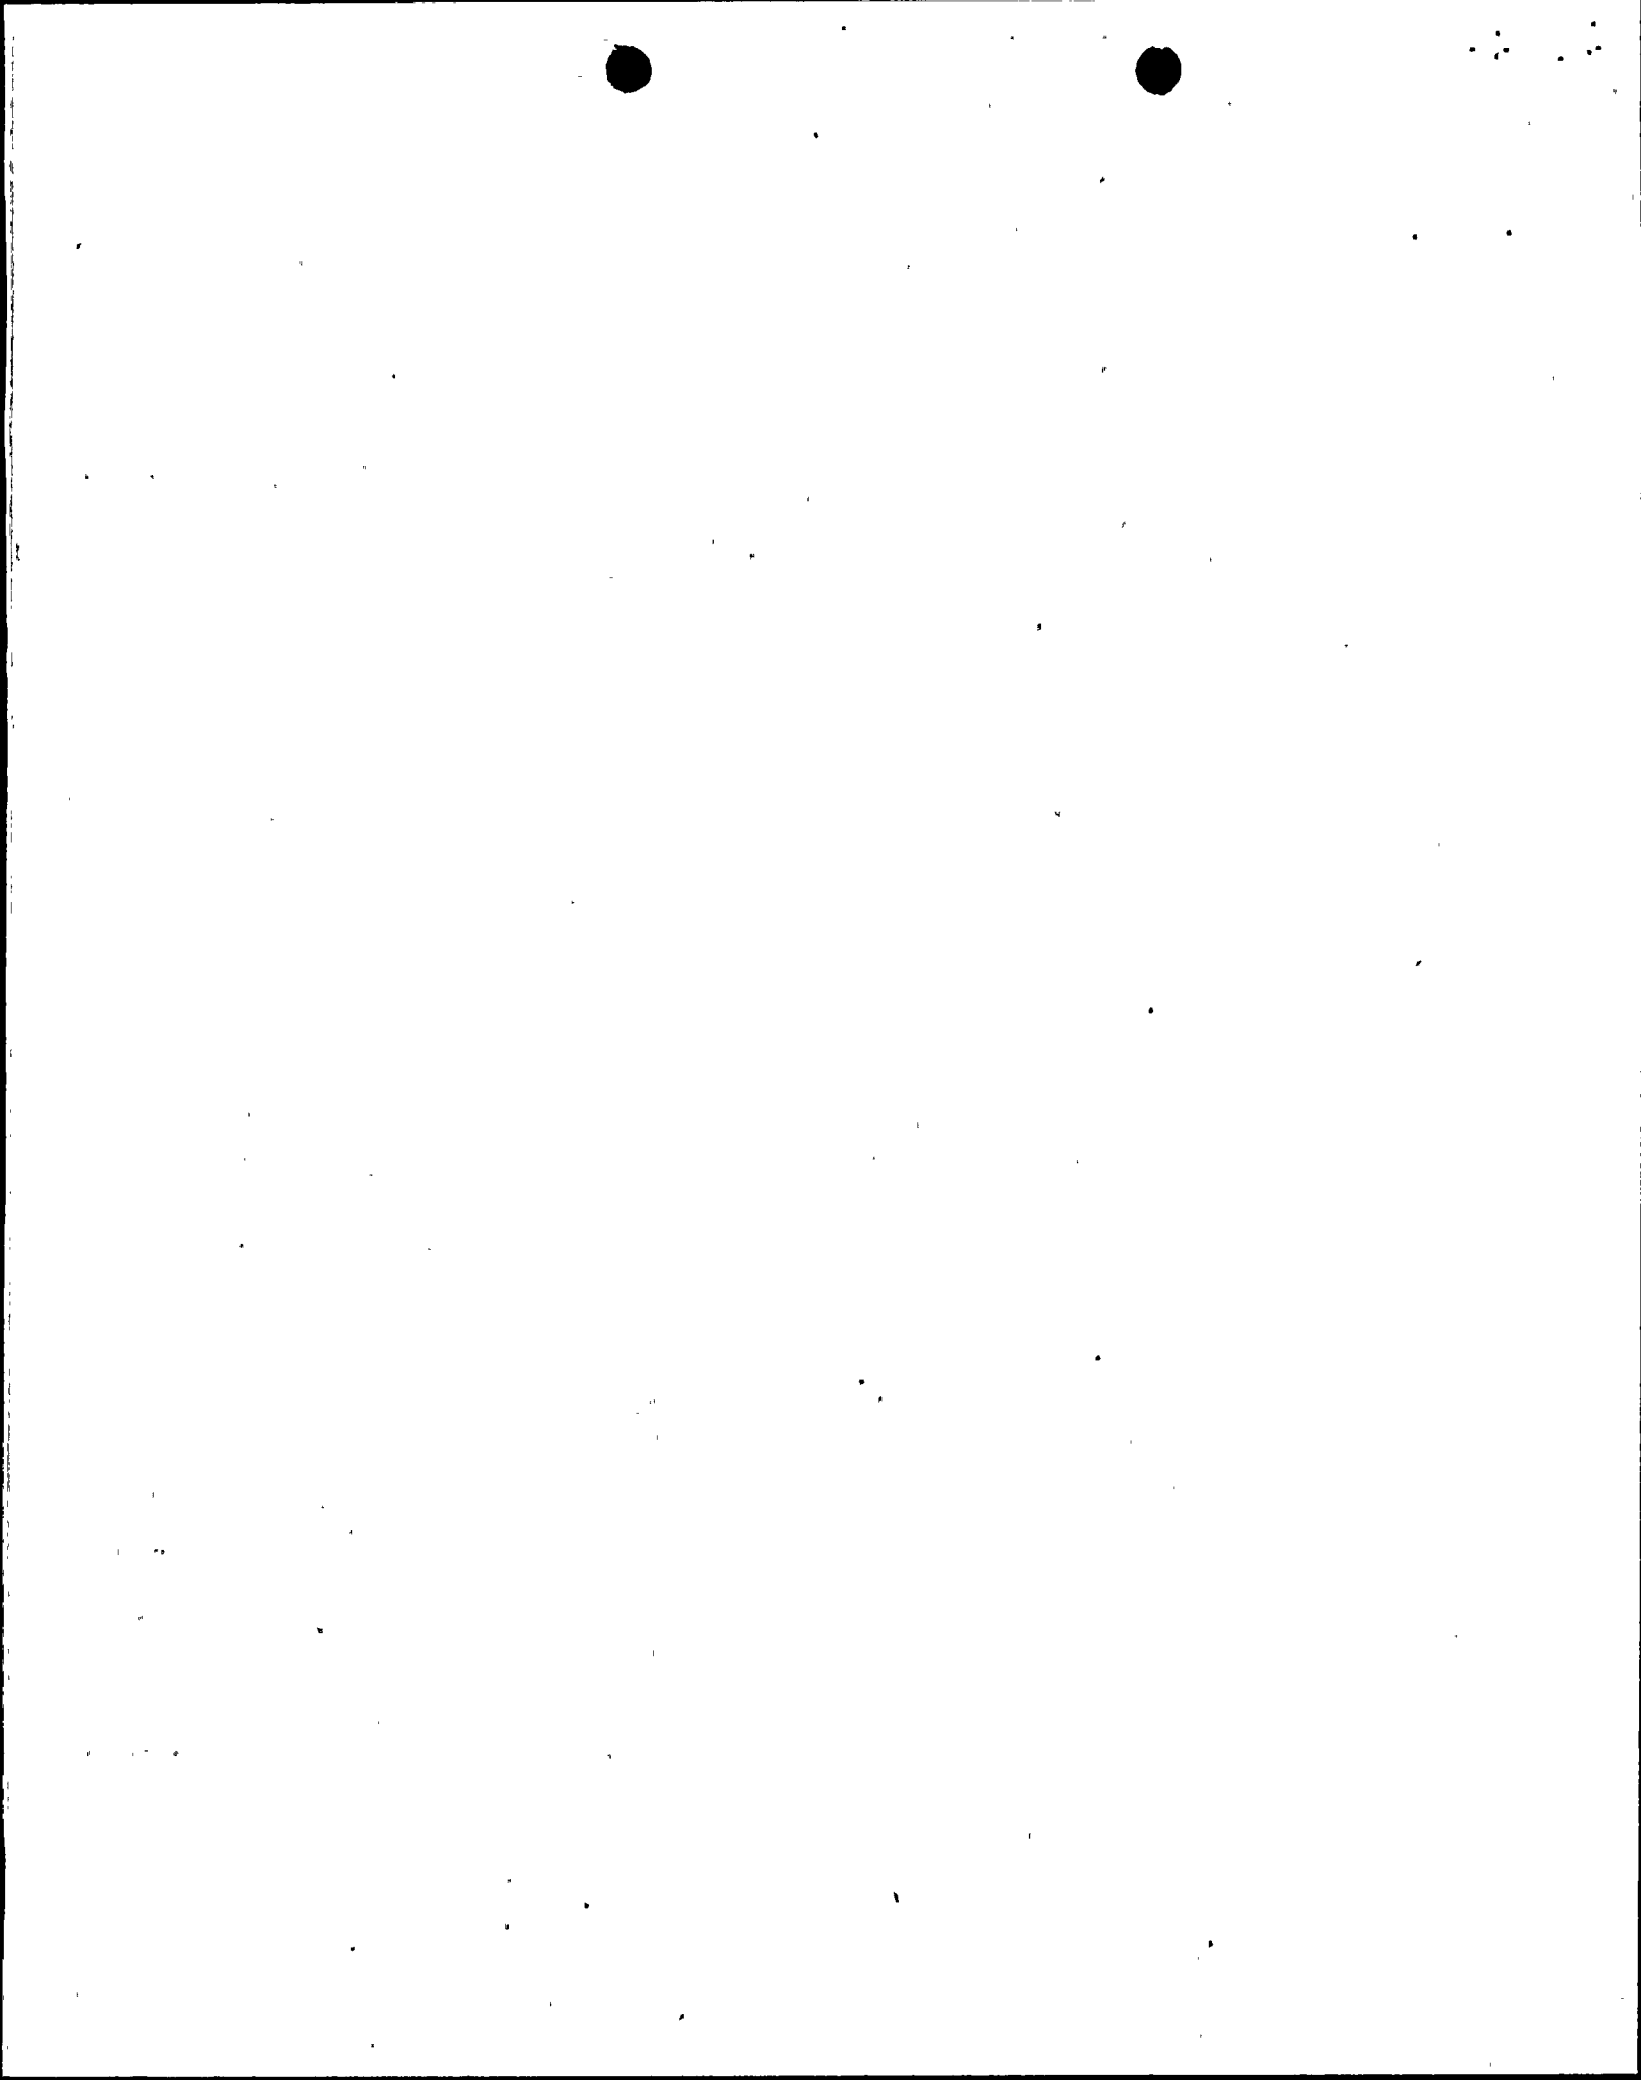

3. This license amendment is effective as of the date of its issuance.

FOR THE NUCLEAR REGULATORY COMMISSION

Original signed by
Gary M. Holahan for

George W. Knighton, Director
Project Directorate V
Division of Reactor Projects - III/IV/V
& Special Projects

Enclosure:
Changes to the Technical
Specifications

Date of Issuance: 29 APR 1987

*See Previous Concurrence

JLee
DRSP/PD5
4/22/87

*DRSP/PD5
JBradfute:cd
4/24/87

BSamworth
DRSP/PD5
BSamworth
4/28/87

*OGC
4/27/87

GWKnighton
DRSP/D:PD5
GWKnighton
4/28/87

DCrutchfield
DRSP/D
DCrutchfield
4/29/87

OFFICIAL RECORD COPY

1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025

1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025

1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025

3. This license amendment is effective as of the date of its issuance.

FOR THE NUCLEAR REGULATORY COMMISSION

George W. Knighton, Director
Project Directorate v
Division of Reactor Projects-III/IV/V
and Special Projects

Enclosure:
Changes to the Technical
Specifications

Date of Issuance:

DRSP/PD5
JLee
4/ /87

BRAD
DRSP/PD5
JBradfute:cd
4/21/87


DRSP/PD5
BSamworth
4/ /87

no legal objection
AP/H
4/21/87

DRSP/D:PD5
GWKnighton
4/ /87

DRSP/D
DCrutchfield
4/ /87

OFFICIAL RECORD COPY

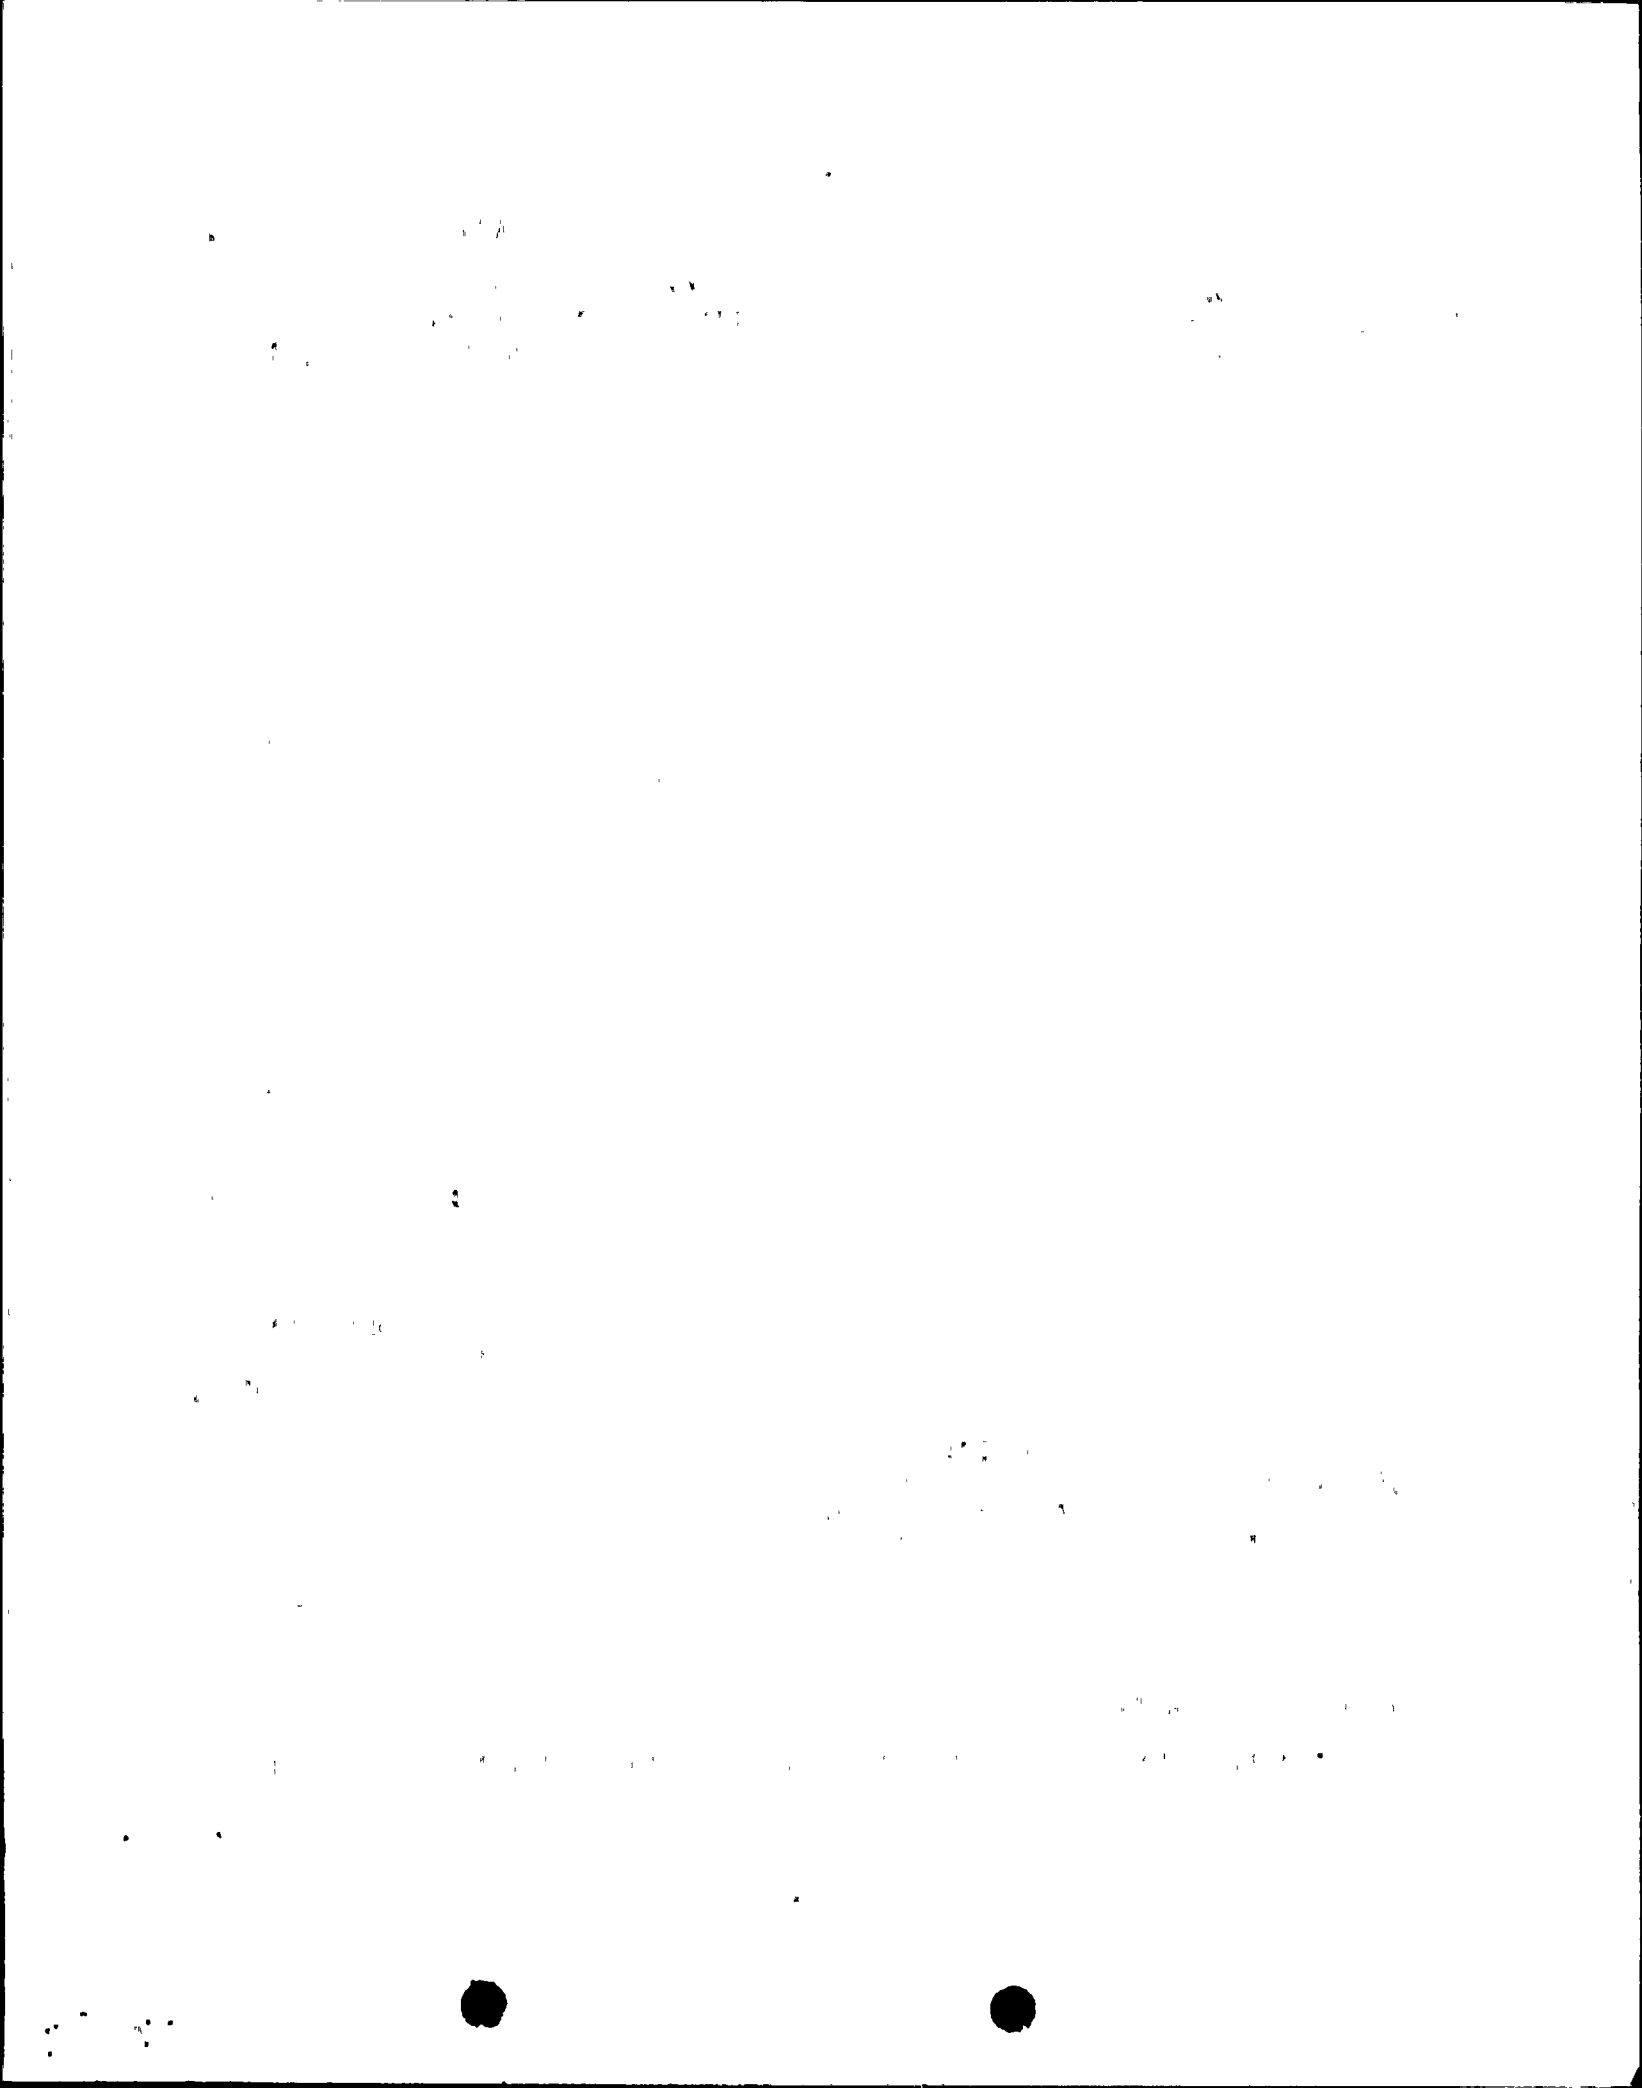

ATTACHMENT TO LICENSE AMENDMENT NO.41

FACILITY OPERATING LICENSE NO. NPF-21

DOCKET NO. 50-397


Replace the following page of the Appendix "A" Technical Specifications with the enclosed page. The revised page is identified by Amendment number and contains a vertical line indicating the area of change.

Remove Page

3/4 6-4

Insert Page

3/4 6-4

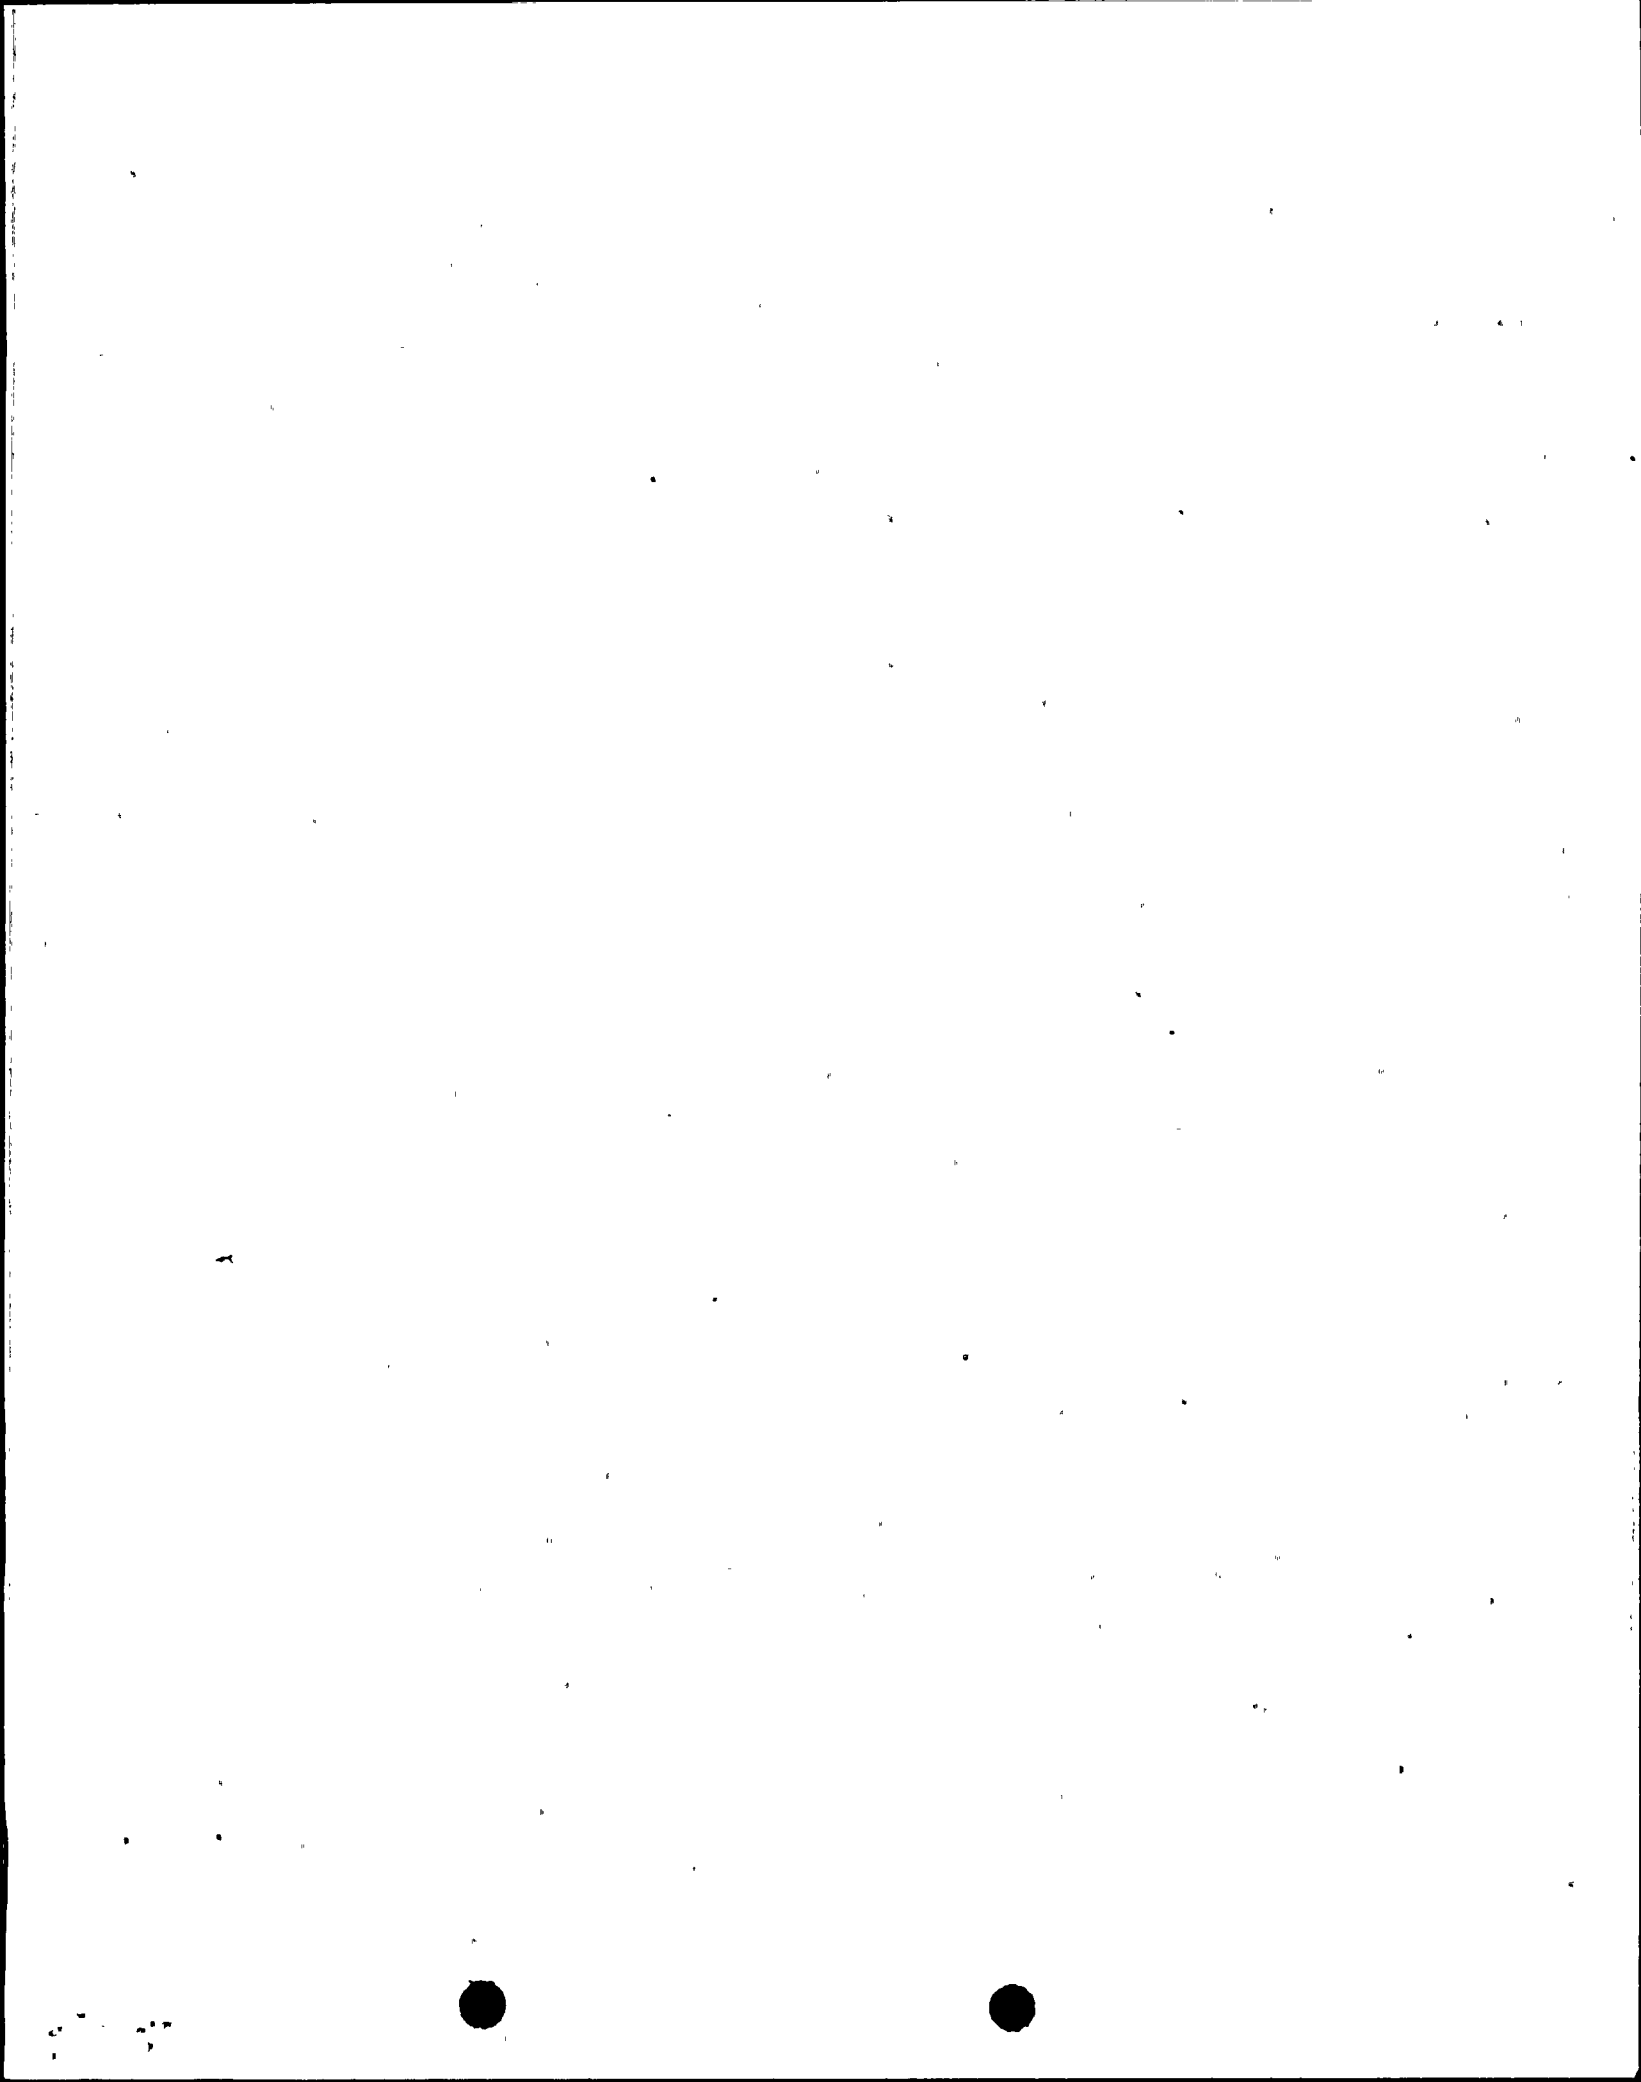

CONTAINMENT SYSTEMS

SURVEILLANCE REQUIREMENTS (Continued)

- d. Type B and C tests shall be conducted with gas at P_a , 34.7 psig,* at intervals no greater than 24*** months except for tests involving:
 - 1. Air Locks
 - 2. Main steam line isolation valves,
 - 3. Valves pressurized with fluid from a seal system,
 - 4. ECCS and RCIC containment isolation valves in hydrostatically tested lines which penetrate the primary containment, and
 - 5. Purge supply and exhaust isolation valves with resilient seals.
- e. Air locks shall be tested and demonstrated OPERABLE per Surveillance Requirement 4.6.1.3.
- f. Main steam line isolation valves shall be leak tested at least once per 18 months.
- g. Leakage from isolation valves that are sealed with fluid from a seal system may be excluded, subject to the provisions of Appendix J, Section III.C.3, when determining the combined leakage rate provided the seal system and valves are pressurized to at least $1.10 P_a$, 38.2 psig, and the seal system capacity is adequate to maintain system pressure for at least 30 days.
- h. ECCS and RCIC containment isolation valves in hydrostatically tested lines which penetrate the primary containment shall be leak tested at least once per 18 months.
- i. Purge supply and exhaust isolation valves with resilient material seals shall be tested and demonstrated OPERABLE per Surveillance Requirements 4.6.1.8.2 and 4.6.1.8.3.
- j. The provisions of Specification 4.0.2 are not applicable to 24-month or 40 ± 10 -month surveillance intervals.

*Unless a hydrostatic test is required per Table 3.6.3-1.

***For those tests conducted during refueling outages, the 24-month interval may be exceeded by no more than 3 months.

