

ACCELERATED DISTRIBUTION DEMONSTRATION SYSTEM

REGULATORY INFORMATION DISTRIBUTION SYSTEM (RIDS)

ACCESSION NBR: 9202240271 DOC. DATE: 92/02/14 NOTARIZED: YES DOCKET #
 FACIL: 50-397 WPPSS Nuclear Project, Unit 2, Washington Public Powe 05000397
 AUTH. NAME AUTHOR AFFILIATION
 SORENSEN, G.C. Washington Public Power Supply System
 RECIP. NAME RECIPIENT AFFILIATION
 Document Control Branch (Document Control Desk)

SUBJECT: Supplement to 920121 application for amend to License
 NPF-21 changing TS Bases Section 3/4.6.1.4 re capacity of
 blowers in MSIV leakage control sys.

DISTRIBUTION CODE: A001D COPIES RECEIVED: LTR 1 ENCL 1 SIZE: 3+7
 TITLE: OR Submittal: General Distribution

NOTES:


	RECIPIENT		COPIES			RECIPIENT		COPIES	
	ID CODE/NAME		LTTR	ENCL		ID CODE/NAME		LTTR	ENCL
	PD5 LA		1	1		PD5 PD		1	1
	ENG, P.L.		2	2					
INTERNAL:	ACRS		6	6		NRR/DET/ECMB 7D		1	1
	NRR/DET/ESGB		1	1		NRR/DOEA/OTSB11		1	1
	NRR/DST 8E2		1	1		NRR/DST/SELB 7E		1	1
	NRR/DST/SICB8H7		1	1		NRR/DST/SRXB 8E		1	1
	NUDOCS-ABSTRACT		1	1		OC/LFMB		1	0
	OGC/HDS1		1	0		<u>REG FILE</u> 01		1	1
	RES/DSIR/EIB		1	1					
EXTERNAL:	NRC PDR		1	1		NSIC		1	1

NOTE TO ALL "RIDS" RECIPIENTS:

PLEASE HELP US TO REDUCE WASTE! CONTACT THE DOCUMENT CONTROL DESK,
 ROOM P1-37 (EXT. 20079) TO ELIMINATE YOUR NAME FROM DISTRIBUTION
 LISTS FOR DOCUMENTS YOU DON'T NEED!

TOTAL NUMBER OF COPIES REQUIRED: LTTR 24 ENCL 22

AA2



WASHINGTON PUBLIC POWER SUPPLY SYSTEM

P.O. Box 968 • 3000 George Washington Way • Richland, Washington 99352

February 14, 1992
G02-92-040

Docket No. 50-397

U.S. Nuclear Regulatory Commission
Attn: Document Control Desk
Washington, D.C. 20555

Subject: WNP-2, OPERATING LICENSE NPF-21
REVISION TO BASES SECTION 3/4.6.1.4 OF
THE TECHNICAL SPECIFICATIONS

- References: 1) Letter, G02-92-015, dated January 21, 1991, GC Sorensen (SS) to NRC, "Request for Amendment to Technical Specification 4.6.1.4 MSIV Leakage Control System"
- 2) Letter, G02-75-238, dated August 18, 1975, NO Strand (SS) to OD Parr (NRC), "Response to Request for Information Main Steam Isolation Valve Leakage Control System"

Reference 1 requested a change to the Technical Specification Surveillance Requirement for the capacity of the blowers in the MSIV Leakage Control (MSLC) System. This letter contains as an attachment a revision to the Bases of the Technical Specifications to support the requested amendment. The MSLC system was designed to divert potential leakage from the Main Steam Isolation Valves (MSIV) to reduce untreated leakage from the valves when primary or secondary containment is required.

As discussed in References 1 and 2, the design capacity is required to be greater than 5 times the allowable Technical Specification leakage for the MSIVs. Extensive modifications were initiated during R4 (1989) and completed in R5 (1990) on the eight MSIVs to reduce leakage. Leak testing on the MSIVs during the most recent outages has proven that valve modifications have significantly reduced measured leakage. No MSIV overhaul has been required because of leakage in excess of Technical Specification limits since the modifications were completed in R5 (1990).

210019

9202240271 920214
PDR ADDCK 05000397
P PDR

ADD 1/1



3

2
1

1
2


1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

100

101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200

The blowers in the MSLC system take a suction on the piping downstream of the inboard and outboard MSIVs. The failure of an inboard MSIV to successfully isolate main steam line would result in excessive flow or high pressure in the corresponding line to the MSLC blower. The system is designed to isolate in this situation, preventing the need for the blowers to handle MSIV leakage significantly beyond allowable Technical Specification limits. The blowers also take a suction on the reactor building atmosphere. This is referred to as dilution flow. The combined flow (~ 30 cfm) of MSIV leakage (≤ 3.8 scfm) and the dilution flow is directed to the SGT for processing. A portion of the flow diverted to the Standby Gas Treatment (SGT) System will be MSIV leakage, but the majority will always be dilution flow.

Sincerely,

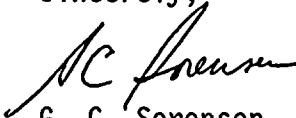

G. C. Sorensen, Manager
Regulatory Programs (Mail Drop 280)

MGE/bk
Attachments

cc: JB Martin - NRC RV
NS Reynolds - Winston & Strawn
PL Eng - NRC
DL Williams - BPA/399
NRC Site Inspector - 901A
RG Waldo - EFSEC

STATE OF WASHINGTON)
COUNTY OF BENTON)

Subject: Revision to Bases Section 3/4.6.1.4

I. G. C. SORENSEN, being duly sworn, subscribe to and say that I am the Manager, Regulatory Programs, for the WASHINGTON PUBLIC POWER SUPPLY SYSTEM, the applicant herein; that I have the full authority to execute this oath; that I have reviewed the foregoing; and that to the best of my knowledge, information, and belief the statements made in it are true.

DATE 14 FEB, 1992

G. C. Sorensen
G. C. Sorensen, Manager
Regulatory Programs

On this date personally appeared before me G. C. SORENSEN, to me known to be the individual who executed the foregoing instrument, and acknowledged that he signed the same as his free act and deed for the uses and purposes herein mentioned.

GIVEN under my hand and seal this 14 day of February 1992.

Barnie Kook
Notary Public in and for the
STATE OF WASHINGTON

Residing at Kennewick, Washington

My Commission Expires April 28, 1994

