




INDIAN POINT 3	FSAR UPDAT
SEISMIC GROUND RESPONSE SPECTRA FOR THE MAXIMUM GROUND ACCELERATION OF 0.10g	
REV I	JULY 1988
FIGURE NO. 16.1-1	

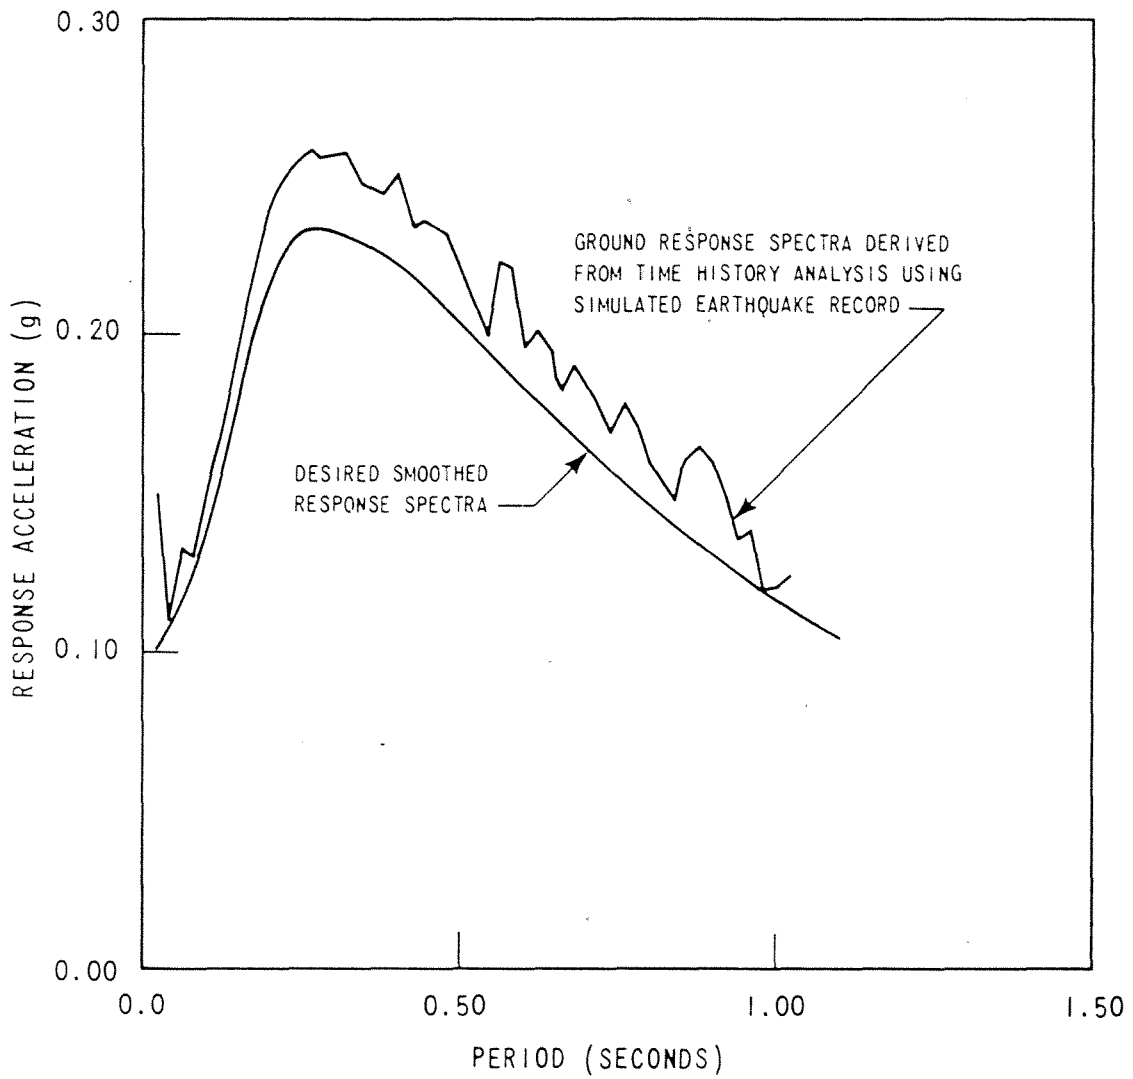


INDIAN POINT 3	FSAR UPDATE
COMPARISON OF DESIRED SPECTRA AND ACTUAL SPECTRA CORRESPONDING TO SIMULATED EARTHQUAKE RECORD FOR 2% DAMPING	
REV. 0	JULY, 1982 FIGURE NO. 16.1-2

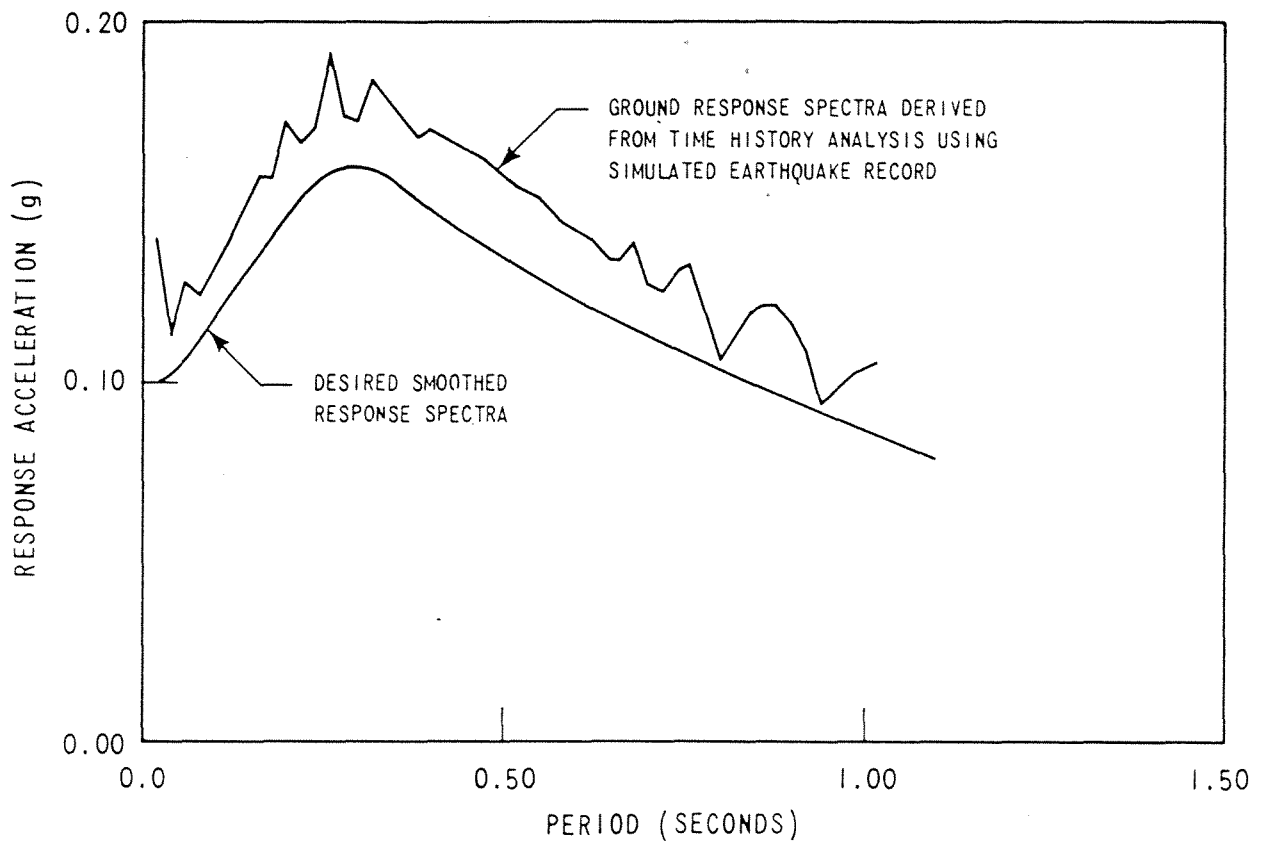


INDIAN POINT 3	FSAR UPDATE
COMPARISON OF DESIRED SPECTRA AND ACTUAL SPECTRA CORRESPONDING TO SIMULATED EARTHQUAKE RECORD FOR 5% DAMPING	
REV. 0	JULY, 1982 FIGURE NO. 16.1-3

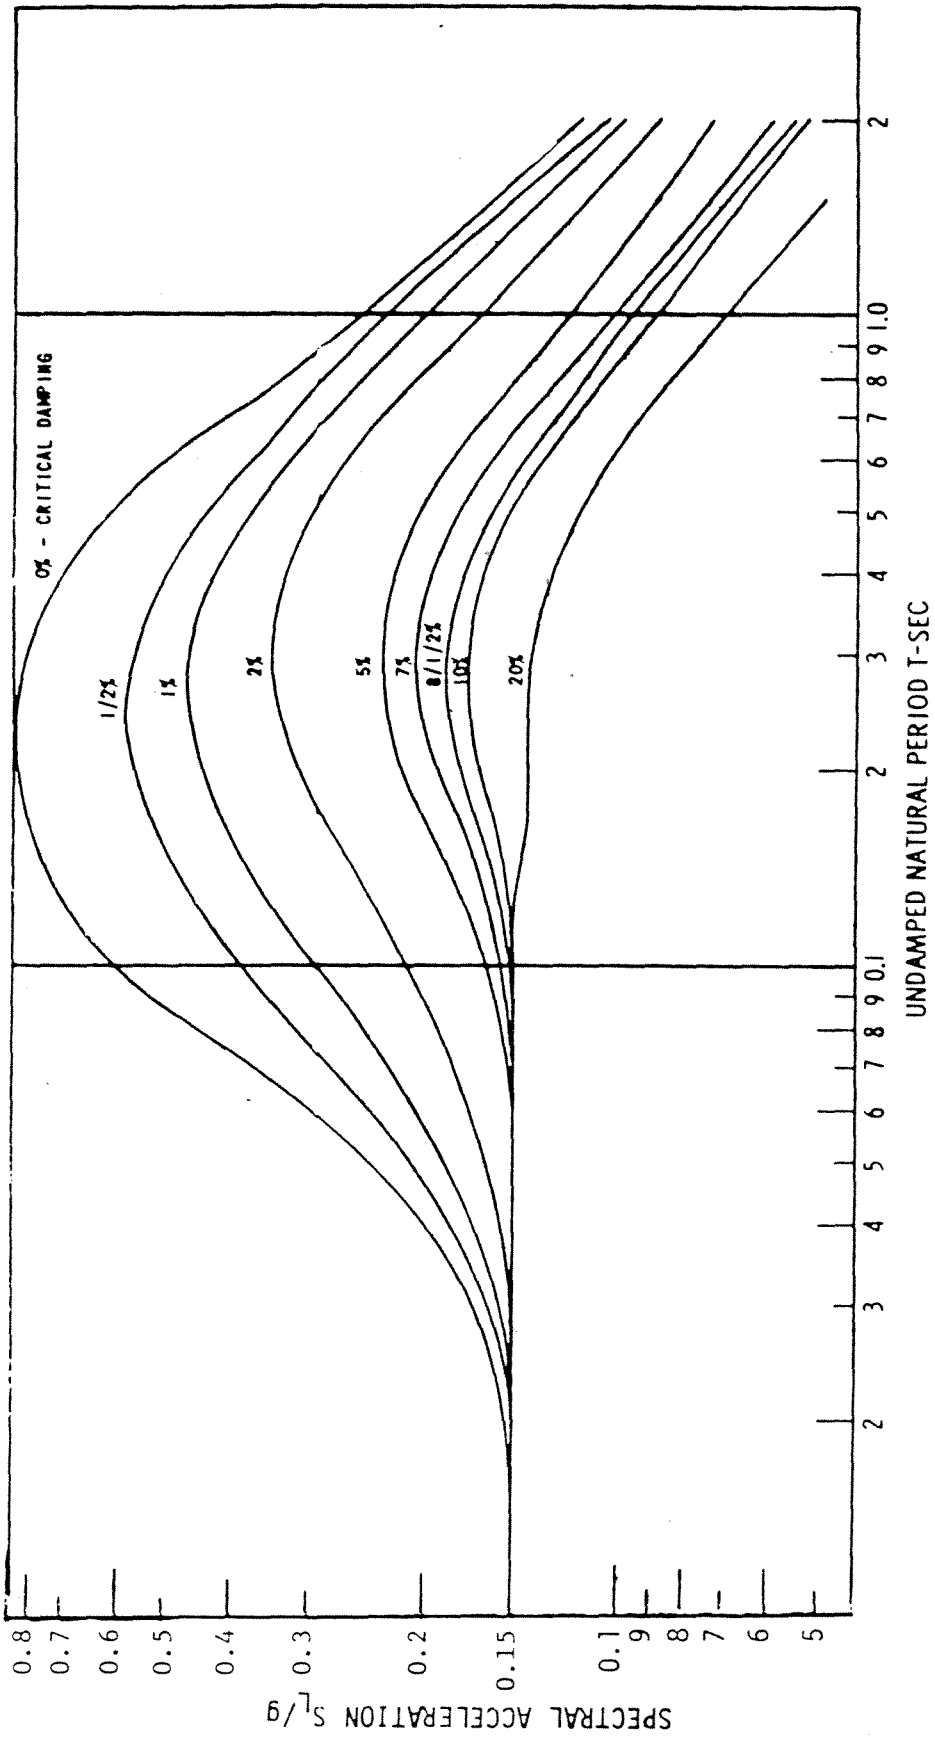

INDIAN POINT 3	FSAR UPDATE
SEISMIC GROUND RESPONSE SPECTRA FOR THE MAXIMUM GROUND ACCELERATION OF 0.15g	
REV. 0	JULY, 1982
FIGURE NO. 16.1-4	

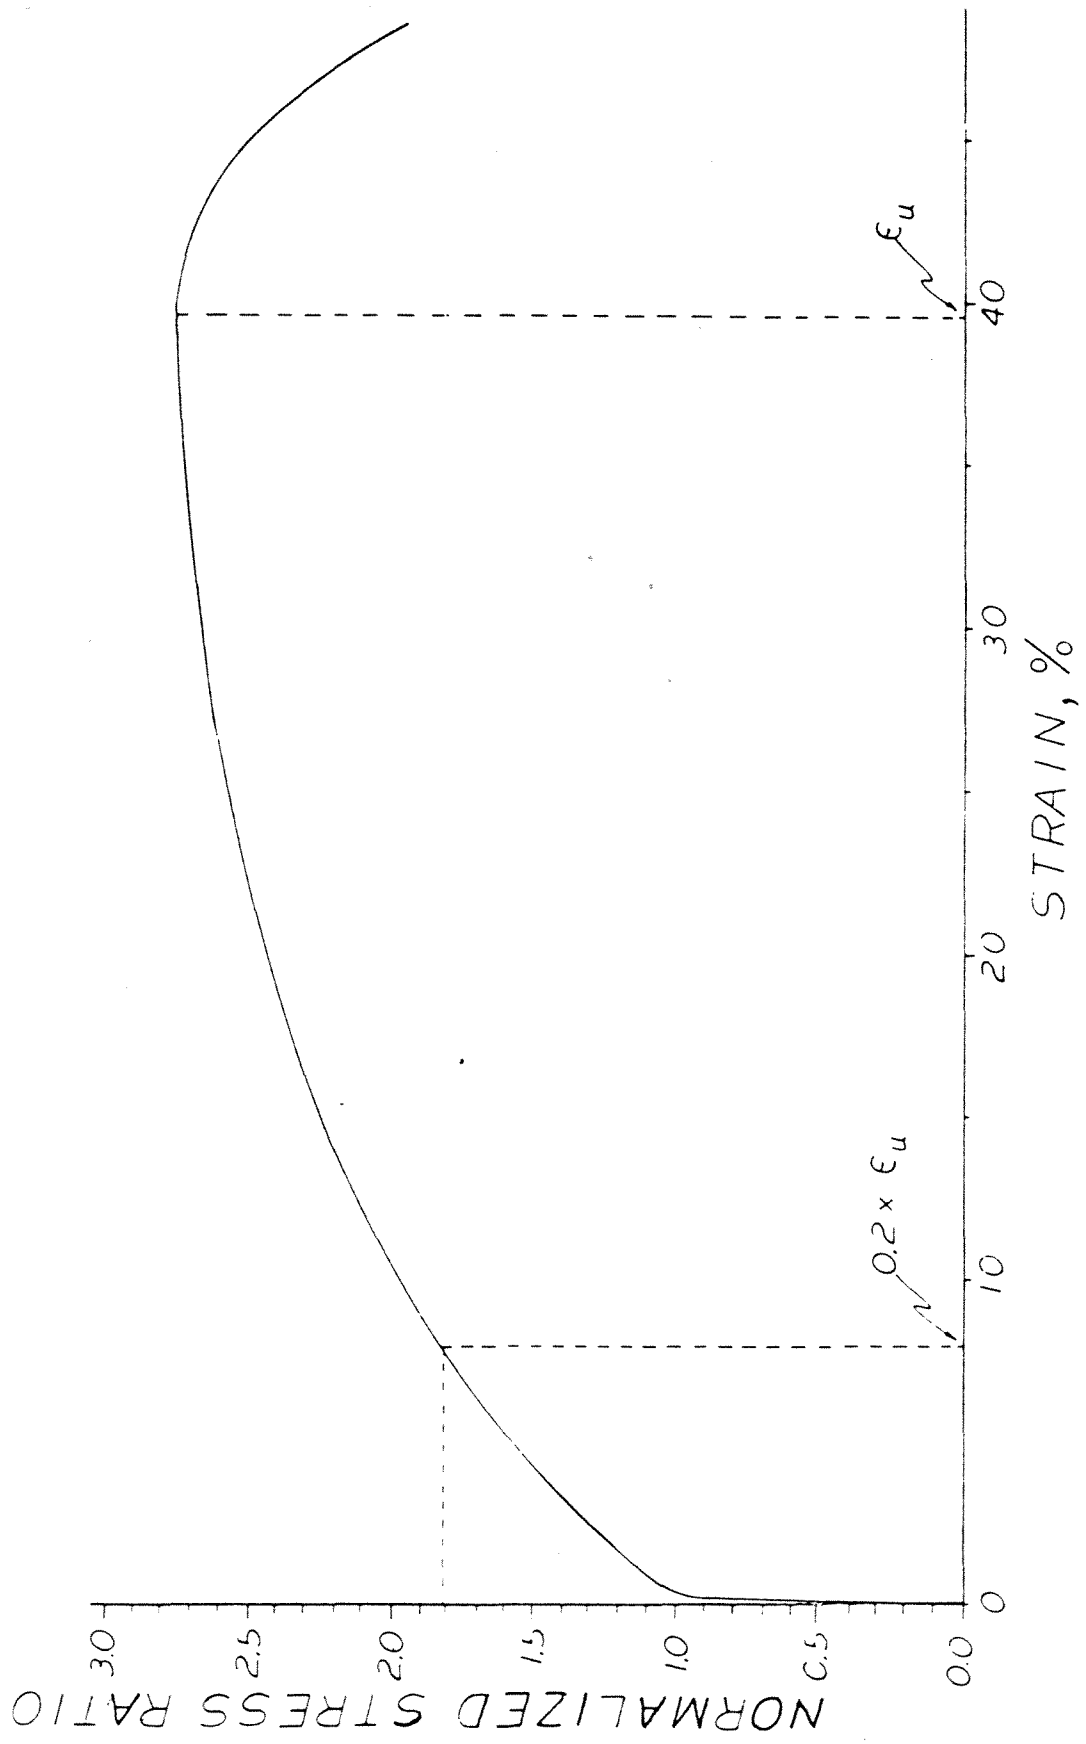

INDIAN POINT 3		FSAR UPDATE
NORMALIZED STRESS STRAIN CURVE STANDARD ASTM TENSILE TEST MATERIAL: 304 STAINLESS STEEL TEMPERATURE: 600°F		
REV. 0	JULY 1982	FIGURE NO. 16.1-5

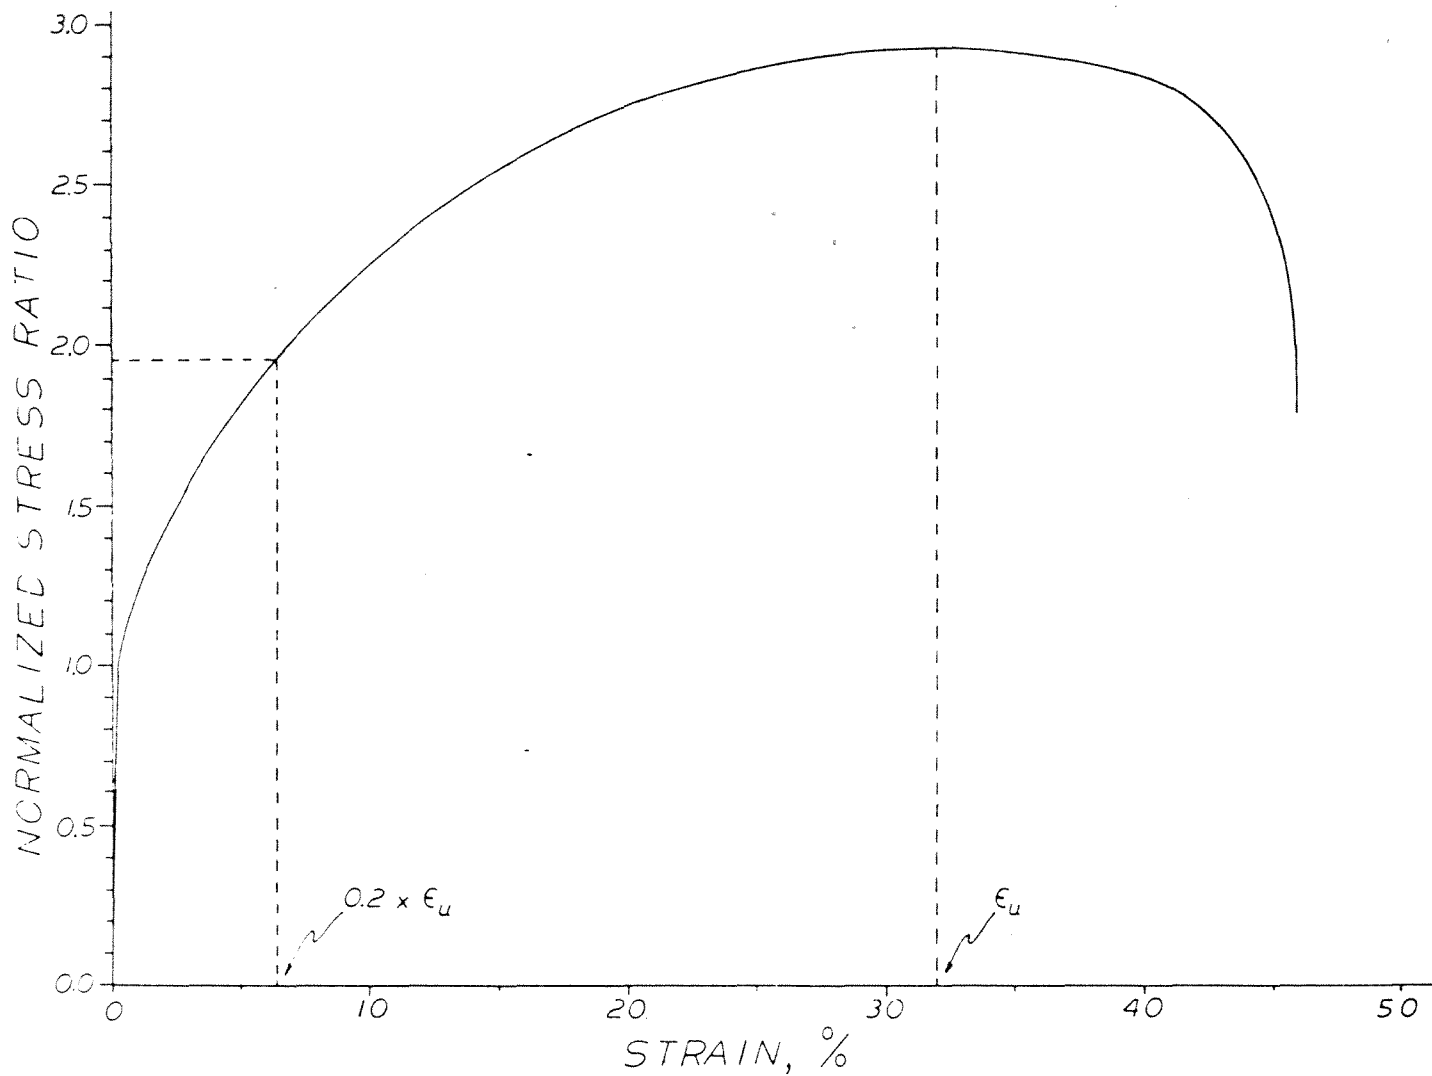

INDIAN POINT 3


FSAR UPDATE

NORMALIZED STRESS STRAIN CURVE
 STANDARD ASTM TENSILE TEST MATERIAL:
 INCONEL 600 TEMPERATURE: 600°F


REV. 0


JULY, 1982

FIGURE NO. 16.1-6

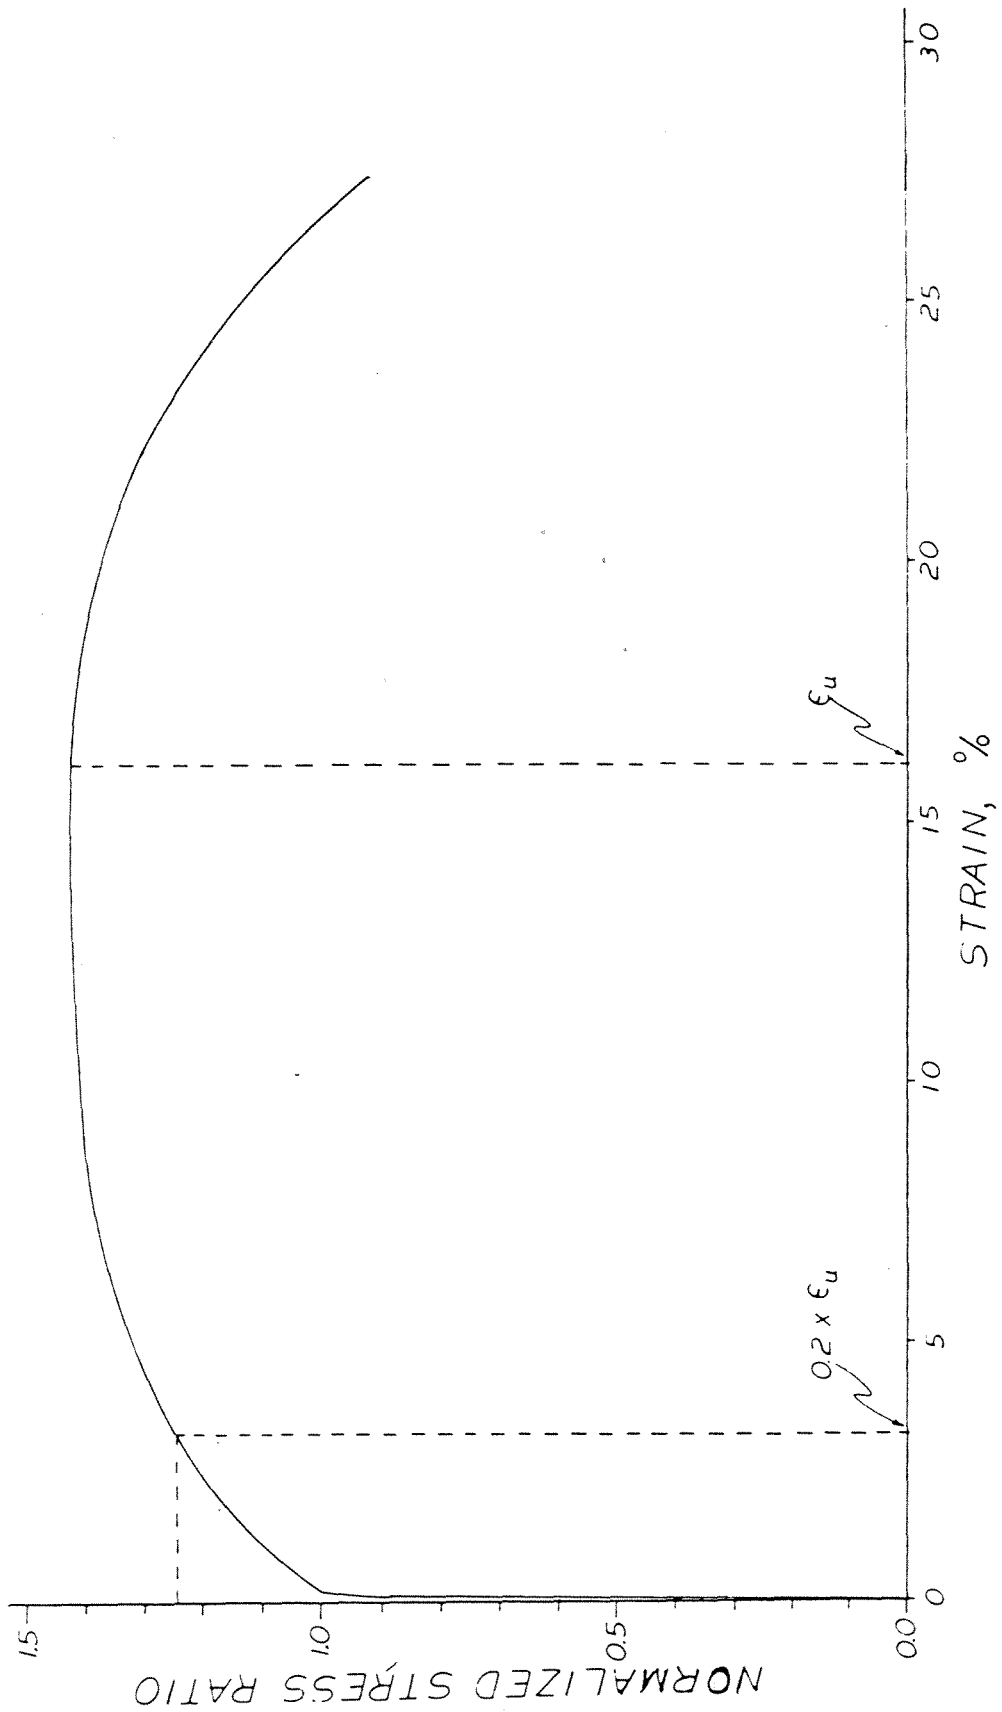

INDIAN POINT 3	FSAR UPDATE
NORMALIZED STRESS STRAIN CURVE STANDARD ASTM TENSILE TEST MATERIAL: SA 302 GRADE B TEMPERATURE: 600°F	
REV 0	FIGURE NO. 16.1-7

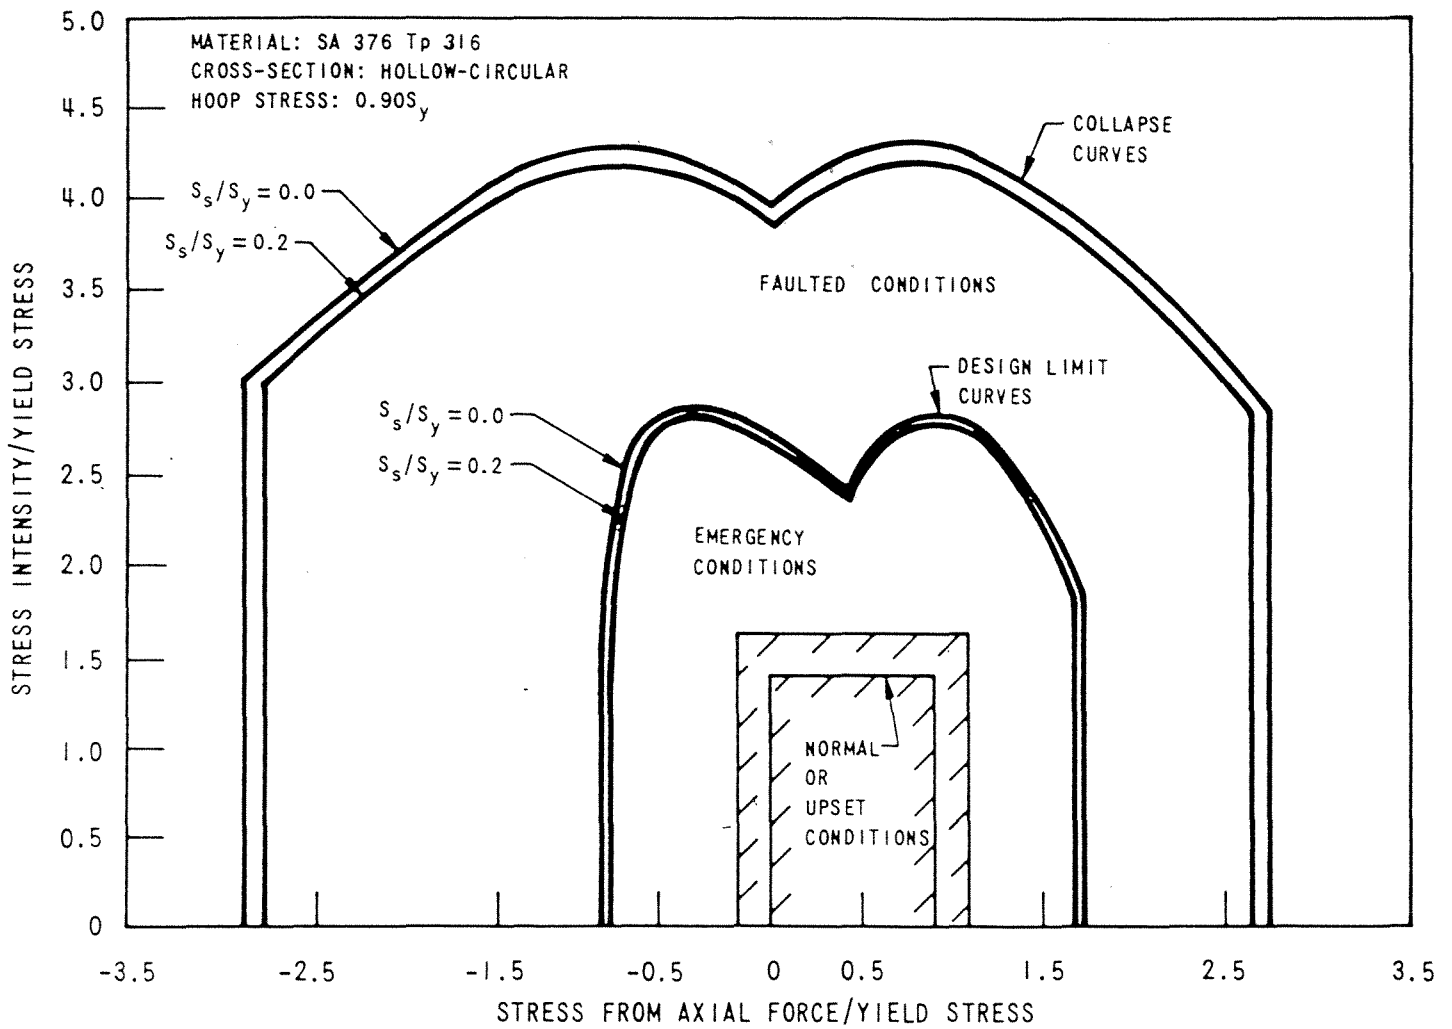

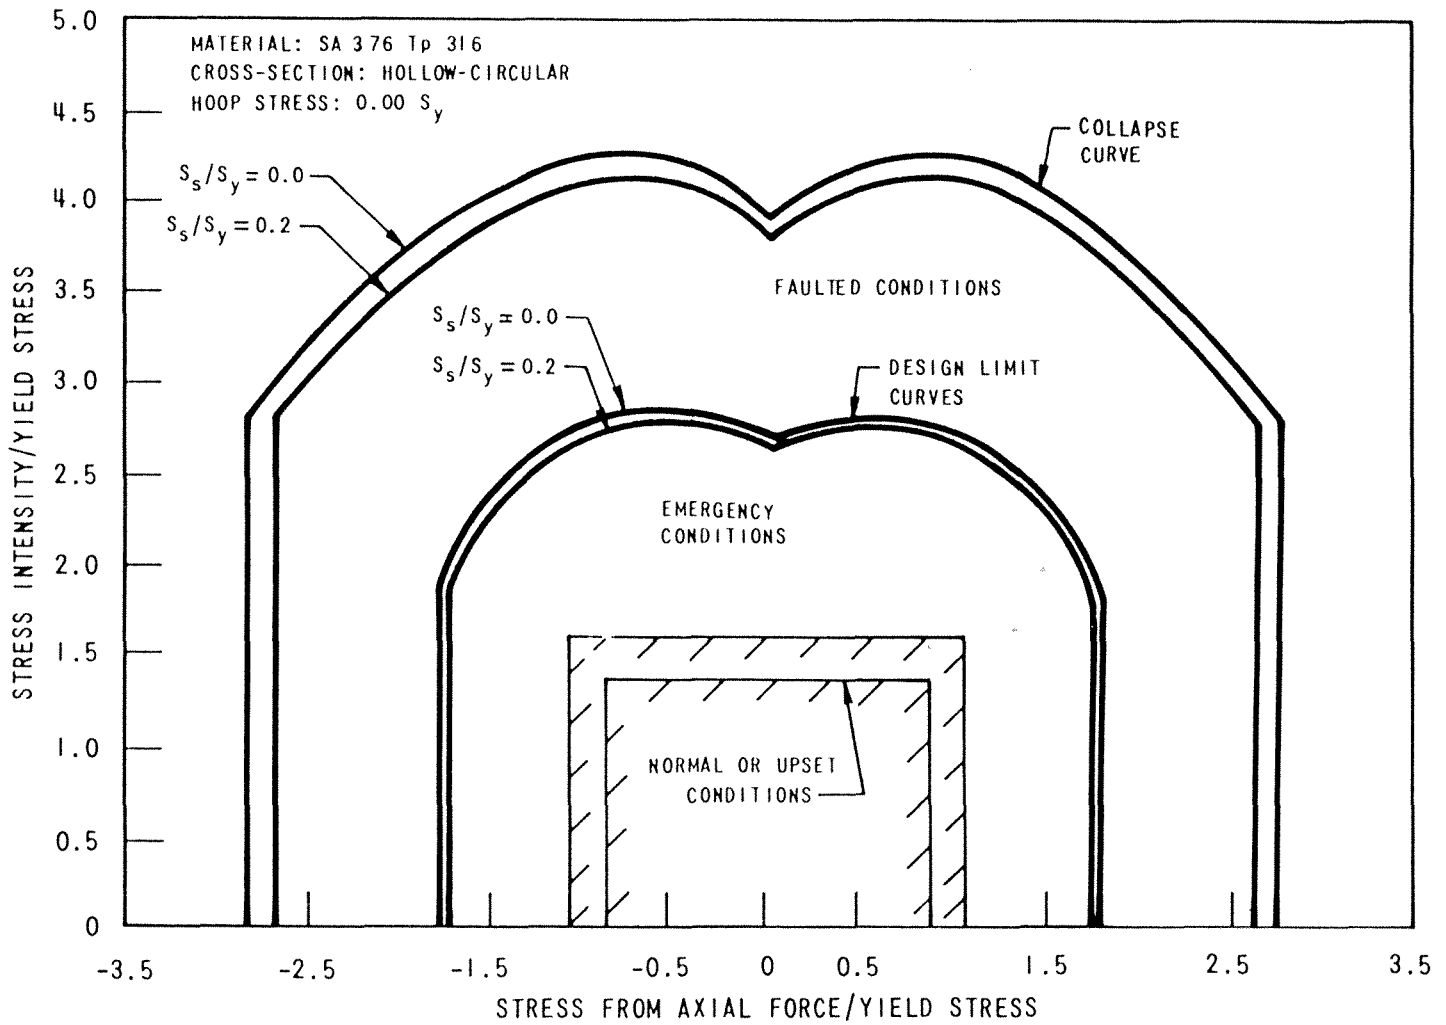

INDIAN POINT 3 FSAR UPDATE

COMPARISON BETWEEN DESIGN
 AND COLLAPSE CONDITIONS (0.00 S_y)

REV 0 JULY 1982 FIGURE NO. 16-1-9