

CATEGORY 1

REGULATORY INFORMATION DISTRIBUTION SYSTEM (RIDS)

97/04/17

ACCESSION NBR: 9704210075 DOC. DATE: 96/12/31 NOTARIZED: NO DOCKET # 05000389
 FACIL: 50-389 St. Lucie Plant, Unit 2, Florida Power & Light Co.
 AUTH. NAME: ALL, J.A. AUTHOR AFFILIATION: Florida Power & Light Co.
 RECIP. NAME: RECIPIENT AFFILIATION:

see report

SUBJECT: "1996 Annual Environ Operating Rept." W/970417 ltr.

DISTRIBUTION CODE: C001D COPIES RECEIVED: LTR 1 ENCL 1 SIZE: 58
 TITLE: Licensing Submittal: Environmental Rept Amdt & Related Correspondence

NOTES:

	RECIPIENT ID CODE/NAME	COPIES LTR ENCL	RECIPIENT ID CODE/NAME	COPIES LTR ENCL
	WIENS, L.	1 1		
INTERNAL:	ACRS	1 1	FILE CENTER 01	1 1
	NUDOCS-ABSTRACT	1 1	UGC/HDS3	1 0
	RGN2 DRS/RSB	1 1		
EXTERNAL:	NOAC	1 1	NRC PDR	1 1

C
A
T
E
G
O
R
Y

1

D
O
C
U
M
E
N
T

NOTE TO ALL "RIDS" RECIPIENTS:
 PLEASE HELP US TO REDUCE WASTE. TO HAVE YOUR NAME OR ORGANIZATION REMOVED FROM DISTRIBUTION LISTS OR REDUCE THE NUMBER OF COPIES RECEIVED BY YOU OR YOUR ORGANIZATION, CONTACT THE DOCUMENT CONTROL DESK (DCD) ON EXTENSION 415-2083

TOTAL NUMBER OF COPIES REQUIRED: LTR 8 ENCL 7





FPL

Florida Power & Light Company, 6501 South Ocean Drive, Jensen Beach, FL 34957

April 17, 1997

L-97-101
10 CFR 50.4
10 CFR 50.36

U. S. Nuclear Regulatory Commission
Attn: Document Control Desk
Washington, DC 20555

Re: St. Lucie Unit 2
Docket No. 50-389
1996 Annual Environmental Operating Report

In accordance with Section 5.4.1 of the St. Lucie Unit 2 Environmental Protection Plan (EPP), enclosed is the St. Lucie Unit 2 Annual Environmental Operating Report for the calendar year 1996.

Should there be any questions on this information, please contact us.

Very truly yours,

J. A. Stall
Vice President
St. Lucie Plant

JAS/spt

Enclosure

cc: Regional Administrator, Region II, USNRC
Senior Resident Inspector, USNRC, St. Lucie Plant



9704210075 961231
PDR ADOCK 05000389
R PDR



COO1/1



*Florida Power
& Light Company
St. Lucie Plant
Unit 2*

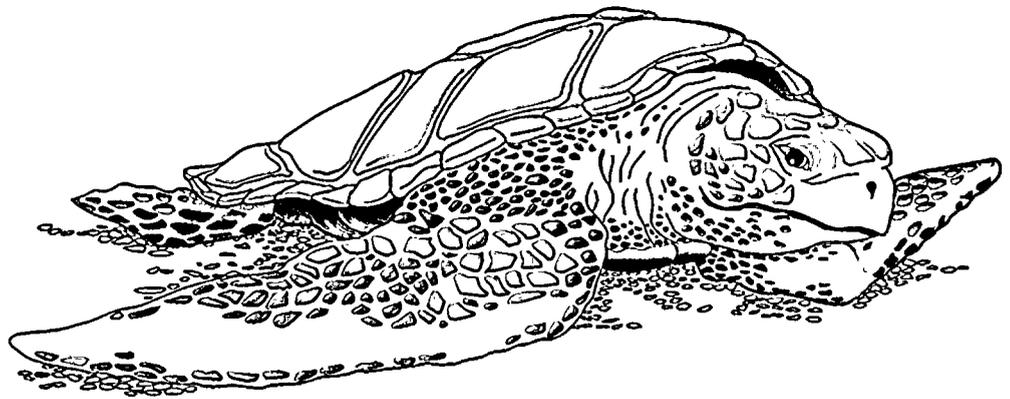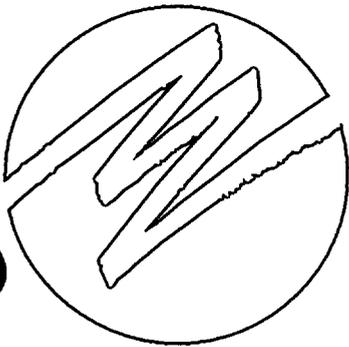

FPL

**St. Lucie Nuclear Plant
Sea Turtle Refuge**

*Annual Environmental
Operating Report*

Rec'd w/ltr dtd 4/17/97
9704210075

(FPL-96)

April 1997

**FLORIDA POWER & LIGHT COMPANY
ST. LUCIE UNIT 2**

**ANNUAL ENVIRONMENTAL
OPERATING REPORT
1996**

**FLORIDA POWER AND LIGHT COMPANY
JUNO BEACH, FLORIDA**

**QUANTUM RESOURCES, INC.
PALM BEACH GARDENS, FLORIDA**

ENVIRONMENTAL OPERATING REPORT

TABLE OF CONTENTS

VOLUME I

EXECUTIVE SUMMARY	iii
Introduction	iii
Turtle Nesting Survey	iii
Intake Canal Monitoring	iv
INTRODUCTION	1
Background	1
Area Description	1
Plant Description	2
TURTLES	3
Introduction	3
Materials and Methods	6
Nesting Survey	6
Intake Canal Monitoring	7
Results and Discussion	11
Nesting Survey	11
1996 Loggerhead Nesting Summary	11
Spatial Distribution of Loggerhead Turtle Nests	11
Long-Term Trends in Loggerhead Turtle Nesting	13
Seasonal Patterns of Loggerhead Turtle Nesting	14
Predation on Loggerhead Turtle Nests	15
1996 Green and Leatherback Nesting Survey	16
Trends in Green and Leatherback Turtle Nesting	16

Intake Canal Monitoring	18
1996 Canal Capture Summary	18
Relative Abundance and Temporal Distribution	18
Size Class Distributions	20
Sex Ratios	21
Capture Efficiencies	21
Relative Condition	23
Mortalities	24
Recapture Incidents	26
Summary	27
LITERATURE CITED	31
FIGURES	34
TABLES	46
 <u>VOLUME II</u>	
INTRODUCTION	49
SEA TURTLE MONITORING AND ASSOCIATED ACTIVITIES	49
OTHER ROUTINE REPORTS	50

EXECUTIVE SUMMARY

INTRODUCTION

The St. Lucie Plant is an electric generating station on Hutchinson Island in St. Lucie County, Florida. The plant consists of two nuclear-fueled 850 net MWe units; Unit 1 was placed on-line in March 1976 and Unit 2 in May 1983. This document has been prepared to satisfy the requirements contained in the United States Nuclear Regulatory Commission's Appendix B Environmental Protection Plan (EPP) to St. Lucie Unit 2 Facility Operating License No. NPF-16. This report discusses environmental protection activities related to sea turtles as required by Subsection 4.2 of the EPP. Other routine annual reporting requirements are addressed in Volume 2.

TURTLE NESTING SURVEY

Since monitoring began in 1971, there have been considerable year-to-year fluctuations in sea turtle nesting activity on Hutchinson Island. However, data collected through 1996 have shown no long-term reductions in nesting on the island. Relatively high nesting during recent years may actually reflect an increase in the number of nesting females in the study area. On a smaller scale, power plant operation has had no significant effect on nesting near the plant. Low nesting activity in 1975 and again in 1981-1983 in the vicinity of the plant was attributed to nighttime construction activities associated with installation of plant intake and discharge structures. Nesting returned to normal or above normal levels following both periods of construction. During 1991, daytime construction activities associated with velocity cap repairs had no apparent effect on nesting. Formal requirements to conduct nesting surveys expired in 1986, but this program was voluntarily continued

through 1996 with agreement from federal and state agencies.

INTAKE CANAL MONITORING

Since plant operation began in 1976, 5038 sea turtles (including recaptures) representing five different species have been removed from the intake canal. The majority of the turtles captured (59 percent) were loggerheads. Differences in the numbers of turtles found during different months and years, including dramatic increases in green turtle captures in recent years, have been attributed primarily to natural variation in the occurrences of turtles in the vicinity of the plant, rather than to operational influences of the plant itself. The majority of turtles removed from the intake canal (about 94 percent) were captured alive and released back into the ocean. Ongoing evaluations and improvements to the canal capture program have substantially reduced mortalities of entrapped sea turtles during recent years. Turtles confined between the barrier net and intake headwalls typically reside in the canal for a relatively short period prior to capture, and most are in good to excellent condition when caught. An improved design barrier net completed in January 1996 is expected to further reduce the residence times and potential for mortalities to sea turtles in the intake canal system.

INTRODUCTION

BACKGROUND

This document has been prepared to satisfy the requirements contained in the United States Nuclear Regulatory Commission's (NRC) Appendix B Environmental Protection Plan to St. Lucie Unit 2 Facility Operating License No. NPF-16.

St. Lucie Plant Units 1 and 2 use the Atlantic Ocean as a source of water for once-through condenser cooling. Since 1971, the potential environmental effects resulting from the intake and discharge of this water have been the subject of FPL-sponsored biotic studies at the site. Jurisdiction for sea turtle studies is with the NRC, which is considered to be the lead federal agency relative to consultation under the Endangered Species Act. Previous results dealing with sea turtle studies are contained in twelve annual environmental operating reports covering the period from 1983 through 1995. This report describes the 1996 environmental protection activities related to sea turtles, as required by Subsection 4.2 of the St. Lucie Plant Unit 2 Environmental Protection Plan.

AREA DESCRIPTION

The St. Lucie Plant is located on a 457-hectare site on Hutchinson Island on Florida's east coast (Figures 1 and 2). The plant is approximately midway between the Ft. Pierce and St. Lucie Inlets. It is bounded on the east side by the Atlantic Ocean and on the west side by the Indian River Lagoon. Hutchinson Island is a barrier island that extends 36 km between inlets and obtains its maximum width of 2 km at the plant site. Elevations approach 5 m atop dunes bordering the beach and decrease to sea level in the mangrove swamps that are common on much of the

western side. The Atlantic shoreline of Hutchinson Island is composed of sand and shell hash with intermittent rocky promontories protruding through the beach face along the southern end of the island. Submerged coquinoid rock formations parallel much of the island off the ocean beaches. The ocean bottom immediately offshore from the plant site consists primarily of sand and shell sediments. The Florida Current, which flows parallel to the continental shelf margin, begins to diverge from the coastline at West Palm Beach. At Hutchinson Island, the current is approximately 33 km offshore. Oceanic water associated with the western boundary of the current periodically meanders over the inner shelf, especially during summer months.

PLANT DESCRIPTION

The St. Lucie Plant consists of two 850 net MWe nuclear-fueled electric generating units that use near shore ocean waters for the plant's once-through condenser cooling water system. Water for the plant enters through three submerged intake structures located about 365 m offshore (Figure 2). Each of the intake structures is equipped with a velocity cap to minimize fish entrainment. From the intake structures, the water passes through submerged pipes (two 3.7 m and one 4.9 m in diameter) under the beach and dunes that lead to a 1,500m long intake canal, which transports water to the plant. After passing through the plant, the heated water is discharged into a 670m long canal that leads to two buried discharge pipelines. These pass underneath the dunes and beach and along the ocean floor to the submerged discharges, the first of which is approximately 365 m offshore and 730 m north of the intake.

TURTLES

INTRODUCTION

Hutchinson Island, Florida, is an important rookery for the loggerhead turtle, Caretta caretta, and also supports some nesting of the green turtle, Chelonia mydas, and the leatherback turtle, Dermochelys coriacea. All three species are protected by state and federal statutes. The federal government has classified the loggerhead turtle as a threatened species. The leatherback turtle and the Florida nesting population of the green turtle are listed by the federal government as endangered species. It has been a prime concern of FPL that the St. Lucie Plant would not adversely affect the Hutchinson Island rookery. Because of this concern, FPL has sponsored monitoring of marine turtle nesting activity on the island since 1971.

Daytime surveys to quantify nesting, as well as nighttime turtle tagging programs, were conducted in odd numbered years from 1971 through 1979. During daytime nesting surveys, nine 1.25 km-long survey areas were monitored five days per week (Figure 3). The St. Lucie Plant began operation in 1976; therefore, the first three survey years (1971, 1973, and 1975) were pre-operational. Though the power plant was not operating during 1975, St. Lucie Plant Unit No. 1 ocean intake and discharge structures were installed during that year. Installation of these structures included nighttime construction activities conducted offshore from and perpendicular to the beach. Construction had been completed and the plant was in full operation during the 1977 and 1979 surveys.

A modified daytime nesting survey was conducted in 1980 during the

preliminary construction of the ocean discharge structure for St. Lucie Plant Unit 2. During this study, four of the previously established 1.25 km-long survey areas were monitored. Additionally, eggs from turtle nests potentially endangered by construction activities were relocated.

Every year from 1981 through 1996, 36 1km long survey areas comprising the entire island were monitored seven days a week during the nesting season (Figure 3). Beginning in 1994, the southern half of the island has been surveyed by Ecological Associates of Jensen Beach, Florida, and their data is included in this report. The St. Lucie Plant Unit 2 discharge structure was installed during the 1981 nesting season. Offshore and beach construction of the Unit 2 intake structure proceeded throughout the 1982 nesting season and was completed near the end the 1983 nesting season. Construction activities associated with installation of both structures were similar to those conducted when Unit 1 intake and discharge structures were installed. Eggs from turtle nests potentially threatened by construction activities were relocated.

During 1991, another major offshore construction project was undertaken to replace damaged velocity caps on the three intake structures. A large elevated platform, from which repair activities were conducted, was erected around the three structures. Construction occurred throughout the nesting season. However, in contrast to previous offshore projects, work was restricted almost entirely to daylight hours, nighttime lighting of the work area was minimal, and no equipment or materials were used on the beach. A sea turtle protection plan implemented in support of the project included caging of nests along a 1,500 m section of beach west of the platform and release of hatchlings to unaffected areas to the north and

south. This plan was intended to mitigate any negative effects potentially resulting from required safety and navigational lighting on and near the platform.

Requirement 4.2.1 of the NRC's St. Lucie Unit 2 Appendix B Environmental Protection Plan was complete with submission of the 1986 nesting survey data (ABI, 1987). The nesting survey was continued voluntarily through 1996 with agreement from federal and state agencies. Results are presented in this report and discussed in relation to previous findings.

In addition to monitoring sea turtle nesting activities and relocating nests away from plant construction areas, removal of turtles from the intake canal has been an integral part of the St. Lucie Plant environmental monitoring program. Turtles entering the ocean intake structures are entrained with cooling water and rapidly transported through the intake pipes into an enclosed canal system where they must be manually captured and returned to the ocean. Since the plant became operational in 1976, turtles entrapped in the intake canal have been systematically captured, measured, weighed, tagged and released.

Previous publications and technical reports have presented findings of the nesting surveys, nest relocation activities and canal capture program (ABI, 1994)(Quantum, 1995,1996). Results of studies to assess the effects of thermal discharges on hatchling swimming speed have also been reported (ABI, 1978). In July of 1994, responsibility for sea turtle research and conservation activities was transferred from Ecological Associates, Inc. (formerly Applied Biology, Inc.) to Quantum Resources, Inc. Methodologies employed in both the nesting surveys and canal capture operations remained essentially unchanged so that data collected in



1994 and future years are directly comparable to previous years data. The purpose of this report is to: 1) present 1996 sea turtle nesting survey data and summarize observed spatial and temporal nesting patterns since 1971, 2) document and summarize predation on turtle nests since 1971, and 3) present 1996 canal capture data and summarize comparable data collected since 1976.

MATERIALS AND METHODS

Nesting Survey

Methodologies used during previous turtle nesting surveys on Hutchinson Island were described in earlier reports (ABI 1994). Methods used during the 1996 survey were designed to allow comparisons with these previous studies.

In 1996, only areas A-S were surveyed by Quantum Resources biologists (Figure 3). Data supplied by Ecological Associates, Inc. are used to provide whole island nesting totals in Figures 6,8, and 9.

From March 29, 1996 through April 15, 1996, preliminary nest surveys were conducted along Hutchinson Island in areas A-S. Five leatherback turtle nests and seven loggerhead turtle nests were found in areas A-S prior to the beginning of formal nesting surveys on April 15, 1996. From April 15, 1996 through September 15, 1996, nest surveys were conducted on a daily basis. The last nest recorded in area A-S was on September 13, 1996. Biologists used small off-road motorcycles to survey the island each morning. New nests, non-nesting emergences (false crawls), and nests destroyed by predators were recorded for each of the 1-km-long survey areas A - S (Figure 3). The 1.25-km-long survey areas established in earlier studies also were monitored so comparisons could be made with previous studies.

Data collected from beach nesting surveys were reported to the Florida Department of Environmental Protection (DEP) as part of the DEP Index Nesting Beach Survey. In a cooperative effort, data from stranded turtles found during beach surveys were routinely provided to the Florida Department of Environmental Protection and the National Marine Fisheries Service (NMFS) through the Sea Turtle Stranding and Salvage Network.

Intake Canal Monitoring

Most turtles entrapped in the St. Lucie Plant intake canal were removed by means of large-mesh tangle nets fished between the intake headwalls and a barrier net located at the Highway A1A bridge (Figure 2). Nets used during 1996 were from 30 to 40 m in length, 3 to 4 m deep and composed of 40 cm stretch mesh multifilament nylon. Large floats were attached to the surface, and unweighted lines used along the bottom. Turtles entangled in the nets generally remained at the water's surface until removed. Since its inception in 1976, the canal capture program has been under continual review and refinement in an attempt to minimize both entrapment time and injuries/mortalities to entrapped sea turtles. Prior to April 1990, turtle nets were usually deployed on Monday morning and retrieved on Friday afternoon. During periods of deployment, the nets were inspected for captures at least twice each day (mornings and afternoons). Additionally, St. Lucie Plant personnel checked the nets periodically, and biologists were notified immediately if a capture was observed. Sea turtle specialists were on call 24 hours a day to retrieve captured turtles from the plant intake canal system.

Beginning April 1990, after consultation with NMFS, net deployment was scaled back to daylight hours only. Concurrently, surveillance of the intake canal

was increased and biologists remained on site for the duration of each day's netting activities. This measure decreased response time for removal of entangled turtles from nets and provided an opportunity to improve daily assessments of turtle levels within the canal. Records of daily canal observations were compared with capture data to assess capture efficiencies.

In 1978, a barrier net at the A1A bridge was constructed to confine turtles to the easternmost section of the intake canal, where capture techniques have been most effective. This net is constructed of large diameter polypropylene rope and has a mesh size of 20.3 cm x 20.3 cm. A cable and series of large floats are used to keep the top of the net above the water's surface, and the bottom is anchored by a series of concrete blocks. The net is inclined at a slope of 1:1, with the bottom positioned upstream of the surface cable. This reduces bowing in the center and minimizes the risk of a weak or injured turtle being pinned underwater by strong currents.

In the past, the integrity of the barrier net was occasionally compromised, and turtles were able to move west of A1A. These turtles were further constrained downstream by an underwater intrusion detection system (UIDS) consisting, in part, of a large barrier positioned perpendicular to the north-south arm of the canal (Figure 2). The UIDS security barrier has a mesh size of 22.9 cm x 22.9 cm. Prior to completion of the UIDS in December 1986, turtles uncontained by the A1A barrier net were usually removed from the canal at the intake wells of Units 1 and 2 (Figure 2). There they were retrieved by means of large mechanical rakes or specially designed nets. Following construction of the UIDS barrier, all but the smallest individuals were unable to reach the intake wells. Improvements made to the A1A

barrier net during 1990 have effectively confined all turtles larger than 32.5 cm carapace length (28.7 cm carapace width) to the eastern end of the canal. In response to the large numbers of small turtles encountered in the intake canal in recent years, an improved design, small mesh barrier net was erected east of the A1A barrier net. Construction was complete in January 1996. This improved barrier net is designed to confine all turtles with a carapace width greater than 18 cm to the extreme eastern portion of the intake canal.

Formal daily inspections of the intake canal were made to determine the numbers, locations and species of turtles present. Surface observations were augmented with periodic underwater inspections, particularly in and around the barrier nets.

In addition to the use of tangle nets, dip nets and hand captures using snorkel and SCUBA are also employed. Long handled dip nets, employed from small boats, the canal banks and headwall structures are moderately effective in capturing turtles with carapace lengths of about 30 cm or less. Divers are employed to hand capture turtles whenever underwater visibility permits, and this technique has proven highly effective in the capture of turtles of all sizes, particularly less active individuals often found partially buried in the sediment in the vicinity of the A1A barrier net. Hand capture efforts have had a significant impact in reducing entrapment times for turtles in the intake canal.

Regardless of capture method, all turtles removed from the canal were identified to species, measured, weighed, tagged and examined for overall condition (wounds, abnormalities, parasites, etc.). Beginning in July 1994, all turtles captured

have been photographed dorsally and ventrally prior to release, and the photographs retained for future reference. Healthy turtles were released into the ocean the same day of capture. Sick or injured turtles were treated and occasionally held for observation prior to release. When treatment was warranted, injections of antibiotics and vitamins were administered by permitted veterinarians.

Resuscitation techniques were used if a turtle was found that appeared to have died recently. Beginning in 1982, necropsies were conducted on dead turtles found in fresh condition.

Florida Power & Light Company and Quantum Resources, Inc., continued to assist other sea turtle researchers in 1996. Since the program began, data, specimens and/or assistance have been given to the Florida Department of Environmental Protection, National Marine Fisheries Service, US Fish and Wildlife Service, US Army Corps of Engineers, Smithsonian Institution, South Carolina Wildlife and Marine Resources Division, Center for Sea Turtle Research (University of Florida), Florida Atlantic University, University of Central Florida, Texas A & M University, University of Rhode Island, University of South Carolina, University of Illinois, University of Georgia, Virginia Institute of Marine Science, Western Atlantic Turtle Symposium, South Atlantic Fishery Management Council, Florida Marine Fisheries Commission, Harbor Branch Oceanographic Institution and the National Research Council.

RESULTS AND DISCUSSION

Nesting Survey

1996 Loggerhead Nesting Summary

In 1996, 7583 Loggerhead turtle nests were recorded in the 36 one kilometer segments comprising Hutchinson Island. This figure is in accordance with a general increase in loggerhead turtle nesting on Hutchinson Island since surveys began in 1971, although significant year to year fluctuations are evident. Loggerhead nests and emergences for survey areas A-S are presented in Figure 4.

Spatial Distribution of Loggerhead Turtle Nests

From 1981 through 1996, 36 1km long segments comprising the island's coastline have been surveyed. The distribution of nests among these 36 survey areas has shown an increase in nesting from north to south along the northern half of the island (ABI, 1987, 1994). Along the southern half of the island there has either been no gradient or a gradient of decreasing nesting from north to south. Though beach dynamics may sometimes affect the selection of nesting sites by loggerhead turtles, relationships between spatial nesting patterns and specific environmental conditions are often difficult to establish because of the interrelationship of the factors involved.

Not all ventures onto the beach by a female turtle culminate in successful nests. These "false crawls" (non-nesting emergences) may occur for many reasons and are commonly encountered at other rookeries. Davis and Whiting (1977) suggested that relatively high percentages of false crawls may reflect disturbances



or unsatisfactory nesting beach characteristics. Therefore, certain factors may affect a turtle's preference to emerge on a beach, while other factors may affect a turtle's tendency to nest after it has emerged. An index which relates the number of nests to the number of false crawls in an area is useful in estimating the post-emergence suitability of a beach for nesting. In the present study this index is termed "nesting success" and is defined as the percentage of total emergences that result in nests. Loggerhead nesting success for areas A - S in 1996 is presented in Figure 5.

Historically, the pattern of loggerhead emergences on the island has generally paralleled the distribution of nests (ABI, 1987, 1994). In contrast, nesting success by loggerheads along the island has typically lacked gradients (ABI, 1987, 1994). Thus, the relatively high numbers of loggerhead nests observed in certain areas are usually a result of more turtles coming ashore in those areas rather than of more preferable nesting conditions being encountered by the turtles after they emerged. A variety of environmental factors (i.e., offshore bottom contours, distribution of reefs, type and extent of dune vegetation, and human activity on the beach at night) may effect loggerhead turtle emergence patterns and several have been reported to affect emergence patterns on Hutchinson Island (ABI, 1988, 1989). Undoubtedly, a combination of factors account for the overall distribution of emergences and therefore the overall nesting pattern on the island.

Nesting surveys on Hutchinson Island were initiated in response to concerns that the operation of the St. Lucie Plant might negatively impact the local sea turtle rookery. Previous analysis, using log-likelihood tests of independence (G-test; Sokal and Rohlf, 1981) demonstrated that the construction of the plant's offshore intake

and discharge structures significantly reduced nesting at the plant site during construction years -- 1975, 1981, 1982, 1983 (ABI, 1987). However, nesting at the plant consistently returned to levels similar to or greater than those at a control site in years following construction. During 1991 when offshore construction was restricted almost entirely to daylight hours, nests were more abundant at the plant site than at the control site. Data collected through 1996 have shown that power plant operation exclusive of nighttime intake/discharge construction has had no apparent effect on nesting.

Long-Term Trends in Loggerhead Turtle Nesting

Various methods were used during surveys prior to 1981 to estimate the total number of loggerhead nests on Hutchinson Island based on the number of nests found in the nine 1.25km long survey areas (ABI, 1980a). Each of these methods was subsequently found to consistently overestimate island totals (ABI, 1987). Since whole-island surveys began in 1981, it has been possible to determine the actual proportion of total nests deposited in the nine areas. This has allowed extrapolation from the nine survey areas to the entire island for years prior to 1981.

From 1981 through 1993 the total number of nests in the nine areas varied from 32.5 to 35.6 percent of the total number of nests on the island. This is slightly higher than the 31.3 percent which would be expected based strictly on the proportion of linear coastline comprised by the nine areas. Using the thirteen-year mean of 33.81 percent, estimates of the total number of nests on Hutchinson Island can be calculated by multiplying the number of nests in the nine areas by 2.958. This technique, when applied to the nine survey areas during the thirteen years in

which the entire island was surveyed, produced whole-island estimates within 5.3 percent of the actual number of nests counted. Because the proportion of nests recorded in the nine survey areas remained relatively constant over the last thirteen years, this extrapolation procedure provides a fairly accurate estimate of total loggerhead nesting for years prior to 1981, and is used to generate data points for 1971 through 1979 in figure 6.

It is clear that loggerhead nesting activity on Hutchinson Island fluctuates considerably from year to year (Figure 6). Annual variations in nest densities also are common at other rookeries, and may result from non-annual reproductive behavior. Nonetheless, data collected through 1996 suggest an overall increase in nesting on Hutchinson Island since surveys began in 1971. Total nesting activity was greatest during 1995 when 8184 loggerhead nests were recorded. No relationships between total nesting activity and power plant operation or intake/discharge construction were indicated by year-to-year variations in total nesting on Hutchinson Island.

Seasonal Patterns of Loggerhead Turtle Nesting

The loggerhead turtle nesting season usually begins between mid-April and early May, attains a maximum during June or July, and ends by mid-September (ABI, 1987). Nesting activity during 1996 followed this same pattern.

Cool water intrusions frequently occur over the continental shelf of southeast Florida during the summer (Smith, 1982). These intrusions may have been responsible for the temporary declines in loggerhead turtle nesting activity previously

observed on Hutchinson Island (ABI, 1994). Though natural fluctuations in temperature have been shown to affect temporal nesting patterns on Hutchinson Island, there has been no indication that power plant operation has affected these temporal patterns (ABI, 1988).

Predation on Loggerhead Turtle nests

Since nest surveys began in 1971, raccoon predation has been a major cause of turtle nest destruction on Hutchinson Island. Researchers at other locations have reported raccoon predation levels as high as 70 to nearly 100 percent (Hopkins et al., 1979). Raccoon predation of loggerhead turtle nests on Hutchinson Island has not approached this level during any study year, though levels for individual 1.25km long areas have been as high as 80 percent. Overall predation rates for survey years 1971 through 1977 were between 21 and 44 percent, with a high of 44 percent recorded in 1973. A pronounced decrease in raccoon predation occurred after 1977, and overall predation rates for the nine areas have not exceeded 10 percent since 1979. A decline in predation rates on Hutchinson Island may be attributable to trapping programs, construction activities, habitat loss and disease.

During 1996, raccoon predation levels were extremely low, with only 0.2 percent (9) of the loggerhead nests (n=3715) in areas A-S depredated by raccoons (Figure 7). As in previous years (ABI, 1994), predation of turtle nests was primarily restricted to the more undeveloped portions of the island.

Ghost crabs have been reported by numerous researchers as important predators of sea turtle nests (Hopkins et al., 1979; Stancyk, 1982). Though turtle

nests on Hutchinson Island probably have been depredated by ghost crabs since nesting surveys began in 1971, quantification of ghost crab predation did not begin until 1983.

Overall predation rates by ghost crabs have varied from 0.1 to 2.1 percent from 1983-1996. During 1996, 0.13 percent (5) of the loggerhead nests (n=3715) in areas A-S were depredated by ghost crabs (Figure 7). Nests destroyed by a combination of raccoon and ghost crab predation have been included as raccoon predations in previous discussions. When these combination predations are included as crab predations, the overall predation rates by ghost crabs range from 0.1 to 4.7 percent. During 1996, 0.16 percent (6) nests were destroyed by either ghost crabs or a combination of ghost crabs and raccoons.

1996 Green and Leatherback Nesting Summary

In 1996, 163 green turtle and 31 leatherback turtle nests were recorded in the 36 1-km-segments comprising Hutchinson Island. The green turtle total represents a substantial increase from last year's totals, while the leatherback total is essentially unchanged (Figures 8 and 9). Strong year to year fluctuations are common; however, and the general trend since 1971 may reflect an increase in the numbers of nesting females in the Hutchinson Island area.

Trends in Green and Leatherback Turtle Nesting

Green and leatherback turtles nest on Hutchinson Island, but in fewer numbers than loggerhead turtles. Prior to 1981, both survey (nine 1.25km long

sections) and inter-survey areas were monitored for the presence of green and leatherback nests. Thirty-one kilometers of beach from Area 1 south to the St. Lucie Inlet were included in that effort. During whole-island surveys from 1981 through 1993, only 2.6 percent (7) of the leatherback nests (n=266) and only 1.4 percent (12) of the green turtle nests (n=831) were recorded on the five kilometers of beach north of Area 1. Therefore previous counts of green and leatherback nests within the 21 kilometers surveyed probably were not appreciably different from total densities for the entire island. Based on this assumption, green and leatherback nest densities may be compared among all survey years, except 1980, when less than 15 kilometers of beach were surveyed.

Since surveys began in 1971, the number of nests observed on the island ranged from 5 to 195 for green turtles and from 1 to 52 for leatherbacks (Figures 8 and 9). Temporal nesting patterns for these species differ from the pattern for loggerhead turtles. Green turtles typically nest on Hutchinson Island from mid-June through the first or second week of September. Leatherback turtles usually begin nesting in March or April and continue to nest through early to mid-July. Considerable fluctuations in green turtle nesting on the island have occurred among survey years (Figure 8). This is not unusual since there are drastic year-to-year fluctuations in the numbers of green turtles nesting at other breeding grounds (Carr et al., 1982). Despite these fluctuations, data collected through 1996 suggest an overall increase in nesting since 1971 and may reflect an increase in the number of nesting females in the Hutchinson Island area. During 1996, green turtles nested most frequently along the southern half of the island. This is consistent with results of previous surveys.

Leatherback turtle nest densities have remained low on Hutchinson Island; however, increased nesting during recent years (Figure 9) may reflect an overall increase in the number of nesting females in the Hutchinson Island area.

Intake Canal Monitoring

Entrainment of sea turtles at the St. Lucie Plant has been attributed to the presumed physical attractiveness of the offshore structures housing the intake pipes rather than to plant operating characteristics (ABI, 1980b and 1986). The velocity caps supported above the openings to each intake pipe eliminate vertical water entrainment and substantially reduce current velocities near the structures by spreading horizontal draw over a wider area. Even when both units are operating at full capacity, turtles must actively swim into the mouth of one of the pipes before they encounter current velocities sufficiently strong to effect entrainment. Consequently, a turtle's entrapment relates primarily to the probability that it will detect and subsequently enter one of the intake structures.

1996 Canal Capture Summary

In 1996, 906 sea turtles were captured in the intake canal of the St. Lucie Plant. Captures included 349 loggerheads, 549 green turtles, 3 Kemp's ridleys, and 5 hawksbills (Table 1).

Relative Abundance and Temporal Distribution

Since intake canal monitoring began in May 1976, 2997 loggerhead (including 185 recaptures), 1973 green (including 298 recaptures), 18 leatherback, 31 Kemp's

ridleys and 18 hawksbill captures have taken place at the St. Lucie Plant. Annual catches for all species combined ranged from a low of 33 in 1976 (partial year of plant operation and monitoring) to 933 in 1995.

Except for 1993 through 1996 when the green turtle was the most abundant species in the canal, loggerheads have dominated annual captures. Since 1977, the first full year of plant operation, the number of loggerheads captured each year ranged from 62 in 1981 to 349 in 1996 (Figure 10). Numbers have exhibited considerable year-to-year fluctuations with no persistent trends evident, although recent years data are suggestive of a possible increasing trend.

The number of green turtles captured each year since 1977 have ranged from 3 in 1979 to a record high of 673 in 1995 (Figure 10). Increasing numbers of captures over recent years may reflect an increase in the number of turtles inhabiting the nearshore coastal area near the plant or may simply represent a natural variation. Another possibility relates to changes in the physical characteristics of the intake structures. As a result of a major reconstruction project undertaken in 1991, the structures may now be more attractive to green turtles, thereby increasing their probability of entrainment. Additional years of capture data will be required before any long-term trends can be established.

During 1996, the monthly catch of loggerheads ranged from 7 (November) to 87 (July), with a monthly mean of 29.1 (Table 2). Over the entire history of the capture program, monthly catches have ranged from 0 to 87, with the greatest number of captures occurring during July 1996.

During 1996, the monthly catch of green turtles ranged from 16 (May and June) to 147 (March), with a monthly mean of 45.7 (Table 3). The March 1996 catch of 147 green turtles is the largest number of captures for this species for any month on record. Seasonal abundance patterns of green turtles have typically been much more pronounced than for loggerheads, with over 50 percent of all captures occurring between January and March. In 1995 and 1996 however, no such seasonal pattern was evident, with captures distributed more or less evenly throughout the year.

Catches of leatherbacks, hawksbills and Kemp's ridleys have been infrequent and scattered throughout the 20 year study period. Each species has shown rather pronounced seasonal occurrences; over 60 percent of all leatherbacks were captured in March and April, over 60 percent of the hawksbills were captured between July and September, and almost 90 percent of the Kemp's ridleys were caught between December and April.

Size-Class Distributions

The size-class distribution for loggerheads removed from the intake canal in 1996 is presented in Figure 11. The size class distribution for green turtles removed from the intake canal in 1996 is presented in Figure 12. ABI(1994) presents size-class data for turtles removed from the intake canal from 1976-1993. All 3 Kemp's ridleys captured in 1996 were juveniles or subadults with a straight line carapace length (SLCL) of less than 60 cm (Hirth, 1980). Of the 5 hawksbills captured in 1996, three were juveniles or subadults (SLCL<63cm) (Witzell 1983) and two were adults.

Sex Ratios

Of the 349 loggerheads captured in 1996, 201 were juveniles with a straight line carapace length (SLCL) less than or equal to 70 cm, 111 were adults (SLCL > 85 cm) and 37 were transitional (SLCL 71-85 cm) (Hirth, 1980). The latter group probably includes both mature and immature individuals. Of the 111 individuals classified as adults for which sex was recorded, 98 were females and 6 were males, with females predominating by a ratio of 16.3:1.

Of the 549 green turtles in 1996, 541 were juveniles or sub-adults (SLCL < 83 cm) (Whitherington and Ehrhart, 1989). Of the 8 adult green turtles captured in 1996, 2 were males and 6 were females. ABI (1994) discusses sex ratio data for previous years.

Capture Efficiencies

Netting methodologies have been under continual review and refinement as net materials, configurations and placement have been varied in an effort to minimize sea turtle entrapment times. Additionally, alternative capture techniques have been evaluated, and potential deterrent systems tested in the laboratory. Current capture procedures have proven to provide a safe, efficient and cost-effective program for removing entrapped turtles from the intake canal.

Formal daily inspections of the intake canal are conducted every day that capture

nets are deployed, and the number, location and relative size of entrapped turtles are recorded on field observation forms. Better utilization of currents and eddies, adjustments to tethering lines, multi-net deployments and increased efforts to hand capture turtles have contributed to reduced entrapment times during recent years.

Entrapment times may be extended for turtles swimming past the A1A barrier net (ABI, 1987). Because capture efforts west of the A1A bridge were generally less effective than those near the intake headwalls, most turtles breaching the barrier net were not caught until they entered the intake wells of Units 1 and 2. Because of their relatively small sizes, virtually all the turtles reaching the intake wells are green turtles. During 1996, 15 of the 549 green turtle captures (2.7 percent) occurred at the intake wells. The substantial decrease in the percentage of captures at the plants intake wells compared to the 1995 figure of 14.5 percent is attributed to the effectiveness of the new small mesh barrier net installed East of A1A in January of 1996.

During 1996, 98.4 percent of all turtles entrapped in the canal were captured east of the A1A bridge, 736 by tangle nets and 155 by hand or dip net capture. The effective confinement of turtles east of A1A has been a major contributor to the high capture efficiency achieved during recent years. The installation of an improved barrier net completed in January 1996 has further increased capture efficiency by more effectively confining turtles of all sizes to a smaller area east to the A1A barrier net.

Relative Condition

Turtles captured alive in the intake canal of the St. Lucie Plant were assigned a relative condition based on weight, activity, parasite infestation, barnacle coverage, wounds, injuries and any other abnormalities which might have affected overall vitality. During 1996, 94.2 percent (329) of all loggerheads found in the canal were alive and in good condition. Only 4.8 percent (17) loggerhead captures involved individuals in fair or poor condition, and 0.8 percent (3) were dead. Of the 549 green turtles removed from the intake canal during 1996, 494 (90.0 percent) were in good condition, 55 (10.0 percent) were in fair or poor condition, and 5 (0.9 percent) were dead. The 3 Kemp's ridleys captured in 1996 were in good condition. The 5 hawksbills captured in 1996 were in good condition.

Relative condition ratings can be influenced by a number of factors, some related and others unrelated to entrainment and/or entrapment in the intake canal. A rating of good indicates that turtles have not been negatively impacted by their entrapment in the canal, at least as evidenced by physical appearance. Although ratings of fair or poor imply reduced vitality, the extent to which entrainment and entrapment is responsible is often indeterminable. In some instances, conditions responsible for lower ratings, such as boat collision or fisheries gear entanglement injuries, obviously were sustained prior to entrainment.

During 1996, 54 of the 906 turtles captured (5.9 percent) had notable injuries; such as, missing appendages, broken or missing pieces of carapace or deep lacerations. Many of these were old, well-healed wounds, and did not require veterinary attention.

Of the 899 live removals during 1996, 875 were released into the ocean the day of capture. Four small green turtles, which were very lethargic at the time of removal, were held over night for observation and released the following day. Generally, relatively low water and air temperatures at the time of capture were thought to be responsible for this condition. Nine turtles (3 loggerheads and 6 green turtles) in obvious ill health or suffering serious injuries were transported to Sea World of Florida or the Marinelife Center of Juno Beach for treatment and rehabilitation. One of the loggerheads had serious boat propeller injuries and two had fishing gear entanglement or ingestion injuries. All three injuries were almost certainly sustained outside the intake canal. One green turtle had injuries from monofilament line entanglement. One green turtle that drowned in a capture net was successfully resuscitated and transported for further rehabilitation. Four green turtles captured in lethargic and underweight to emaciated condition were also transported for rehabilitation. Forty two green turtles with fibropapilloma tumors were removed from the canal in 1996. Eleven turtles with extensive tumors were transferred to the Florida DEP for transportation to a rehabilitation facility. Thirty one turtles with minor tumors were tagged and released. Few turtles with fibropapillomas have been captured in the past at the St. Lucie Plant.

Mortalities

Sea turtle mortalities have been closely monitored throughout the life of the canal capture program in an attempt to assign probable causes and take appropriate remedial action to minimize future occurrences. Previous analyses of capture data identified drowning in nets (A1A barrier net, UIDS barrier, and tangle nets), drowning in the intake pipes during periods of reduced intake flow, injuries sustained from

dredging operations and injuries sustained from the mechanical rakes used in the intake wells as probable mortality factors (ABI,1987)(FPL, 1995). Although difficult to quantify, the entrapment and subsequent demise of injured or sick turtles has probably accounted for a portion of observed mortalities.

Over the entire 20 year monitoring period, 134 (4.5 percent) of the 2997 loggerheads and 47 (2.4 percent) of the 1973 green turtles entrapped in the canal were found dead. Mortalities spanned the range of size classes for loggerheads (SLCL = 47.5-103 cm), while all green turtle mortalities involved juveniles less than 42 cm in length. The four Kemp's ridley mortalities documented at the plant during 1987 and 1988 were the only deaths for this species to date; no dead leatherback or hawksbill turtles have been recovered at the St. Lucie Plant.

Modifications to capture procedures , improvements to the A1A barrier net and virtual elimination of low flow conditions within the canal have resulted in a substantial reduction in sea turtle mortalities over the life of the canal capture program. Mortality rate, expressed as the percentage of total captures involving dead animals, declined from 7.8 percent during the period 1976-1984 to 2.5 percent since 1984 (Table 1).

In 1996, seven turtles (4 green turtles and 3 loggerheads) were removed dead from the intake canal, for an overall mortality rate of 0.7%. One of the 4 green turtle mortalities was recovered from the plant intake wells. Three of the four green turtle mortalities were in fresh condition and one was moderately decomposed. All three of the loggerhead mortalities were recovered in the vicinity of the small mesh barrier net east of the A1A bridge. One loggerhead was fresh dead, and two were

moderately decomposed when recovered. In all cases, entanglement or impingement on the barriers was not evidently the cause of death. Four of the mortalities were held for DEP examination, and three were disposed of after consultation with DEP.

In response to the 1995 mortalities and the dramatic increase in intake canal captures in 1995, consultation was initiated with FPL, NRC, and the NMFS under Section 7 of the Endangered Species Act. As a result of that consultation, FPL has designed and constructed an improved, smaller mesh barrier net located between the A1A barrier net and the intake canal headwalls (Figure 2). Construction of the net was completed in January 1996. This barrier net prevents turtles from reaching the intake wells or UIDS barrier and should increase capture efficiency by confining turtles to a smaller area of the intake canal.

Recapture Incidents

Since the St. Lucie Plant capture program began, most turtles removed from the intake canal have been tagged and released into the ocean at various locations along Hutchinson Island. Consequently, individual turtles can be identified as long as they retain their tags. Over the history of the program at the St. Lucie Plant, 483 recaptures (185 loggerheads and 298 green turtles) have occurred, and a number of turtles have been recaptured more than once. The large number of green turtles recaptured in 1996 (152) reflects the recent large increases in green turtle captures in recent years and probably also the saturation of local green turtle populations with turtles tagged at the St. Lucie Plant. Several other turtles with tag scars have also been recovered, indicating that the actual number of recaptures may be higher.

Occasionally, turtles are captured that have been tagged by other researchers. Six such captures occurred in 1996, 4 green turtles and 2 loggerheads with tags from the University of Florida, National Marine Fisheries Service, and Florida DEP. The original tagging organization was contacted and supplied with tag return data.

SUMMARY

A gradient of increasing loggerhead turtle nest densities from north to south along the northern half of Hutchinson Island has been shown during most survey years. This gradient may result from variations in beach topography, offshore depth contours, distribution of nearshore reefs, onshore artificial lighting and human activity on the beach at night. Low nesting activity in the vicinity of the power plant during 1975 and from 1981 through 1983 was attributed to nighttime construction activities associated with installation of power plant intake and discharge structures. Nesting returned to normal or above normal levels following both periods of construction. During 1991, daytime construction activities associated with velocity cap repairs had no apparent effect on nesting. Statistical analyses indicate that power plant operation, exclusive of nighttime construction, has had no significant effect on nest densities near the plant. In 1996, 7583 loggerhead turtle nests were recorded on Hutchinson Island. There have been considerable year-to-year fluctuations in loggerhead nesting activity on Hutchinson Island from 1971 through 1996. Fluctuations are common at other rookeries and may result from non-annual reproductive behavior. Despite these fluctuations, loggerhead nesting activity has remained high during recent years and may reflect an overall increase in the number of nesting females in the Hutchinson Island area. No relationship between total nesting on the island and power plant operation or intake/discharge construction was indicated.

Temporal nesting patterns of the Hutchinson Island population may be influenced by natural, large scale fluctuations in water temperature, such as those produced by the cool water intrusions that frequently occur over the continental shelf of southeast Florida during the nesting season. However, localized fluctuations in water temperature associated with power plant operation have had no apparent effect on nesting.

Since nesting surveys began in 1971, raccoon predation has been one of the major causes of turtle nest destruction on Hutchinson Island. From 1971 through 1977, overall predation rates in the nine survey areas were between 21 and 44 percent. However, a pronounced decrease in raccoon predation occurred after 1977, and overall predation rates in the nine survey areas have not exceeded ten percent since 1979. Decreased predation by raccoons probably reflects a decline in the raccoon population. More years of survey data will be required to determine if the extremely low level of raccoon predation in 1996 is an isolated occurrence or part of a continuing trend. Ghost crab predation on the turtle nests may be more significant than previously documented but remains relatively minor compared to raccoon predation.

During 1996, 163 green turtle and 31 leatherback turtle nests were recorded on Hutchinson Island. Nesting activity by these two species has exhibited considerable annual fluctuations, as has been recorded at other rookeries, but has remained relatively high during recent years. This may reflect an overall increase in the number of nesting green and leatherback turtles in the Hutchinson Island area.

During 1996, 349 loggerheads, 549 green turtles, 5 hawksbills, and 3 Kemp's

ridleys were removed from the St. Lucie Plant intake canal. Since monitoring began in May 1976, 2997 loggerhead, 1973 green, 18 leatherback, 18 hawksbill and 32 Kemp's ridley turtles have been captured and tagged. Over the life of the monitoring program, annual catches for loggerhead turtles have ranged from 33 in 1976 (partial year of plant operation and monitoring) to a high of 349 in 1996. Yearly catches of green turtles have ranged from 0 in 1976 to 673 in 1995. Differences in the number of turtles entrapped during different years and months are attributed primarily to natural variation in the occurrence of turtles in the vicinity of the offshore intake structures, rather than to plant operation characteristics.

Size-class distributions of loggerhead turtles removed each year from the canal have consistently been predominated by juveniles between 50 and 70 cm in straight line carapace length. Over 75 percent of all green turtles entrapped in the canal were juveniles 40 cm or less in length. For both species, the largest number of captures for all years combined occurred during winter, but, with the exception of 1995, and to lesser extent 1996, these seasonal peaks were much more pronounced for green turtles. Sex ratio of loggerheads caught in the canal continued to be biased towards females.

During 1996, about 94 and 90 percent, respectively, of all loggerheads and green turtles removed from the canal were categorized by physical appearance as being in good condition.

About six percent of the turtles removed from the intake canal during 1996 had substantial injuries, and many of those were apparently sustained prior to entrapment. Once in the canal, turtles confined east of A1A had very brief residency

times. Thus the relative condition of most turtles was not affected by their entrapment.

During 1996, mortalities of 4 green turtles and 3 loggerheads were recorded in the intake canal. Program modifications, including continual surveillance of tangle nets during periods of deployment, improvements to the integrity of the A1A barrier net and greater effort to hand capture turtles have contributed to a substantial decline in sea turtle mortalities during recent years. The design and construction of an improved barrier net completed in January 1996 should significantly reduce mortalities and entrapment times for turtles in the intake canal. Data for 1996 indicate that the new barrier net configuration has been highly effective in excluding turtles from the plant intake wells, and has contributed to the substantial reduction in mortality achieved in 1996.

LITERATURE CITED

ABI (Applied Biology, Inc.), 1978. Ecological monitoring at the Florida Power & Light Co. St. Lucie Plant, annual report 1977. Volumes I and II. AB-101. Prepared by Applied Biology, Inc. for Florida Power & Light Co., Miami.

1980a. Florida Power & Light Company, St. Lucie Plant annual non-radiological environmental monitoring report 1979. Volumes II and III, Biotic monitoring. AB-244. Prepared by Applied Biology, Inc. for Florida Power & Light Co., Miami.

1980b. Turtle entrainment deterrent study. AB-290. Prepared by Applied Biology, Inc. For Florida Power & Light Co., Miami.

1986. Florida Power & Light Company, St. Lucie Unit 2 annual environmental operating report 1985. AB-563. Prepared by Applied Biology, Inc. for Florida Power & Light Co., Juno Beach.

1987. Florida Power and Light Company, St. Lucie Unit 2 annual environmental operating report 1986. AB-579. Prepared by Applied Biology, Inc. for Florida Power & Light Co., Juno Beach.

1988. Florida Power & Light Company, St. Lucie Unit 2 annual environmental operating report 1987. AB-595. Prepared by Applied Biology, Inc. for Florida Power & Light Co., Juno Beach.

1989. Florida Power & Light Company, St. Lucie Unit 2 annual environmental operating report 1988. AB-596. Prepared by Applied Biology, Inc. for Florida Power & Light Co., Juno Beach.

1994. Florida Power & Light Company, St. Lucie Unit 2 annual environmental monitoring report. AB-631. Prepared by Applied Biology, Inc., for Florida Power & Light Co., Juno Beach.

Carr, A., A. Meyan, J. Mortimer, K. Bjorndal and T. Carr, 1982. Surveys of sea turtle populations and habitats in the Western Atlantic. NOAA Technical Memorandum NMFS-SEFC-91:1-82.

Davis, G.E., and M.C. Whiting, 1977. Loggerhead sea turtle nesting in Everglades National Park, Florida, U.S.A. *Herpetologica* 33:18-28.

FPL, 1995. Assessment of the impacts of the St. Lucie Nuclear Generating plant on sea turtle species found in the inshore waters of Florida. Florida Power and Light Co., Juno Beach, FL.

Hirth, H.F., 1980. Some aspects of the nesting behavior and reproductive biology of sea turtles. *American Zoologist* 20:507-523.

Hopkins, S.R., T.M. Murphy, Jr., K.B. Stansell and P.M. Wilkinson, 1979. Biotic and abiotic factors affecting nest mortality in the Atlantic loggerhead turtle. Proceeding Annual Conference of Southeastern Fish and Wildlife Agencies 32:213-223.

Quantum Resources Inc., 1995. Florida Power and Light Co., St. Lucie Unit 2 Annual Environmental Operating Report 1994. Prepared by Quantum Resources Inc. for Florida Power and Light Company, Juno Beach, FL.

1996. Florida Power and Light Co., St. Lucie Unit 2 Annual Environmental Operating Report 1995. Prepared by Quantum Resources Inc. For Florida Power and Light Company, Juno Beach, FL.

Smith, N.P., 1982. Upwelling in Atlantic shelf waters of south Florida. *Florida Scientist* 45(2):125-138.

Sokal, R.R. and F.J. Rohlf, 1981. *Biometry. The principles and practice of statistics in biological research.* S.H. Freeman and Company, San Francisco. 859 pp.

Stancyk, S.E., 1982. Non-human predators of sea turtle and their control. Pages 139-152 in Bjrndal, K.A., ed. *Biology and Conservation of Sea Turtles.* Smithsonian Institution Press. Washington, D.C.

Witherington, B.E. and L.M. Ehrhart, 1989. Status and reproductive characteristics of green turtles (*Chelonia mydas*) nesting in Florida. Pages 351-352 in Ogren, L., F. Berry, K. Bjrndal, H. Kumpf, R. Mast, G. Medina, H. Reichart and R. Witham, editors. *Proceeding of the Second Western Atlantic Turtle*

Symposium. Mayaguez, Puerto Rico, 12-16 October 1987. NOAA Technical Memorandum NMFS-SEFC-226.

Witzell, W.N. 1983. Synopsis of Biological Data on the Hawksbill Turtle Eretmochelys imbricata (Linnaeus, 1766). FAO Fisheries Synopsis, 137: 1-78.

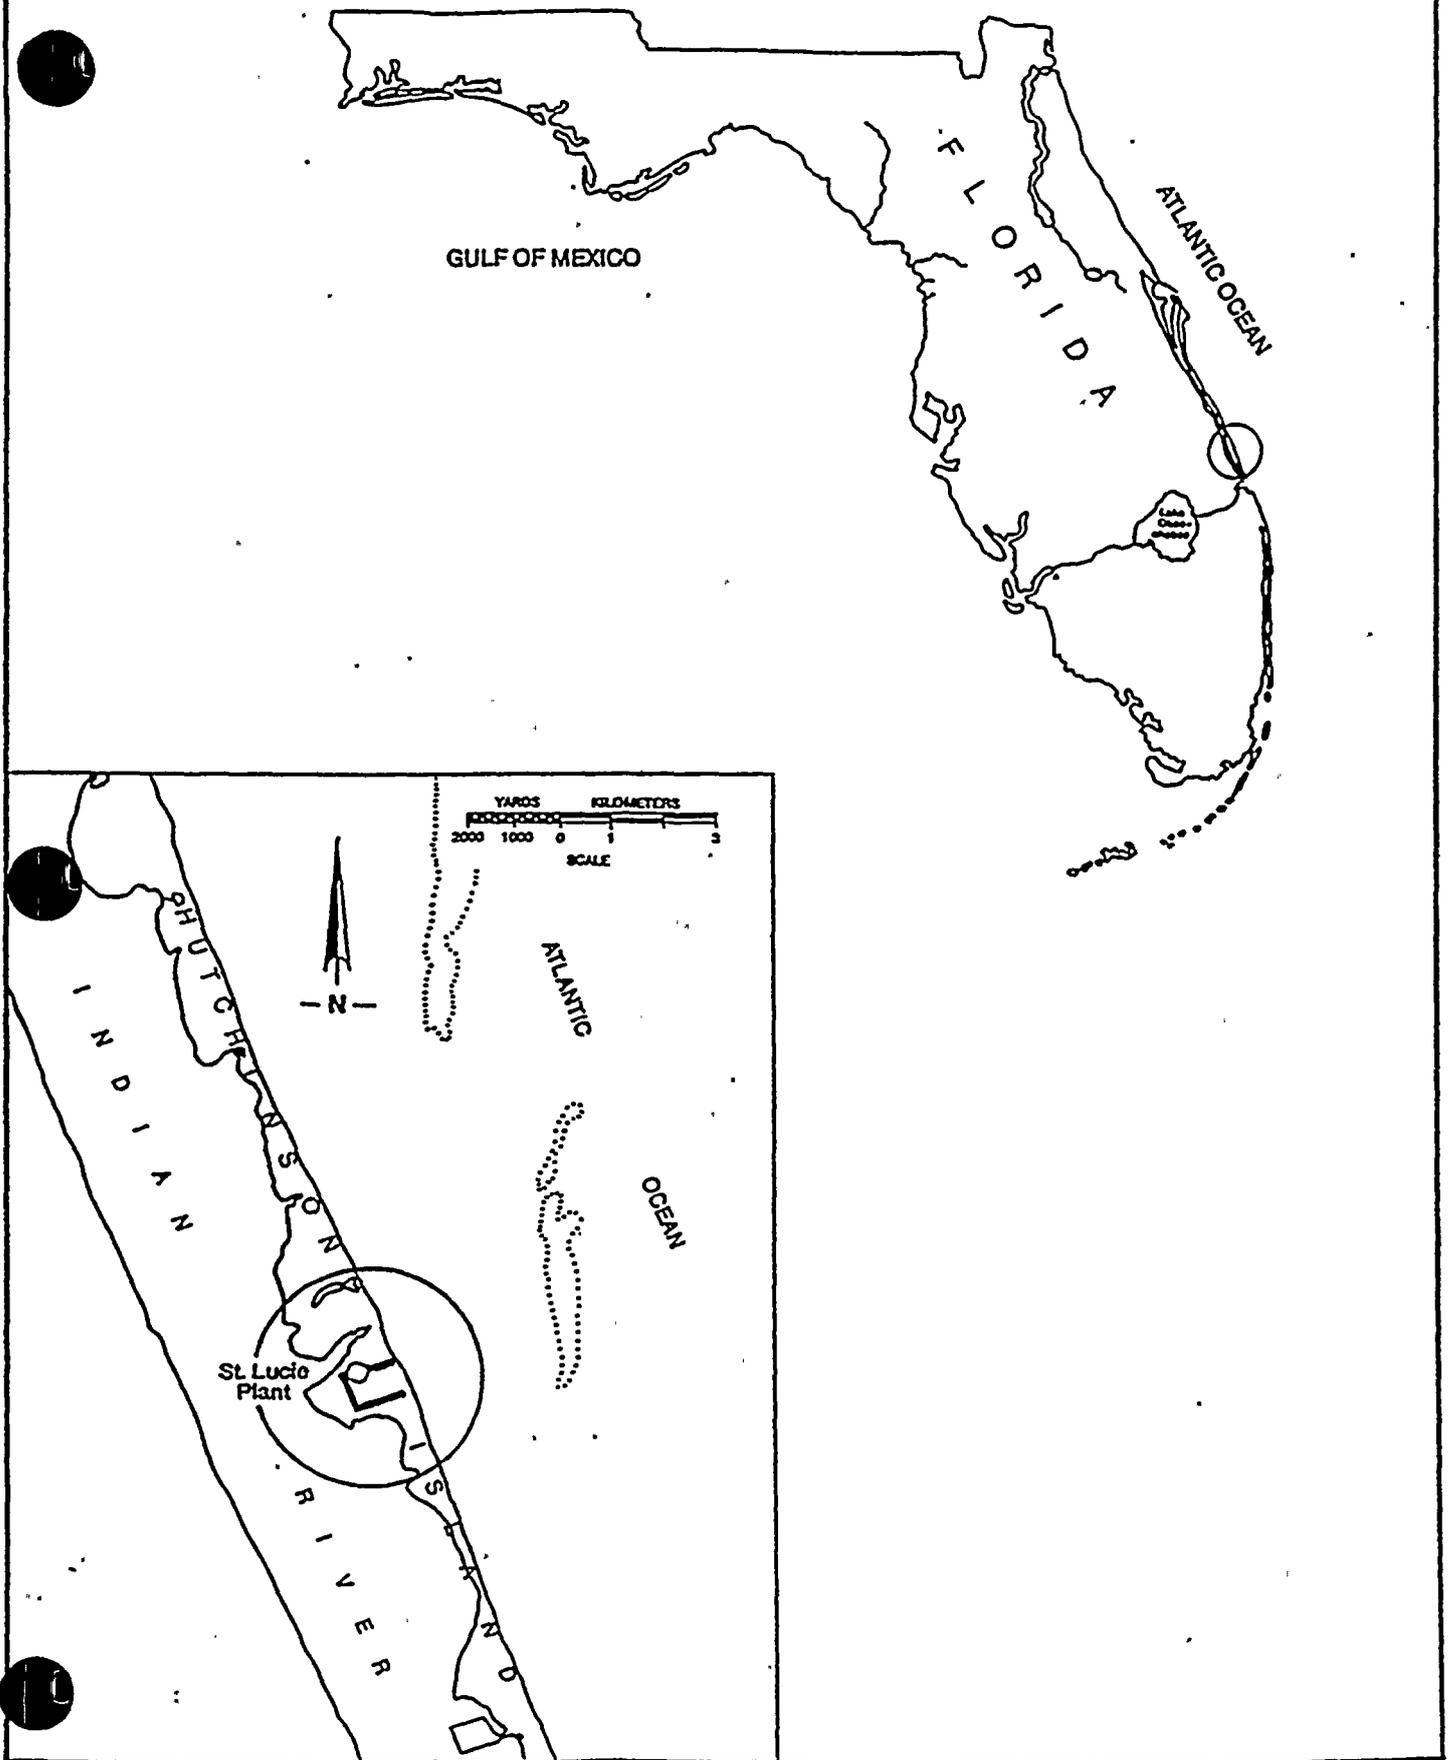


Figure 1. Location of the St. Lucie Plant.



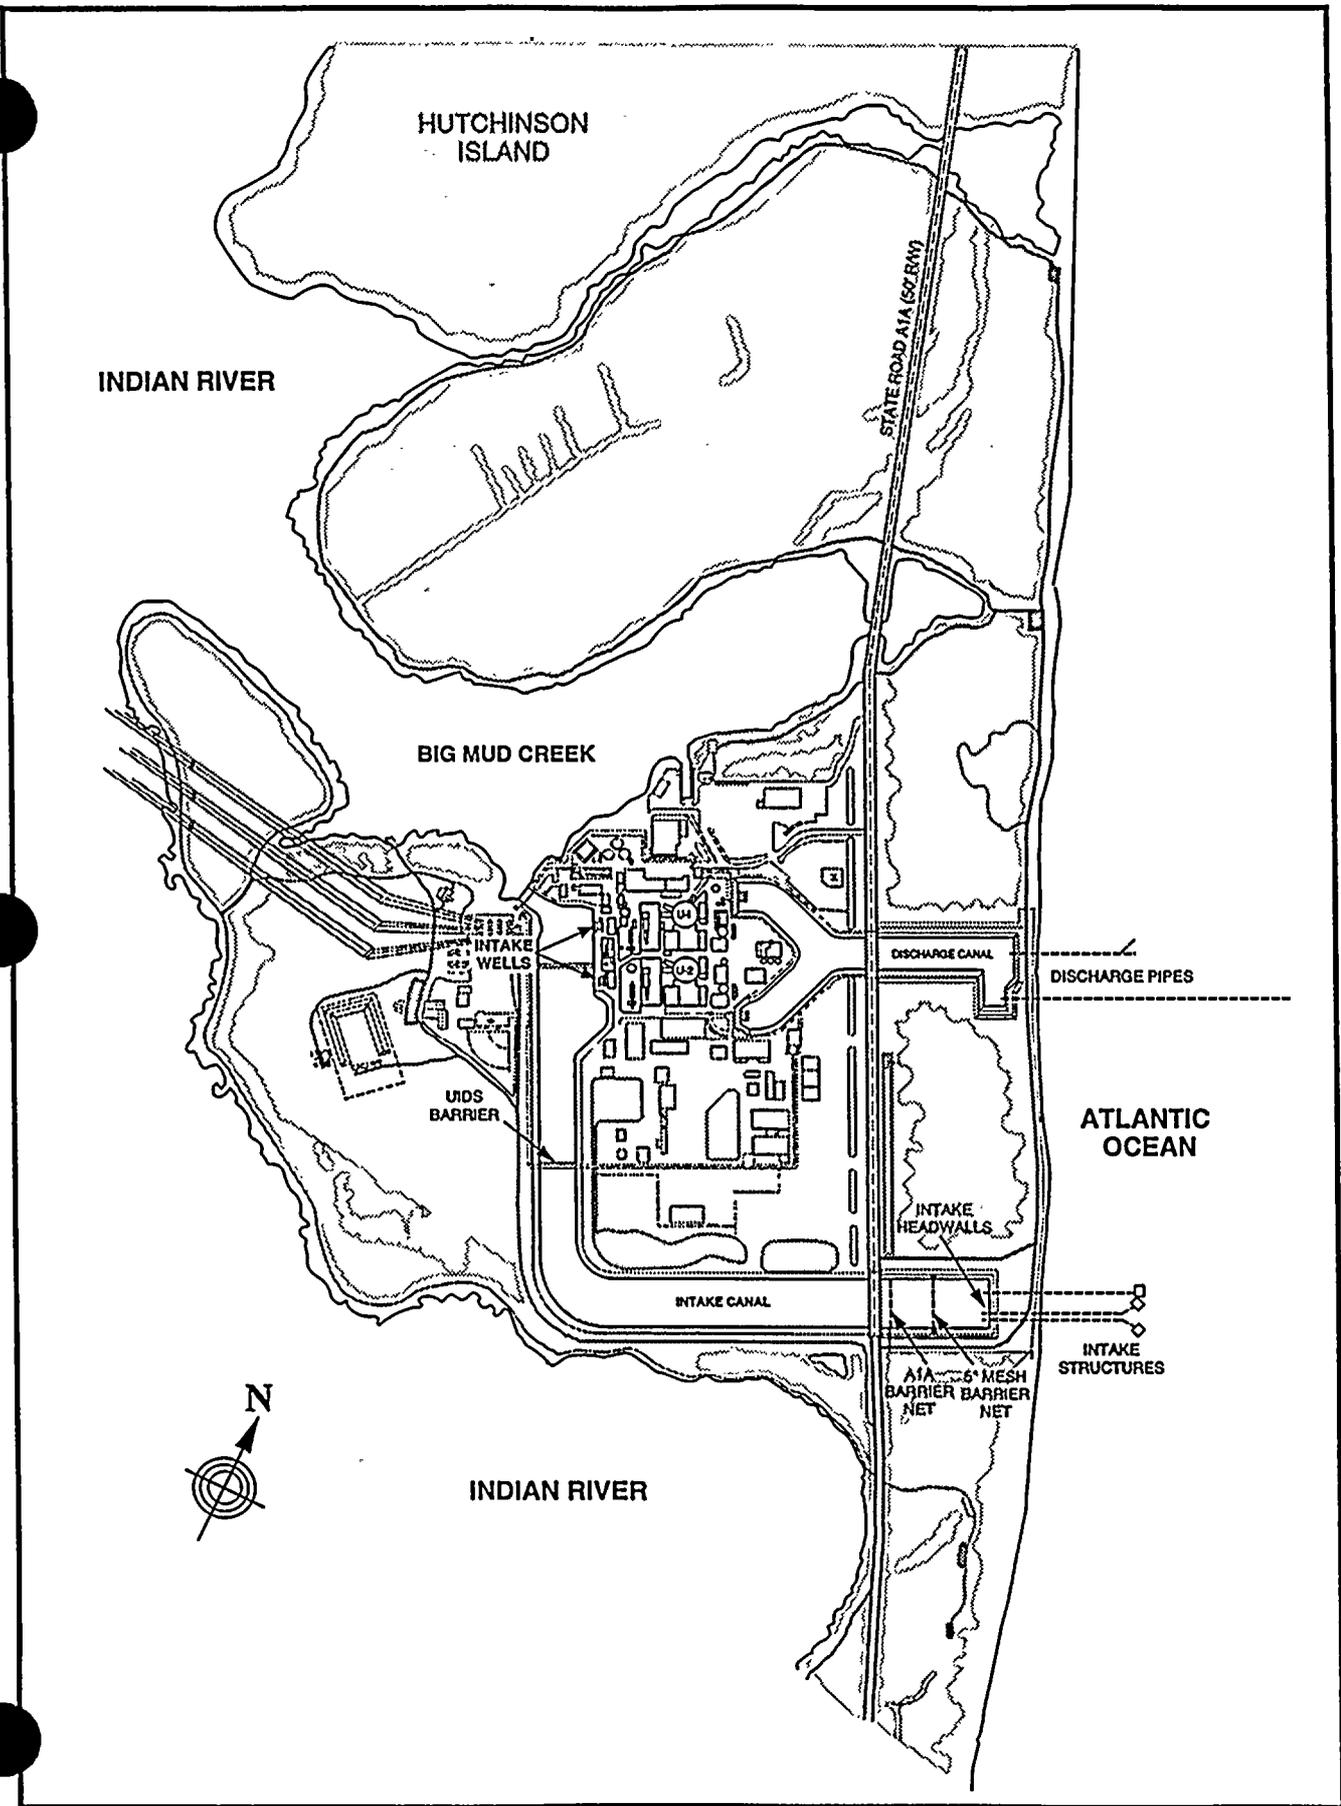


Figure 2. St. Lucie Plant cooling water intake and discharge system.

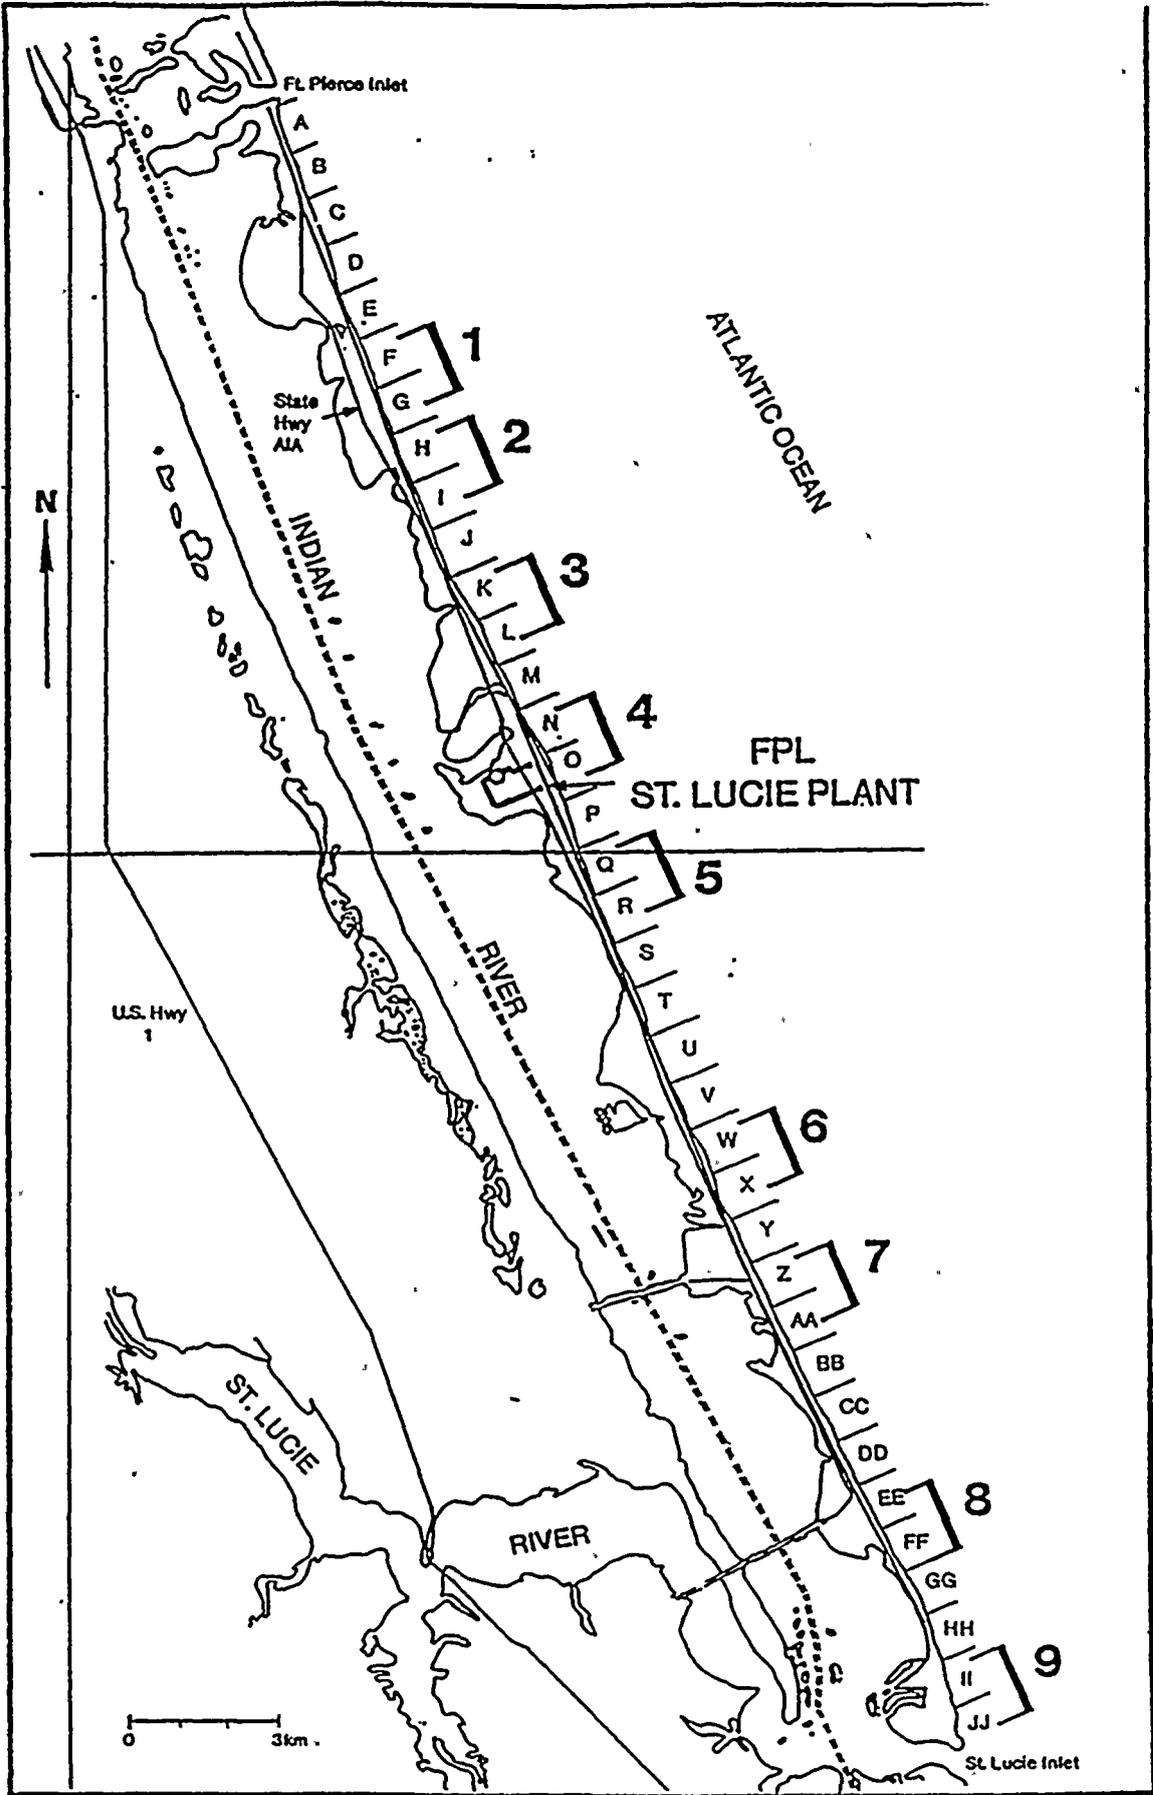


Figure 3. Designation and location of nine 1.25-km segments and thirty-six 1-km segments surveyed for sea turtle nesting, Hutchinson Island, 1971-1992.

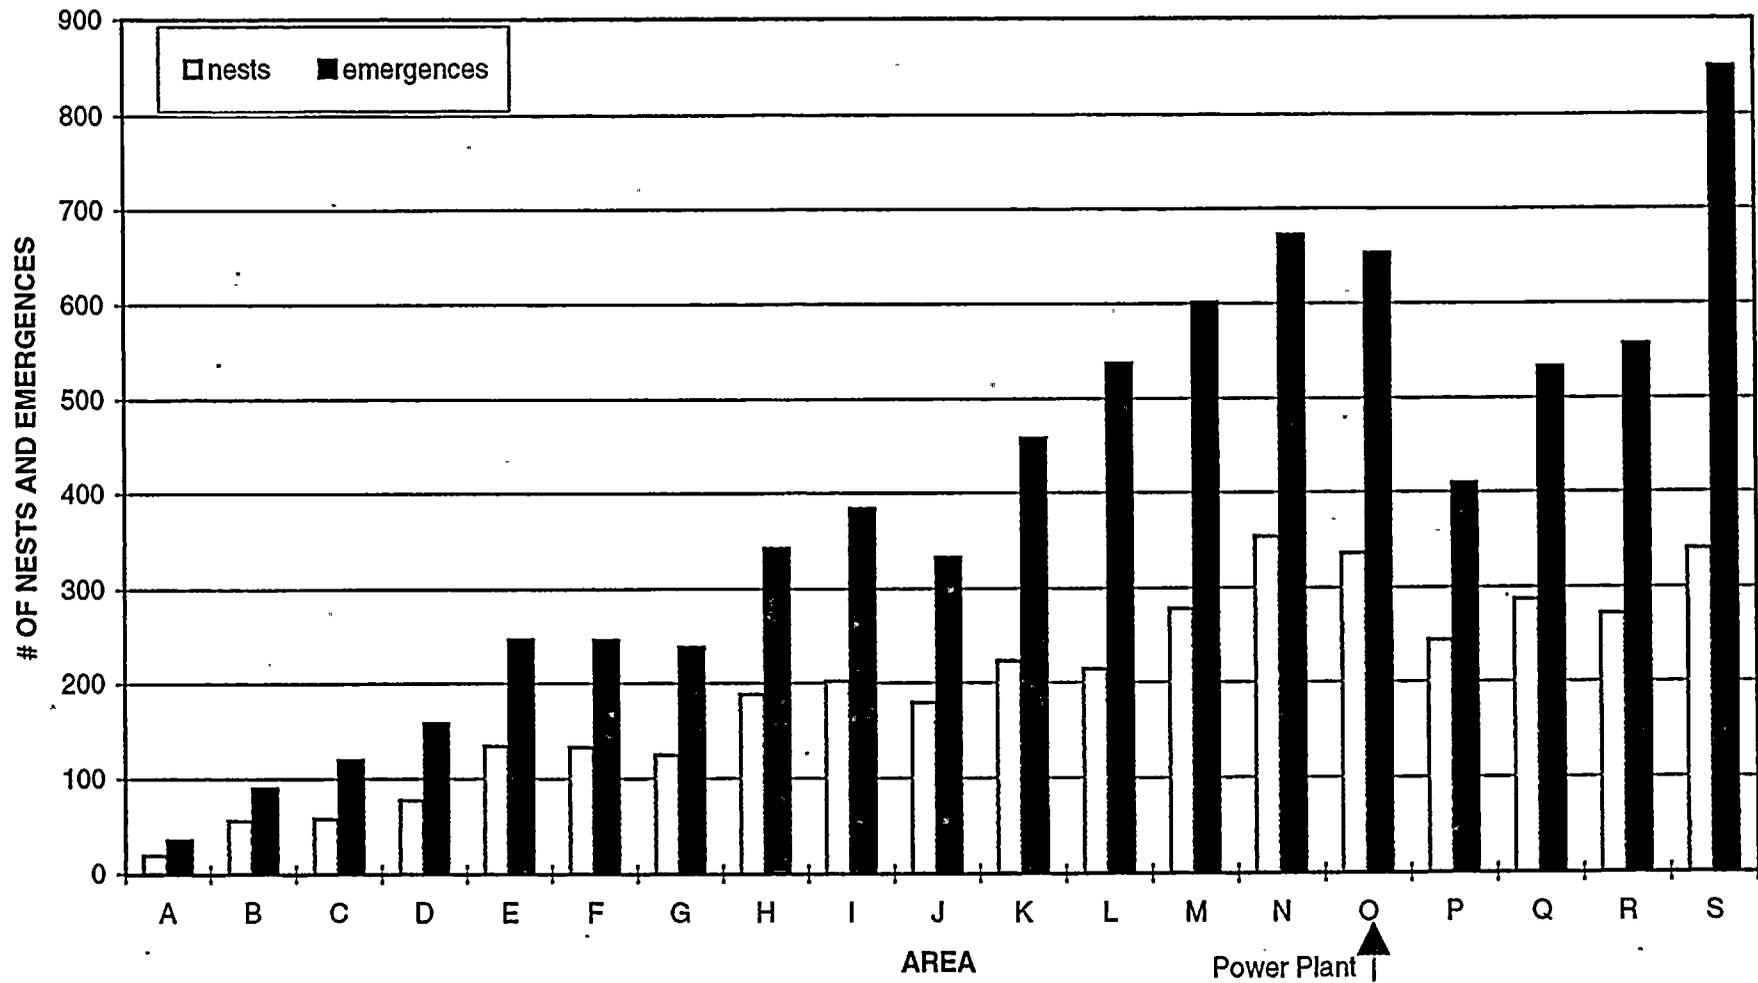


Figure 4. Number of loggerhead turtle nests and emergences for areas A through S, Hutchinson Island, April through September 1996.

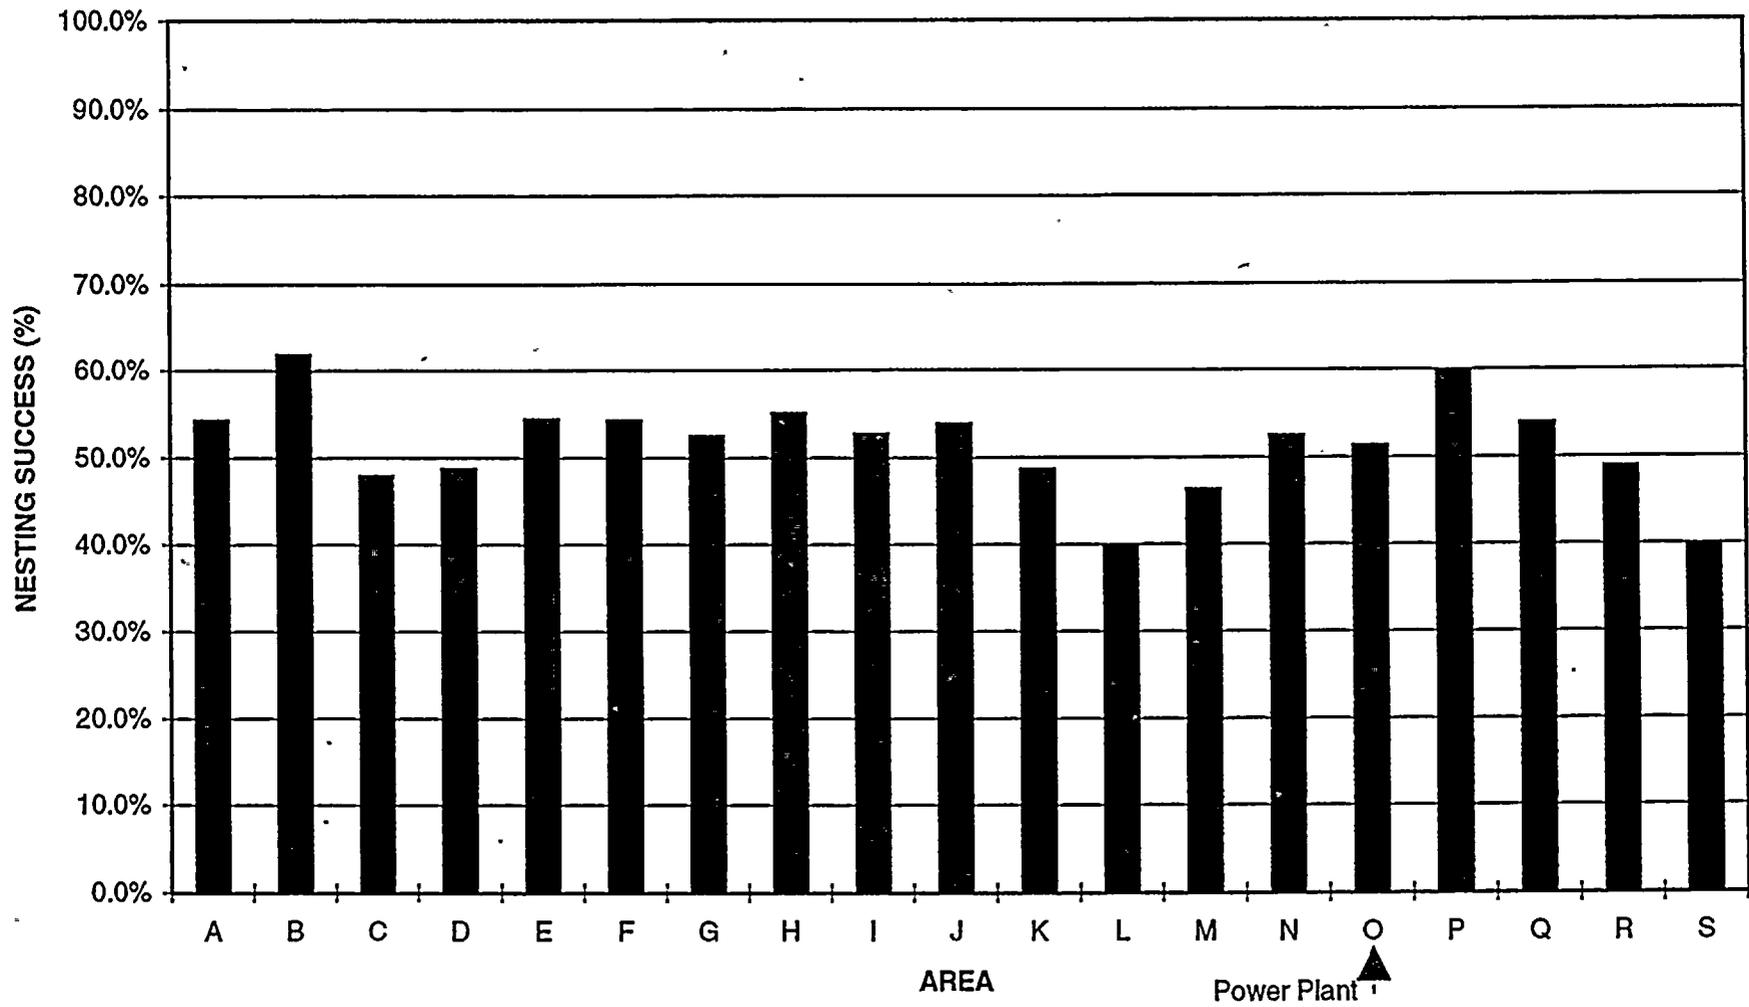


Figure 5. Loggerhead turtle nesting success (percentage of emergences resulting in nests) for areas A through S, Hutchinson Island, April through September 1996.

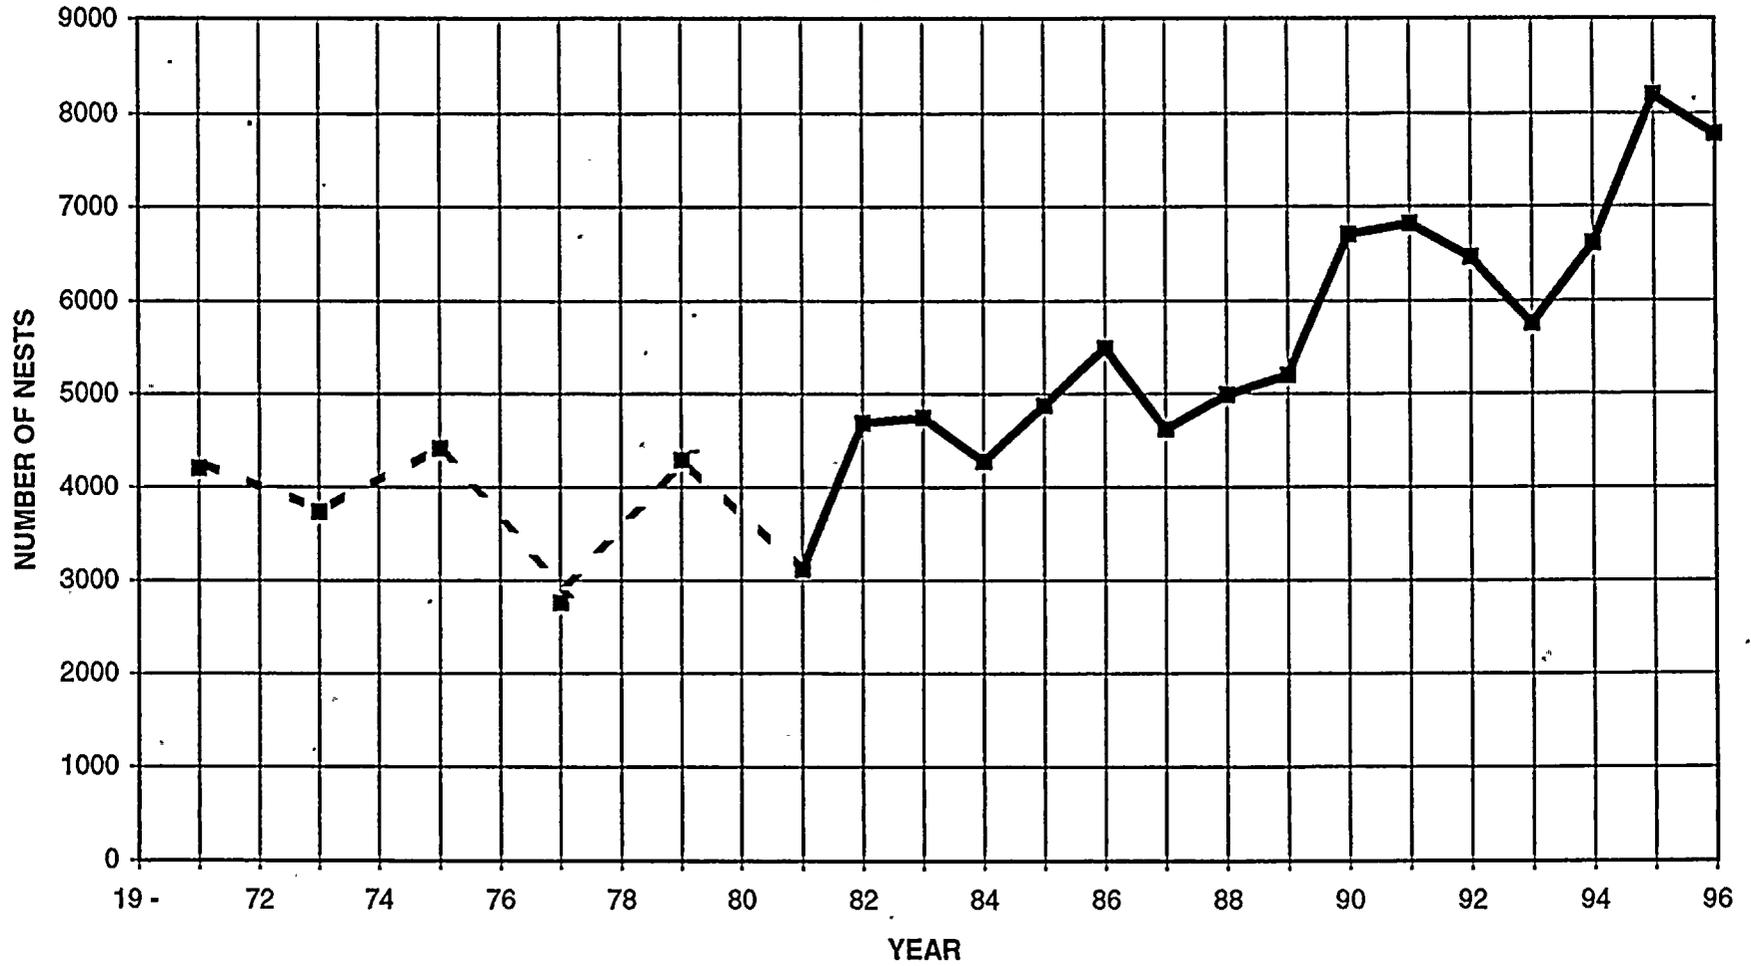


Figure 6. Number of loggerhead turtle nests, Hutchinson Island 1971 through 1996. Values for 1971 through 1979 are estimates (see text), values for 1981 through 1996 are from whole island surveys.

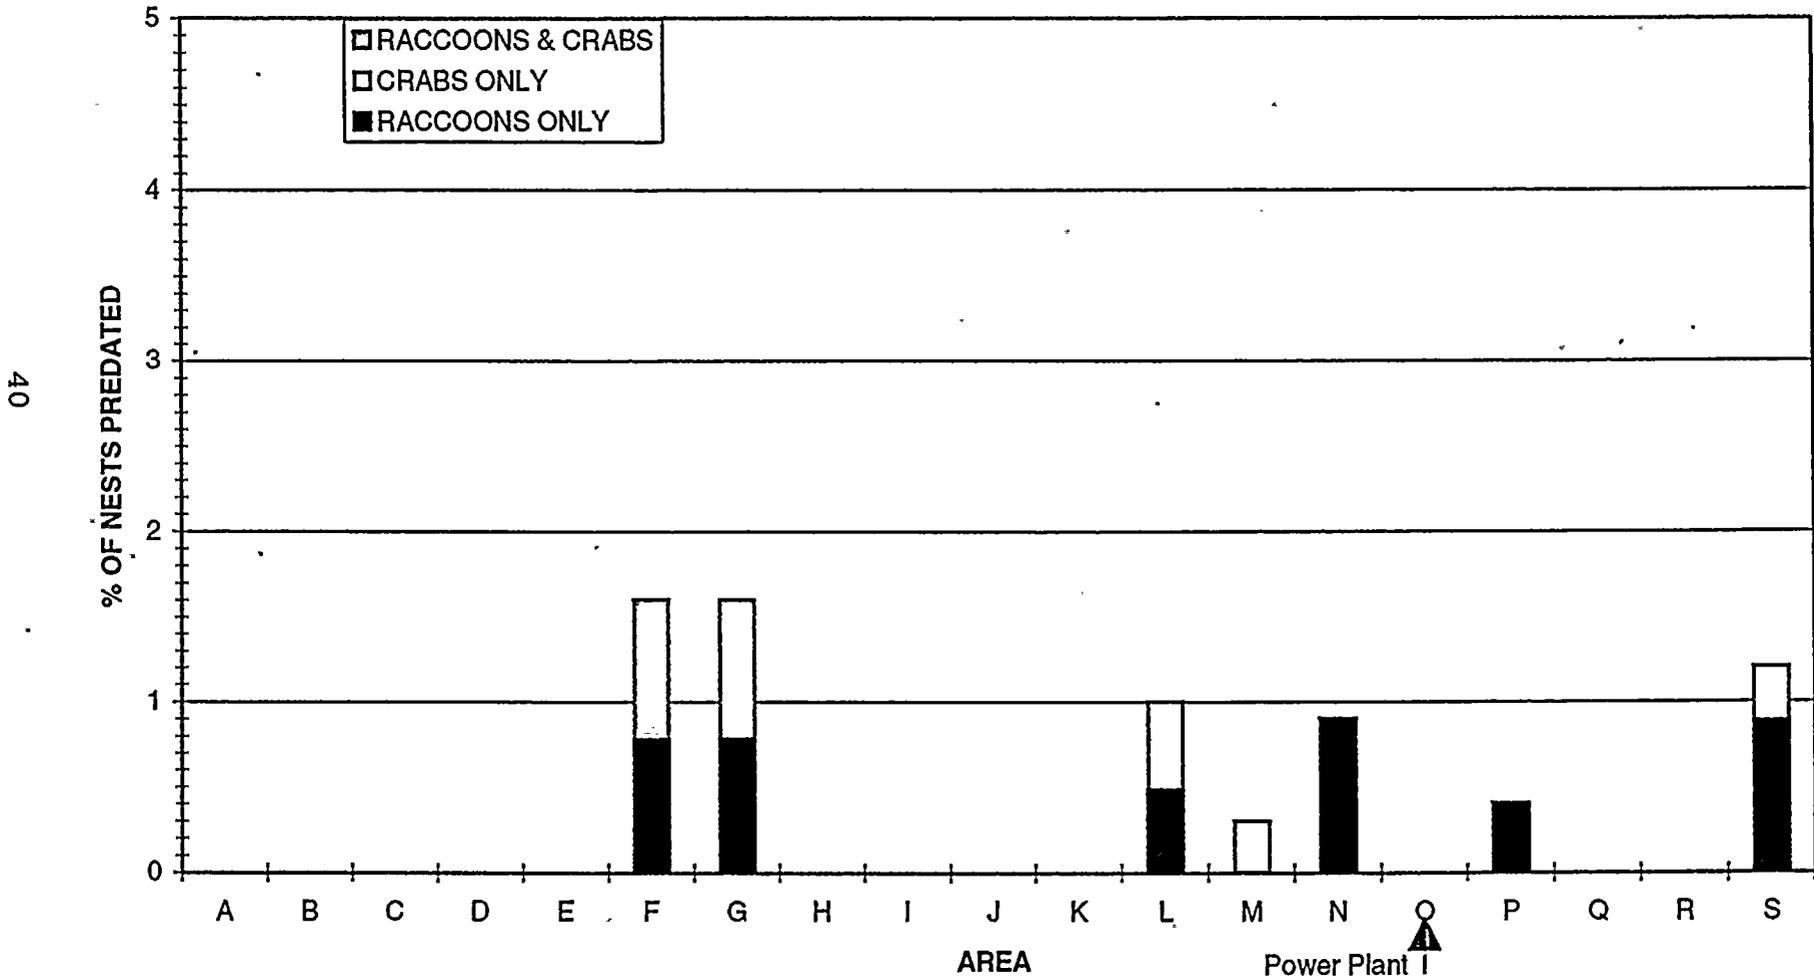


Figure 7. Percentage of loggerhead turtle nests predated by raccoons and/or ghost crabs in areas A through S, Hutchinson Island, April through September 1996.

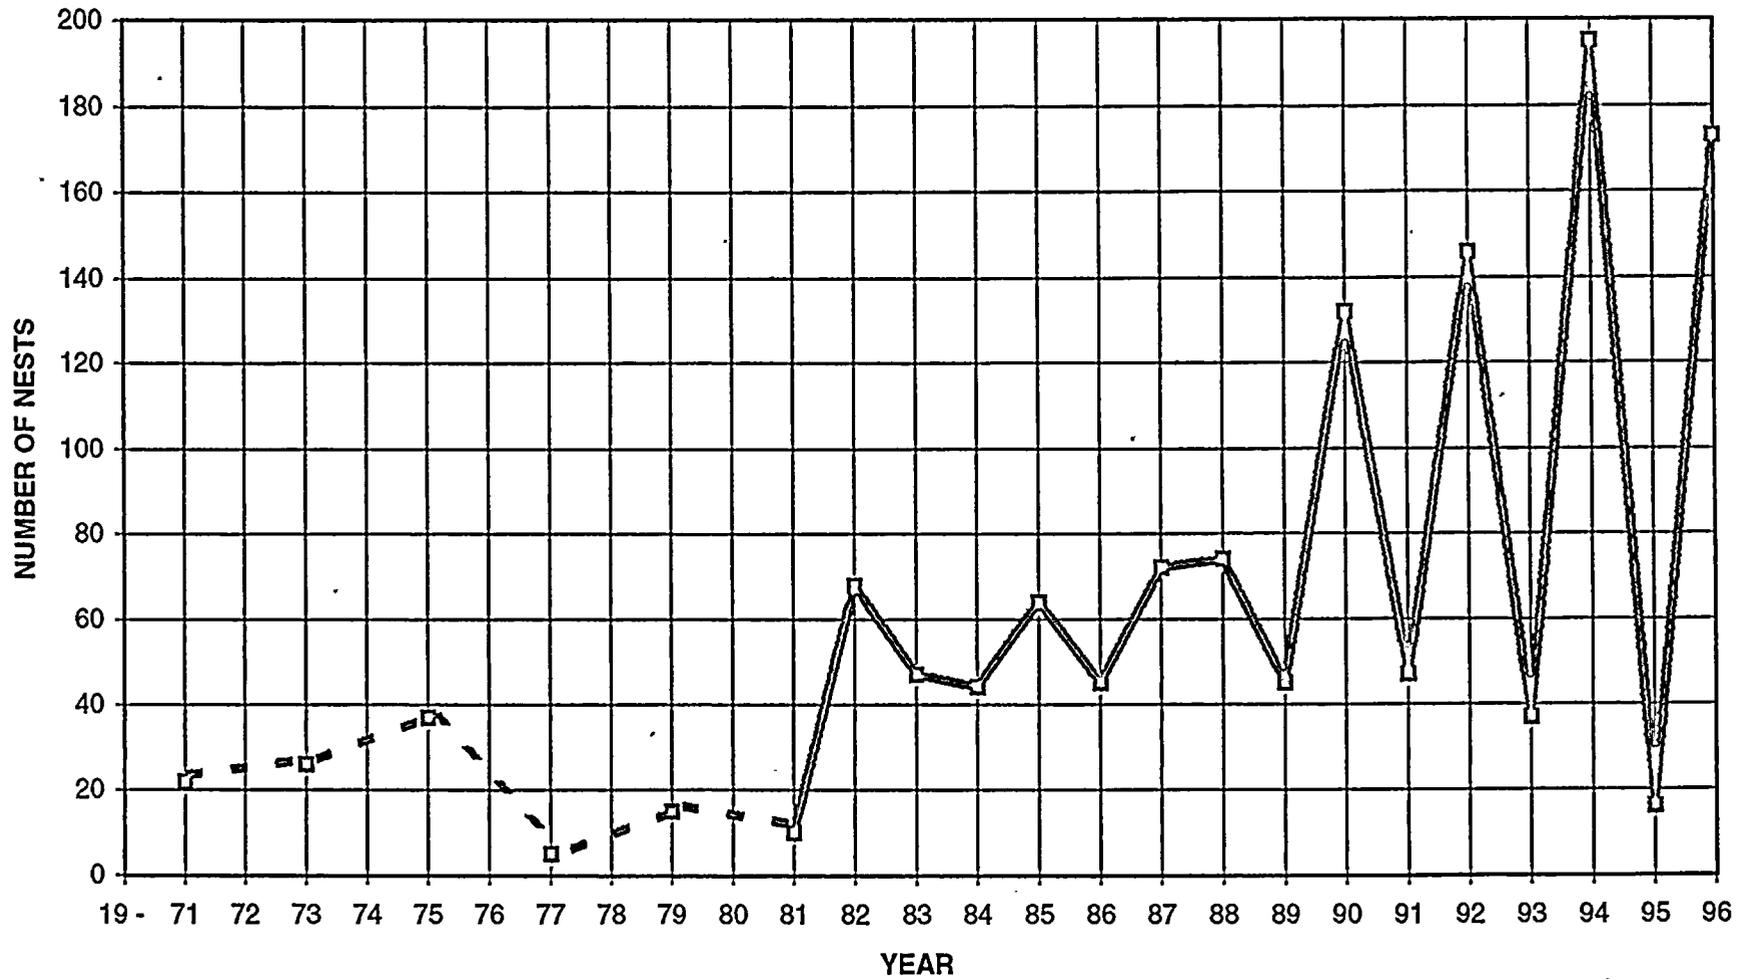


Figure 8. Number of green turtle nests, Hutchison Island, 1971 through 1996. Values for 1971 through 1979 are estimates (see text). Values for 1981 through 1996 are from whole island surveys.

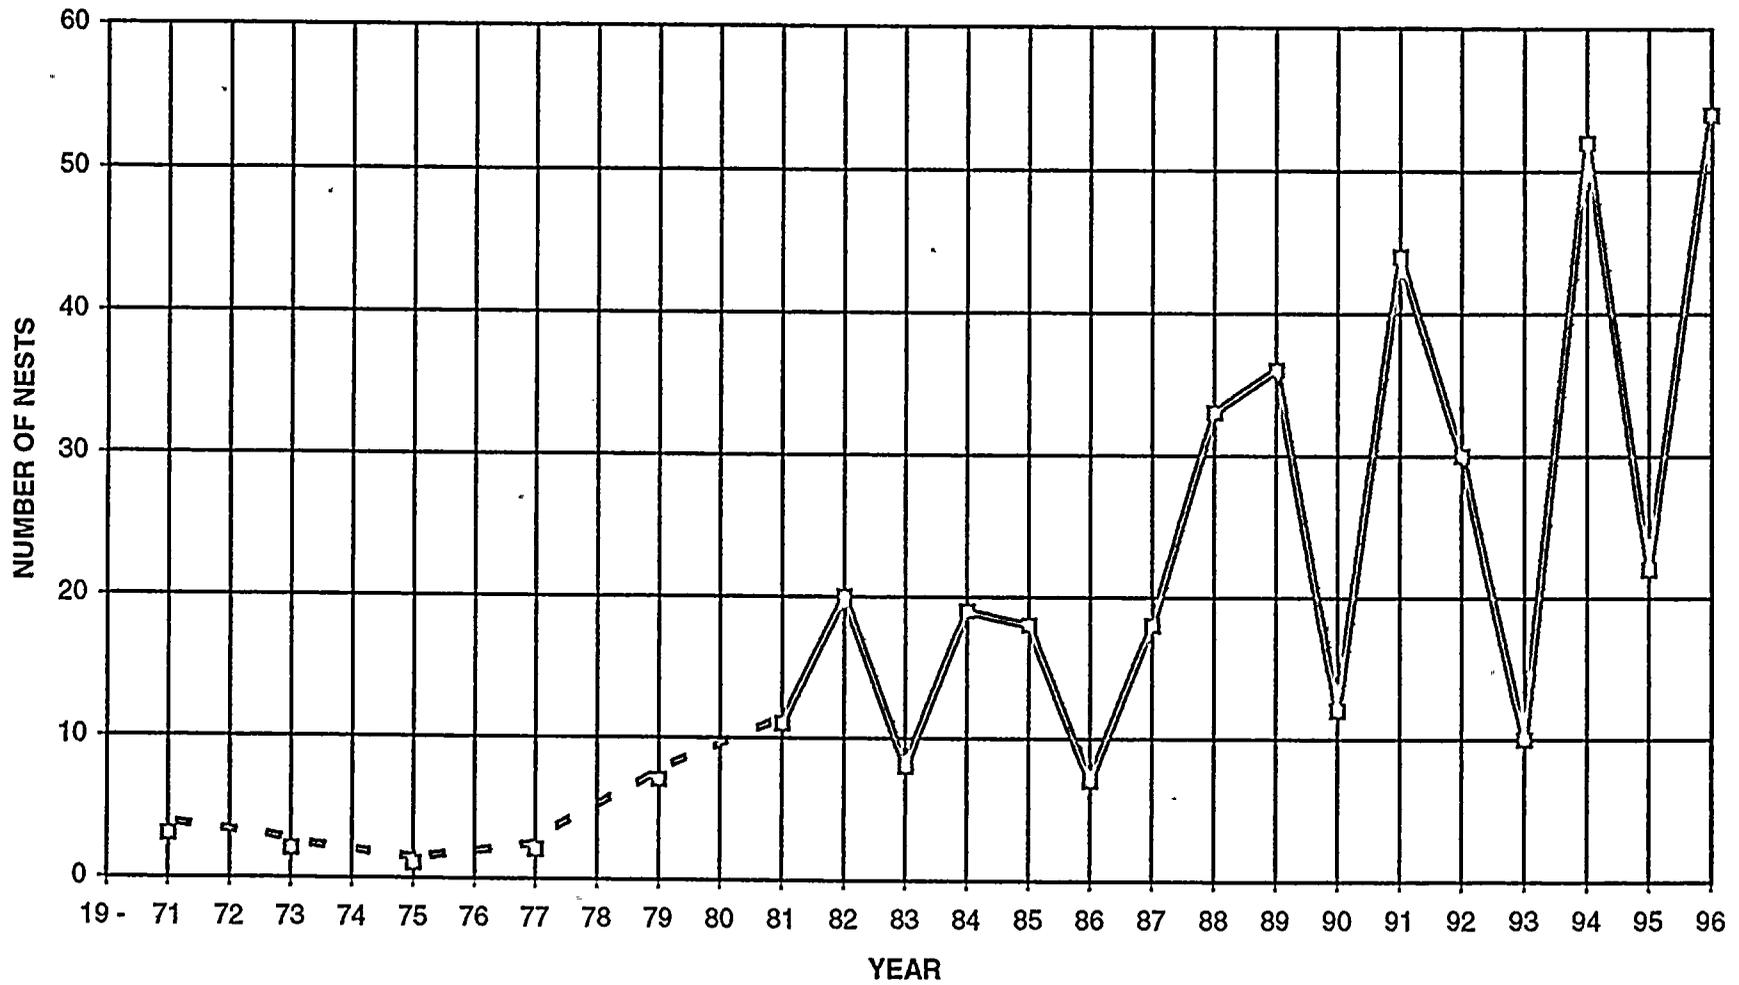


Figure 9. Number of leatherback turtle nests, Hutchinson Island, 1971 through 1996. Values for 1971 through 1979 are estimates (see text). Values for 1981 through 1996 are from whole island surveys.

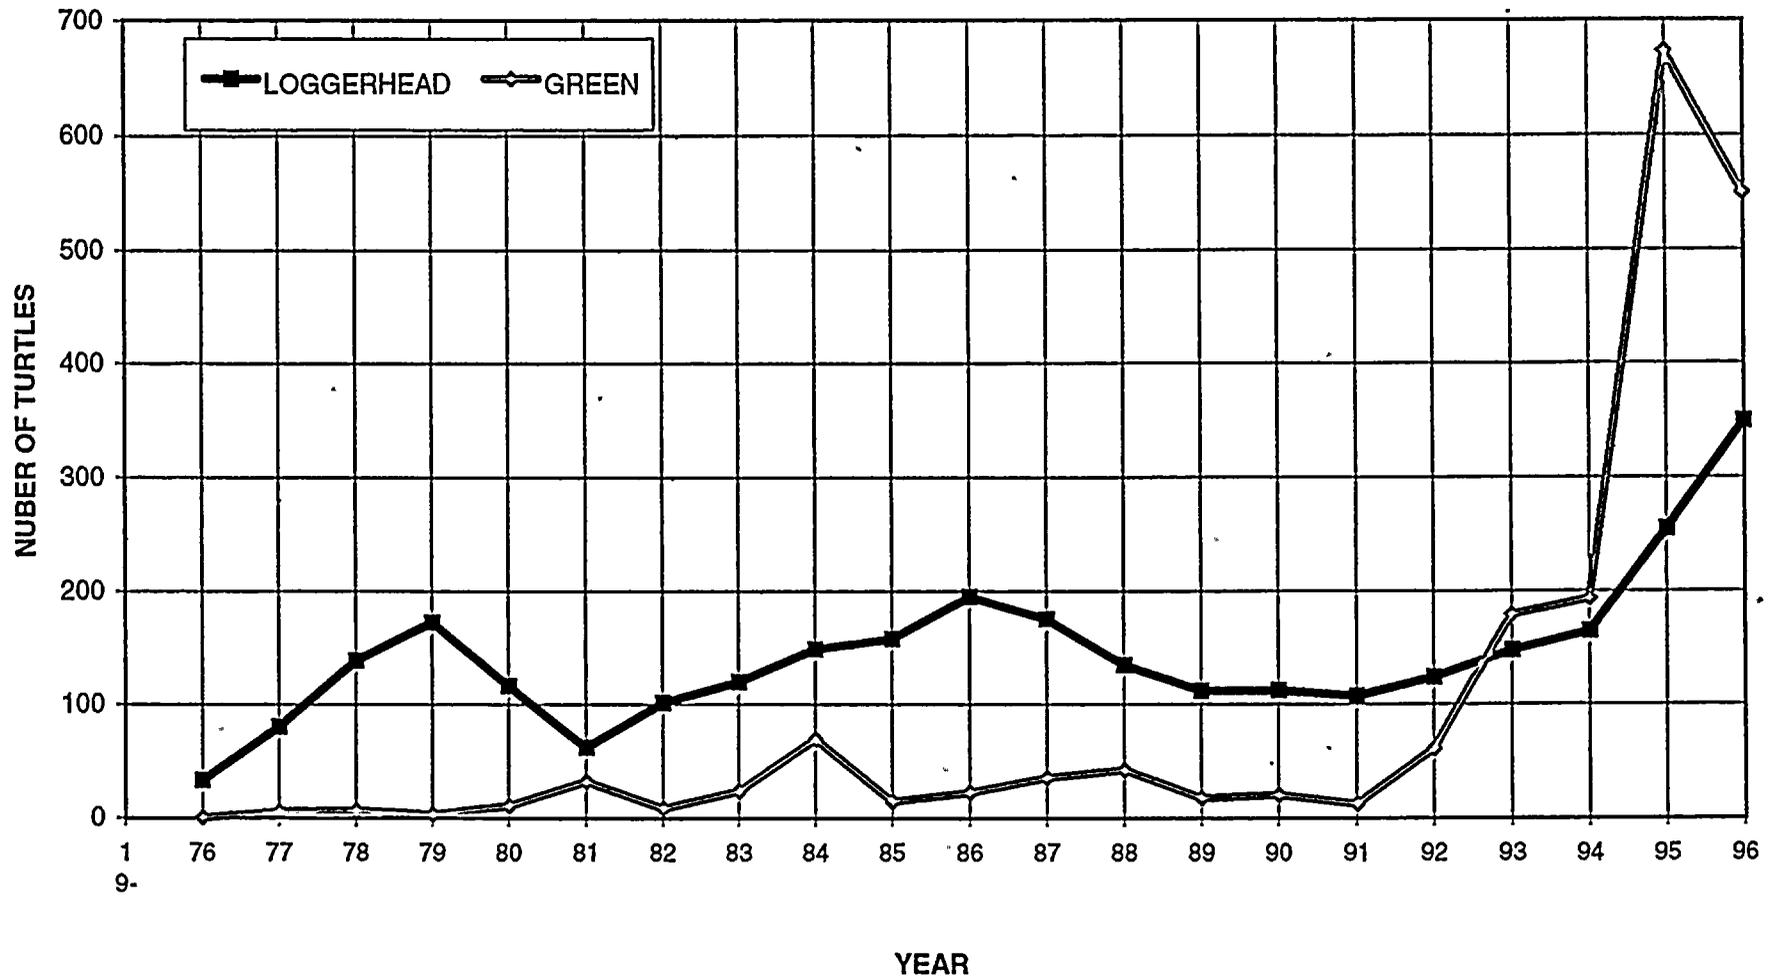


Figure 10. Number of loggerhead and green turtles removed each year from the intake canal, St. Lucie Plant, 1976 through 1996.

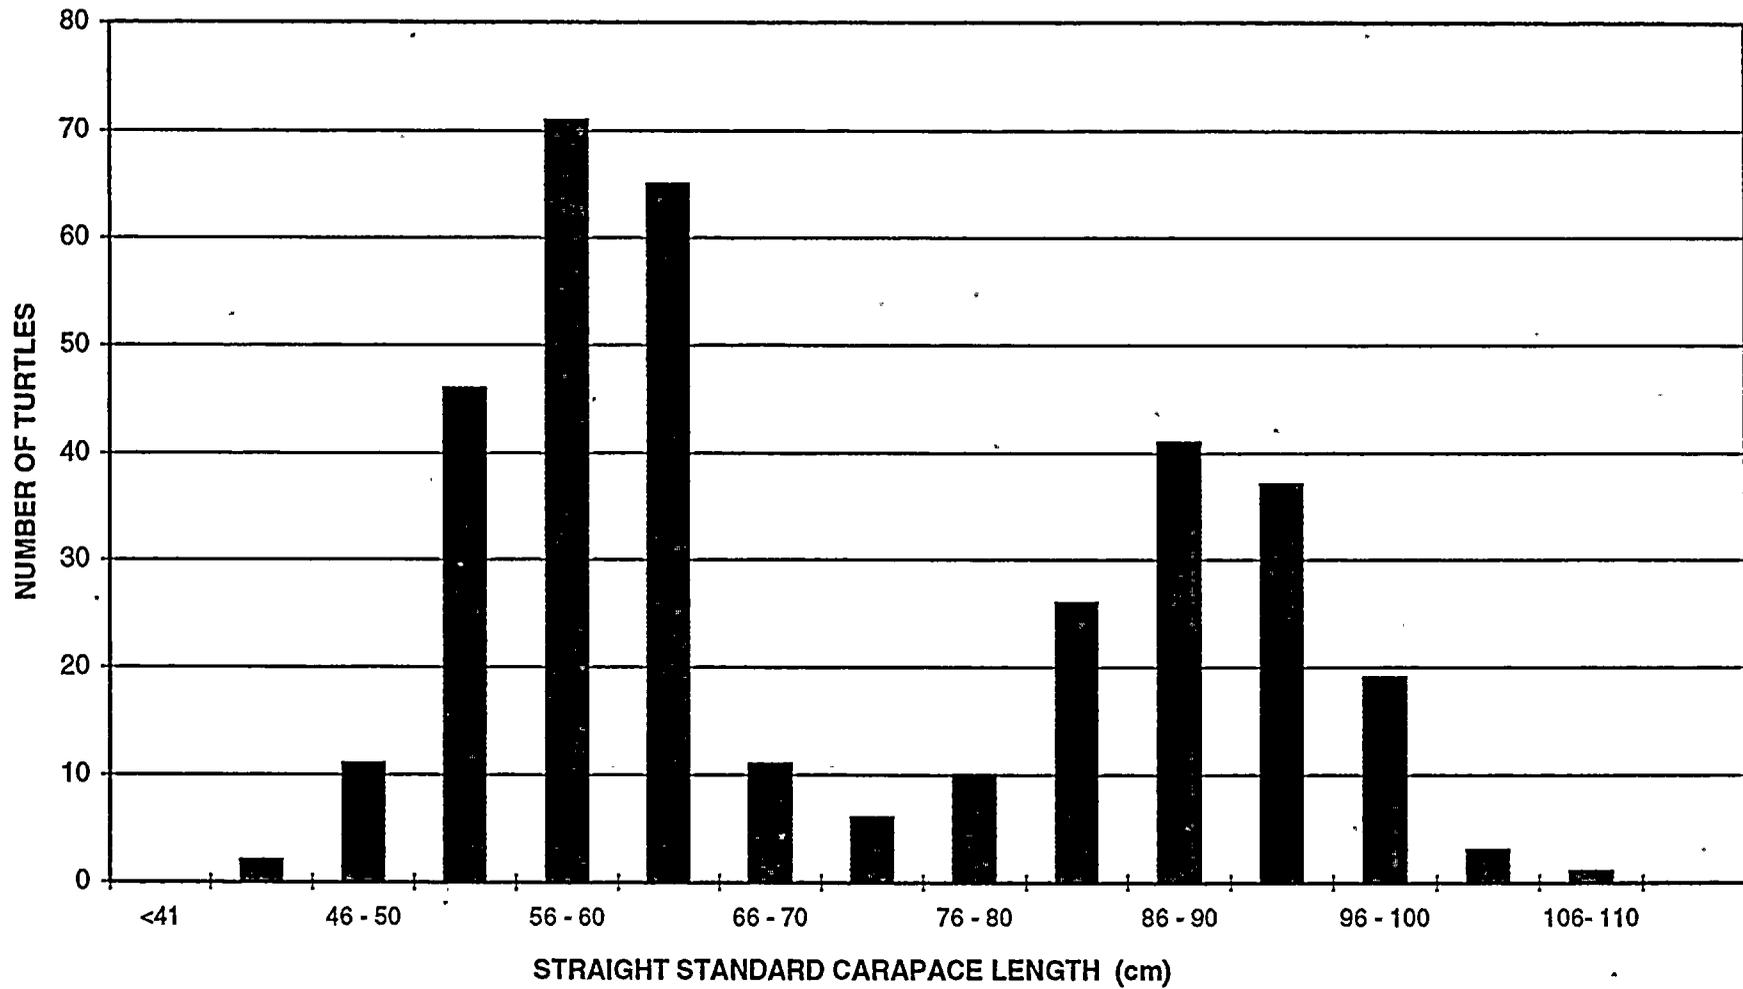


Figure 11. Length distribution (SSCL) of loggerhead turtles (N = 349) removed from the intake canal, St. Lucie Plant, 1996.

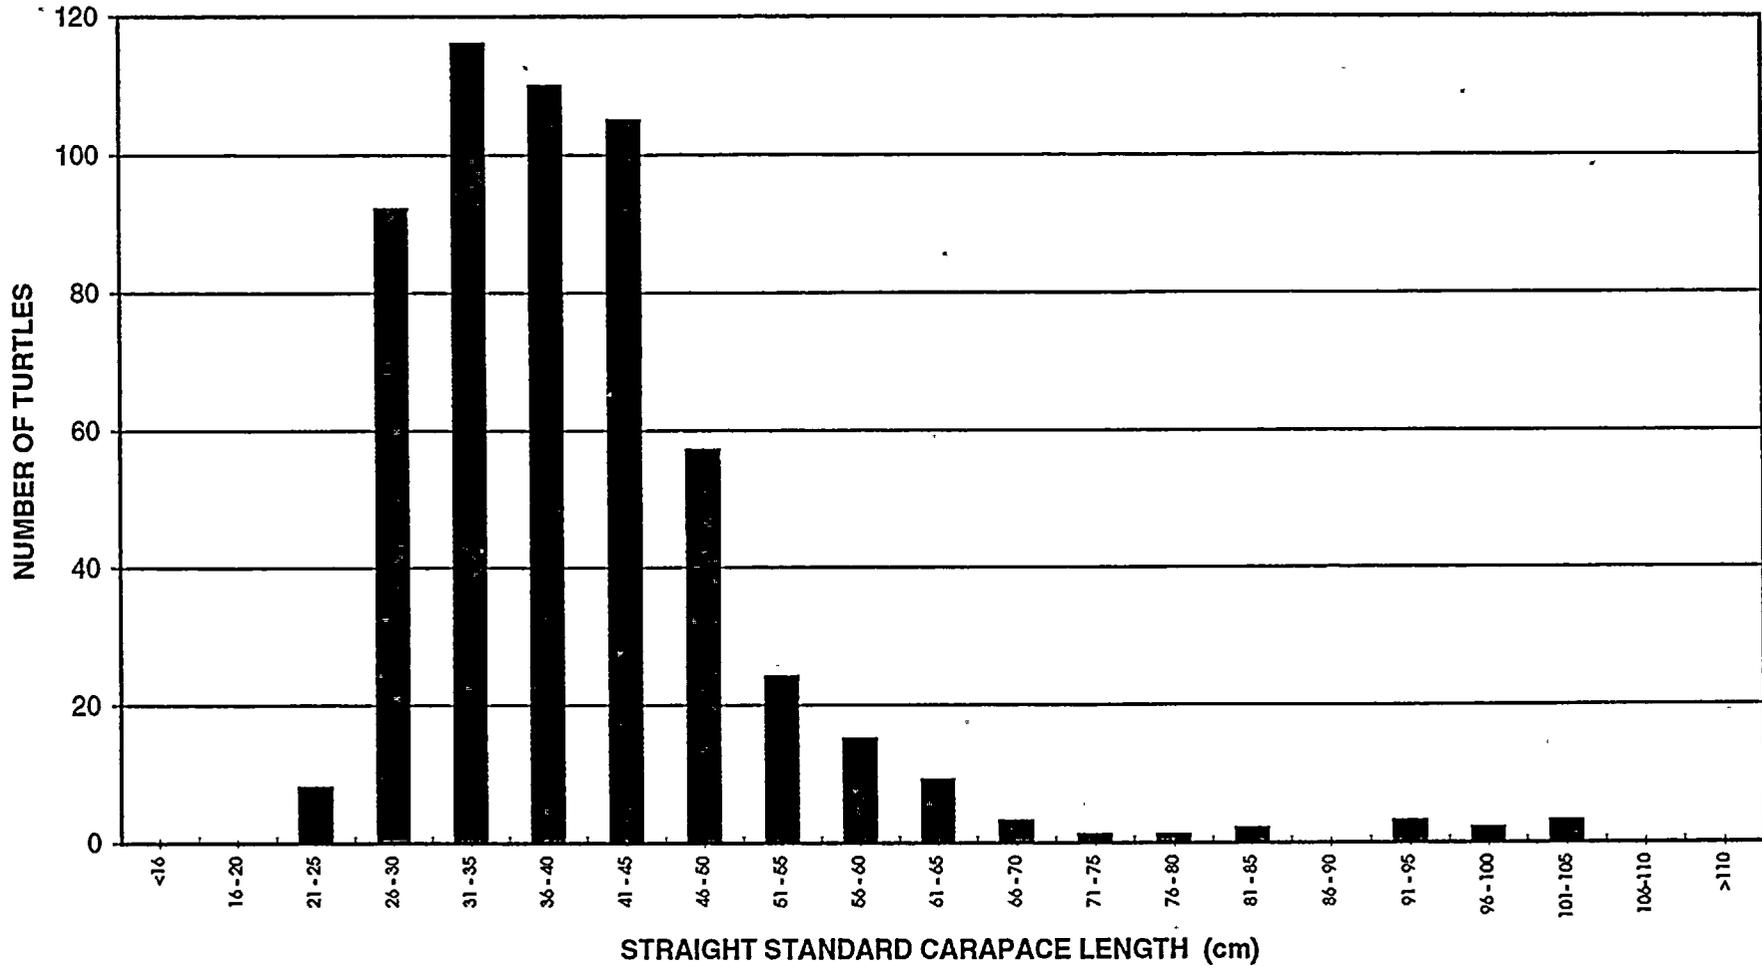


Figure 12. Length distribution (SSCL) of green turtles (N = 549) removed from the intake canal, St. Lucie Plant, 1996.

TABLE 1

TOTAL NUMBER OF CAPTURES AND (NUMBER OF DEAD) TURTLES REMOVED FROM THE INTAKE CANAL

ST. LUCIE PLANT, 1976 - 1996

YEAR	Species					Total
	loggerhead	green	leatherback	hawksbill	kemp's ridley	
1976	33 (4)					33 (4)
1977	80 (5)	5 (2)	1			86 (7)
1978	138 (19)	6 (1)	3	1		148 (20)
1979	172 (13)	3 (1)				175 (14)
1980	116 (5)	10 (3)				126 (8)
1981	62 (5)	32 (2)	2		1	97 (7)
1982	101 (16)	8	1			110 (16)
1983	119 (4)	23 (4)				142 (8)
1984	148 (3)	69 (2)		1	2	220 (5)
1985	157 (4)	14		1		172 (4)
1986	195 (27)	22 (1)	1	1	1	220 (28)
1987	175 (11)	35 (0)		2	6 (2)	218 (13)
1988	134 (6)	42 (2)			5 (2)	181 (10)
1989	111 (4)	17 (1)	1	2	2	133 (5)
1990	112 (1)	20 (2)				132 (3)
1991	107 (1)	12		1	1	121 (1)
1992	123 (2)	61 (2)	1	2		187 (4)
1993	147	179 (1)	5	2	4	337 (1)
1994	164	193 (4)	2		2	361 (4)
1995	254 (1)	673 (15)	1		5	933 (16)
1996	349 (3)	549 (4)		5	3	906 (7)
Total	2997 (134)	1973 (47)	18	18	32 (4)	5038 (185)
Annual Mean*	148.2 (6.7)	98.7 (2.4)	1.8	1.8	2.9 (0.2)	250.3 (9.8)

* Excludes 1976 (partial year of plant operation).

TABLE 2

TOTAL NUMBER OF LOGGERHEAD TURTLES REMOVED EACH MONTH FROM THE INTAKE CANAL

ST. LUCIE PLANT, 1977* - 1996

Month	Number of Captures	Percent of All Captures	Minimum	Maximum	Mean	Standard Deviation	1996
January	370	12.5%	6	39	18.5	10.0	38
February	275	9.3%	5	34	13.8	7.2	34
March	271	9.1%	1	51	13.6	11.4	51
April	291	9.8%	0	44	14.6	10.9	36
May	257	8.7%	0	40	12.9	10.3	17
June	296	10.0%	3	34	14.8	9.7	8
July	339	11.4%	0	87	17.0	19.0	87
August	275	9.3%	2	41	13.8	10.8	41
September	171	5.8%	1	19	8.6	5.1	12
October	162	5.5%	0	17	8.1	5.0	8
November	114	3.8%	0	15	5.7	3.8	7
December	143	4.8%	1	13	7.2	4.1	10
Total	2964		0	87			349
Mean	247.0				12.4		29.1
Std. Deviation	80.7				4.0		23.9

* First full year of plant operation. An additional 33 loggerheads were captured during 1976.

TABLE 3

TOTAL NUMBER OF GREEN TURTLES REMOVED EACH MONTH FROM THE INTAKE CANAL

ST. LUCIE PLANT, 1977* - 1996

Month	Number of Captures	Percent of All Captures	Minimum	Maximum	Mean	Standard Deviation	1996
January	234	11.9%	0	59	11.7	15.8	32
February	205	10.4%	0	64	10.3	15.8	32
March	324	16.4%	0	147	16.2	37.3	147
April	161	8.2%	0	64	8.1	17.4	49
May	133	6.7%	0	91	6.7	20.3	16
June	91	4.6%	0	52	4.6	11.7	16
July	109	5.5%	0	61	5.5	14.8	61
August	116	5.9%	0	64	5.8	15.5	33
September	130	6.6%	0	77	6.5	18.7	39
October	160	8.1%	0	54	8.0	15.7	47
November	136	6.9%	0	42	6.8	11.3	42
December	174	8.8%	0	68	8.7	16.6	35
Total	1973		0	147			549
Mean	118.7				8.2		45.8
Std. Deviatio	64.6				3.2		34.4

* First full year of plant operation.

ANNUAL ENVIRONMENTAL OPERATING REPORT VOLUME II

INTRODUCTION

The St. Lucie Unit 2 Environmental Protection Plan (EPP) requires the submittal of an annual report for various activities at the plant site including the reporting on sea turtle monitoring programs, and other matters related to Federal and State environmental permits and certifications.

SEA TURTLE MONITORING AND ASSOCIATED ACTIVITIES

Surveillance and maintenance of the light screen to minimize sea turtle disorientation as required by Section 4.2.4 of the EPP is ongoing. The vegetation light screen located on the beach dune between the power plant and the ocean is routinely surveyed to determine its overall vitality. The vegetation line is surveyed for any gaps occurring from mortality, which would result in unacceptable light levels on the beach. Trees, vegetation or shade cloth are replaced as necessary to maintain the overall integrity of the light screen.

OTHER ROUTINE REPORTS

The following items for which reporting is required are listed by section number from the plant's Environmental Protection Plan:

5.4.1(a) EPP NONCOMPLIANCES AND CORRECTIVE ACTIONS TAKEN

No noncompliances under EPP Section 5.4.1(a) were determined to have occurred during 1996.

5.4.1(b) CHANGES IN STATION DESIGN OR OPERATION, TESTS, AND EXPERIMENTS IN ACCORDANCE WITH EPP SUBSECTION 3.1

No plant site activities were determined to be reportable under Section 5.4.1.(b) during 1996.

An environmental evaluation of the construction and operation of the St. Lucie County South Hutchinson Island Water Reclamation Facility was performed by FPL in July of 1996. The facility (which is owned and will be operated by St. Lucie County) will have its own permits issued by the Florida Department of Environmental Protection for construction and operation of the facility, including the discharge of reuse quality effluent into the discharge canal of the St. Lucie Plant. This facility should be operational in mid-1997.

Since the permit applications will be reviewed and approved by the State of Florida, pursuant to EPP 3.3, the changes are not subject to the requirements of EPP 3.1. FPL's evaluation concluded that there will be no significant adverse environmental impact and that no unreviewed environmental question exists under subsection 3.1 of the EPP.

5.4.1(c) NONROUTINE REPORTS SUBMITTED TO THE NRC FOR THE YEAR 1996 IN ACCORDANCE WITH EPP SUBSECTION 5.4.2

1. Report concerning application-for-renewal of the St. Lucie site's Wastewater Permit (formerly NPDES Permit); reported to NRC by FPL letter L-96-86 on April 3, 1996.
2. Report concerning a fish kill in the plant's intake canal associated with high winds and heavy seas; reported to NRC by FPL letter L-96-89 on April 5, 1996.
3. Report concerning an exceedence of the Wastewater (formerly NPDES)

Permit minimum pH limitation for sewage treatment plant effluent; reported to the NRC by FPL letter L-96-187 on July 23, 1996.

4. Report concerning entrapment of a West Indian Manatee in the plant's intake canal; reported to NRC by FPL letter L-96-261 on October 10, 1996.