

REGULATORY INFORMATION DISTRIBUTION SYSTEM (RIDS)

ACCESSION NBR: 8105270098 DOC. DATE: 81/05/19 NOTARIZED: NO
 FACIL: 50-250 Turkey Point Plant, Unit 3, Florida Power and Light C
 50-251 Turkey Point Plant, Unit 4, Florida Power and Light C
 AUTH. NAME: UHRIG, R.E. AUTHOR AFFILIATION: Florida Power & Light Co.
 RECIP. NAME: EISENHUT, D.G. RECIPIENT AFFILIATION: Division of Licensing

DOCKET #
 05000250
 05000251

SUBJECT: Forwards evaluation of effect of auxiliary feedwater sys
 runout flow & impact of other energy sources on containment
 pressure response, per IE Bulletin 80-04, "Analysis of PWR
 Main Steam Line Break w/Continued Feedwater Addition."


DISTRIBUTION CODE: A001S COPIES RECEIVED: LTR 3 ENCL 3 SIZE: 4
 TITLE: General Distribution for after Issuance of Operating License

NOTES:

ACTION:	RECIPIENT ID CODE/NAME		COPIES		RECIPIENT ID CODE/NAME		COPIES	
			LTTR	ENCL			LTTR	ENCL
ACTION:	VARGA, S.	04	13	13				
INTERNAL:	D/DIR, HUM FAC08		1	1	DIR, DIV OF LIC		1	1
	I&E	06	2	2	NRC PDR	02	1	1
	OELD	11	1	0	OR ASSESS BR	10	1	0
	RAD ASMT BR		1	1	REG FILE	01	1	1
EXTERNAL:	ACRS	09	16	16	LPDR	03	1	1
	NSIC	05	1	1				

MAY 28 1981



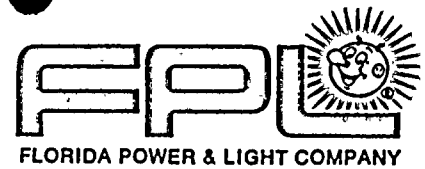

May 19, 1981
L-81-211

Office of Nuclear Reactor Regulation
Attention: Mr. Darrell G. Eisenhut, Director
Division of Licensing
U. S. Nuclear Regulatory Commission
Washington, D. C. 20555



Dear Mr. Eisenhut:

Re: Turkey Point Units 3 & 4
Docket No. 50-250 & 50-251
NRC I & E Bulletin 80-04

Our letter L-80-148 dated May 8, 1980 addressed a portion of I & E Bulletin 80-04 and committed to evaluate the effect of runout flow of the Auxiliary Feedwater System and the impact of other energy sources on the containment pressure response as required by the Bulletin. Please find attached the results of our evaluation.

Very truly yours,

J. a. De Massey
or

Robert E. Uhrig
Vice President
Advanced System and Technology

REU/JEM/ras

Attachment

cc: Mr. James P. O'Reilly, Region II
Harold F. Reis, Esquire

A001
s
3/3

8105270098

Q

U. S. DEPARTMENT OF THE ARMY
OFFICE OF THE CHIEF OF STAFF

WASHINGTON, D. C. 20315

100-100000

1

100-100000
100-100000

CONTAINMENT PRESSURE RESPONSE TO STEAM LINE BREAK

QUESTION:

Review the containment pressure response analysis to determine if the potential for containment overpressure for a main steam line break inside containment included the impact of runout flow from the auxiliary feedwater system and the impact of other energy sources, such as continuation of feedwater for condensate flow. In your review, consider your ability to detect and isolate the damaged steam generator from those sources and the ability of the pumps to remain operable after extended operation at runout flow.

RESPONSE:

- A. The response to this question was prepared considering both the current Turkey Point steam generators and the steam generators to be installed as part of the repair effort. The major difference in steam generator design is that the new design includes integral flow restrictors in the steam generator outlet nozzles.

NEW STEAM GENERATORS

An analysis was performed to provide an estimate of the containment pressure response during a steamline break. Although this analysis did not include a full spectrum of break sizes, initial power levels, and single failures which would be performed for a full scope analysis, the results do provide a high degree of confidence that a steam line break would not cause the containment design pressure of 59 psig or the vessel test pressure of 65 psig to be exceeded. The analyses did specifically account for main feedwater flow and auxiliary feedwater flow.

The mass/energy release portion of the transient was calculated using the LOFTRAN code. LOFTRAN has been used for accident analyses in numerous safety analysis reports. The containment pressure and temperature transients are calculated using the COCO code. COCO has been used and found acceptable to calculate containment pressure transients for the H. B. Robinson and Zion plants.

Cases were analyzed at zero power and full power (2500 MWt) to evaluate the sensitivity to initial power level. Conservatively high steam generator masses were assumed. A full double-ended break was analyzed assuming dry steam blowdown, i.e. no credit was taken for liquid entrainment in the mass/energy releases. Credit was taken for integral flow restrictors in the steam generator outlet nozzles. The assumption of dry steam in conjunction with a double ended break typically provides a pressure transient which bounds smaller breaks. No credit was taken for steamline check valves to prevent reverse flow from the intact steam generators. It was assumed there was no BIT in the Safety Injection System, resulting in a conservatively high return to power. Conservatively high main feedwater flow was assumed prior to feedline isolation. Analyses were run assuming various auxiliary

THE UNIVERSITY OF CHICAGO

1954

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
5401 S. UNIVERSITY AVE.
CHICAGO, ILL. 60637

1954

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
5401 S. UNIVERSITY AVE.
CHICAGO, ILL. 60637

1954

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
5401 S. UNIVERSITY AVE.
CHICAGO, ILL. 60637

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
5401 S. UNIVERSITY AVE.
CHICAGO, ILL. 60637

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
5401 S. UNIVERSITY AVE.
CHICAGO, ILL. 60637

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
5401 S. UNIVERSITY AVE.
CHICAGO, ILL. 60637

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
5401 S. UNIVERSITY AVE.
CHICAGO, ILL. 60637

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
5401 S. UNIVERSITY AVE.
CHICAGO, ILL. 60637

feed flows. The 1200 gpm is well in excess of either the 800 gpm or the 1000 gpm which could be supplied by the existing auxiliary feed system. Credit was taken for operator action at 10 minutes to isolate auxiliary feed flow to the faulted steam generator.

For the containment pressure transient calculation, a conservatively low value for containment heat sinks was assumed. The containment atmosphere was conservatively assumed to reach a maximum of only 280°F for the purpose of calculating the heat removal capability of the fan cooler. The spray pumps were assumed to supply only 400 gpm. For most cases, failure of a spray pump and/or a fan cooler were assumed as the most limiting single failure.

In addition, a zero power steambreak (which the sensitivity studies indicate is more limiting) with the assumptions listed above was performed. This analysis specifically considered 800 gpm auxiliary feedwater to the faulted steam generator, and operation of one containment spray pump and two fan coolers. The results of this analysis indicate a peak containment pressure of 56.1 psig.

CURRENT STEAM GENERATORS

An analysis was performed with the current steam generator design assuming a full double ended break upstream of the flow restrictor with a break area of 4.35 ft², i.e. assuming flow restrictors are located in the steamline. The break was assumed to occur at zero power. The auxiliary feedwater flow was assumed to be 800 gpm to the faulted steam generator with credit for operator action at 10 minutes to isolate the flow. The blowdown was assumed to be dry steam. In the containment response calculation, credit was taken for the operation of only 1 spray pump and 2 fan coolers, i.e. minimum safeguards. It was assumed that there was a BIT with 20,000 ppm boron solution in the Safety Injection System. This case resulted in a peak pressure of 56.0 psig. Based on the conservatism noted above, these cases are expected to bound other power levels break sizes and single failures such as auxiliary feed runout, provided that credit for operator action at ten minutes is retained.

B. The ability to detect and isolate the damaged steam generator from sources of feedwater flow has been reviewed and are summarized below:

- (a) Main feedwater flow, including condensate flow, will be isolated automatically following Safety Injection actuation. The feedwater isolation signal resulting from Safety Injection will close the main feedwater control valves, close the bypass feedwater control valves, trip the main feed pumps, and close the feedwater pump discharge valves, thereby terminating both main feedwater flow and condensate flow to the damaged steam generator.
- (b) Auxiliary feedwater flow to the damaged steam generator must be determined manually and isolated as

1. The first part of the document is a list of names and their corresponding dates. The names are: "John Doe", "Jane Smith", "Bob Johnson", "Alice Brown", "Charlie White", "David Green", "Eve Black", "Frank Gray", "Grace Pink", "Henry Blue", "Ivy Yellow", "Jack Purple", "Karen Red", "Leo Orange", "Mia Silver", "Noah Gold", "Olivia Bronze", "Peter Copper", "Quinn Iron", "Rory Tin", "Sam Lead", "Tina Zinc", "Uma Nickel", "Victor Platinum", "Wendy Silver", "Xavier Gold", "Yara Bronze", "Zoe Copper". The dates are: "1990-01-01", "1990-02-01", "1990-03-01", "1990-04-01", "1990-05-01", "1990-06-01", "1990-07-01", "1990-08-01", "1990-09-01", "1990-10-01", "1990-11-01", "1990-12-01", "1991-01-01", "1991-02-01", "1991-03-01", "1991-04-01", "1991-05-01", "1991-06-01", "1991-07-01", "1991-08-01", "1991-09-01", "1991-10-01", "1991-11-01", "1991-12-01", "1992-01-01", "1992-02-01", "1992-03-01", "1992-04-01", "1992-05-01", "1992-06-01", "1992-07-01", "1992-08-01", "1992-09-01", "1992-10-01", "1992-11-01", "1992-12-01".

1. The first step in the process is to identify the problem or issue that needs to be addressed. This involves gathering information and understanding the context of the problem.

2. Once the problem is identified, the next step is to define the objectives and goals of the project. This helps to clarify what needs to be achieved and provides a clear direction for the team.

3. The third step is to develop a plan or strategy to address the problem. This involves breaking down the problem into smaller, manageable tasks and determining the resources needed to complete each task.

4. The fourth step is to implement the plan. This involves putting the strategy into action and monitoring progress to ensure that the project is on track.

5. The final step is to evaluate the results of the project. This involves assessing the outcomes against the objectives and goals and identifying any areas for improvement.

1. The first step in the process of the investigation is the identification of the problem. This is done by the investigator who is responsible for the investigation. The investigator must identify the problem and the scope of the investigation. The investigator must also identify the objectives of the investigation and the methods to be used. The investigator must also identify the resources available for the investigation.

6-10-1964

[illegible]

Figure 1. The effect of the concentration of the *Agrobacterium* suspension on the transformation efficiency of *Agrobacterium* strains. The number of transformed cells was determined by the number of colonies obtained on the selective medium. The results are the mean of three independent experiments. Error bars represent the standard deviation.

1. The first part of the document is a header section containing the following information:

- Page: 1
- Date: 10/10/2010
- Time: 10:10:10
- Author: [Redacted]
- Editor: [Redacted]
- Reviewer: [Redacted]
- Version: 1.0
- Project: [Redacted]
- Task: [Redacted]
- Sub-task: [Redacted]
- Priority: [Redacted]
- Status: [Redacted]
- Category: [Redacted]
- Sub-category: [Redacted]
- Keywords: [Redacted]
- Tags: [Redacted]
- Labels: [Redacted]
- Comments: [Redacted]
- Attachments: [Redacted]
- Links: [Redacted]
- References: [Redacted]
- Notes: [Redacted]
- History: [Redacted]
- Log: [Redacted]
- Footer: [Redacted]

Figure 1. The effect of the concentration of the *Agrobacterium* suspension on the transformation efficiency of *Agrobacterium* strains. The concentration of the *Agrobacterium* suspension was 10⁶ cells/ml (A), 10⁷ cells/ml (B), 10⁸ cells/ml (C), and 10⁹ cells/ml (D). The concentration of the *Agrobacterium* suspension was 10⁶ cells/ml (A), 10⁷ cells/ml (B), 10⁸ cells/ml (C), and 10⁹ cells/ml (D). The concentration of the *Agrobacterium* suspension was 10⁶ cells/ml (A), 10⁷ cells/ml (B), 10⁸ cells/ml (C), and 10⁹ cells/ml (D). The concentration of the *Agrobacterium* suspension was 10⁶ cells/ml (A), 10⁷ cells/ml (B), 10⁸ cells/ml (C), and 10⁹ cells/ml (D).

required by the plant's Emergency Operating Procedure. Following closure of the Main Steamline Isolation Valves, the faulted steam generator may be determined by comparing steamline pressure among the various loops. A low steamline pressure compared to the other loops denotes a faulted loop. The valves in the auxiliary feedwater line supplying the damaged steam generator may then be closed to terminate flow to the faulted loop.

- C. The Turkey Point auxiliary feedwater pumps do not attain runout flow conditions during a main steam line break accident. The flow control valves are in a preset position and the turbine driver maximum horsepower limits the flow to 800 gpm. This flow rate is within the normal operating bounds of auxiliary feedwater pumps. Therefore, pump runout is not applicable to the Turkey Point auxiliary feedwater system as presently designed.



[Faint, illegible text scattered across the upper half of the page, possibly representing a list or a series of small entries.]