

REGULATORY INFORMATION DISTRIBUTION SYSTEM (RIDS)

ACCESSION NBR: 8310180359 DOC. DATE: 83/10/13 NOTARIZED: NO DOCKET #
 FACIL: 50-250 Turkey Point Plant, Unit 3, Florida Power and Light C 05000250
 50-251 Turkey Point Plant, Unit 4, Florida Power and Light C 05000251
 AUTH. NAME AUTHOR AFFILIATION
 WILLIAMS, J.W. Florida Power & Light Co.
 RECIP. NAME RECIPIENT AFFILIATION
 DENTON, H.R. Office of Nuclear Reactor Regulation, Director


SUBJECT: RO: several fire barrier penetrations breached for longer than 7 days, due to implementation of approved design changes, including new computer room, auxiliary power upgrade & App R. Hourly fire watch established.

DISTRIBUTION CODE: A006S COPIES RECEIVED: LTR 1 ENCL 0 SIZE: 1
 TITLE: OR Submittal: Fire Protection

NOTES:

RECIPIENT ID CODE/NAME	COPIES LTTR ENCL	RECIPIENT ID CODE/NAME	COPIES LTTR ENCL
NRR ORB1 BC 01	3		
INTERNAL: ELD/HDS4	1	IE FILE	06 1
IE/WHITNEY, L	1	NRR FIORAVANT	07 2
NRR WAMBACH	1	NRR/DE/CEB	09 2
NRR/DL DIR	1	REG FILE	04 1
RGN2	1		
EXTERNAL: ACRS	11 3	LPDR	03 1
NRC PDR	02 1	NSIC	05 1
NTIS	1		

1-10-68

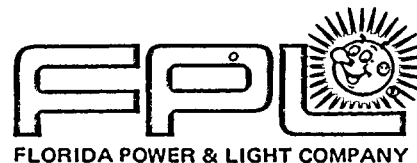

October 13, 1983
L-83-519

Mr. Harold R. Denton, Director
Office of Nuclear Reactor Regulation
U. S. Nuclear Regulatory Commission
Washington, D.C. 20555

Dear Mr. Denton:

Re: Turkey Point Units 3 & 4
Docket Nos. 50-250 & 50-251
Special Report
Fire Barrier Penetrations
Technical Specification 3.14.5.b

This special report is being submitted in accordance with Technical Specification 6.9.3 to provide 30 days notification on the subject occurrence.

Due to the implementation of approved design changes which included the new computer room, auxiliary power upgrade and Appendix R, several fire barrier penetrations were breached for longer than seven (7) days. These penetrations are located at Units 3 & 4 MCC rooms, Units 3 & 4 4160 V switchgear rooms, Unit 3 electrical penetration room (3W), Unit 4 electrical penetration rooms (4N) and (4W) and Auxiliary Building east and west hallway above the double doors.

Our ability to return the breached penetrations to functional status depends on the time frame required to complete the implementation of the design changes. The projected duration is six (6) months from the date of this report. In compliance with Technical Specifications, an hourly fire watch has been established.

Very truly yours,

J. W. Williams, Jr.
Vice President
Nuclear Energy

JWW/JA/cab

cc: J. P. O'Reilly, Region II
Harold F. Reis, Esquire

Handwritten: A006
1/0

8310180359 831013
PDR ADOCK 05000250
S PDR

