L-99-018 Attachment 3

٠

.

ATTACHMENT 3

PROPOSED LICENSE AMENDMENT FOR ULTIMATE HEAT SINK TEMPERATURE MONITORING

* PROPOSED TECHNICAL SPECIFICATION PAGES

3/4 7-15

<u>,</u> 1

.



¢

, ·

ى • •

ي ب کړ ب

· · · •

•

- 4 - 4 - 4 - 4

| ~ | |
|---|-----------------------------------|
| | PLANT SYSTEMS |
| | 3/4.7.4 ULTIMATE HEAT SINK DELETE |
| | |
| | LIMITING CONDITION FOR OPERATION |
| | , |

3.7.4 The ultimate heat sink shall be OPERABLE with an average supply water temperature to-the-Intake-Gooling Water-System less than or equal to 100°F.

APPLICABILITY: MODES 1, 2, 3, and 4.

ACTION:

ł

(

With the requirements of the above specification not satisfied, be in at least HOT STANDBY within 12 hours and in COLD SHUTDOWN within the following 30 hours. This ACTION shall be applicable to both units simultaneously.

SURVEILLANCE REQUIREMENTS

4.7.4 The ultimate heat sink shall be determined OPERABLE at least once per 24 hours by verifying the average supply water temperature* to the Intake Gooling Water System to be within its limit.


DELETE

Portable monitors may be used to measure the temperature.

TURKEY POINT - UNITS 3 & 4

3/4 7-15

AMENDMENT NOS.137 AND 132

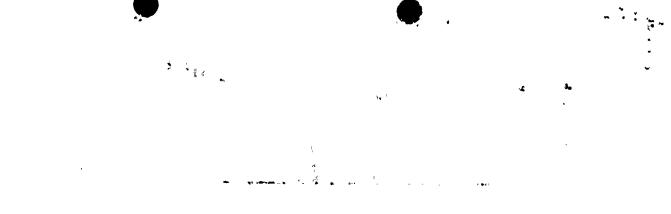

••

.

,

.