

3/4.5 EMERGENCY CORE COOLING SYSTEMS

3/4.5.1 ACCUMULATORS

COLD LEG INJECTION

LIMITING CONDITION FOR OPERATION

3.5.1 Each Reactor Coolant System (RCS) accumulator shall be OPERABLE with:

- a. The isolation valve open with power supply circuit breaker open,
- b. A contained borated water volume of between 66 and 96% indicated level,
- c. A boron concentration of between 2400 and 2600 ppm, and
- d. A nitrogen cover-pressure of between 585 and 665 psig.

APPLICABILITY: MODES 1, 2, and 3'.

ACTION:

- a. With one accumulator inoperable, except as a result of a closed isolation valve, restore the inoperable accumulator to OPERABLE status within 1 hour or be in at least HOT STANDBY within the next 6 hours and reduce pressurizer pressure to less than 1000 psig within the following 6 hours.
- b. With one accumulator inoperable due to the isolation valve being closed, either immediately open the isolation valve or be in at least HOT STANDBY within 6 hours and reduce pressurizer pressure to less than 1000 psig within the following 6 hours.

or boron concentration not within limits

SURVEILLANCE REQUIREMENTS

4.5.1.1 Each accumulator shall be demonstrated OPERABLE:


- a. At least once per 12 hours by:
 1. Verifying ^{that} ~~by the absence of alarms,~~ the contained borated water volume and nitrogen cover-pressure in the tanks, and
 2. Verifying that each accumulator isolation valve is open.

Insert

Are within their limits

*RCS pressure above 1000 psig.

c. With one accumulator in operable due to boron concentration not within limits, restore the boron concentration within limits within 72 hours or be in at least HOT STANDBY within the next 6 hours and reduce pressurizer pressure to less than 1000 psig within the following 6 hours.

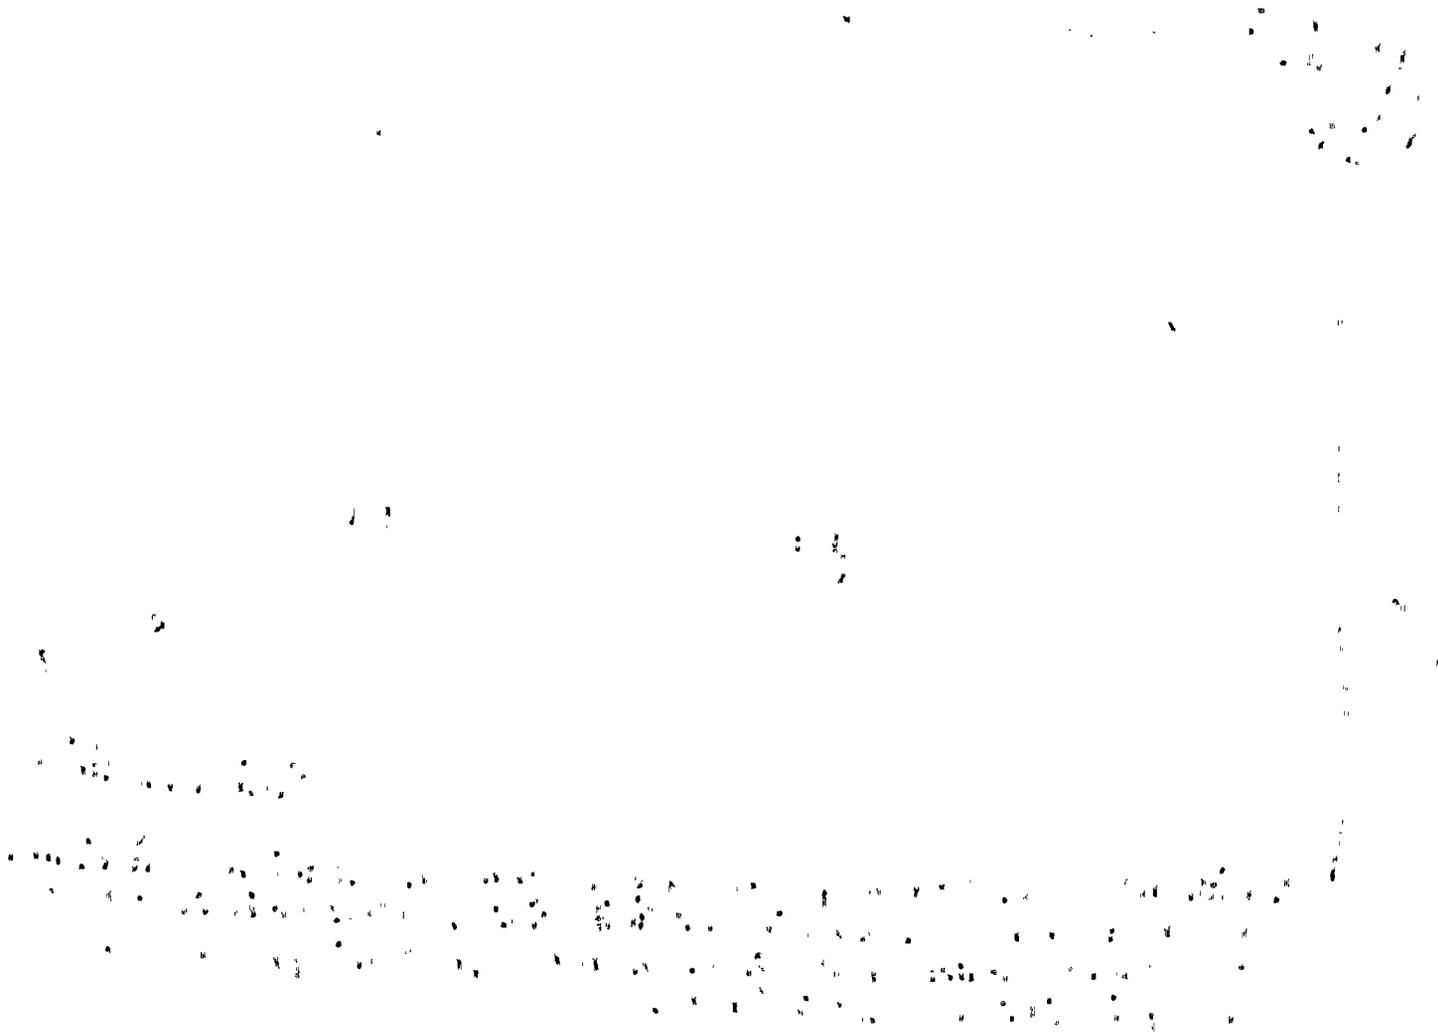

EMERGENCY CORE COOLING SYSTEMS

SURVEILLANCE REQUIREMENTS (Continued)

- b. At least once per 31 days and within 6 hours after each solution volume increase of greater than or equal to 76 gallons, which is equivalent to an indicated level change of 9% by verifying the boron concentration of the accumulator solution; and
- c. At least once per 31 days when the RCS pressure is above 1000 psig by verifying that the circuit breaker supplying power to the respective isolation valve operator is open.

Delete

4.5.1.2 Each accumulator water level and pressure channel shall be demonstrated OPERABLE at least once per 18 months by the performance of a CHANNEL CALIBRATION.

Add

This surveillance is not required when the volume increase makeup source is the Refueling Water Storage Tank (RWST) and the RWST has not been diluted since verifying that the RWST boron concentration is equal to or greater than the accumulator boron concentration limit.

3/4.5 EMERGENCY CORE COOLING SYSTEMS

BASES

3/4.5.1 ACCUMULATORS

The OPERABILITY of each Reactor Coolant System (RCS) accumulator ensures that a sufficient volume of borated water will be immediately forced into the reactor core through each of the cold legs in the event the RCS pressure falls below the pressure of the accumulators. This initial surge of water into the core provides the initial cooling mechanism during large RCS pipe ruptures.

The limits on accumulator volume, boron concentration and pressure ensure that the assumptions used for accumulator injection in the safety analysis are met. The value of 66% indicated level ensures that a minimum of 7440 gallons is maintained in the accumulators. The maximum indicated level of 96% ensures that an adequate volume exists for nitrogen pressurization.

The accumulator power operated isolation valves are considered to be "operating bypasses" in the context of IEEE Std. 279-1971, which requires that bypasses of a protective function be removed automatically whenever permissive conditions are not met. In addition, as these accumulator isolation valves fail to meet single failure criteria, removal of power to the valves is required.

The limits for operation with an accumulator inoperable for any reason except an isolation valve closed ^{or boron concentration not within limits} minimizes the time exposure of the plant to a LOCA event occurring concurrent with failure of an additional accumulator which may result in unacceptable peak cladding temperatures. ^{Insert A} If a closed isolation valve cannot be immediately opened, the full capability of one accumulator is not available and prompt action is required to place the reactor in a mode where this capability is not required.

3/4.5.2 AND 3/4.5.3 ECCS SUBSYSTEMS

The OPERABILITY of two independent ECCS subsystems ensures that sufficient emergency core cooling capability will be available in the event of a LOCA assuming the loss of one subsystem through any single failure consideration. Either subsystem operating in conjunction with the accumulators is capable of supplying sufficient core cooling to limit the peak cladding temperatures within acceptable limits for all postulated break sizes ranging from the double ended break of the largest RCS cold leg pipe downward. In addition, each ECCS subsystem provides long-term core cooling capability in the recirculation mode during the accident recovery period.

With the RCS temperature below 350°F, one OPERABLE ECCS subsystem is acceptable without single failure consideration on the basis of the stable reactivity condition of the reactor and the limited core cooling requirements.

The limitation for a maximum of one charging/safety injection pump to be OPERABLE and the Surveillance Requirement to verify one charging/safety injection pump OPERABLE below 325°F provides assurance that a mass addition pressure transient can be relieved by the operation of a single PORV.



THE UNIVERSITY OF CHICAGO

1954

Insert A page B 3/4 5-1

The boron in the accumulators contributes to the assumption that the combined ECCS water in the partially recovered core during the early reflooding phase of a large break LOCA is sufficient to keep that portion of the core subcritical. One accumulator below the minimum boron concentration limit, however, will have no effect on the available ECCS water and an insignificant effect on core subcriticality during reflood. Boiling of ECCS water in the core during reflood concentrates boron in the saturated liquid that remains in the core. In addition, current analysis demonstrates that the accumulators do not discharge following a large steam line break for HNP. Therefore, 72 hours is permitted to return the boron concentration to within limits.



1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

3/4.5 EMERGENCY CORE COOLING SYSTEMS

3/4.5.1 ACCUMULATORS

COLD LEG INJECTION

LIMITING CONDITION FOR OPERATION

3.5.1 Each Reactor Coolant System (RCS) accumulator shall be OPERABLE with:

- a. The isolation valve open with power supply circuit breaker open,
- b. A contained borated water volume of between 66 and 96% indicated level,
- c. A boron concentration of between 2400 and 2600 ppm, and
- d. A nitrogen cover-pressure of between 585 and 665 psig.

APPLICABILITY: MODES 1, 2, and 3*.

ACTION:

- a. With one accumulator inoperable, except as a result of a closed isolation valve or boron concentration not within limits, restore the inoperable accumulator to OPERABLE status within 1 hour or be in at least HOT STANDBY within the next 6 hours and reduce pressurizer pressure to less than 1000 psig within the following 6 hours.
- b. With one accumulator inoperable due to the isolation valve being closed, either immediately open the isolation valve or be in at least HOT STANDBY within 6 hours and reduce pressurizer pressure to less than 1000 psig within the following 6 hours.
- c. With one accumulator inoperable due to boron concentration not within limits, restore the boron concentration within limits within 72 hours or be in at least HOT STANDBY within the next 6 hours and reduce pressurizer pressure to less than 1000 psig within the following 6 hours.

SURVEILLANCE REQUIREMENTS

4.5.1.1 Each accumulator shall be demonstrated OPERABLE:

- a. At least once per 12 hours by:
 1. Verifying that the contained borated water volume and nitrogen cover-pressure in the tanks are within their limits, and
 2. Verifying that each accumulator isolation valve is open.

*RCS pressure above 1000 psig.

EMERGENCY CORE COOLING SYSTEMS

SURVEILLANCE REQUIREMENTS (Continued)

- b. At least once per 31 days and within 6 hours after each solution volume increase of greater than or equal to 76 gallons, which is equivalent to an indicated level change of 9%, by verifying the boron concentration of the accumulator solution#; and
- c. At least once per 31 days when the RCS pressure is above 1000 psig by verifying that the circuit breaker supplying power to the respective isolation valve operator is open.

This surveillance is not required when the volume increase makeup source is the Refueling Water Storage Tank (RWST) and the RWST has not been diluted since verifying that the RWST boron concentration is equal to or greater than the accumulator boron concentration limit.

3/4.5 EMERGENCY CORE COOLING SYSTEMS

BASES

3/4.5.1 ACCUMULATORS

The OPERABILITY of each Reactor Coolant System (RCS) accumulator ensures that a sufficient volume of borated water will be immediately forced into the reactor core through each of the cold legs in the event the RCS pressure falls below the pressure of the accumulators. This initial surge of water into the core provides the initial cooling mechanism during large RCS pipe ruptures.

The limits on accumulator volume, boron concentration and pressure ensure that the assumptions used for accumulator injection in the safety analysis are met. The value of 66% indicated level ensures that a minimum of 7440 gallons is maintained in the accumulators. The maximum indicated level of 96% ensures that an adequate volume exists for nitrogen pressurization.

The accumulator power operated isolation valves are considered to be "operating bypasses" in the context of IEEE Std. 279-1971, which requires that bypasses of a protective function be removed automatically whenever permissive conditions are not met. In addition, as these accumulator isolation valves fail to meet single failure criteria, removal of power to the valves is required.

The limits for operation with an accumulator inoperable for any reason except an isolation valve closed or boron concentration not within limits minimizes the time exposure of the plant to a LOCA event occurring concurrent with failure of an additional accumulator which may result in unacceptable peak cladding temperatures. The boron in the accumulators contributes to the assumption that the combined ECCS water in the partially recovered core during the early reflooding phase of a large break LOCA is sufficient to keep that portion of the core subcritical. One accumulator below the minimum boron concentration limit, however, will have no effect on the available ECCS water and an insignificant effect on core subcriticality during reflood. Boiling of ECCS water in the core during reflood concentrates boron in the saturated liquid that remains in the core. In addition, current analysis demonstrates that the accumulators do not discharge following a large steam line break for HNP. Therefore, 72 hours is permitted to return the boron concentration to within limits. If a closed isolation valve cannot be immediately opened, the full capability of one accumulator is not available and prompt action is required to place the reactor in a mode where this capability is not required.

3/4.5.2 AND 3/4.5.3 ECCS SUBSYSTEMS

The OPERABILITY of two independent ECCS subsystems ensures that sufficient emergency core cooling capability will be available in the event of a LOCA assuming the loss of one subsystem through any single failure consideration. Either subsystem operating in conjunction with the accumulators is capable of supplying sufficient core cooling to limit the peak cladding temperatures within acceptable limits for all postulated break sizes ranging from the double ended break of the largest RCS cold leg pipe downward. In addition, each ECCS subsystem provides long-term core cooling capability in the recirculation mode during the accident recovery period.

3/4.5 EMERGENCY CORE COOLING SYSTEMS

BASES

ECCS SUBSYSTEMS (Continued)

With the RCS temperature below 350°F, one OPERABLE ECCS subsystem is acceptable without single failure consideration on the basis of the stable reactivity condition of the reactor and the limited core cooling requirements.

The limitation for a maximum of one charging/safety injection pump to be OPERABLE and the Surveillance Requirement to verify one charging/safety injection pump OPERABLE below 325°F provides assurance that a mass addition pressure transient can be relieved by the operation of a single PORV.

