


**ENCLOSURE 1**

**REVISED TITLE FOR FIGURE 1-15  
CORRECTED TECHNICAL SPECIFICATIONS FOR COC NO. 1004  
RENEWED AMENDMENT NO. 11, REVISION 1**

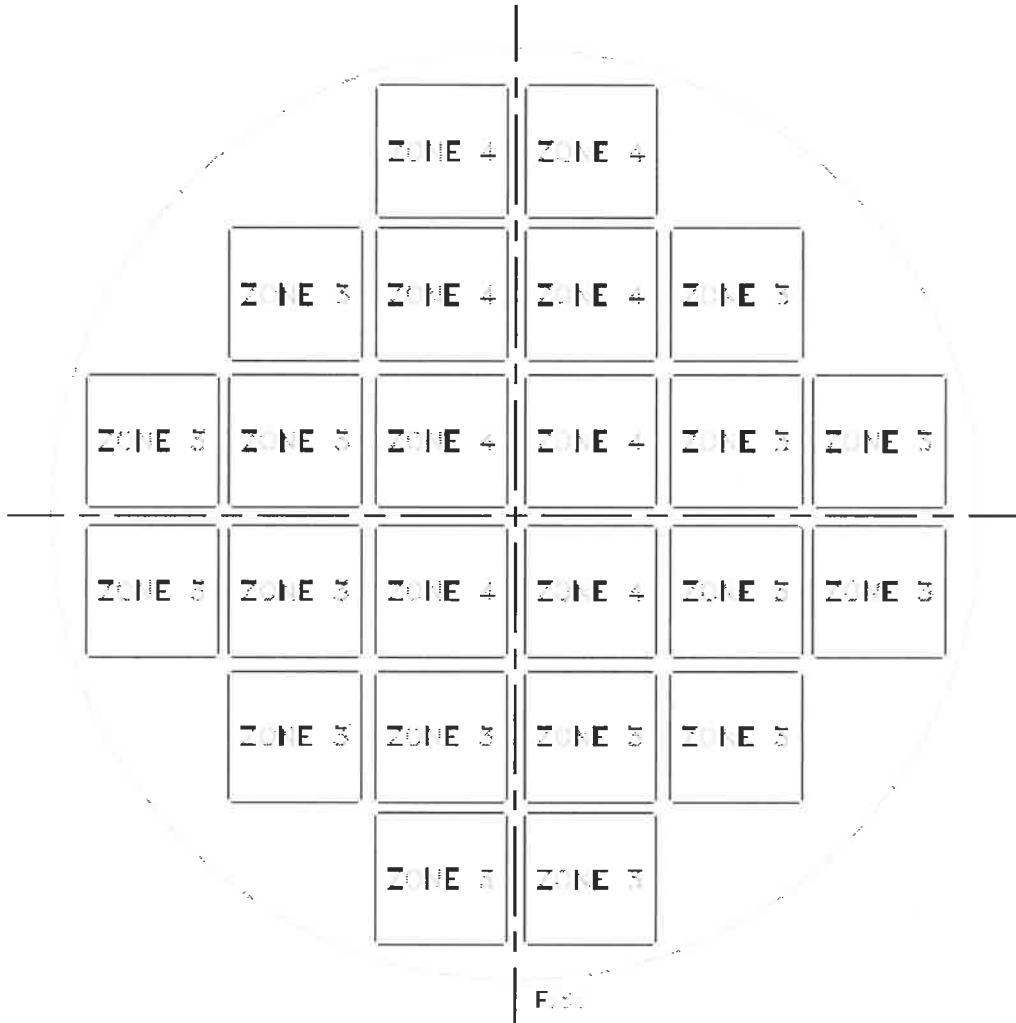

	<b>Zone 1</b>	<b>Zone 2</b>	<b>Zone 3</b>	<b>Zone 4</b>
<b>Maximum Decay Heat (kW/FA)</b>	N/A	N/A	1.5	1.3
<b>Maximum Decay Heat per Zone (kW)</b>	N/A	N/A	Note 1	10.4

Notes:

1. Fuel assemblies with a maximum heat load of 1.5 kW are permitted in Zone 3 as long as the total of 24 kW/canister maximum heat load is maintained.
2. This configuration is applicable to Basket Types 2A, 2B, or 2C only (without aluminum inserts)

**Figure 1-15**  
**Heat Load Zoning Configuration Number 5 for 24PTH-S-LC DSC**  
**(with or without Control Components)<sup>(2)</sup>**