


ENCLOSURE 2

REVISED TITLE FOR FIGURE 1-15  
CORRECTED TECHNICAL SPECIFICATIONS FOR COC NO. 1004  
RENEWED AMENDMENT NO. 13, REVISION 1

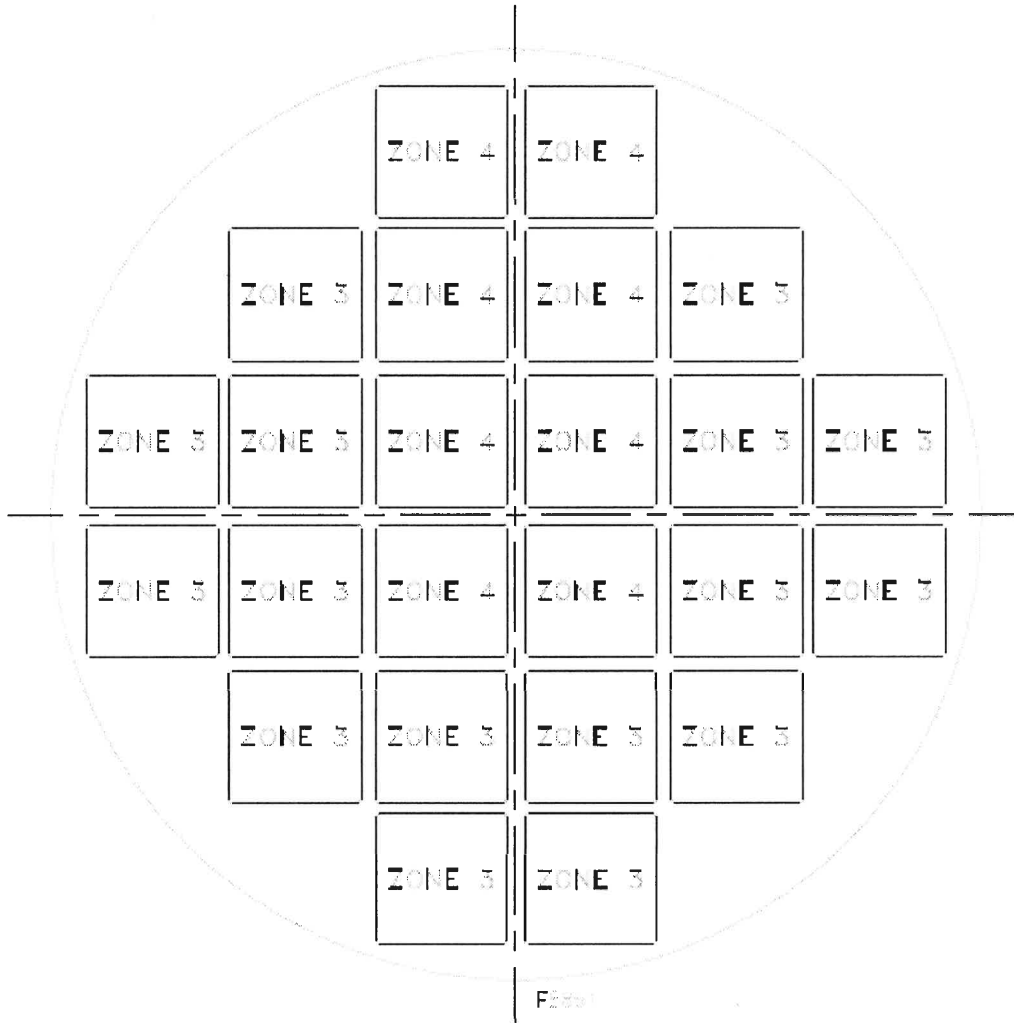

	Zone 1	Zone 2	Zone 3	Zone 4
Maximum Decay Heat (kW/FA)	N/A	N/A	1.5 <sup>(3)</sup>	1.3 <sup>(3)</sup>
Maximum Decay Heat per Zone (kW)	N/A	N/A	Note 1	10.4

1. Fuel assemblies with a maximum heat load of 1.5 kW are permitted in Zone 3 as long as the total of 24 kW/canister maximum heat load is maintained.
2. This configuration is applicable to Basket Types 2A, 2B, or 2C only (without aluminum inserts)
3. The maximum decay heat load allowed for failed fuel assemblies is 0.6 kW/FA. If damaged fuel assemblies are loaded with the failed fuel assemblies in the same basket, the maximum decay heat load allowed for damaged fuel assemblies is also 0.6 kW/FA.

**Figure 1-15**  
**Heat Load Zoning Configuration Number 5 for 24PTH-S-LC DSC**  
**(with or without Control Components)<sup>(2)</sup>**