

**NRC DISTRIBUTION FOR PART 50 DOCKET MATERIAL
(TEMPORARY FORM)**

CONTROL NO: 13231

FILE: _____

FROM: Penn. Power & Light Co Allentown, Pa N W Curtis			DATE OF DOC 11-18-75	DATE REC'D 12-8-75	LTR XXX	TWX	RPT	OTHER
TO: DL			ORIG one signed	CC	OTHER	SENT NRC PDR <u>XX</u> SENT LOCAL PDR <u>XX</u>		
CLASS	UNCLASS XXXXXXXX	PROP INFO	INPUT	NO CYS REC'D 1	DOCKET NO: <u>50-387/388</u>			

DESCRIPTION:
Ltr trans the following:

DIST PER LPM CUTCHIN

PLANT NAME: Susquehanna 1 & 2

ENCLOSURES:
Spent Fuel Pool Ventilation Exhaust System study.....(10 cys encl rec'd)

**DO NOT REMOVE
ACKNOWLEDGED**

see shelf

FOR ACTION/INFORMATION 12-10-75 ehf

BUTLER (L) W/ Copies <i>ltv</i>	SCHWENCER (L) W/ Copies	ZIEMANN (L) W/ Copies	REGAN (E) W/ Copies	REID (L) W/ COPIES
CLARK (L) W/ Copies	STOLZ (L) W/ Copies	DICKER (E) W/ Copies	LEAR (L) W/ Copies	
PARR (L) W/ Copies	VASSALLO (L) W/ Copies	KNIGHTON (E) W/ Copies	SPIES W/ Copies	
KNIEL (L) W/ Copies	PURPLE (L) W/ Copies	YOUNGBLOOD (E) W/ Copies	LPM <i>Cutchin</i> W/ Copies	

INTERNAL DISTRIBUTION

<u>REG FILE</u> NRC PDR OGC, ROOM P-506A <i>ltv</i> GOSSICK/STAFF CASE GIAMBUSSO BOYD MOORE (L) DEYOUNG (L) <i>ltv</i> SKOVHOLT (L) GOLLER (L) (Ltr) P. COLLINS DENISE REG OPR FILE & REGION (2) MIPC	<u>TECH REVIEW</u> SCHROEDER MACCARY KNIGHT PAWLICKI SHAO STELLO HOUSTON NOVAK ROSS IPPOLITO TEDESCO <i>ltv</i> J. COLLINS LAINAS BENAROYA VOLLMER	DENTON GRIMES GAMMILL KASTNER BALLARD SPANGLER <u>ENVIRO</u> MULLER DICKER KNIGHTON YOUNGBLOOD REGAN PROJECT LDR <u>HARLESS</u>	<u>LIC ASST</u> R. DIGGS (L) H. GEARIN (L) E. GOULBOURNE (L) P. KREUTZER (E) J. LEE (L) M. RUSHBROOK (L) <i>ltv</i> S. REED (E) M. SERVICE (L) S. SHEPPARD (L) M. SLATER (E) H. SMITH (L) S. TEETS (L) G. WILLIAMS (E) V. WILSON (L) R. INGRAM (L) M. DUNCAN (E)	<u>A/T IND.</u> BRAITMAN SALTZMAN MELTZ <u>PLANS</u> MCDONALD CHAPMAN DUBE (Ltr) E. COUPE PETERSON HARTFIELD (2) KLECKER EISENHUT WIGGINTON
--	---	--	--	--

EXTERNAL DISTRIBUTION

- | | | | |
|---|--------------------------------|-------------------|------------------------|
| 1 - LOCAL PDR <i>Wilkes Barre, Pa</i> | 1 - TIC (ABERNATHY) (1)(2)(10) | 1 - NATIONAL LABS | 1 - PDR-SAN/LA/NY |
| 1 - NSIC (BUCHANAN) | 1 - W. PENNINGTON, Rm E-201 GT | 1 - CONSULTANTS | 1 - BROOKHAVEN NAT LAB |
| 1 - ASLB | 1 - NEWMARK/BLUME/AGBABIAN | | 1 - G. ULRIKSON ORNL |
| 1 - Newton Anderson | | | |
| -3 - ACRS HOLDING/SENT
<i>AS CAT B</i> | | | |



[Faint, illegible text, possibly a header or introductory paragraph.]

[Faint, illegible text, possibly a section header or a line of dialogue.]

[Large block of very faint, illegible text, likely the main body of the document.]




TWO NORTH NINTH STREET, ALLENTOWN, PA. 18101 PHONE: (215) 821-5151

NOV 18 1975

Director of Nuclear Reactor Regulation
U.S. Nuclear Regulatory Commission
Washington, D.C. 20555

Attn: Dr. Walter R. Butler, Chief
Light Water Reactors Branch No. 1-2

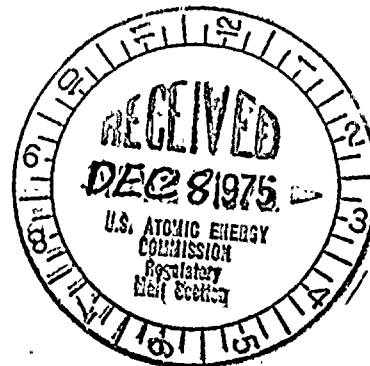

SUSQUEHANNA SES
REACTOR BUILDING VENTILATION SYSTEM
ER 100450 FILE 840-1

Docket Nos. 50-387
and 50-388

PLA-93

REGULATORY DOCKET FILE COPY.


Dear Dr. Butler:

At PP&L's request, Bechtel performed tests on the Spent Fuel Ventilation Exhaust System (SFVES) at an operating plant. Attached is the report containing descriptions of the tests and recommendations for improvements in design.

As a result of this study, the Susquehanna design is being changed to improve the performance of the Reactor Building Ventilation System, Zone III (RBVS III). The SFVES is being deleted and its function replaced by the RBVS III. The RBVS III system capacity has been increased by 38,000 SCFM to 92,450 SCFM to compensate for the deleted SFVES which had been designed to remove 38,000 SCFM of air from the space above the spent fuel pool, reactor cavity and dryer/separator pool.

The RBVS III is now oriented such that all air is supplied along one wall of the reactor building, and is normally exhausted along the opposite wall, thus providing a sweeping air flow across the pool. The exhaust system has been further modified to exhaust air from directly above the pool when the water temperature to air temperature ratio is high causing water vapor to rise above the pool and escape the normal sweep pattern. During this operating mode, the normal wall exhaust ducts can be isolated with dampers.

Attached is a marked-up copy of PSAR Figure 5.3.1A showing the system changes. Figures 5.3.1B and 5.3.1C will have identical modifications. The necessary changes to the PSAR are in preparation and will be submitted in a later amendment.

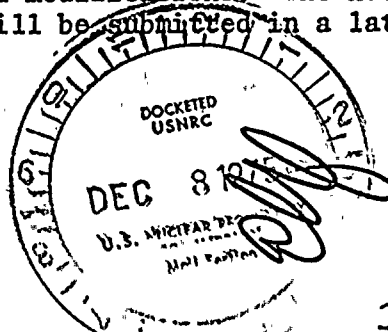

13231



[The text in this section is extremely faint and illegible due to the high contrast of the scan. It appears to be several paragraphs of a document.]

Page 2

If you require additional information, please let us know.

Very truly yours,

A handwritten signature in cursive script, appearing to read "N W Curtis".

N. W. Curtis
V.P.-Engineering & Construction

WEB:MAS



THE UNIVERSITY OF CHICAGO LIBRARY

1963

1963

1963