




HIGHEST REF. DESIGNATION USED						* FOR REF. ONLY		NOTES:		5,35 1,31 6,36 15 45 +20V GND -20V INTERLOCK		21 ANALOG COMMAND (FROM A2)	
D5	TP7	S1	R35	U58	C46	75XX OUTPUT COMMON INPUT	S1-7 OPEN, S1-8 CLOSED, S1-9 OPEN S1-7 OPEN, S1-8 OPEN, S1-9 CLOSED S1-10 (LSB) TO S1-5 (MSB) CARRY CURRENT BALANCE RESISTORS ARE 1/4W 5% & CAPS ARE 5% UNLESS OTHERWISE NOTED						
REF. DESIGNATION NOT USED						75XX OUTPUT INPUT COMMON	GATE SIGNAL (FOUR LEG RECTIFIER) DESIGNATION (SINGLE LEG RECTIFIER) DESIGNATION (DOUBLE LEG RECTIFIER)						
U38,39,52,27													

FOR INFORMATION ONLY																S/D A13A3 CHG DIGI MK2U																EA															
EXIDE ELECTRONICS																SCHEMATIC A13A3																CHG. SYNC & DIGITAL CONTROL															
REV. 1.0																DATE: 1/14/82																REF. 101 072 372															
D 110																071																308															

9305050130 E

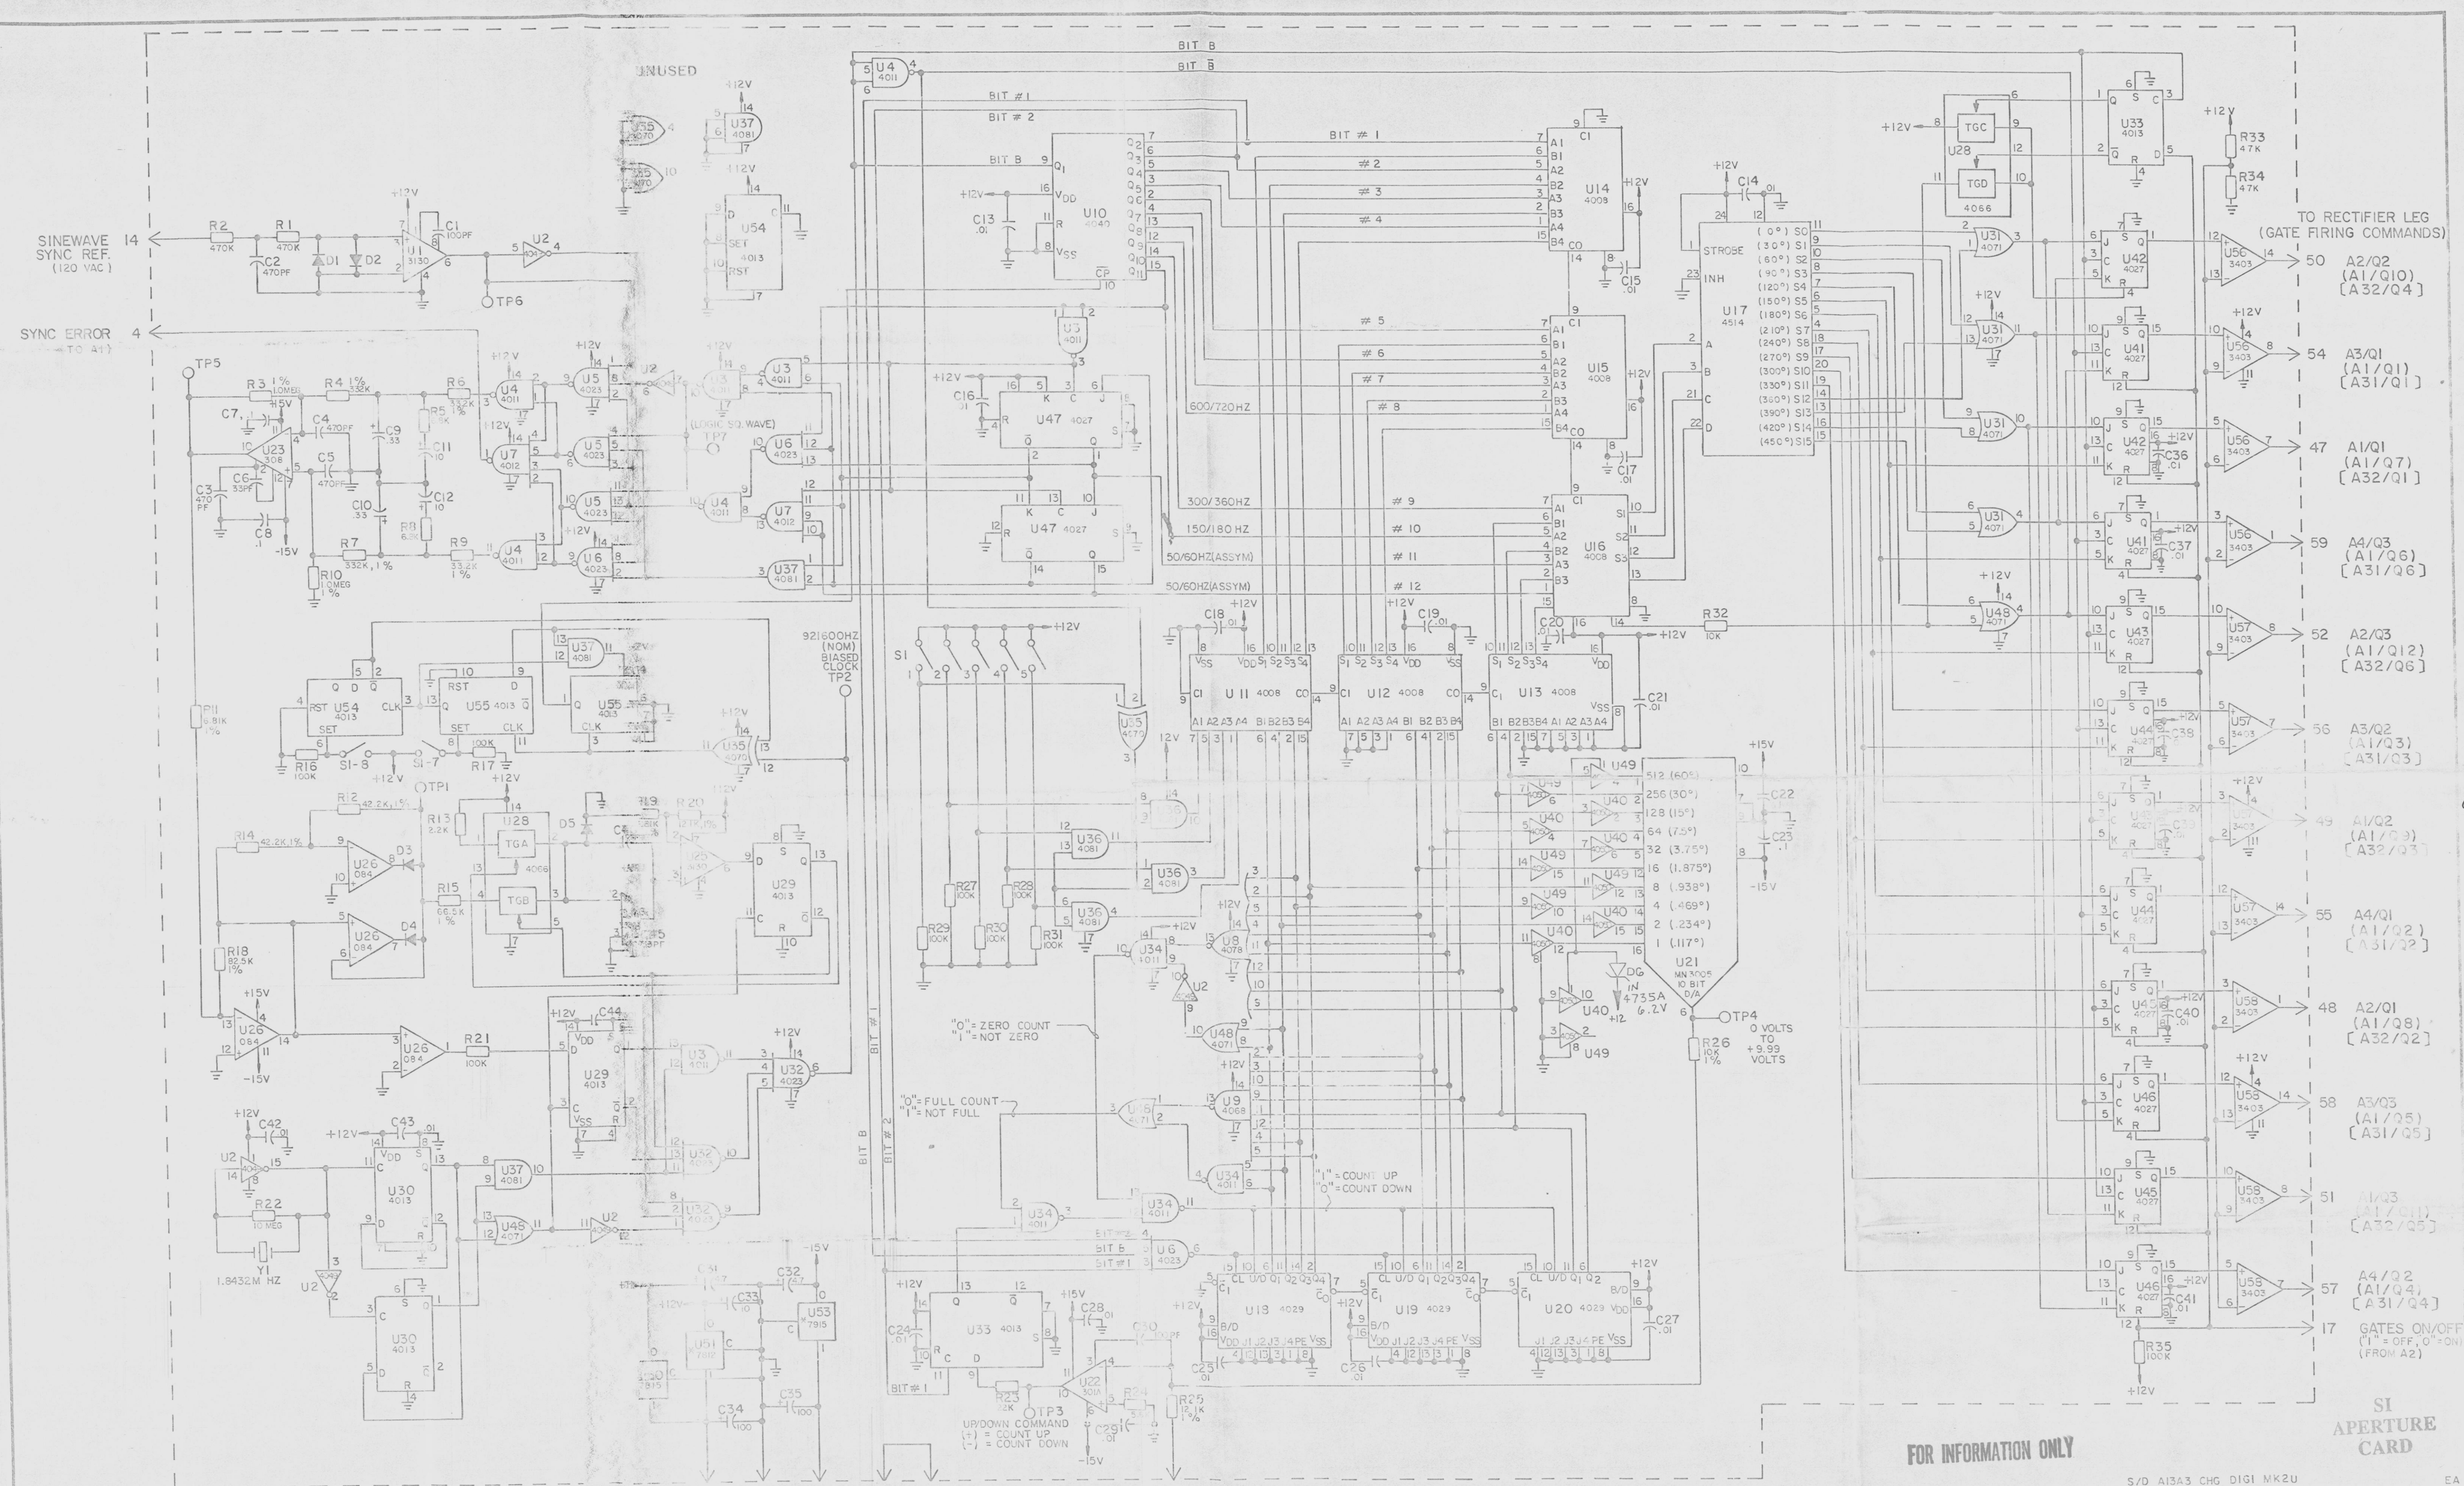