



UNITED STATES
NUCLEAR REGULATORY COMMISSION
WASHINGTON, D.C. 20555-0001

June 13, 2019

Mr. Paul Fessler
Senior Vice President and
Chief Nuclear Officer
DTE Electric Company
Fermi 2 – 260 TAC
6400 North Dixie Highway
Newport, MI 48166

SUBJECT: FERMI 2 - RELIEF FROM THE REQUIREMENTS OF THE ASME CODE
(EPID L-2019-LLR-0024)

Dear Mr. Fessler:

By letter dated February 28, 2019 (Agencywide Documents Access and Management System (ADAMS) Accession No. ML19059A327), DTE Electric Company requested the use of an alternative to certain American Society of Mechanical Engineers Boiler and Pressure Vessel Code (ASME Code) requirements at Fermi 2. The proposed alternative would allow the licensee to use ASME Code Case N-513-4, "Evaluation Criteria for Temporary Acceptance of Flaws in Moderate Energy Class 2 or 3 Piping Section XI, Division 1," for the evaluation and temporary acceptance of flaws in moderate energy Class 2 and 3 piping in lieu of specified ASME Code requirements. Specifically, pursuant to Title 10 of the *Code of Federal Regulations* (10 CFR) 50.55a(z)(2), the licensee requested to use an alternative on the basis that complying with the specified requirement would result in hardship or unusual difficulty.

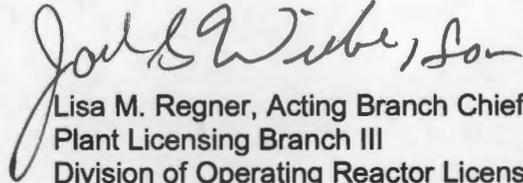
The NRC staff has reviewed the subject request and concludes, as set forth in the enclosed safety evaluation, that the proposed alternative provides reasonable assurance of structural integrity of the subject components and that complying with IWC-3100 and IWD-3100 of the ASME Code, Section XI, would result in a hardship or unusual difficulty without a compensating increase in the level of quality and safety. All other ASME Code, Section XI requirements for which relief was not specifically requested and approved in the subject requests for relief remain applicable, including third-party review by the Authorized Nuclear Inservice Inspector. Accordingly, the staff concludes that the licensee has adequately addressed all the regulatory requirements set forth in 10 CFR 50.55a(z)(2). Accordingly, the staff concludes that the licensee has adequately addressed all the regulatory requirements set forth in 10 CFR 50.55a(z)(2).

P. Fessler

- 2 -

If you have any questions, please contact the Project Manager, Sujata Goetz at 301-415-8004 or via e-mail at Sujata.Goetz@nrc.gov.

Sincerely,

A handwritten signature in cursive script, appearing to read "Lisa M. Regner".

Lisa M. Regner, Acting Branch Chief
Plant Licensing Branch III
Division of Operating Reactor Licensing
Office of Nuclear Reactor Regulation

Docket No.: 50-341

Enclosure: Safety Evaluation

cc: Listserv



UNITED STATES
NUCLEAR REGULATORY COMMISSION
WASHINGTON, D.C. 20555-0001

SAFETY EVALUATION BY THE OFFICE OF NUCLEAR REACTOR REGULATION

RELIEF REQUEST RR-A40 REGARDING PROPOSED ALTERNATIVE

TO UTILIZE ASME CODE CASE N-513-4

DTE ELECTRIC COMPANY

FERMI, UNIT 2

DOCKET NO. 50-341

1.0 INTRODUCTION

By letter dated February 28, 2019 (Agencywide Documents Access and Management System (ADAMS) Accession No. ML19059A327), DTE Electric Company (DTE, the licensee), requested the use of an alternative to certain American Society of Mechanical Engineers Boiler and Pressure Vessel Code (ASME Code) requirements at Fermi 2. The proposed alternative would allow the licensee to use ASME Code Case N-513-4, "Evaluation Criteria for Temporary Acceptance of Flaws in Moderate Energy Class 2 or 3 Piping Section XI, Division 1," for the evaluation and temporary acceptance of flaws in moderate energy Class 2 and 3 piping in lieu of specified ASME Code requirements. Specifically, pursuant to Title 10 of the *Code of Federal Regulations* (10 CFR) 50.55a(z)(2), the licensee requested to use an alternative on the basis that complying with the specified requirement would result in hardship or unusual difficulty.

2.0 REGULATORY EVALUATION

The licensee proposed an alternative to the acceptance standards of ASME Code, Section XI, Articles IWC-3100 and IWD-3100.

Regulation 10 CFR 50.55a(g)(4), "Inservice inspection [ISI] standards requirements for operating plants," states, in part, that ASME Code Class 1, 2, and 3 components (including supports) meet the requirements, except for the design and access provisions and the pre-service examination requirements, set forth in the ASME Code, Section XI, of the ASME Code.

Regulation 10 CFR 50.55a(z), "Alternatives to codes and standards requirements," states, in part, that alternatives to the requirements of paragraph (g) of 10 CFR 50.55a may be used, when authorized by the US Nuclear Regulatory Commission (NRC), if the licensee demonstrates that: (1) the proposed alternative provides an acceptable level of quality and safety, or (2) compliance with the specified requirements would result in hardship or unusual difficulty without a compensating increase in the level of quality and safety.

Based on the above, and subject to the following technical evaluation, the NRC staff finds that regulatory authority exists for the licensee to request the use of an alternative and the NRC to authorize the proposed alternative.

3.0 TECHNICAL EVALUATION

3.1.1 ASME Code Components Affected

The affected components are ASME Code Class 2 and 3 moderate energy piping systems, within the scope of Code Case N-513-4, whose maximum operating temperature does not exceed 200 degrees Fahrenheit and whose operating pressure does not exceed 275 pounds per square inch gauge. The components are classified in Tables IWC-2500 and IWD-2500 of the ASME Code, Section XI, as Examination Category C-H and D-B (Pressure Retaining Components), Item Nos. C7.10 and D2.10.

3.1.2 Applicable Code Edition and Addenda

The Code of Record for the fourth 10-year ISI interval at Fermi 2 is ASME Code, Section XI, 2013 Edition.

3.1.3 Applicable Code Requirement

ASME Code, Section XI, subarticle IWC-3100, applies to Class 2 components and requires that flaws exceeding the specified acceptance criteria be corrected by repair, replacement or be deemed acceptable by analytic evaluation. ASME Code, Section XI, subarticle IWD-3100, applies to Class 3 components and requires that components exceeding the applicable acceptance standards be subject to supplemental examination, or to a repair or replacement activity.

3.1.4 Reason for Request

The licensee stated that ASME Code Case N-513-3, "Evaluation Criteria for Temporary Acceptance of Flaws in Moderate Energy Class 2 or 3 Piping Section XI, Division 1," currently approved for use in Regulatory Guide (RG) 1.147 "Inservice Inspection Code Case Acceptability, ASME Section XI, Division 1," Revision 18, contains limitations regarding the evaluation of flaws in certain locations of moderate energy piping components. Many of these limitations have been addressed in Code Case N-513-4; however, the NRC has not approved generic use of ASME Code Case N-513-4. Under current code requirements, moderately degraded piping could require a plant shutdown within the required action statement time frames to repair observed degradation. The licensee stated that the resulting radiation dose accrual and plant risk would fail to provide a compensating increase in levels of quality or safety when the degraded condition is demonstrated to retain adequate margin for component functionality.

3.1.5 Licensee's Proposed Alternative and Basis for Use

The licensees proposed alternative, pursuant to 10 CFR 50.55a(z)(2), is to use ASME Code Case N-513-4 for the evaluation and temporary acceptance of flaws in moderate energy Class 2 and 3 piping in lieu of specified ASME Code, Section XI, requirements. In addition to the requirements of the code case, the licensee's proposed alternative includes the determination of an allowable leakage rate by dividing the critical leakage rate by a safety factor of four.

The licensee stated that limitations in Code Case N-513-3, related to its use on piping components such as elbows, bent pipe, reducers, expanders, and branch tees and external tubing or piping attached to heat exchangers, have been addressed in Code Case N-513-4. The licensee provided a high-level overview of changes introduced in N-513-4.

The licensee stated that "Technical Basis for Proposed Fourth Revision to ASME Code Case N-513," from the proceedings of the ASME 2014 Pressure Vessels & Piping Conference, (PVP2014-28355) July 20-24, 2014, in Anaheim, California (PVP2014-28355), was previously submitted to the NRC by another licensee (ADAMS Accession No. ML16029A003) to support the use of Code Case N-513-4. The licensee stated that the technical information in PVP2014-28355 is applicable to Fermi 2's use of Code Case N-513-4.

The licensee stated that the effects of leakage may impact the operability determination, or the plant flooding analyses specified in paragraph 1(f) of Code Case N-513-4. For a leaking flaw, the licensee stated that the allowable leakage rate will be determined by dividing the critical leakage rate by a safety factor of four. The critical leakage rate is determined as the limiting leakage rate that can be tolerated and may be based on the allowable loss of inventory or the maximum leakage that can be tolerated relative to room flooding, among others. The licensee contends that applying a safety factor of four to the critical leakage rate provides quantitative measurable limits which ensure the operability of the system and early identification of issues that could erode defense-in-depth and lead to adverse consequences.

The licensee stated that the application of Code Case N-513-4, along with leakage limits, will maintain acceptable structural and leakage integrity while minimizing plant risk and personnel radiation exposure as compared to repairing instances of degradation in certain components under the current criteria.

3.1.6 Hardship Justification

The licensee stated that under current code requirements, moderately degraded piping could require a plant shutdown within the required action statement timeframes. The resulting radiation dose accrual and plant risk would fail to provide a compensating increase in levels of quality or safety when the degraded condition is demonstrated to retain adequate margin for component functionality. The licensee contends that its proposed alternative will maintain acceptable structural and leakage integrity while minimizing plant risk and personnel radiation exposure as compared to repairing instances of degradation in certain components under the current criteria.

3.1.7 Duration of Proposed Alternative

The licensee stated in its letter dated February 28, 2019, that the duration of the proposed alternative at Fermi 2 is the fourth 10-year ISI interval which began on May 2, 2019, and is scheduled to end on December 31, 2029, or until the NRC publishes Code Case N-513-4 in RG 1.147 or another NRC document.

3.2 NRC Staff Evaluation

The NRC staff evaluated the adequacy of the proposed alternative in maintaining structural integrity of piping components identified in the relief request. Code Case N-513-3, which is conditionally approved for use in RG 1.147, provides alternative evaluation criteria for temporary acceptance of flaws, including through-wall flaws, in moderate energy Class 2 and 3 piping.

However, Code Case N-513-3 contains limitations that the licensee considers restrictive and could result in an unnecessary plant shutdown. Code Case N-513-3 is limited to straight pipe with provisions for flaws that extend for a short distance, at the pipe to fitting weld, into the fitting. Evaluation criteria for flaws in elbows, bent pipe, reducers, expanders, branch tees and heat exchangers are not included within the scope of N-513-3. Code Case N-513-4 addresses these limitations. Given that the previous revision of Code Case N-513-3 is conditionally approved for use in RG 1.147, Revision 18, the NRC staff focused its review of the relief request on the differences between Code Cases N-513-3 and N-513-4.

The significant changes in Code Case N-513-4 include: (1) revised temporary acceptance period; (2) added flaw evaluation criteria for elbows, bent pipe, reducers/expanders and branch tees; (3) expanded applicability to heat exchanger tubing or piping; (4) limited use to liquid systems; (5) clarified treatment of service load combinations; (6) revised treatment of flaws in austenitic pipe flux welds; (7) revised minimum wall thickness acceptance criteria to consider longitudinal stress in addition to hoop stress; and (8) revised leakage monitoring requirements. The NRC staff also evaluated the licensee's proposed limitation on the leakage rate and its hardship justification.

The NRC staff notes that many requirements specified in Code Case N-513-4 are not discussed in this safety evaluation, but they should not be considered as less important. As part of the NRC-approved proposed alternative, all requirements in the code case must be followed. Any exceptions or restrictions to the code case that are approved in this safety evaluation also need to be followed.

3.2.1 Temporary Acceptance Period

Code Case N-513-3 specifies a temporary acceptance period of a maximum of 26 months and accepted for use in RG 1.147, Revision 18, with the following condition: "The repair or replacement activity temporarily deferred under the provisions of this Code Case shall be performed during the next scheduled outage." Code Case N-513-4 includes wording that limits the use of the code case to the next refueling outage. The NRC staff finds that Code Case N-513-4 appropriately addresses the NRC condition, and is, therefore, acceptable.

3.2.2 Flaw Evaluation Criteria for Elbows, Bent Pipe, Reducers/Expanders and Branch Tees.

Evaluation and acceptance criteria have been added to Code Case N-513-4 for flaws in elbows, bent pipe, reducers, expanders and branch tees using a simplified approach which is based on the Second International Piping Integrity Research Group (IPIRG-2) program reported in NUREG/CR-6444 BMI-2192 "Fracture Behavior of Circumferentially Surface-cracked Elbows," March 1996.

The flaw evaluation methodology approach in Code Case N-513-4 for piping components is conducted as if the flaw exists in a straight pipe by scaling hoop and axial stresses using ASME Code piping design code stress indices and stress intensification factors to account for the stress variations caused by the geometric differences. Equations used in the code case are consistent with the piping design by rule approach in ASME Code, Section III, NC/ND-3600. NUREG/CR-6444 shows that this approach is conservative for calculating stresses used in flaw evaluations in piping elbows and bent pipe. The code case also applies this methodology to reducers, expanders and branch tees.

The NRC staff finds that the flaw evaluation and acceptance criteria in Code Case N-513-4 for elbows, bent pipe, reducers, expanders and branch tees is acceptable because: (1) the flaw evaluation methods in the code case are consistent with ASME Code, Section XI and Section III, design by rule approach, and (2) provides a conservative approach as confirmed by comparing the failure moments predicted using this approach to the measured failure moments from the elbow tests for through-wall circumferential flaws conducted as part of the IPIRG-2 program.

3.2.3 Flaw Evaluation in Heat Exchanger Tubing or Piping

Code Case N-513-4 has been revised to include heat exchanger external tubing or piping provided that the flaw is characterized in accordance with Section 2(a) of the code case and leakage is monitored. Section 2(a) requires that the flaw geometry be characterized by volumetric inspection or physical measurement.

The NRC staff determined that the flaw evaluation criteria in Code Case N-513-4 for straight or bent piping, as appropriate, can be applied to heat exchanger external tubing or piping. The staff determined the methods for evaluating flaws in straight pipe are acceptable since they are currently allowed in Code Case N-513-3. For bent pipe, the acceptability is described in Section 3.2.2 above. Therefore, the NRC staff finds inclusion of heat exchanger external tubing or piping in the code case to be acceptable because only heat exchanger tubing flaws that are accessible for characterization and leakage monitoring may be evaluated in accordance with the code case and the code case provides acceptable methods for the evaluation of flaws.

3.2.4 Limit Use to Liquid Systems

The use of Code Case N-513-4 is specifically limited to liquid systems. The NRC staff finds this change acceptable since Code Case N-513 is not intended to apply to air or other compressible fluid systems.

3.2.5 Treatment of Service Load Combinations

Modifications in N-513-4 now make clear that all service load combinations must be considered in flaw evaluations to determine the most limiting condition. Although previously implied in Code Case N-513-3, Code Case N-513-4 makes this requirement clear. The NRC staff finds this change acceptable.

3.2.6 Treatment of flaws in austenitic pipe flux welds

Paragraph 3.1(b) of N-513-4 contains modifications which include a reference to ASME Code Section XI, Appendix C, C-6320, to address flaws in austenitic stainless-steel pipe flux welds. The ASME Code, Section XI, Appendix C, C-6000, permits the use of elastic-plastic fracture mechanics criteria in lieu of limit load criteria to analyze flaws in stainless steel pipe flux welds. Equation 1 of the code case was also revised to be consistent with ASME Code, Section XI, Appendix C, C-6320, so the equation can be used for flaws in austenitic stainless steel pipe flux welds. The NRC staff finds this acceptable because the modification to the code case now includes the appropriate methods for the evaluation of stainless steel pipe flux welds in accordance with ASME Code, Section XI.

3.2.7 Minimum Wall Thickness Acceptance Criteria to Consider Longitudinal Stress

Although it is unlikely that a minimum wall thickness calculated based on the longitudinal stress would be limiting when compared to a minimum wall thickness calculated based on hoop stress, Code Case N-513-4 includes revisions that require consideration of longitudinal stress in the calculation of minimum wall thickness. Previous versions of the code case only required the use of hoop stress. The NRC staff finds this acceptable because it will ensure that the more limiting of the longitudinal or hoop stress is used to determine minimum wall thickness.

3.2.8 Leakage Monitoring for Through-Wall Flaws

Code Case N-513-3 required through-wall leakage to be observed by daily walkdowns to confirm the analysis conditions used in the flaw evaluation remain valid. Code Case N-513-4 modifies this requirement by continuing to require that leakage be monitored daily but now allows other techniques to be used to monitor leakage such as using visual equipment or leakage detection systems to determine if leakage rates are changing. The NRC staff finds this change acceptable because the code case continues to require through-wall leaks to be monitored daily and the expanded allowable monitoring methods should have no adverse impact.

3.2.9 Leakage Rate

Code Case N-513-3, paragraph 1(d), states: "The provisions of this Case demonstrate the integrity of the item and not the consequences of leakage. It is the responsibility of the Owner to demonstrate system operability considering effects of leakage." Code Case N-513-4 modified the last sentence, now located in paragraph (f), to state: "It is the responsibility of the Owner to consider effects of leakage in demonstrating system operability and performing plant flooding analyses."

The licensee stated that the allowable leakage rate will be determined by dividing the critical leakage rate by a safety factor of four. The critical leakage rate is determined as the limiting leakage rate that can be tolerated and may be based on the allowable loss of inventory or the maximum leakage that can be tolerated relative to room flooding, among others. The licensee contends that applying a safety factor of four to the critical leakage rate, provides quantitative measurable limits which ensure the operability of the system and early identification of issues that could erode defense-in-depth and lead to adverse consequences.

Code Cases N-513-3 and N-513-4 do not contain leakage limits for components with through-wall flaws. The NRC staff finds that the licensee's approach of applying a safety factor of four to the critical leakage rate is acceptable because it will provide sufficient time for corrective measures to be taken before significant increases in leakage erodes defense-in-depth which could lead to adverse consequences.

3.2.10 Hardship Justification

The NRC staff finds that performing a plant shutdown to repair the subject piping would cycle the unit and increase the potential of an unnecessary transient, resulting in undue hardship. Additionally, performing ASME Code repair/replacements during normal operation would place the plant at higher safety risk than warranted by taking safety-related components out of service that are capable of performing their intended function. Therefore, the NRC staff determines that

compliance with the specified ASME Code repair requirements would result in hardship or unusual difficulty without a compensating increase in the level of quality and safety.

3.3 Summary

The NRC staff finds that the proposed alternative will provide reasonable assurance of the structural integrity because: (1) Code Case N-513-4 addresses the NRC condition in RG 1.147 for Revision 3 of the code case; (2) flaw evaluations in component types added to Revision 4 of the code case are based on acceptable methodologies; and (3) the method for determining the allowable leakage rate is adequate to provide early identification of a significant increase in leakage. In addition, complying with ASME Code, Section XI requirements would result in hardship or unusual difficulty without a compensating increase in the level of quality and safety.

4.0 CONCLUSION

As set forth above, the NRC staff determines that the proposed alternative provides reasonable assurance of structural integrity of the subject components and that complying with IWC-3100, and IWD-3100 of the ASME Code, Section XI, would result in a hardship or unusual difficulty without a compensating increase in the level of quality and safety. All other ASME Code, Section XI requirements for which relief was not specifically requested and approved in the subject requests for relief remain applicable, including third-party review by the Authorized Nuclear Inservice Inspector. Accordingly, the staff concludes that the licensee has adequately addressed all the regulatory requirements set forth in 10 CFR 50.55a(z)(2).

Therefore, the NRC staff authorizes the use of the licensee's proposed alternative relief RR-A40 described in the licensee's February 28, 2019, letter at Fermi 2 for the remainder of fourth 10-year ISI interval which is scheduled to end December 31, 2029, or until such time as the

NRC approves Code Case N-513-4 for general use through revision of NRC RG 1.147 or other NRC document.

Principal Contributor(s): Robert Davis, NRR/DMLR/MPHB

Date of issuance: June 13, 2019

SUBJECT: FERMI 2 - RELIEF FROM THE REQUIREMENTS OF THE ASME CODE
(EPID L-2019-LLR-0024) DATED JUNE 13, 2019

DISTRIBUTION:

PUBLIC

PM File Copy

RidsACRS_MailCTR Resource

RidsNrrDorLpl3 Resource

RidsNrrDMLR/MPHB Resource

RidsNrrLASRohrer Resource

RidsNrrPMFermi2 Resource

RidsRgn3MailCenter Resource

ADAMS Accession No. ML19143A219

OFFICE	NRR/DORL/LPL3/PM	NRR/DORL/LPL3/LA	NRR/DMLR/MPHB	NRR/DORL/LPL3/PM	NRR/DORL/LPL3/BC
NAME	SGoetz	SRohrer	SCumblidge	SGoetz	LRegner
DATE	6/11/19	6/10/19	5/20/19	6/17/19	6/13/19

OFFICIAL RECORD COPY