USGS
science for a changing world

The Retention and Release of Groundwater Contaminants in Fractured Rock and Other Dual-Porosity Media by Matrix Diffusion and "Effective" Matrix Diffusion

Allen M. Shapiro

U.S. Geological Survey, Reston, VA

Acknowledgements:

U.S. Geological Survey Toxic Substances Hydrology Program

SERDP DOD • EPA • DOE

ESTCP

UNITED STATES NAVY

ALLEN SHAPIRO

Digitally signed by ALLEN SHAPIRO
Date: 2019.10.08 07:24:57 -04'00'

Hierarchy of void space

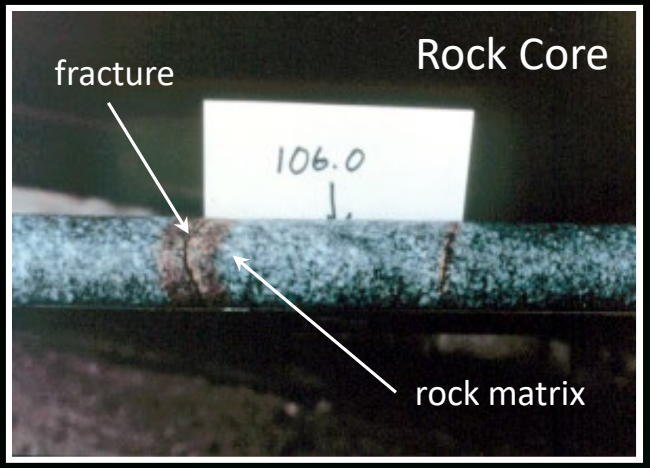

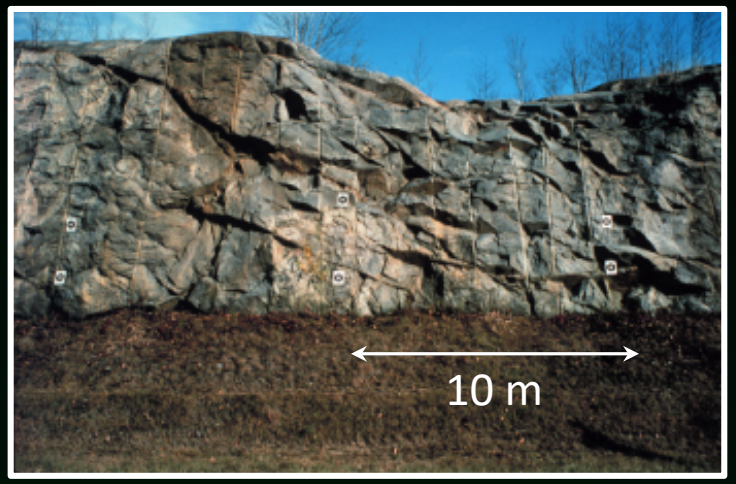

Fault Zone

Shapiro et al., 2007

Fractured Rock

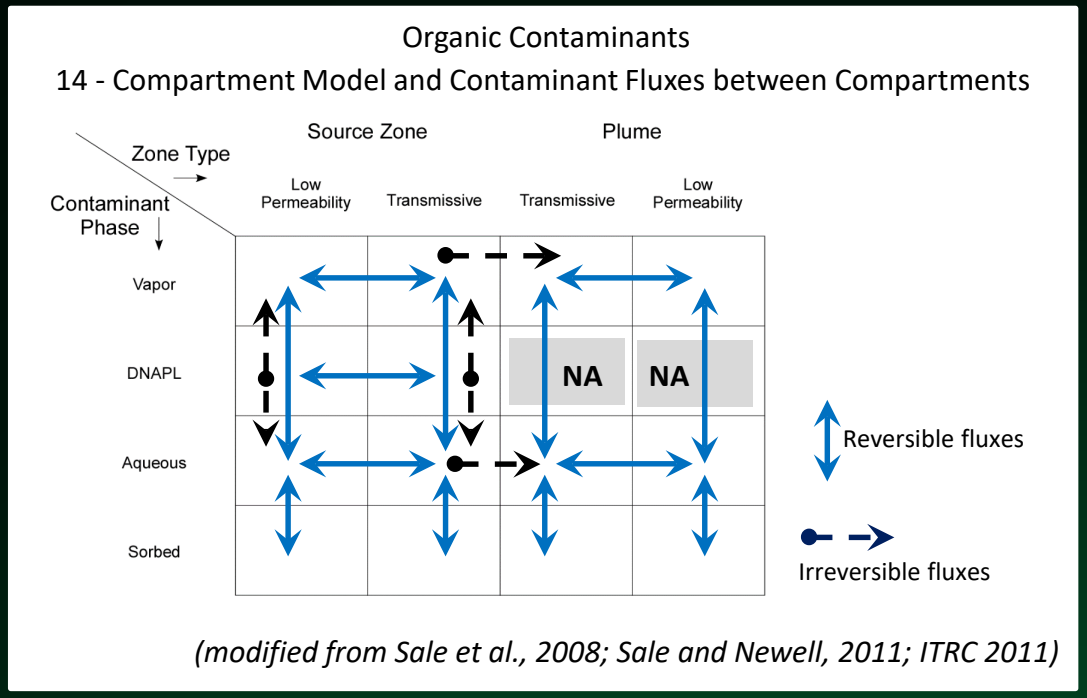

(modified from Sale et al., 2008; Sale and Newell, 2011; ITRC 2011)

Low-permeability (flow-limited) regions of aquifer:

- Do not contribute to volumetric flow
- Act as reservoirs for contaminant storage
- Mass fluxes into and out of low-permeability regions defined via diffusive exchange with more permeable aquifer materials

USGS

Flow-Limited Regions of an Aquifer

- *Low permeability material may not be significant with respect to volumetric groundwater flow. . .*
- *During contaminant "loading", dye diffuses from permeable pathways to low-permeability materials due to concentration gradient*
- *During "flushing", dye diffuses from low-permeability materials to permeable pathways due to concentration gradient*

❑ Low-permeability material embedded in a permeable sand

Dye injection. . .

from Doner and Sale, Colorado State University

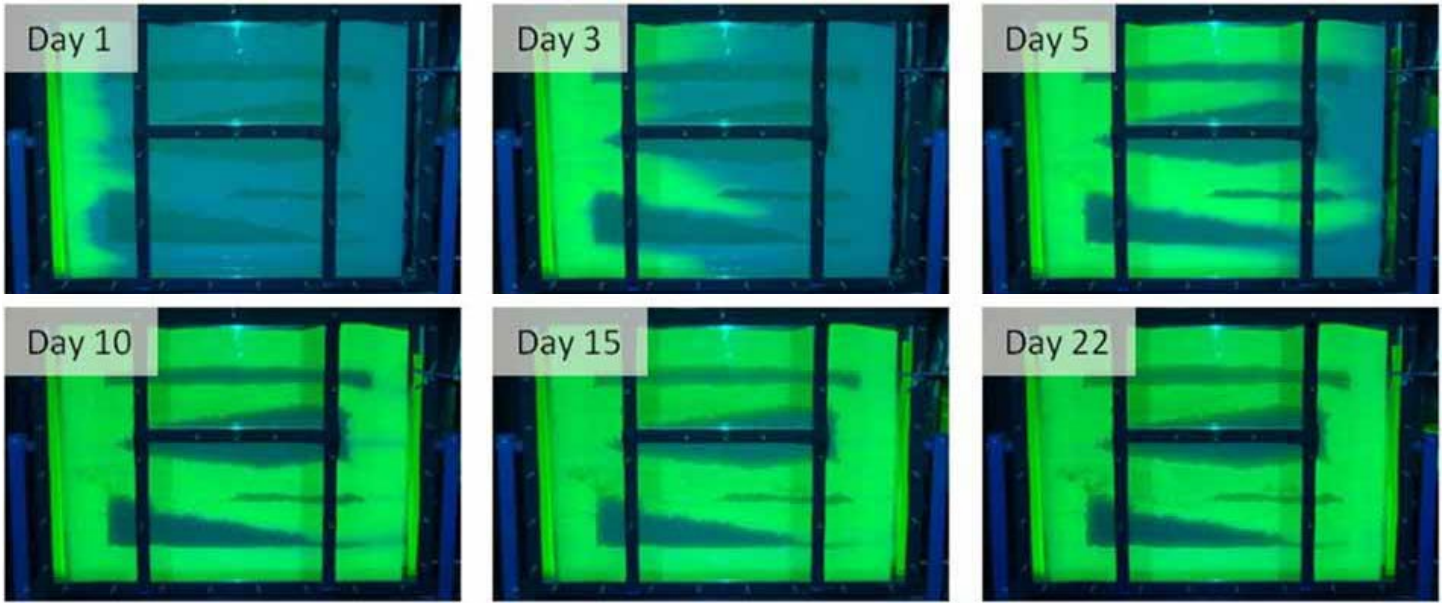

Flushing. . .

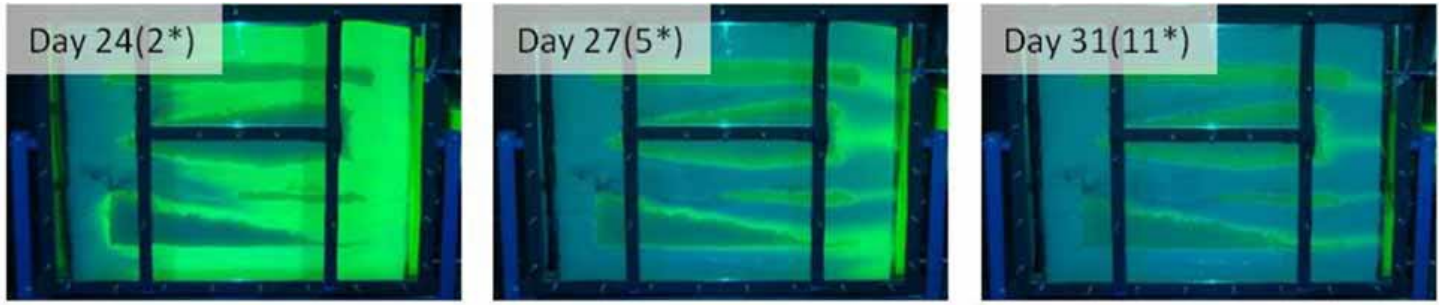

(* denotes days since flushing started)

USGS

Matrix Diffusion in Fractured Rock: Contaminant Retention and Release

Example of chemical transport and matrix diffusion in a single fracture. . .

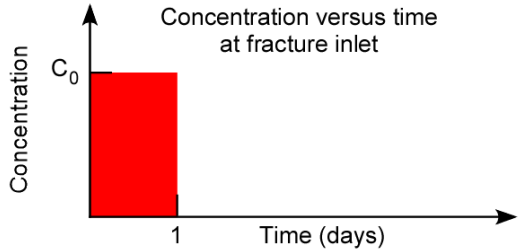

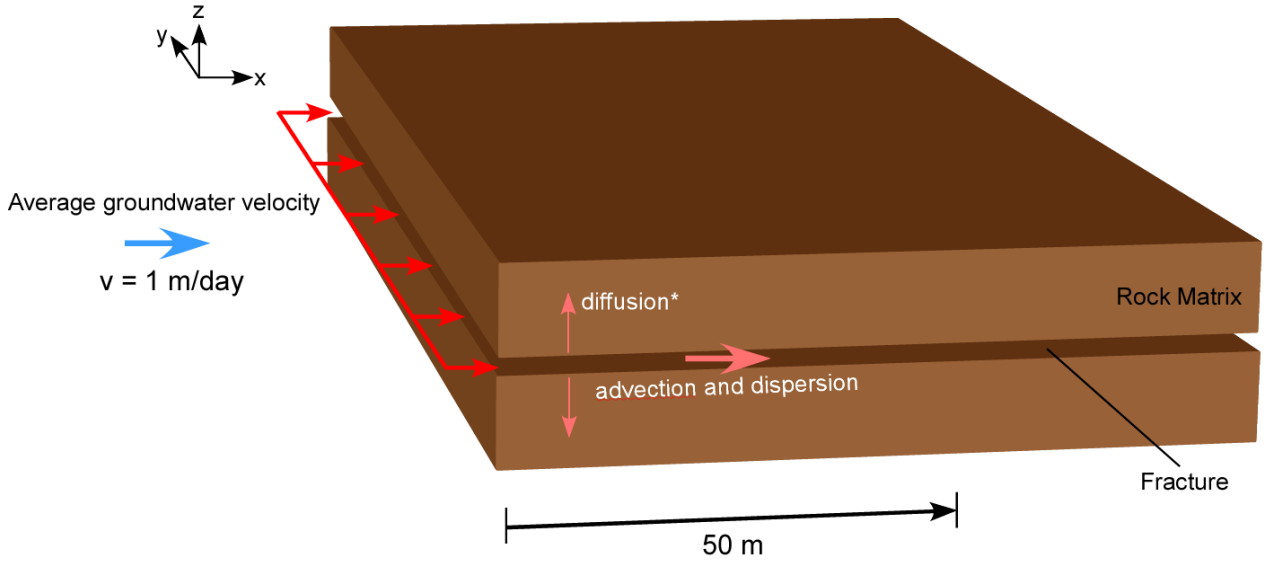

Dispersion: $D = \alpha_L|v|$

Matrix diffusion: $D_m = n\,\gamma\,D_w$

*direction of diffusion depends on the local concentration gradient in the z-direction

Longitudinal dispersivity: α_L

Matrix porosity: n

Matrix formation factor: γ

Free water diffusion: D_w

Shapiro et al., 2007

USGS

Matrix Diffusion in Fractured Rock: Contaminant Retention and Release

Example of chemical transport and matrix diffusion in a single fracture. . .

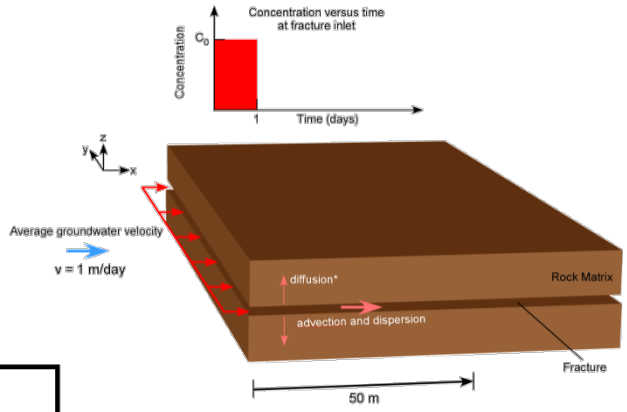

Chemical response in the fracture (50 m downgradient). . .

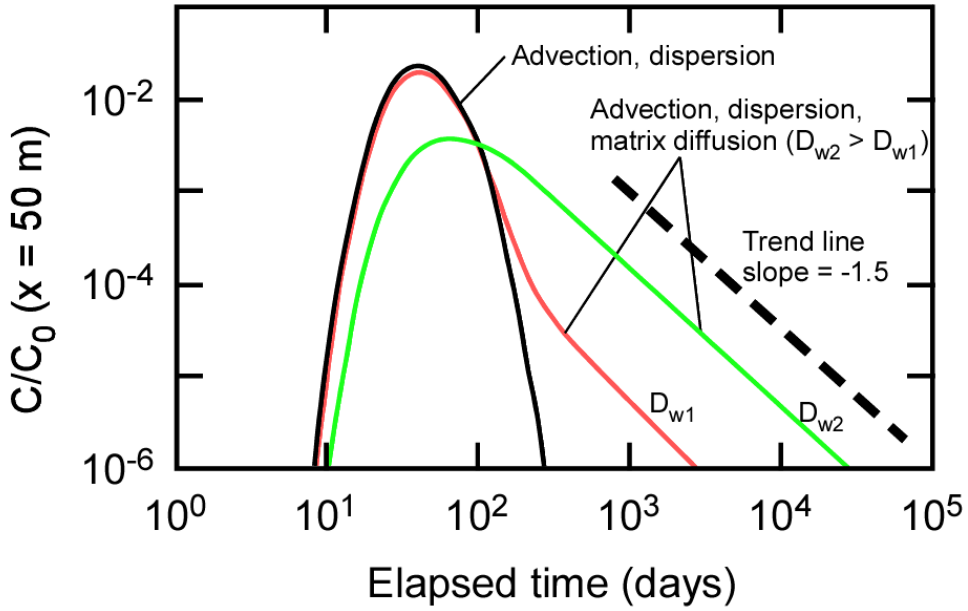

Dispersion: $D = \alpha_L |v|$

Matrix Diffusion: $D_m = n \gamma D_w$

Longitudinal dispersivity: α_L

Matrix porosity: n

Matrix formation factor: γ

Free-water diffusion: D_{w1}, D_{w2}

Shapiro et al., 2007

USGS

Matrix Diffusion in Fractured Rock: A Blessing or a Curse ?

The "curse" of matrix diffusion. . .

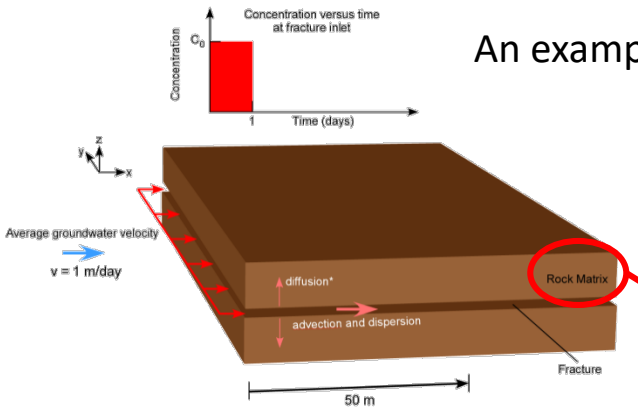

An example: Pulse injection and monitoring 50 m downgradient

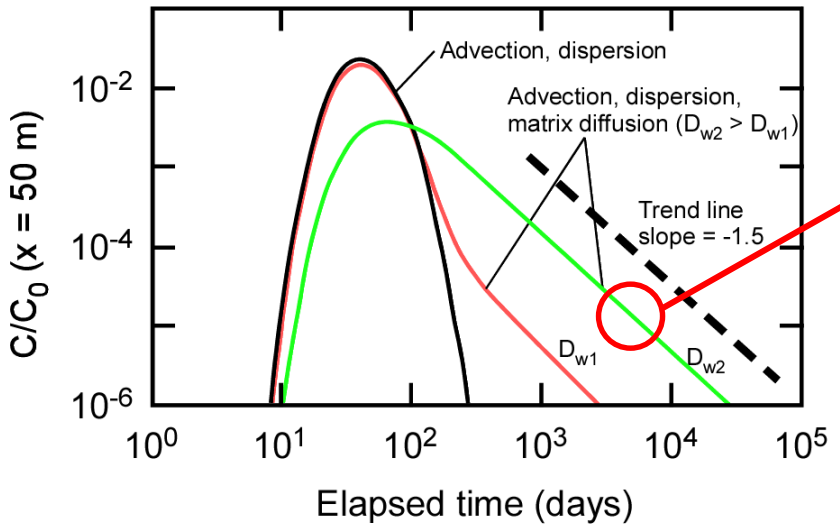

the curse. . .retention of contaminants in flow limited regions of the aquifer. .

limiting access to remediation amendments

slow release of contaminants to permeable pathways yields a long-term contaminant source

Shapiro et al., 2007

USGS

Matrix Diffusion in Fractured Rock: A Blessing or a Curse ?

The "blessing" of matrix diffusion. . .

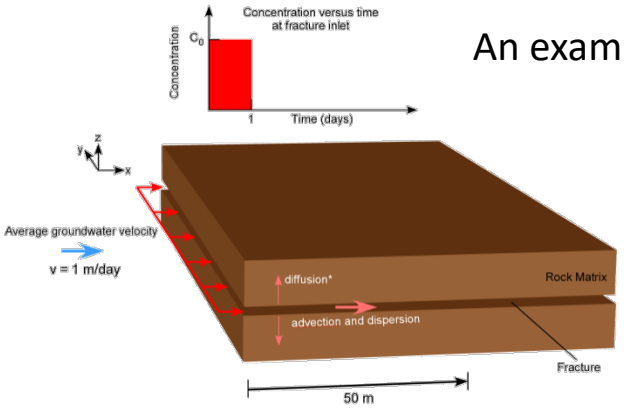

An example: Pulse injection and monitoring 50 m downgradient

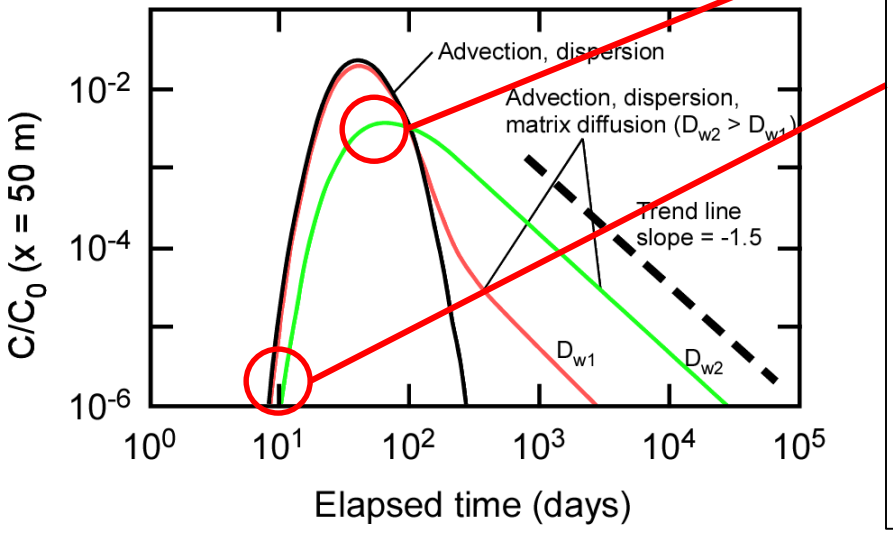

<u>the blessing</u>. . .retention of contaminants in flow limited regions of the aquifer. . .

attenuating the downgradient concentrations. . .

delaying downgradient migration of contaminants. .

. . .matrix diffusion is the rationale for the licensing of selected geologic environments as sites for waste isolation (e.g., WIPP site, New Mexico, USA)

USGS

Shapiro et al., 2007

Matrix Diffusion in Fractured Rock: Why do we see extended residence times?

Although fractures are highly permeable groundwater pathways, contaminants introduced into fractures have extended residence times. . .

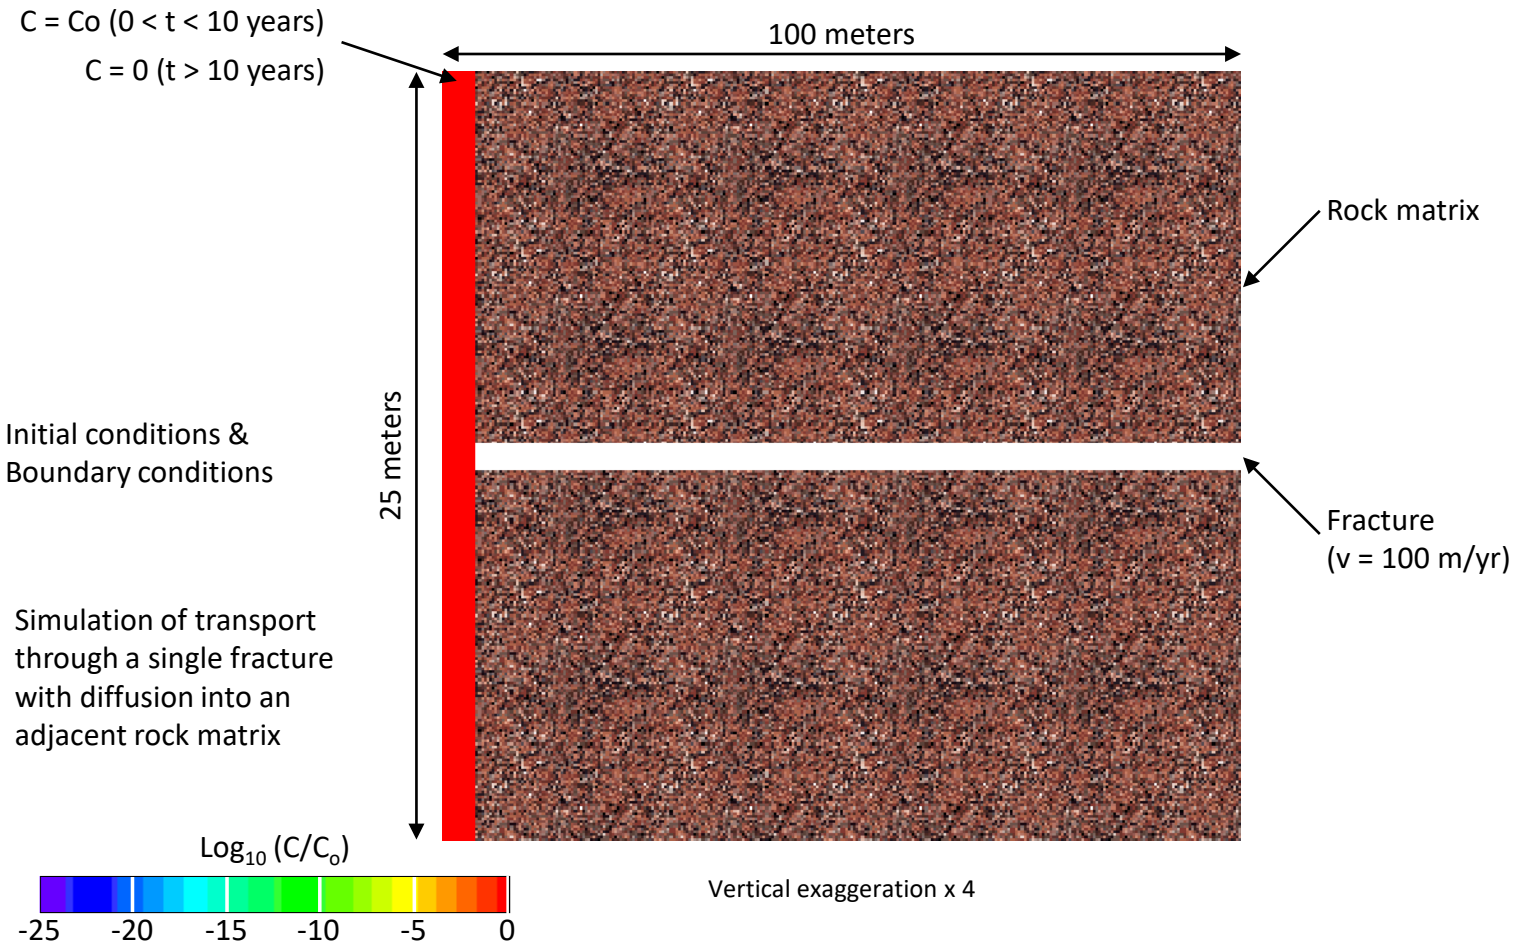

USGS

Matrix Diffusion in Fractured Rock: Why do we see extended residence times?

Although fractures are highly permeable groundwater pathways, contaminants introduced into fractures have extended residence times. . .

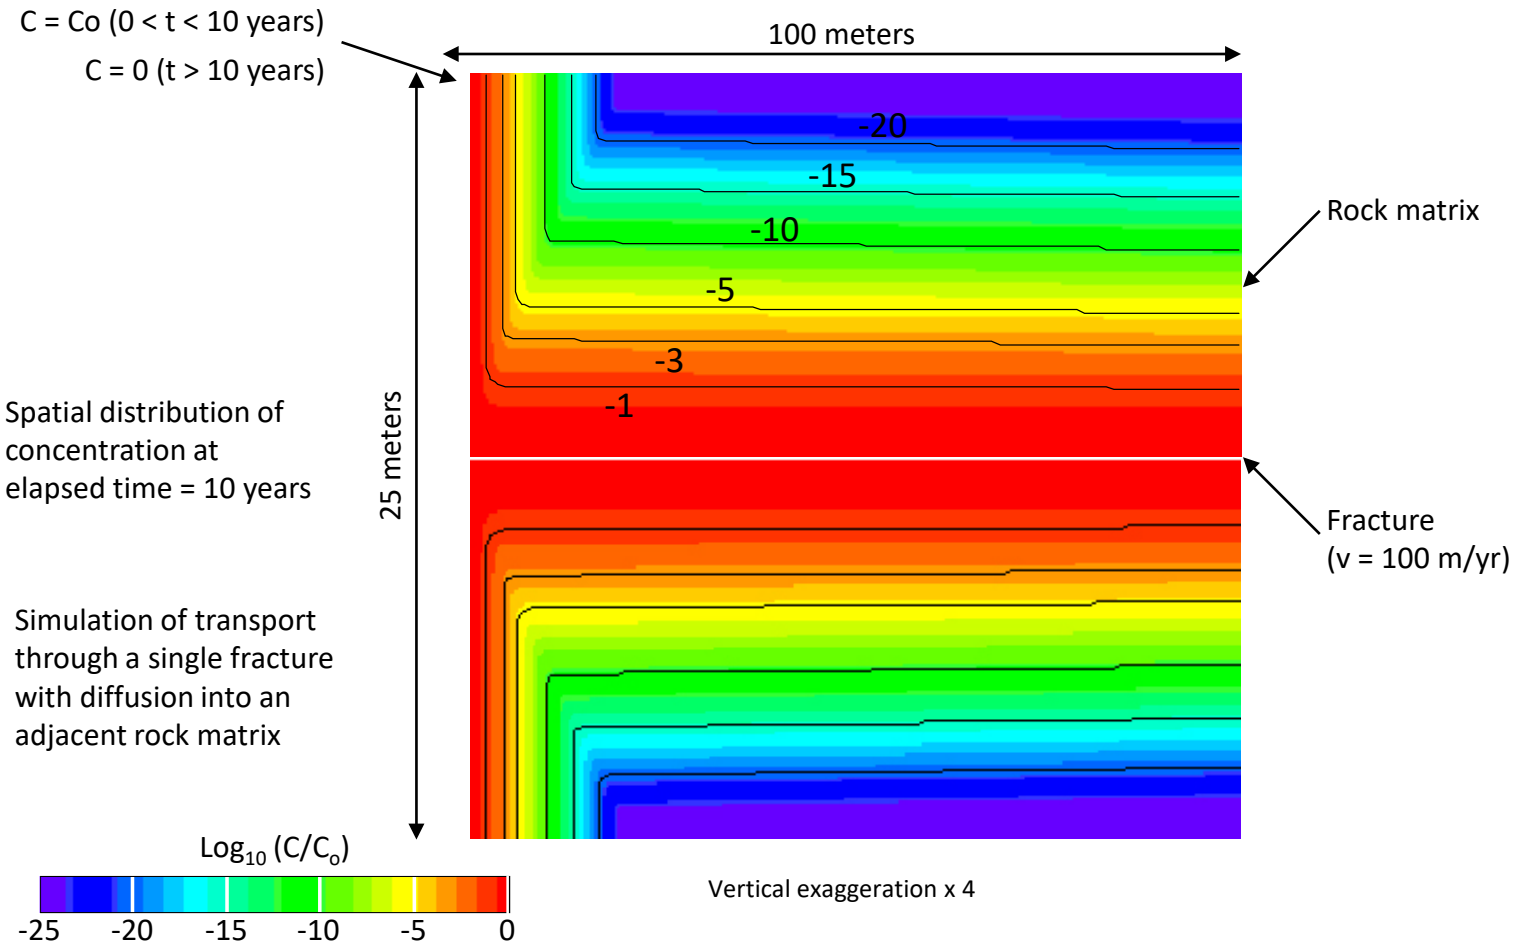

USGS

Matrix Diffusion in Fractured Rock: Why do we see extended residence times?

Although fractures are highly permeable groundwater pathways, contaminants introduced into fractures have extended residence times. . .

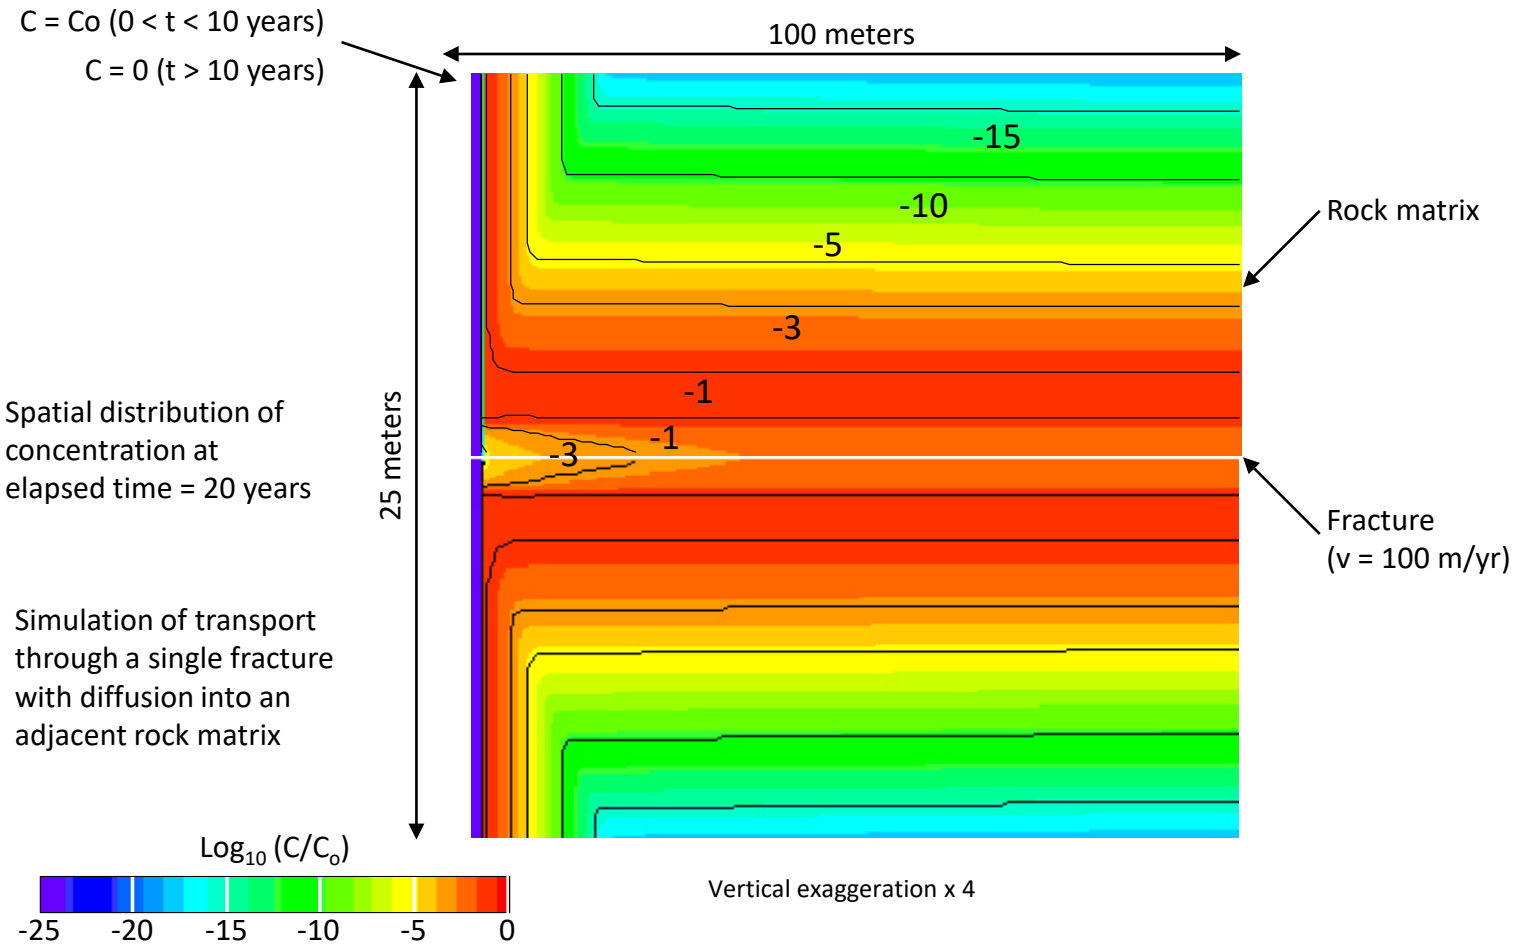

USGS

Matrix Diffusion in Fractured Rock: Why do we see extended residence times?

Although fractures are highly permeable groundwater pathways, contaminants introduced into fractures have extended residence times. . .

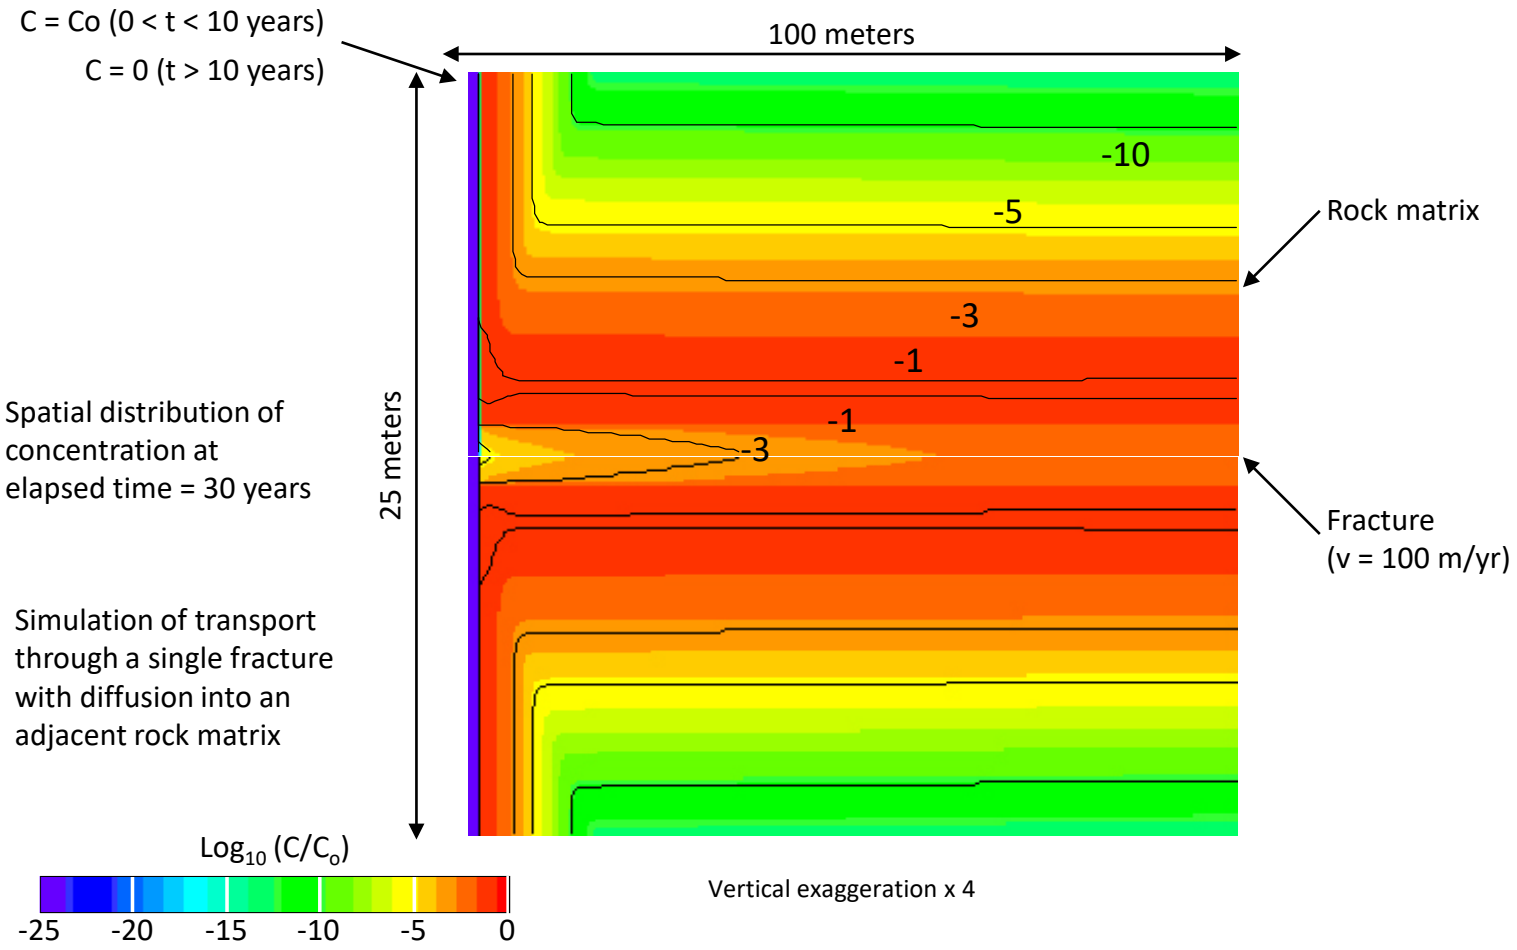

USGS

Matrix Diffusion in Fractured Rock: Why do we see extended residence times?

Although fractures are highly permeable groundwater pathways, contaminants introduced into fractures have extended residence times. . .

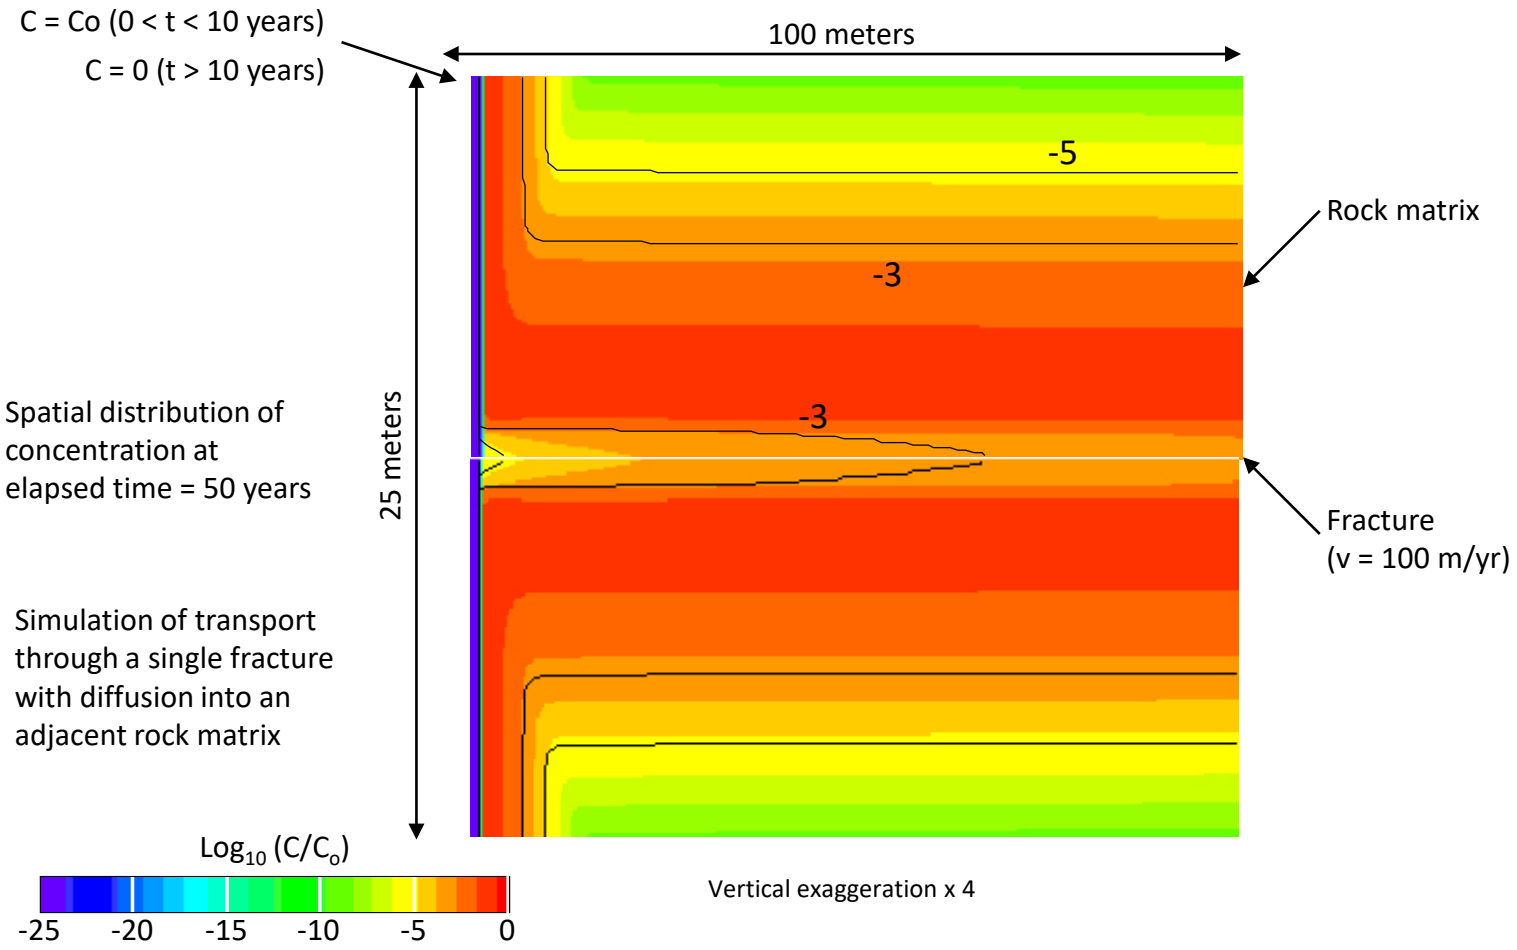

USGS

Matrix Diffusion in Fractured Rock: Why do we see extended residence times?

Although fractures are highly permeable groundwater pathways, contaminants introduced into fractures have extended residence times. . .

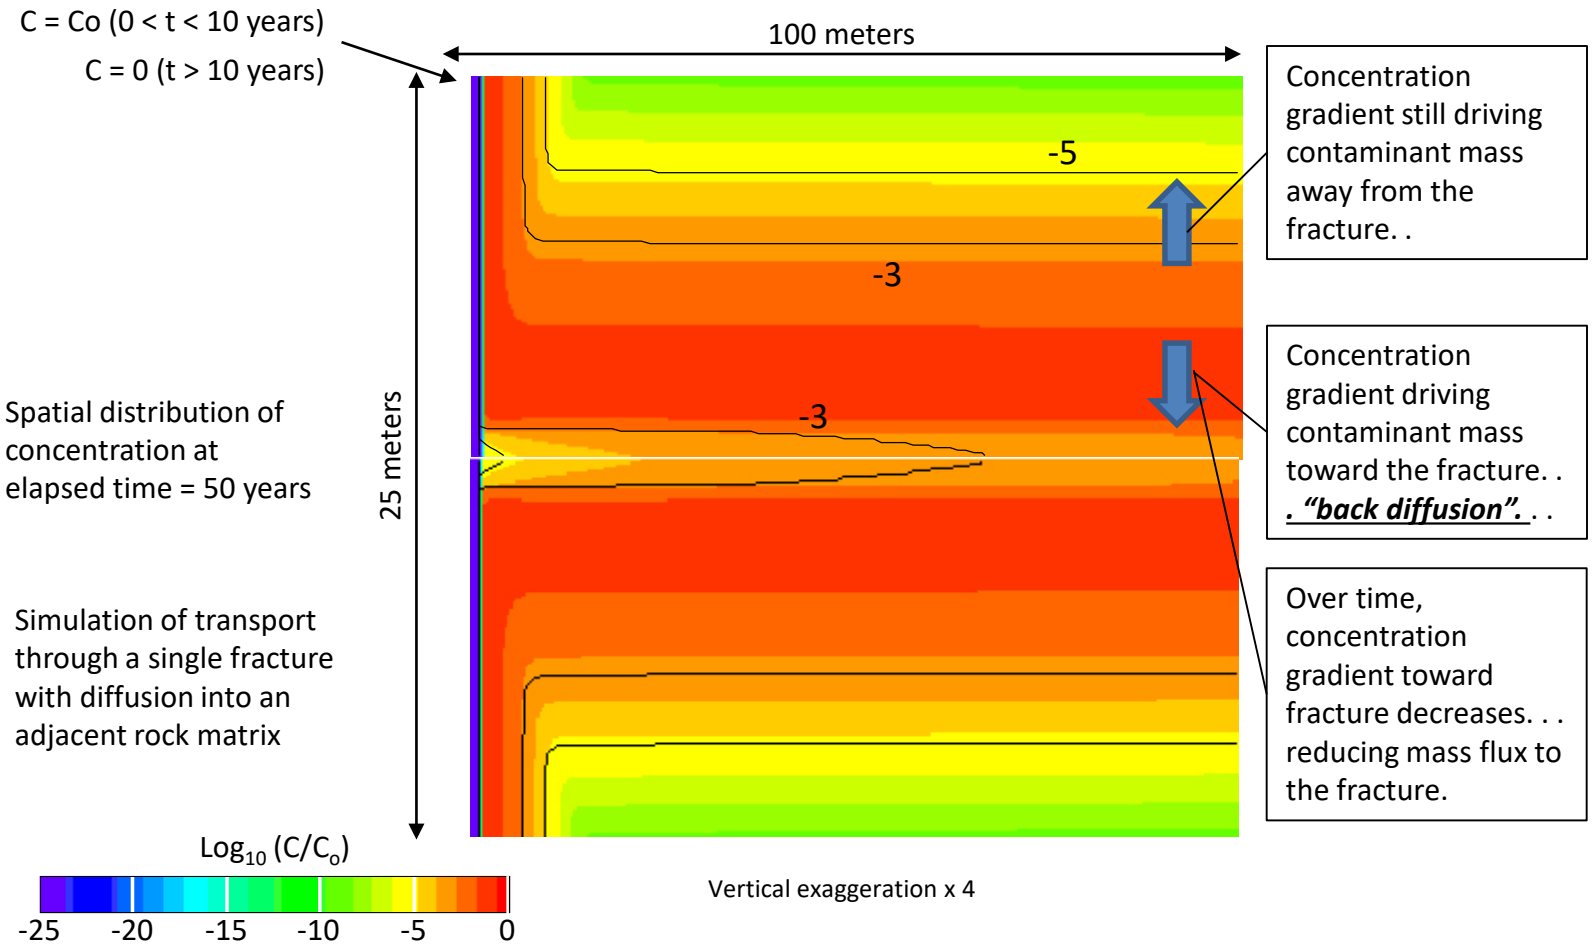

USGS

Characterizing contaminant mass in the subsurface

Naval Air Warfare Center, West Trenton, NJ

Interpretation of contaminant mass from ***mobile groundwater*** . . .water samples extracted from ***permeable fractures*** intersecting monitoring intervals (~20 ft sections of borehole)

Mudstone units of the Lockatong Formation on Cross Section G – G’

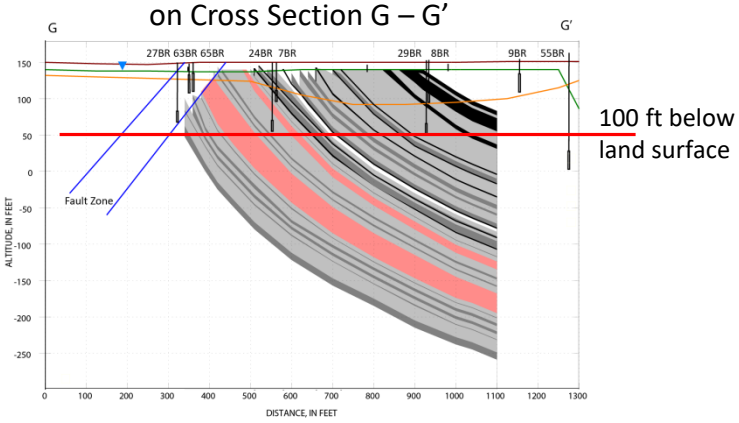

100 ft below land surface

Are these isocontours of aqueous concentrations from fractures a physically meaningful way of characterizing contaminant mass in fractured rock ?

Are they useful in designing remediation strategies ?

Isocontours of TCE concentration at 100 ft below land surface

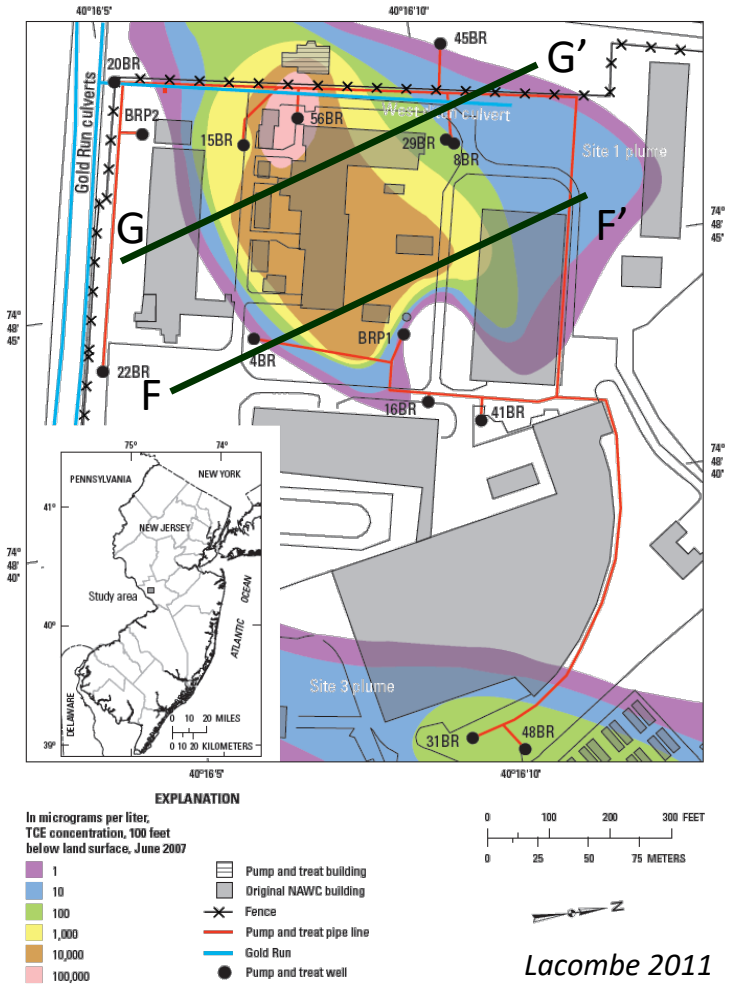

Lacombe 2011

USGS

Characterizing contaminant mass in the subsurface

Water samples from mobile groundwater (fractures) do not provide an accurate picture of the contaminant distribution in the subsurface

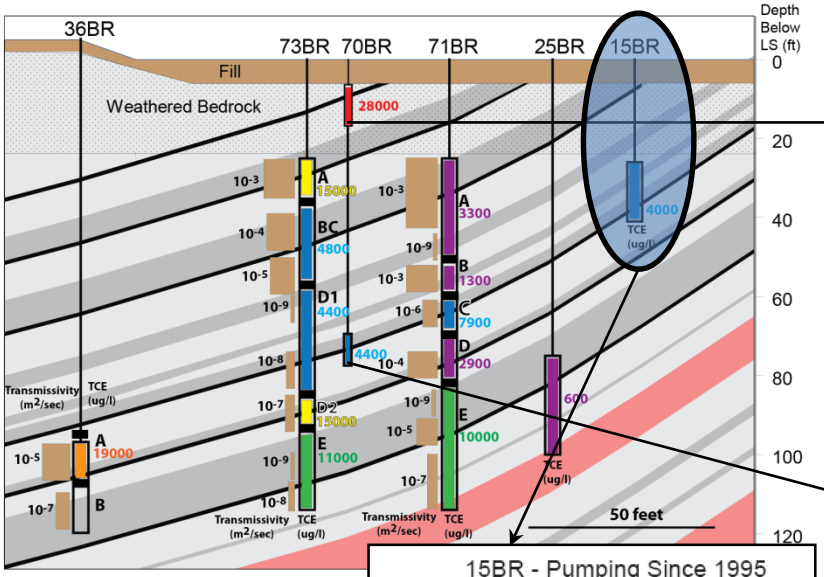

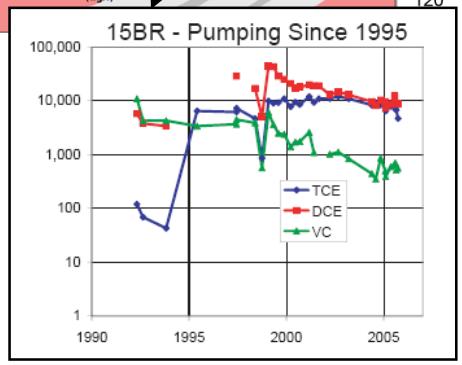

. . .if pumping was terminated, mass of TCE in rock matrix would likely yield elevated concentrations in mobile groundwater (fractures). . . "***contaminant rebound***"

TCE in fractures and the rock matrix

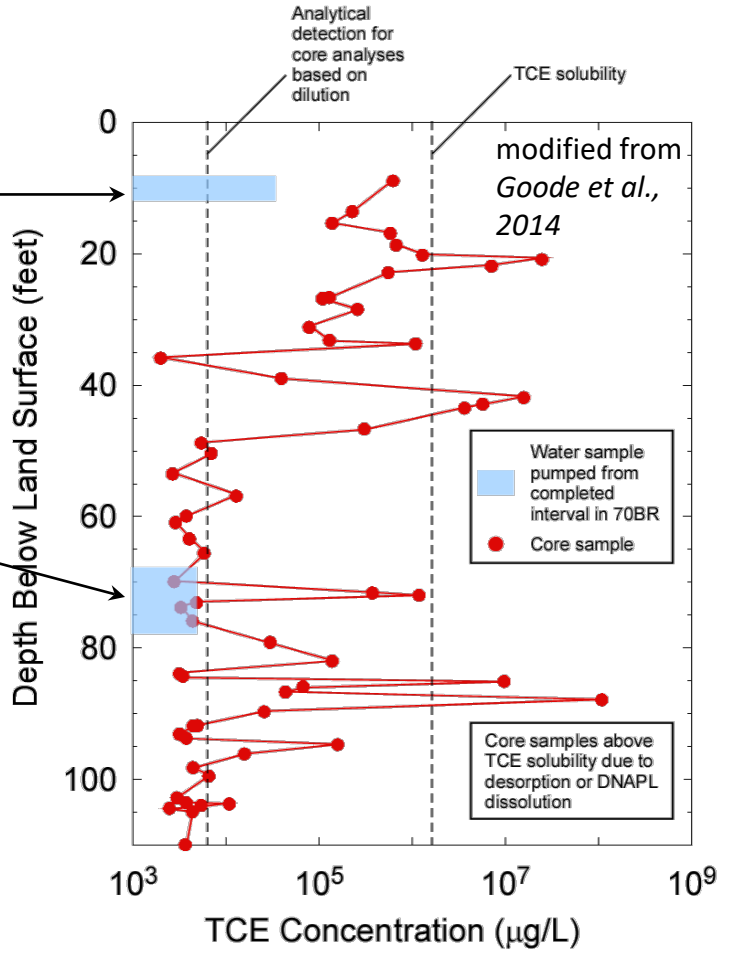

Equivalent Aqueous Phase TCE for Core Samples

USGS

Characterizing contaminant mass in the subsurface

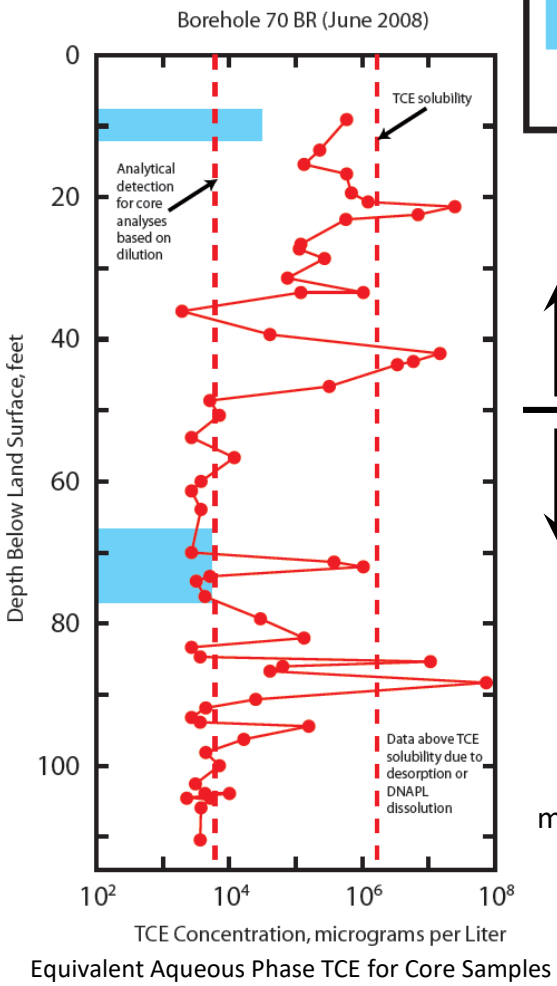

Equivalent Aqueous Phase TCE for Core Samples

Weathered rock

Un-weathered rock

modified from *Goode et al., 2014*

Distribution of organic contaminants between fractures and rock matrix

Equivalent kilograms TCE in fractures and rock matrix in bioaugmentation area



Weathered & Un-weathered Rock

Equivalent kilograms TCE in fractures and rock matrix in bioaugmentation area



Un-weathered Rock

Are water samples from mobile groundwater (fractures) a viable means of assessing contaminant distribution?

USGS

Quantifying Matrix Diffusion – Laboratory Analysis of Rock Core

Diffusion through a rock face

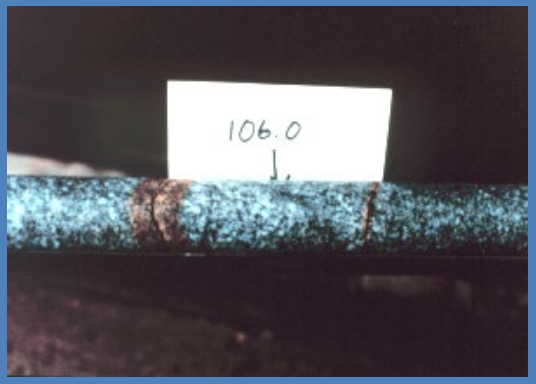

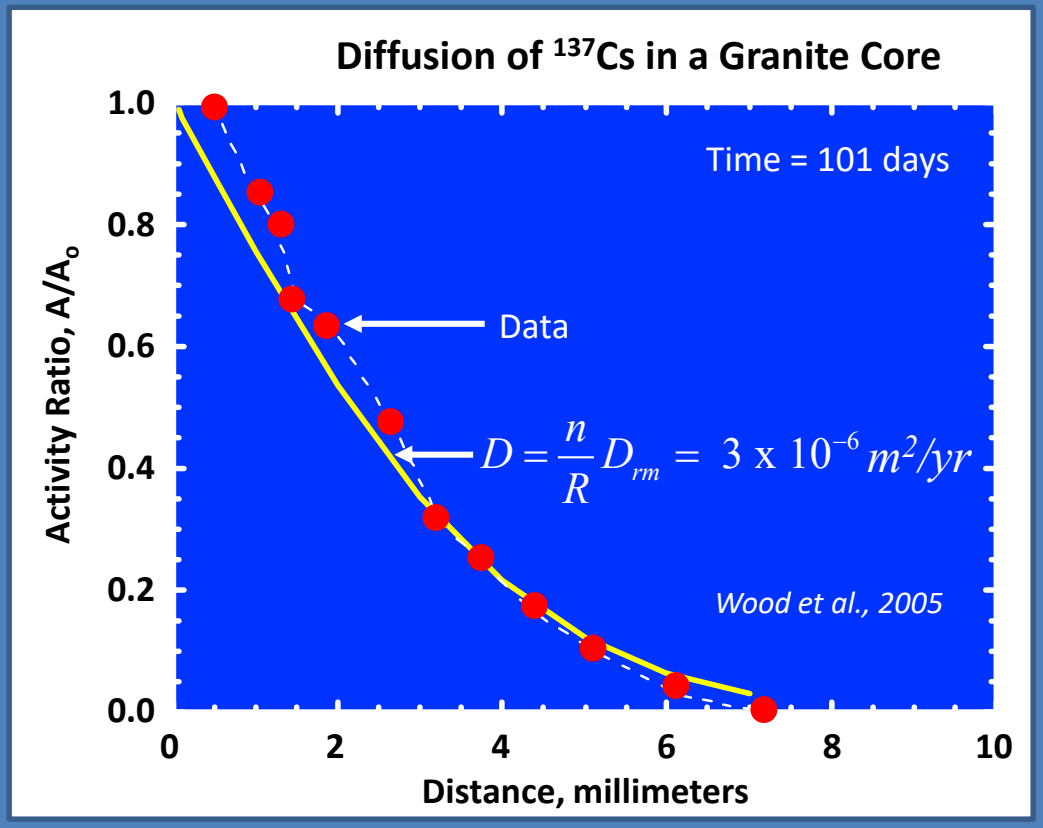

$$J_x = -\frac{n\gamma D_w}{R}\frac{dC}{dx}$$

n – rock matrix porosity
J_x - diffusive mass flux in the x-direction per unit area ($ML^{-2}T^{-1}$)
γ - formation factor (inversely proportional to tortuosity)
D_w – ^{137}Cs free water diffusion coefficient (L^2T^{-1})
$D_{rm} = \gamma D_w$ – rock matrix diffusion coefficient (L^2T^{-1})
R – ^{137}Cs retardation factor
C – aqueous concentration (mass per unit volume, ML^{-3})
x – spatial coordinate (L)
L – units of length; M – units of mass; T – units of time

$$\frac{n}{R}\gamma D_w = \frac{n}{R}D_{rm}$$

Are laboratory interpretations appropriate for field scale characterization?

USGS

Quantifying Matrix Diffusion – Field Scale Testing (10's of meters)

Simulation – transport in a single fracture

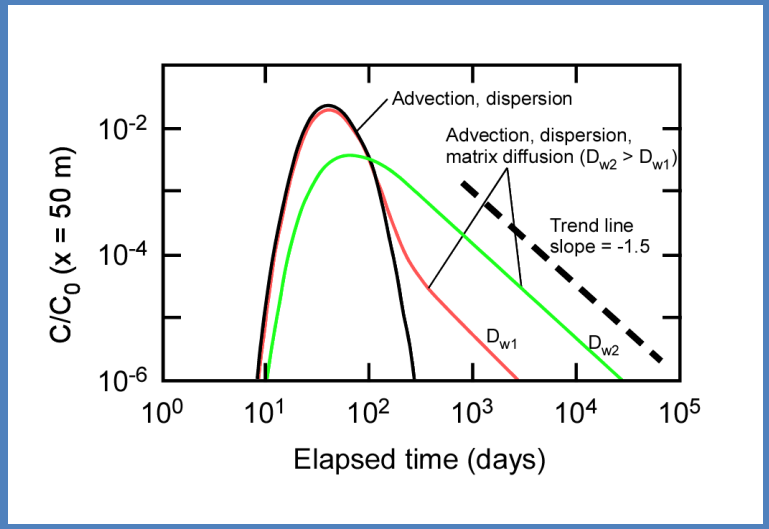

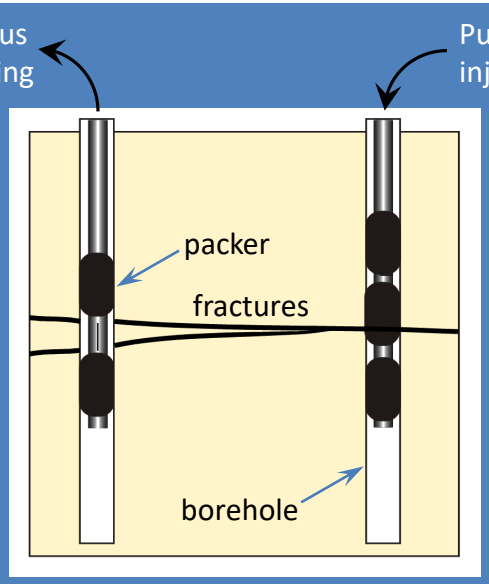

Field Experiment:
Multiple tracers injected with different free water diffusion coefficients, D_w

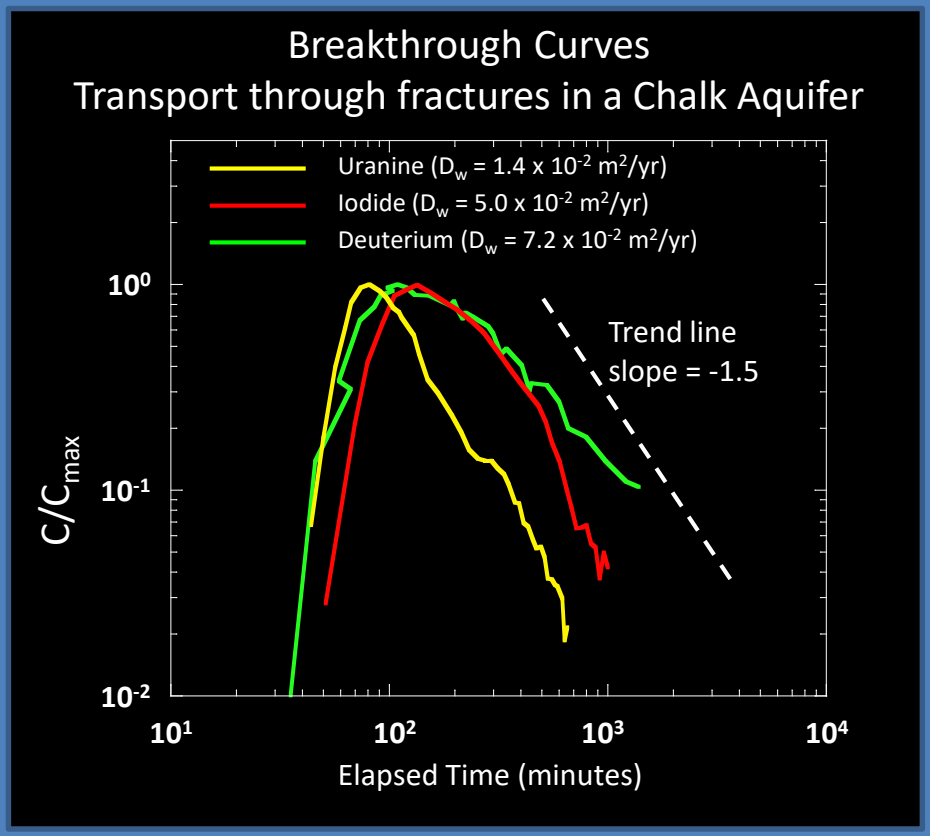

Chalk Aquifer, Béthune, France, modified from *Garnier et al. 1985*

USGS

Quantifying Matrix Diffusion – Field Scale Testing (10's of meters)

Tracer Injection Pumping

Not all field scale tests support use of laboratory interpretations to characterize matrix diffusion at the field scale. . .

Granite and Schist – Mirror Lake, NH

Multiple tracers injected with different free water diffusion coefficients, D_w

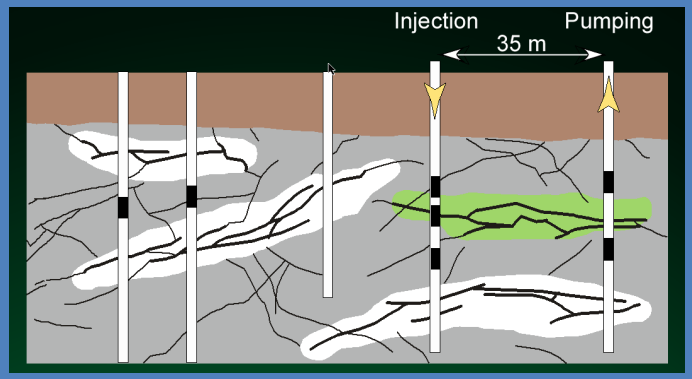

$$D = n\gamma D_w = nD_{rm}$$

However, from interpretation of breakthrough curves:

$$D_{rm} > D_w$$

Is this physically reasonable?

Breakthrough Curves
Transport through fractures in a Crystalline Rock

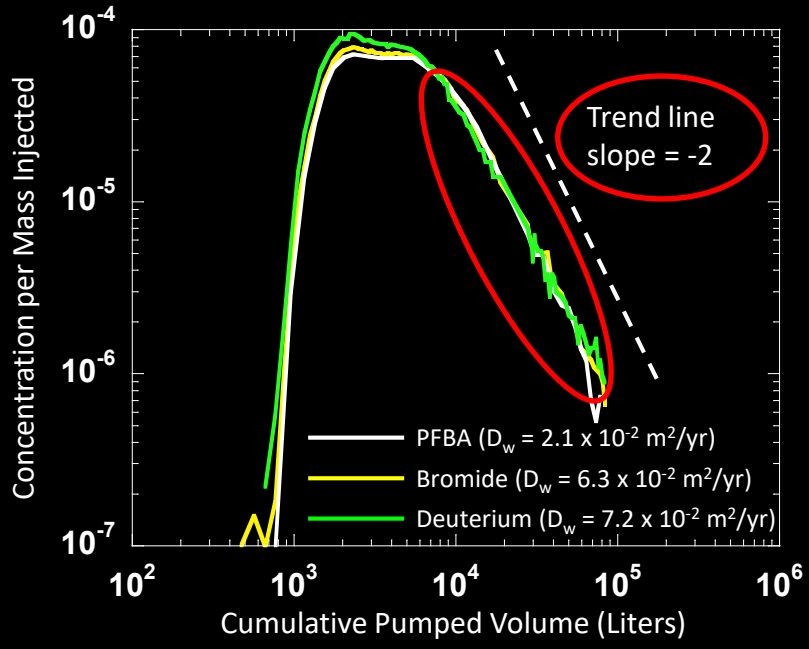

USGS

Becker and Shapiro, 2000 *Shapiro et al., 2007*

“Effective” Matrix Diffusion

Diffusion-like tailing ($D_{rm} > D_w$), leading to extended residence times. . .
An artifact of “extreme” variability in fluid advection

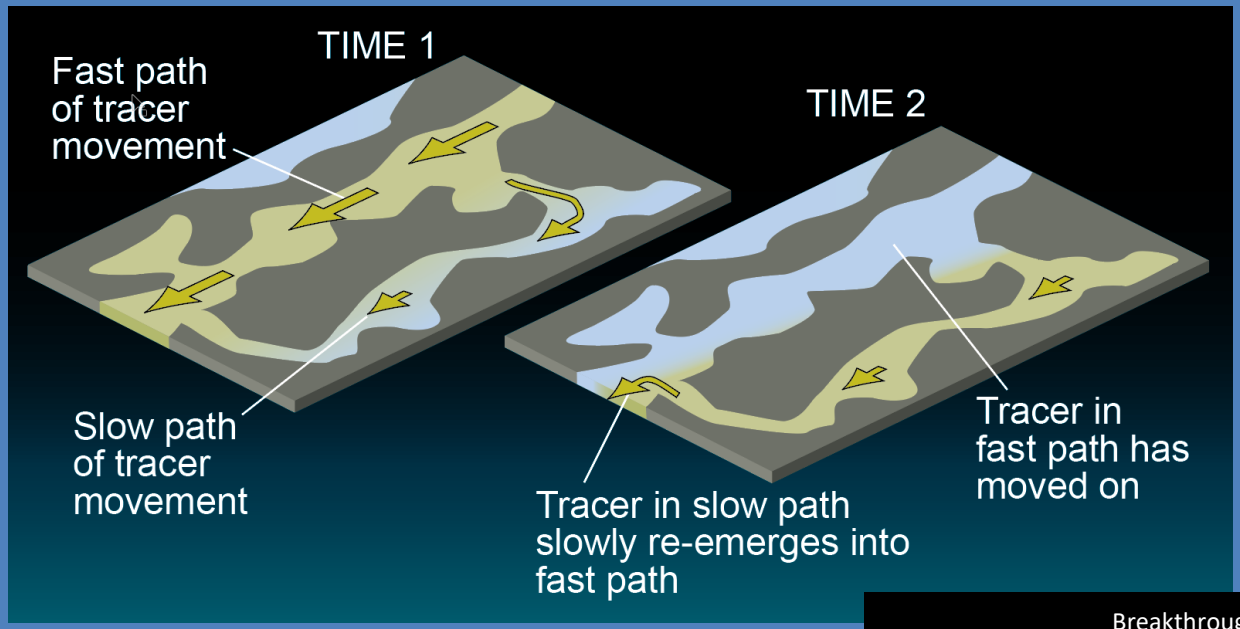

Becker and Shapiro, 2000

Shapiro 2001

Shapiro et al., 2007

Shapiro et al., 2008

- Hydraulic conductivity of fractures varies over more than 6 orders of magnitude
- Large range of velocity is not consistent with the conceptualization of hydrodynamic dispersion
- Slow advection leads to a diffusion-like process – small travel distance over extended period time, similar to diffusion into and out of flow-limited aquifer material

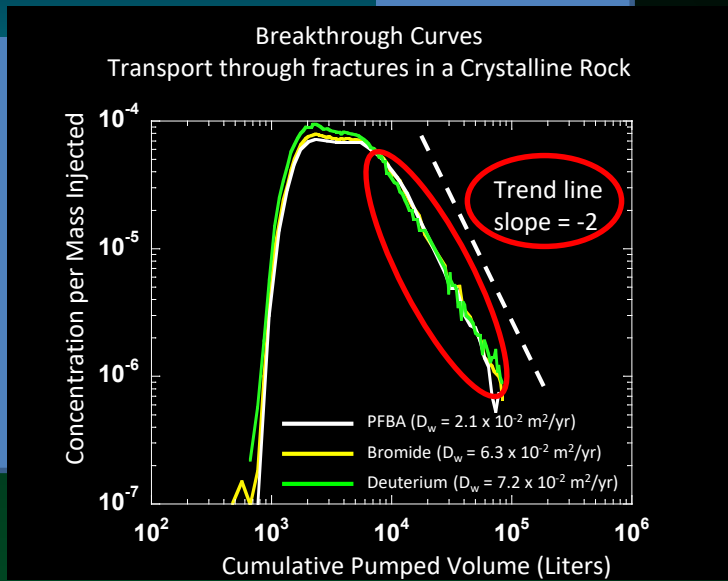

USGS

“Effective” Matrix Diffusion

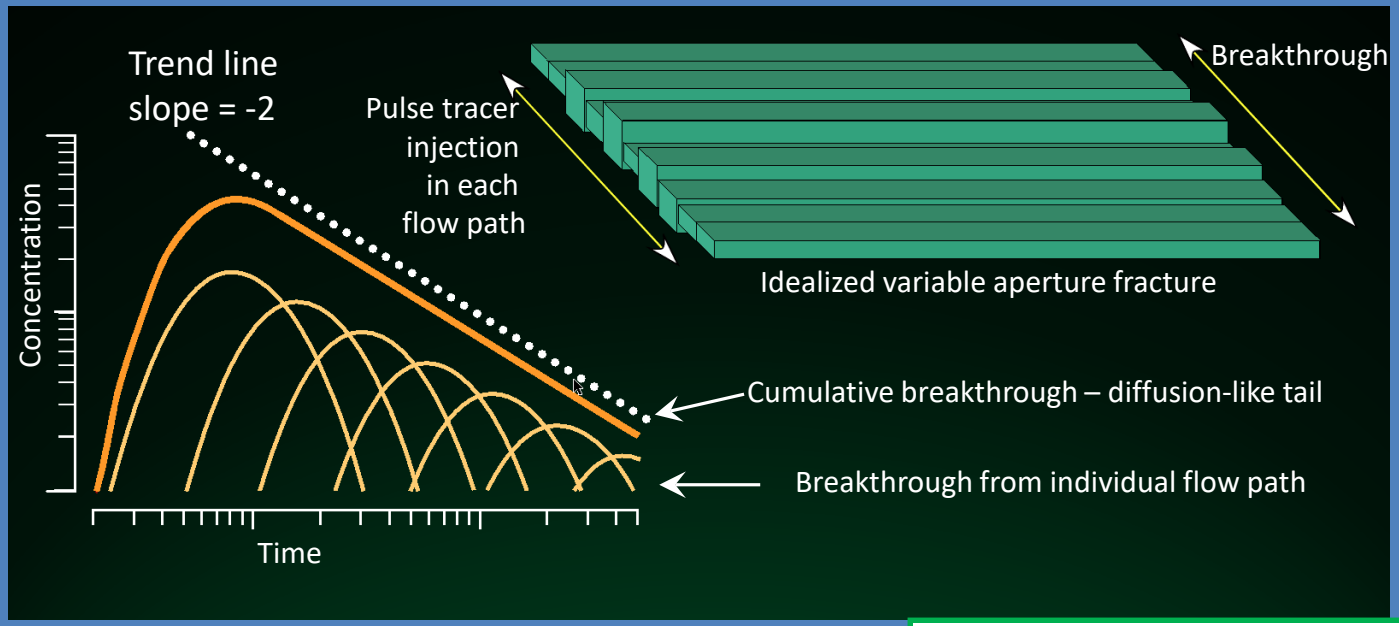

Becker and Shapiro, 2000

Shapiro 2001

Shapiro et al., 2007

“Effective” diffusion impacts calculations of the longevity of contamination. . .

. . .contaminant storage and release exists not only in the rock matrix. . .

. . .but also, in low-permeability fractures. . .

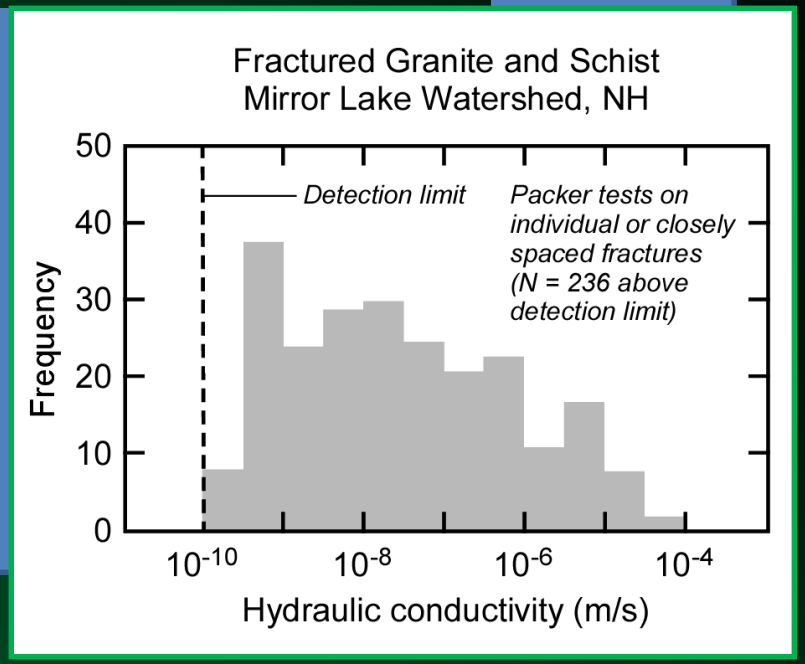

USGS

The Significance of the Rock Matrix at Sites of Groundwater Contamination

- **Do not underestimate the significance of the rock matrix in retaining contaminant mass. . .a critical element of source zone delineation. . .and contaminant longevity. . .**
- **Even crystalline rocks exhibit matrix retention. . .e.g., nuclear waste isolation (e.g., Swedish Nuclear Fuel and Waste Management Program)**
- **The retention of contaminant mass in the rock matrix can be of significance in both the source zone and the downgradient plume**
- **Large concentration gradients "drive" contaminant mass into the rock matrix "rapidly". . .**
- **Rate of "back diffusion" diminishes as the concentration gradient in the rock matrix decreases over time. . .**
- **Surface chemical processes (sorption) must also be considered in evaluating retention and release of contaminants in the rock matrix. . .**

Shapiro et al., 2017

Shapiro and Brenneis, 2018

Shapiro et al., 2019

USGS

Selected References

Becker, M. W. and Shapiro, A. M. 2000. Tracer transport in fractured crystalline rock: Evidence of nondiffusive breakthrough tailing. Water Resources Research, 36(7): 1677-1686.

Becker, M. W. and Shapiro, A. M. 2003. Interpreting tracer breakthrough tailing from different forced-gradient tracer experiment configurations in fractured bedrock. **Water Resources Research** 39(1): 10.1029/2001WR001190.

Carrera, J., Sanchez-Vila, X., Benet, I., Medina, A., Galarza, G. and Guimera, J. 1998. On Matrix Diffusion: Formulations, Solution Methods and Qualitative Effects. **Hydrogeology Journal** 6(1): 178-190.

Dai, Z., Wolfsberg, A., Lu, Z. and Reimus, P. 2007. Upscaling matrix diffusion coefficients for heterogeneous fractured rocks. Geophysical Research Letters 34: doi:10.1029/2007GL029332.

Dincutoiu, I., Gorecki, T. and Parker, B. L. 2003. A novel technique for rapid extraction of volatile organohalogen compounds from low permeability media. Environmental Science and Technology, 37(17): 3978-3984.

Garnier, J. M., Crampon, N., Préaux, C., Porel, G. and Vreulx, M. 1985. Traçage par 13C, 2H, I− et uranine dans la nappe de la craie sénonienne en écoulement radial convergent (Béthune, France). **Journal of Hydrology** 78(3): 379-392. https://doi.org/10.1016/0022-1694(85)90114-3.

Interstate Technology and Regulatory Council (ITRC). 2011. Integrated DNAPL site strategy. Interstate Technology and Regulatory Council, Integrated DNAPL Site Strategy Team. Washington, DC. Retrieved July 17, 2016, from http://www.itrcweb.org/guidancedocuments/integrateddnaplstrategy_idssdoc/idss-1.pdf.

Lipson, D. S., Kueper, B. and Gefell, M. J. 2005. Matrix Diffusion-Derived Plume Attenuation in Fractured Bedrock. **Ground Water** 43(1): 30-39.

Neretnieks, I., Eriksen, T. and Tähtinen, P. 1982. Tracer movement in a single fissure in granitic rock: Some experimental results and their interpretation. **Water Resources Research** 18(4): 849-858. 10.1029/WR018i004p00849.

Parker, B. L., Cherry, J. A., and Gillham, R. W. 1996. The effects of molecular diffusion on DNAPL behavior in fractured porous media. *in* Pankow, J. F., and Cherry, J. A., eds., Dense Chlorinated Solvents and Other DNAPLs in Groundwater: History, Behavior, and Remediation. Waterloo Press, Portland, OR. p. 355-393.

Parker, B.L., McWhorter, D. B., and Cherry, J. A. 1997. Diffusive loss of non-aqueous phase organic solvents from idealized fracture networks in geologic media. Ground Water 35(6): 1077–1088.

USGS

Selected References

Sale, T. and Newell, C. 2011. A guide for selecting remediies for subsurface releases of chlorinated solvents. Department of Defense, Environmental Security Technology Certification Program (ESTCP). 134p.

Sale, T., Newell, C., Stroo, H., Hinchee, R. and Johnson, P. 2008. Frequently asked questions regarding management of chlorinated solvents in soils and groundwater. Department of Defense, Environmental Security Technology Certification Program (ESTCP). 34p. https://www.serdp-estcp.org/Tools-and-Training/Environmental-Restoration/DNAPL-Source-Zones.

Sale, T., Parker, B. L., Newell, C. J. and Devlin, J. F. 2013. Management of contaminants stored in low permeability zones. State-of-the-Science Review, SERDP Project ER-1740. Strategic Environmental Research and Development Porgram. 348p. https://www.serdp-estcp.org/content/download/23838/240653/file/ER-1740%20State%20of%20the%20Science%20Review%20Report.pdf.

Shapiro, A. M. 2001. Effective matrix diffusion in kilometer-scale transport in fractured crystalline rock. Water Resources Research 37(3): 507-522. 10.1029/2000WR900301.

Shapiro, A.M. 2002. Cautions and suggestions for geochemical sampling in fractured rock. Ground Water Monitoring and Remediation 22(3): 151–164.

Shapiro, A. M. and Brenneis, R. J. 2018. Variability of organic carbon content and the retention and release of trichloroethene in the rock matrix of a mudstone aquifer. **Journal of Contaminant Hydrology** 217: 32-42. https://doi.org/10.1016/j.jconhyd.2018.09.001.

Shapiro, A. M., Evans, C. E. and Hayes, E. C. 2017. Porosity and pore size distribution in a sedimentary rock: Implications for the distribution of chlorinated solvents. **Journal of Contaminant Hydrology** 203: 70-84. https://doi.org/10.1016/j.jconhyd.2017.06.006.

Shapiro, A. M., Goode, D. J., Imbrigiotta, T. E., Lorah, M. M. and Tiedeman, C. R. 2019. The complex spatial distribution of trichloroethene and the probability of NAPL occurrence in the rock matrix of a mudstone aquifer. **Journal of Contaminant Hydrology** 223: https://doi.org/10.1016/j.jconhyd.2019.04.001.

Shapiro, A. M., Hsieh, P. A., Burton, W. C., and Walsh, G. J. 2007. Integrated Multi-Scale Characterization of Ground-Water Flow and Chemical Transport in Fractured Crystalline Rock a the Mirror Lake Site, New Hampshire, *in* Subsurface Hydrology: Data Integration for Properties and Processes. eds., D. W. Hyndman, F. D. Day-Lewis and K. Singha. American Geophysical Union, Washington, DC. p. 201-226.

USGS

Selected References

Shapiro, A. M., Renken, R. A., Harvey, R. W., Zygnerski, M. R. and Metge, D. W. 2008. Pathogen and chemical transport in the karst limestone of the BIscayne Aquifer: 2. Chemical retention from diffusion and slow advection. Water Resources Research 44(8): doi:10.1029/2007WR006059.

Shapiro, A. M., Tiedeman, C. R., Imbrigiotta, T. E., Goode, D. J., Hsieh, P. A., Lacombe, P. J., DeFlaun, M. F., Drew, S. R. and Curtis, G. P. 2018. Bioremediation in Fractured Rock: 2. Mobilization of Chloroethene Compounds from the Rock Matrix. **Groundwater** 56(2): 317-336. 10.1111/gwat.12586.

Sterling, S. N., Parker, B. L., Cherry, J. A., Williams, J. H., Lane, J. W., Jr. and Haeni, F. P. 2005. Vertical Cross Contamination of Trichloroethylene in a Borehole in Fractured Sandstone. Ground Water, 43(4): 557-573.

Tiedeman, C. R., Shapiro, A. M., Hsieh, P. A., Imbrigiotta, T. E., Goode, D. J., Lacombe, P. J., DeFlaun, M. F., Drew, S. R., Johnson, C. D., Williams, J. H. and Curtis, G. P. 2018. Bioremediation in Fractured Rock: 1. Modeling to Inform Design, Monitoring, and Expectations. **Groundwater** 56(2): 300-316. 10.1111/gwat.12585.

Williams, J.H., Lane, J. W., Jr., Singha, K., and Haeni, F. P. 2002. Application of advance geophysical logging methods in the characterization of a fractured sedimentary bedrock aquifer, Ventura County, California. USGS Water-Resources Investigations Report 00–4083.

Wood, W. W., Kraemer, T. F. and Shapiro, A. 2005. Radon (^{222}Rn) in Ground Water of Fractured Rocks: A Diffusion/Ion Exchange Model. **Groundwater** 42(4): 552-567. 10.1111/j.1745-6584.2004.tb02624.x.

USGS