



METROPOLITAN EDISON COMPANY SUBSIDIARY OF GENERAL PUBLIC UTILITIES CORPORATION

POST OFFICE BOX 542 READING, PENNSYLVANIA 19603

February 28, 1979
GQL 0186

TELEPHONE 215 - 929-3601


Director of Nuclear Reactor Regulations
U.S. Nuclear Regulatory Commission
Washington, D.C. 20555

Dear Sir:

Three Mile Island Nuclear Station, Unit 1
Operating License No. DPR-50
Docket No. 50-289
Steam Generator Operating History No. 2

Enclosed please find our second completed questionnaire concerning steam generator operating history. Should you have any questions concerning this response, please contact R. O. Barley at Three Mile Island Nuclear Station.

Sincerely,

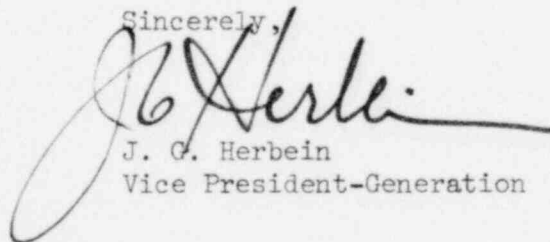

J. G. Herbein
Vice President-Generation

JGH:DGM:jdp

Enclosure

A023
S
11
P

7903050 325

ENCLOSURE 1
STEAM GENERATOR OPERATING
HISTORY QUESTIONNAIRE No. 2

NOTE: All percentages should be reported to four significant figures.

I. BASIC PLANT INFORMATION

Plant:	Three Mile Island - Unit 1
Startup Date:	2 September 1974
Utility:	Metropolitan Edison Company
Plant Location:	Middletown, Pennsylvania
Thermal Power Level:	2535 MWT
Nuclear Steam Supply System (NSSS) Supplier:	Babcock & Wilcox
Number of Loops:	2
Steam Generator Supplier, Model No. and Type:	B&W, N/A, OTSG
Number of Tubes Per Generator:	15, 531
Tube Size and Material:	0.625" O.D./0.034" wall 56' 2 3/8" Inconel

II. STEAM GENERATOR OPERATING CONDITIONS

<u>Normal Operation</u>	Prim.	Sec.
Temperature:	602.8°F/570°F	
Flow Rate:	$65.6 \times 10^6 \frac{\text{LB}}{\text{HR}}$	$5.3 \times 10^6 \frac{\text{LB}}{\text{HR}}$
Primary Pressure:	2200 psia	
Secondary Pressure:	925 psia	

Allowable Leakage Rate: 1 gpm / 2 Steam Generators

Accidents

Design Base LOCA Max. Delta-P: 925 psia
Main Steam Line Break (MSLB) Max. Delta-P: 2200 psia

III. STEAM GENERATOR SUPPORT PLATE INFORMATION

Material:	Carbon Steel
Design Type:	Broached Opening
Design Code:	SA-212-B
Dimensions:	118 3/8" Diameter
Flow Rate:	$5.3 \times 10^6 \frac{\text{LB}}{\text{HR}}$
Tube Hole Dimensions:	≈0.320 in. min. radius/tube
Flow Hole Dimensions:	≈0.135 sq. in./tube

IV. STEAM GENERATOR BLOWDOWN INFORMATION

Frequency of Blowdown:	Not Required
Normal Blowdown Rate:	NA
Blowdown Rate w/Condenser Leakage:	NA
Chemical Analysis Results:	NA

Results	Parameter Control Limits
NA	NA

V. WATER CHEMISTRY INFORMATION

Secondary Water

Type of Treatment and Effective Full Power (EFP) Months of Operation:
 Ammonia and Hydrazine added to feedwater - Powdex polishing 32 EFPM

Typical Chemistry or Impurity Limits:	Ammonia	2-20	ppm
	Hydrazine	>50	ppm
	Catalyzed Hydrazine	>25	ppm
	pH @77°F	9.5-10.5	
	Cation Conductivity	<10	µmho
	Na ⁺	<1.0	ppm
	Cl ⁻	<1.0	ppm

Feedwater

Typical Chemistry or Impurity Limits:	pH @77°F	9.3-9.5	
	Max Solids	<50	ppb
	Cation Conductivity	<5	µmho
	Max O ₂	7	ppb
	Max Si O ₂	20	ppb
	Max. Fe ²⁺	10	ppb
	Max. Cu	2	ppb

Condenser Cooling Water

Typical Chemistry or Impurity Limits:

1. Concentration controlled to 2-3x river water solids concentration by blowdown
2. Maintain 0-0.5 L'Angelier Index by adding sulfuric acid
3. Chlorination 0.4 ppm free Cl⁻ by adding for the 15 minute periods per day during warm months only

Demineralizers - Type: None

Cooling Tower (open cycle, closed cycle or none): Closed Cycle

VI. TURBINE STOP VALVE TESTING (applicable to Babcock & Wilcox (B&W) S.G. only)

Frequency of Testing

Actual: 1 per month
Manufacturer Recommendation: 1 per day

Power Level At Which Testing Is Conducted

Actual: 50%
Manufacturer Recommendation: Not specified

Testing Procedures (Stroke length, stroke rate, etc.)

Actual: 100% stroke @ <1 min. full open to full close
Manufacturer Recommendation: Not specified

VII. STEAM GENERATOR TUBE DEGRADATION HISTORY

(The following is to be repeated for each scheduled ISI)

Inservice Inspection (ISI) Date: 3/78
Number of EFP Days of Operation Since Last Inspection: 287

(The following is to be repeated for each steam generator)

	A	B
Steam Generator Number:	12%	9%
Percentage of Tubes Inspected At This ISI:		
Percentage of Tubes Inspected At This ISI That Had Been Inspected At The Previous Scheduled ISI:	3%	3%
Number of Tubes Plugged Prior to This ISI:	4	9
Number of Tubes Plugged At This ISI:	1	1
Percentage of Tubes Plugged That Did Not Exceed Degradation Limits:	0	100%
Percentage of Tubes Plugged As A Result of Exceedance of Degradation Limits:	100%	0%
Sludge Layer Material Chemical Analysis Results:	Not applicable	
Sludge Lancing (date):	NA	
Ave. Height of Sludge Before Lancing:	NA	
Ave. Height of Sludge After Lancing:	NA	
Replacement, Retubing or Other Remedial Action Considered: (Briefly Specify Details)	NA	
Support Plate Hourglassing:	NA	
Support Plate Islanding:	NA	
Tube Metallurgical Exam Results:	NA	

POOR ORIGINAL

Fretting or Vibration in U-Bend Area (not applicable to B&W S.G.) AS OF (4)

Percentage of Tubes Plugged	Other Preventive Measures
NA	

Wastage/Cavitation Erosion AS OF (4)

Hot Leg: (Repeat this information for the cold leg on Combustion Engineering (C.E.) and Westinghouse (W) S.G.)

Area of Tube Bundle (1)	a	b	c	d	e	NA
% of Tubes Affected by Wastage/Cavitation Erosion	NOT APPLICABLE					
% of Tubes Plugged Due to Exceedance of Allowable Limit (2)						
% of Tubes Plugged That Did not Exceed Degradation Limit						
Location Above Tube Sheet (3)						
Max. Wastage/Cavitation Erosion Rate for Any Single Tube (Tube Circum. Ave) (Mills/Month)						
Max. Wastage/Cavitation Erosion in Any Single Unplugged Tube (Tube Circum. Ave) (Mills)						

Cracking AS OF (4)

Caustic Stress Corrosion Induced in C.E. and W S.G.

Flow Induced Vibration Caused in B&W S.G.

POOR ORIGINAL

Cracking (Con't)

Hot Leg: (repeat this information for the cold leg on C.E. and W S.G.)

Area of Tube Bundle (1)	a	b	c	d	e
% of Tubes Affected By Cracking	NOT APPLICABLE				
% of Tubes Plugged Due to Cracking					
% of Tubes Plugged That Did Not Exceed Degradation Limit					
Location Above Tube Sheet (3)					
Rate of Leakage From Leaking Cracks (gpm)					

Denting (Not applicable to B&W S.G.) AS OF (4)

Hot Leg: (Repeat this information for the cold leg on C.E. and W S.G.)

Area of Tube Bundle (1)	a	b	c	d	e
% of Tubes Affected by Denting	NOT APPLICABLE				
% of Tubes Plugged Due to Exceedance of Allowable Limit (2)					
% of Tubes Plugged That Did Not Exceed Degradation Limit					
Rate of Leakage From Leaking Dents (gpm)					
Max. Denting Rate for Any Single Tube (Tube Circum. Ave) (Mills/Month)					
Max. Denting in Any Single Unplugged Tube (Tube Circum. Ave) (Mills)					

POOR ORIGINAL

Denting (Con't)

Support Plate Levels	Max. Denting in Any Single Tube in Bundle Area (Tube Ave) (Mills) (1)					% of Tubes Affected By Denting in Bundle Area				
	a	b	c	d	e	a	b	c	d	e
1	NOT APPLICABLE									
2										
3										
4										
5										
6										
7										
8										
9										
10										
11										
12										

POOR ORIGINAL

TABLE KEY

NOTE: All percentages refer to the percent of the tubes within a given area of the tube bundle.

(1)

Area of the Tube Bundle	No. of Tubes Within the Area
a. Periphery of Bundle (wi/20rows for B&W; wi/10 rows for C.E. and <u>W</u>)	~6870
b. Patch Plate (wi/4 rows)	NA
c. Missing Tube Lane (B&W only) (wi/5 rows)	~770 (including 200 from part A)
c. Flow Slot Areas (C.E. and <u>W</u> only) wi/10 rows)	NA
d. Wedge Regions (C.E. and <u>W</u> only) (wi/8 rows)	NA
e. Interior of Bundle (remainder of tubes)	~8090

(2)

Allowable Limit for Wastage/Cavitation Erosion: 40%

Allowable Limit For Denting: Not Applicable

(3)

1. Specifies area between the tube sheet and the first support plate
2. Specifies in the following locations: (list the additional locations)

Wastage/Cavitation Erosion: NA

Cracking: NA

(4)

Specify the date of the inspection for which results have been tabulated.

POOR ORIGINAL

VIII. SIGNIFICANT STEAM GENERATOR ABNORMAL OPERATIONAL EVENTS

DATE	SUMMARY	
	(Include event description; unscheduled ISI results; if performed; and subsequent remedial actions)	
Date	Event	OTSG
1. HFT*	11 cycles on EF nozzles	A & B
2. 12/76	1 hr. @ 500°F with FW <90°F	A & B
3. 12/76	½ hr. @ 520°F with FW <90°F	A
4. 11/77	6½ hr. @ 532°F with FW <90°F	A & B
5. 10/77	3.6 pH for about 3 hours (secondary)	A & B
6. HFT	OTSG Level <97% RC>300 F numerous cycles	A & B

IX. CONDENSER INFORMATION:

Condenser Material	Tube Leakage Date	Leakage Rate (gpm)	Detectable Limit	Detection Method
304 SS	HFT*	160 gpm	0.1-0.2 gpm	Cat. Cond. High
	6/9/76	0.4-1.5	0.1-0.2 gpm	Sodium High Powdex Performance

X. RADIATION EXPOSURE HISTORY WITH RESPECT TO STEAM GENERATORS

Date	Exam Dosage (Man-Rem)	Repair Dosage (Man-Rem)	Comments
76	Data not available	NA	
77	12.834 Man-Rem	9.467 Man-Rem	
78	12.913 Man-Rem	1.085 mrem	Tube Plugging

*HFT = Hot Functional Testing Period

XI. DEGRADATION HISTORY FOR EACH TYPE OF DEGRADATION EXPERIENCED FOR TEN REPRESENTATIVE, UNPLUGGED TUBES FOR WHICH THE RESULTS OF TWO OR MORE ISI'S ARE AVAILABLE

If the results for ten tubes are not available, specify this information for all those tubes for which results are available. NA

(repeat the following information for each tube and degradation type)

Steam Generator No:

Tube Identification: NOT APPLICABLE

Type of Degradation: (specify denting, wastage, cavitation erosion, caustic stress corrosion cracking, or flow induced vibration cracking)

(repeat the following information chronologically for each ISI for which results are available)

ISI Date:

Amount of Degradation: (specify amount and units)

EFP Months of Operation Since Last ISI for Which Results are Given:

POOR ORIGINAL